



I. R. IRAN

ISSN: 1728-144X

e-ISSN: 1735-9244



International Journal of Engineering

Journal Homepage: www.ije.ir



TRANSACTIONS B: APPLICATIONS

Volume 37, Number 02, February 2024

Materials and Energy Research Center

INTERNATIONAL JOURNAL OF ENGINEERING

Transactions B: Applications

DIRECTOR-IN-CHARGE

H. Omidvar

EDITOR IN CHIEF

G. D. Najafpour

ASSOCIATE EDITOR

A. Haerian

EDITORIAL BOARD

- | | | | |
|------|--|-------|--|
| S.B. | Adeloju, Charles Sturt University, Wagga, Australia | A. | Mahmoudi, Bu-Ali Sina University, Hamedan, Iran |
| K. | Badie, Iran Telecomm. Research Center, Tehran, Iran | O.P. | Malik, University of Calgary, Alberta, Canada |
| M. | Balaban, Massachusetts Ins. of Technology (MIT), USA | G.D. | Najafpour, Babol Noshirvani Univ. of Tech., Babol, Iran |
| M. | Bodaghi, Nottingham Trent University, Nottingham, UK | F. | Nateghi-A, Int. Ins. Earthquake Eng. Seis., Tehran, Iran |
| E. | Clausen, Univ. of Arkansas, North Carolina, USA | S. E. | Oh, Kangwon National University, Korea |
| W.R. | Daud, University Kebangsaan Malaysia, Selangor, Malaysia | M. | Osanloo, Amirkabir Univ. of Tech., Tehran, Iran |
| M. | Ehsan, Sharif University of Technology, Tehran, Iran | M. | Pazouki, MERC, Karaj, Iran |
| J. | Faiz, Univ. of Tehran, Tehran, Iran | J. | Rashed-Mohassel, Univ. of Tehran, Tehran, Iran |
| H. | Farrahi, Sharif University of Technology, Tehran, Iran | S. K. | Sadrnezhaad, Sharif Univ. of Tech, Tehran, Iran |
| K. | Firoozbakhsh, Sharif Univ. of Technology, Tehran, Iran | R. | Sahraeian, Shahed University, Tehran, Iran |
| A. | Haerian, Sajad Univ., Mashhad, Iran | A. | Shokuhfar, K. N. Toosi Univ. of Tech., Tehran, Iran |
| H. | Hassanpour, Shahrood Univ. of Tech., Shahrood, Iran | R. | Tavakkoli-Moghaddam, Univ. of Tehran, Tehran, Iran |
| W. | Hogland, Linnaeus Univ, Kalmar Sweden | T. | Teng, Univ. Sains Malaysia, Gelugor, Malaysia |
| A.F. | Ismail, Univ. Tech. Malaysia, Skudai, Malaysia | P. | Tiong, Nanyang Technological University, Singapore |
| M. | Jain, University of Nebraska Medical Center, Omaha, USA | X. | Wang, Deakin University, Geelong VIC 3217, Australia |
| M. | Keyanpour rad, Materials and Energy Research Center, Karaj, Iran | H. | Omidvar, Amirkabir Univ. of Tech., Tehran, Iran |

EDITORIAL ADVISORY BOARD

- | | | | |
|-------|--|-------|---|
| S. T. | Akhavan-Niaki, Sharif Univ. of Tech., Tehran, Iran | A. | Kheyroddin, Semnan Univ., Semnan, Iran |
| M. | Amidpour, K. N. Toosi Univ of Tech., Tehran, Iran | N. | Latifi, Mississippi State Univ., Mississippi State, USA |
| M. | Azadi, Semnan university, Semnan, Iran | H. | Oraee, Sharif Univ. of Tech., Tehran, Iran |
| M. | Azadi, Semnan University, Semnan, Iran | S. M. | Seyed-Hosseini, Iran Univ. of Sc. & Tech., Tehran, Iran |
| F. | Behnamfar, Isfahan University of Technology, Isfahan | M. T. | Shervani-Tabar, Tabriz Univ., Tabriz, Iran |
| R. | Dutta, Sharda University, India | E. | Shirani, Isfahan Univ. of Tech., Isfahan, Iran |
| M. | Eslami, Amirkabir Univ. of Technology, Tehran, Iran | A. | Siadat, Arts et Métiers, France |
| H. | Hamidi, K.N.Toosi Univ. of Technology, Tehran, Iran | C. | Triki, Hamad Bin Khalifa Univ., Doha, Qatar |
| S. | Jafarmadar, Urmia Univ., Urmia, Iran | | |

TECHNICAL STAFF

M. Khavarpour; M. Mohammadi; V. H. Bazzaz, R. Esfandiar; T. Ebadi

DISCLAIMER

The publication of papers in International Journal of Engineering does not imply that the editorial board, reviewers or publisher accept, approve or endorse the data and conclusions of authors.

International Journal of Engineering *Transactions A: Basics* (ISSN 1728-1431) (EISSN 1735-9244)
International Journal of Engineering *Transactions B: Applications* (ISSN 1728-144X) (EISSN 1735-9244)
International Journal of Engineering *Transactions C: Aspects* (ISSN 2423-7167) (EISSN 1735-9244)
Web Sites: www.ije.ir & www.ijeir.info E-mails: ije.editor8@gmail.com, Tel: (+9821) 88771578, Fax: (+9821) 88773352
Materials and Energy Research Center (MERC)

CONTENTS

Transactions B: Applications

C. Rosyidan, B. Kurniawan, B. Soegijono, V. G. Vidia Putra, D. R. Munazat, F. B. Susetyo	Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition	213-223
O. V. Trushko, V. L. Trushko, P. A. Demenkov	Construction of Underground and Multi-story Car Parks in High-density Urban Areas	224-236
S. Mahmood Ali	A Novel Design and Simulation of a Nano Prosthetic Artificial Heart Valves	237-251
M. Hosseinpour, A. Dastgiri, M. Shahparasti	Design and Analysis of a Power Quality Improvement System for Photovoltaic Generation Based on LCL-Type Grid Connected Inverter	252-267
S. El Yassari, A. EL Ghoulbzouri, S. El Janous	Seismic Fragility of FRC Columns using Incremental Dynamic Analysis and eXtended Finite Element Method	268-282
A. Nakhaei Zadeh, M. Ameri, A. Shojaei, I. Baniasad Askari	Optical Efficiency of Linear Fresnel Reflectors in Fixed, Variable and Optimal Distance between Mirrors: Theoretical and Experimental Studies	283-297
M. Shahraeini, R. Soltanifar	A Complex Network-based Approach for Designing of Wide Area Measurement Systems in Smart Grids using Adam-Eve Like Genetic Algorithm	298-311
S. Shedthi B., V. Shetty, R. Chadaga, R. Bhat, B. Preethi, P. Kini K.	Implementation of Chatbot that Predicts an Illness Dynamically using Machine Learning Techniques	312-322
S. Abdi, M. Yazdani, E. Najafi	Comprehensive Framework of Influential Factors on Innovation Ecosystem Resilience: Using Meta-Synthesis and Structural Equation Modelling	323-340
M. Nabian Dehaghani, M. Biglarahmadi, S. Y. Mousazadeh Mousavi, M. Abdolahi	A Distributed Cooperative Secondary Control Scheme for Obtaining Power and Voltage References of Distributed Generations in Islanded DC Microgrids	341-351
P. Jalili, M. Mahboob, A. Shateri, B. Jalili, D. Domiri Ganji	A Comparative Study of Hybrid Analytical and Laplace Transform Approaches for Solving Partial Differential Equations in Python	352-364

G. R. Fouladi, H. Mazaheri, A. Marjani	Effect of SiO ₂ Concentration and Time on Stability of TiO ₂ Zeolite Nanocomposite Membrane in Light Gas Dehumidification	365-376
D. H. Wardhani, H. N. Ulya, A. Redondo, A. Riztian Nugraha, A. C. Kumoro, S. Susanti	Performances of Amphiphilic Glucomannan Produced by Combination Methods of Ultrasonication, Deacetylation, and Carboxymethylation Heterogeneously	377-386
Z. Khodadadi, M. S. Owlia, A. Amiri	Enhancing Fault Detection in Image Analysis: A Combined Wavelet-Fourier Technique for Advancing Manufacturing Quality Control	387-401
H. Hamidi, A. Tavassoli	A Model for Scheduling of Electric Vehicles Charging in a Distribution Network using Multi-agent Model	402-411
F. Alizadeh, H. Jazayeriy, O. Jazayeri, F. Vafaee	Genomic Ancestry Inference of Admixed Population by Identifying Approximate Boundaries of Ancestry Change	412-424
M. Mouhine, M. Derife, S. Aboumdian, E. Hilali	Improving Seismic Vulnerability of Irregular Reinforced Concrete Moment-Resisting Frames using Shear Walls	425-438
N. V. Babyr	Topical Themes and New Trends in Mining Industry: Scientometric Analysis and Research Visualization	439-451



Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

C. Rosyidan^{a,b}, B. Kurniawan^{*a}, B. Soegijono^c, V. G. Vidia Putra^d, D. R. Munazat^a, F. B. Susetyo^e

^a Department of Physics, Universitas Indonesia, Depok, Indonesia

^b Department of Petroleum, Universitas Trisakti, Jakarta, Indonesia

^c Department of Geoscience, Universitas Indonesia, Depok, Indonesia

^d Plasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, Indonesia

^e Department of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta, Indonesia

PAPER INFO

Paper history:

Received 28 July 2023

Received in revised form 08 September 2023

Accepted 30 September 2023

Keywords:

Cathodic Current Efficiency

Microhardness

Ni-Cu Coating

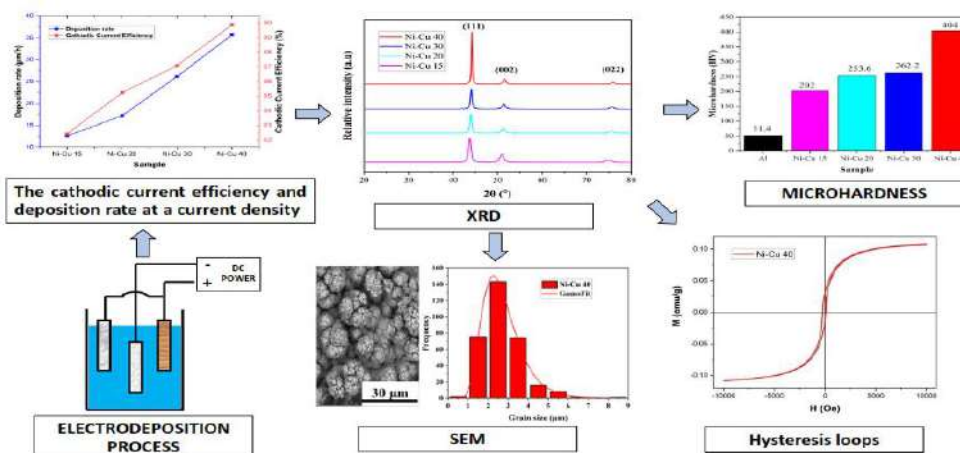
Vibrating Sample Magnetometer

ABSTRACT

Nickel (Ni)-rich single-phase nickel-copper (Ni-Cu) alloy coatings were produced on aluminum (Al) substrates by electrodeposition in stabilized citrate baths. Electrodeposition experiments were performed at four different current densities. Increasing the current density resulted in the metal deposition rate increasing faster than the hydrogen evolution rate; thus, the cathodic current efficiency increased. The crystal systems of the Ni-Cu alloys were face center cubic (fcc), with the (111) plane as the preferred crystal plane. Scanning electron microscopy with energy dispersive X-ray spectroscopy (SEM-EDS) measurements showed that the Ni content in the coating increased with increasing current density. The Ni-Cu 40 sample had the most Ni content and showed a homogeneous and compact morphology. It was found that the higher the concentration of Ni in the solution, the smaller the grain size. Measurements recorded with a vibrating sample magnetometer (VSM) showed that the Ni-Cu 40 sample provided magnetic saturation, with the highest value being 0.108 emu/g. The microhardness method produced 404 HV on the Ni-Cu 40 sample. In conclusion, higher current densities were associated with a higher Ni composition and increased thickness, which were responsible for the increases in the magnetic properties and hardness.

doi: 10.5829/ije.2024.37.02b.01

Graphical Abstract



*Corresponding author email: budhy.kurniawan@sci.ui.ac.id. (B. Kurniawan)

Please cite this article as: Rosyidan C, Kurniawan B, Soegijono B, Vidia Putra VG, Munazat DR, Susetyo FB. Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition. International Journal of Engineering, Transactions B: Applications. 2024;37(02):213-23.

NOMENCLATURE

C_e	Cathodic current efficiency	W_i	Initial weight of the substrate
σ	Lattice strain	W_f	Weight
W_s	Final weight of the substrate	I	Total current
W_m	Ratio of the final weight of the substrate	t	Deposition time
μ	Texture coefficient of the unique plane	F	Faraday's constant
$I(hkl)$	Measured intensity	f_{ni}	Nickel deposit weight ratio
m_{cu}	Copper's atomic weight	m_{ni}	Nickel's atomic weight

1. INTRODUCTION

Researchers widely study nickel (Ni) and copper (Cu) alloys as engineering materials due to their unique mechanical, magnetic, and anti-corrosion properties (1, 2). Ni-Cu alloys are known as monel in the industry and are typically comprised of 70 wt% Ni and 30 wt% Cu (3). These alloys have outstanding capabilities in acidic and alkaline environments (4). Ni-Cu alloys are single-phase alloys throughout their composition on the phase diagram, and these alloys formed because Ni and Cu are fully soluble in their solid and liquid states (5). Ni and Cu both have a face center cubic (fcc) crystal structure, and they have almost similar electronegativity and atomic radii (6, 7).

Given that conventional casting as a manufacturing method for monel results in substantial production costs and that Ni-Cu alloy coated on aluminum (Al) has potential as a replacement for monel as a bulk material (8), Al-based metals have received considerable attention (9, 10). They are lightweight and demonstrate high resistance to wear and corrosion and a high strength–stiffness combination (11).

Several techniques have been proposed to successfully modify the surface morphology and chemical composition, including sol-gel, chemical etching, chemical vapor deposition, thermal embossing, and electrodeposition (12, 13). The electrodeposition technique is a cost-effective, scalable, and easy-to-control process for coating Ni-Cu alloy (14). Specific methods have also been developed to determine the structure, morphology, and phase composition of the coated Ni-Cu alloys (15, 16). Goranova et al. (17) investigated how changing the concentration of Ni ions and the current density affected the structure and composition of Ni-Cu alloys formed by electrodeposition in alkaline citrate baths. Higher concentrations of Ni ions in the bath led to notably smoother deposits and enhanced current efficiency. However, producing a uniform Ni-Cu coating can be challenging due to the difference in reduction potential between Ni and Cu. The reduction potential of Ni atoms is -0.25 V vs. SHE, and that of Cu atoms is +0.34 V vs. SHE (18). As a result, controlling the concentrations of Ni and Cu is vital. Complexing agents must be added to narrow the potential difference between Ni and Cu. The most frequently used complexing agent is citrate due to its low toxicity, cost-effectiveness, and buffering characteristics (19).

The electrodeposition process affects the physical properties of the resultant Ni-Cu alloy, as does the current density. A high current density causes the crystal plane to be oriented in the (111) plane, the lattice size to be smaller, and the atomic distance to be less (20). The grain size becomes smaller when the current density is high, and the morphological shape resembles that of a cauliflower (21). As a result of a high current density, the coating will be thicker, and the composition of the Ni weight fraction will also be higher. The amount of Ni deposited on the substrate and the thickness of the coating both have an impact on the product's magnetic properties (22). In addition, a smaller grain size results in an increase in hardness (23). Karunakaran et al. (24) reported a hardness of 153 HV when the current density was 40 mA/cm², and Karunakaran and Pugazh (25) Vadivu reported a magnetic saturation value of 0.0004 emu/g at 40 mA/cm². Nevertheless, the researchers did not examine the impact of the coating electrodeposition factors, structure, and morphology on the magnetic and hardness properties.

The aims of this research were 1) to produce a Ni-rich Ni-Cu alloy coating on Al via electrodeposition and 2) to investigate the link between magnetic and hardness properties and the coating's microstructure and surface morphology. We varied the current density, and the process was conducted at room temperature. We examined the influence of various process variables on the cathodic current efficiency, structure, morphology, composition, grain size, and thickness of the produced coatings. Finally, the magnetic properties and hardness of the coatings were investigated.

2. MATERIAL AND METHODS

2. 1. Material and Electrodeposition Process

The chemical composition of the Al substrate (cathode) used was Fe = 1.63 wt%, Mg = 1.49 wt%, and Al = 96.88 wt%. The chemical composition of the Ni (anode) used was Al = 0.02 wt%, Ca = 0.04 wt%, Fe = 0.23 wt%, Y = 1.61 wt%, Zr = 0.04 wt%, Nb = 0.05 wt%, and Ni = 98.01 wt%. The chemical composition of the Cu (anode) used was P = 0.22 wt%, Cd = 0.684 wt%, Si = 0.137 wt%, and Cu = 98.959 wt%. The Al was cleaned from the oxide coating with sandpaper before deposition using DELTA D68H for 5 min. Ni-Cu electrodeposition was carried out using a SANFIX 305 E DC power supply. The samples produced using a current density of

15 mA/cm², 20 mA/cm², 30 mA/cm², and 40 mA/cm² were designated as Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40, respectively. Table 1 summarized the bath composition and deposition parameters.

2. 2. Characterization The deposition rate was calculated using the previously reported method (26). The following formula, Equation 1, was used to calculate the efficiency of the cathodic current (27):

$$C_e = W_m / W_f \quad (1)$$

W_m and W_f were calculated using Faraday's law, as shown in Equations 2 and 3.

$$W_m = W_s - W_i, \quad (2)$$

$$W_f = \{(m_{ni}/2) * f_{ni} + (m_{cu}/2) * f_{cu}\} * I * \frac{t}{F}. \quad (3)$$

The crystal structure of the Ni-Cu coating was determined using X-ray diffraction (XRD-PANalytical Aeris Instrument Suit) (Cu-K α radiation, $\lambda = 0.15418$ nm). XRD data were collected from 20° to 80° with a step size of 0.020°. The Materials Analysis Using Diffraction (MAUD) program was used to determine the crystal parameters of the sample after Rietveld refinement. The preferential crystallite orientation was determined from the texture coefficient μ , as shown in Equation 4 (28):

$$\mu = \frac{I(hkl)/I_0(hkl)}{(\frac{1}{N}) \sum [I(hkl)/I_0(hkl)]}, \quad (4)$$

Based on XRD results, the lattice strain σ was calculated using Equation (5) (29):

$$\sigma = \left(\frac{\beta}{4 \times \tan \theta} \right) \quad (5)$$

SEM-EDS (Thermofisher Quanta 650 EDAX EDS Analyzer) with 1000 $\times$ magnification was used to analyze the surface morphology of the Ni-Cu coatings. EDS was used to determine the chemical composition of the coatings, and the statistical distribution of grain sizes was calculated using ImageJ software. The cross sections of the coated samples were also examined to assess how the current density and CCE affected the

coating thickness. Measurement of magnetic properties was conducted using a vibrating sample magnetometer (VSM, Oxford 1.2H). The hardness of the Ni-Cu coatings was measured using a MicroMct® 5100 Series Microindentation Hardness Tester. The ATM E384 standard was used for the tests, which were performed with a load of 100 g for 10 s at five places.

3. RESULTS AND DISCUSSION

3. 1. Cathodic Current Efficiency and Deposition Rate

Figure 1 depicts the relationship between the average CCE and deposition rate in the citrate electrolyte bath. The CCE was found to be high, with a value of 82–89%. The basic concept of current efficiency can be understood as the fraction of total current used for metal plating (30). Apart from metal deposition, hydrogen evolution is the only other necessary process that must occur on the substrate surface. Ni and Cu precipitation are both antagonistic to the hydrogen evolution reaction. In this study, the metal deposition rate increased faster than the hydrogen evolution rate when the current density increased from 15 to 40 mA/cm²; hence, the CCE increased. The highest CCE (89.96%) was associated with the Ni-Cu 40 sample, and the lowest CCE (82.55%) was associated with the Ni-Cu 15 sample. Basori et al. and Syamsuir et al. (31) found that the deposition rate and current efficiency are considered linear.

3. 2. Structural Properties Figure 2(a) depicts the XRD spectra of the Ni-Cu alloy samples produced at various current densities. According to the XRD analysis results, each Ni-Cu alloy sample consisted of a single phase with an fcc structure. The evolution of the lattice parameters of the Ni-rich (111) phase over the range of current densities is shown in Figure 2(b). The

TABLE 1. Bath composition and deposition parameters

Bath composition and condition	Quantity
NiSO ₄ .6H ₂ O (Merck)	0.5 M
CuSO ₄ .5H ₂ O (Merck)	0.04 M
Na ₃ C ₆ H ₅ O ₇ (Merck)	0.2 M
pH	4.2
Temperature	25 °C
Deposition time	1 h

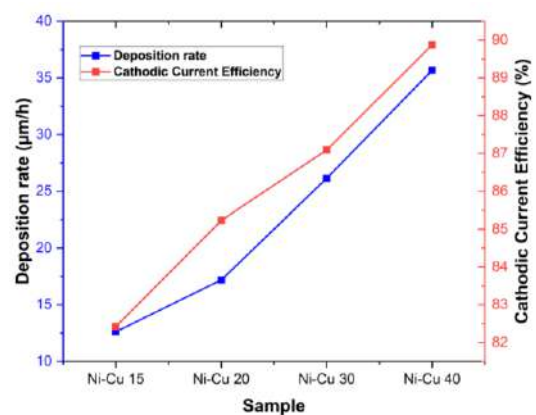


Figure 1. The cathodic current efficiency and deposition rate at a current density of 15, 20, 30, and 40 mA/cm²

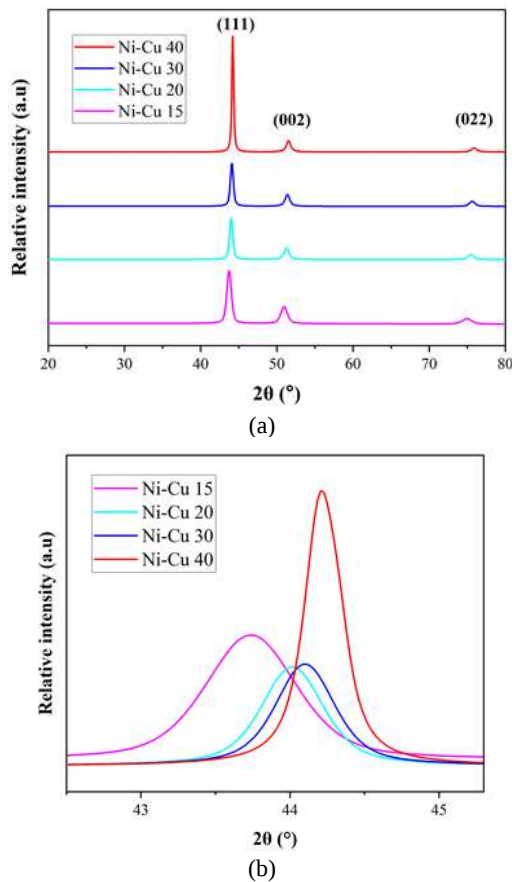


Figure 2. (a) X-ray diffraction spectra of Ni-Cu coatings electrodeposited at various current densities and (b) the extended view of the Ni-Cu (111) plane, showing peak shifts

peaks of each sample were found between the peaks of the fcc of $2\theta = 43.3^\circ$ for pure Cu and $2\theta = 44.5^\circ$ for pure Ni (32, 33). As the Ni content of the alloy coating increased, the diffraction angle also increased.

Crystal size calculation using MAUD resolved refinement was used to determine the size of the crystallites in the Ni-Cu alloys, and the results (Table 2) show that the crystallite size of the Ni-Cu coating ranged from approximately 24 to 50 nm. The crystallite size of a pure Ni layer is 60 nm, meaning that the Ni-Cu alloys had smaller crystallite sizes than a pure Ni layer. This result is also similar to that obtained by Li et al. (34). In contrast to the typical watt-Ni coating, we found that the presence of a sodium citrate complexing agent resulted in a finer crystallite size. This is consistent with the findings of Sarac and Baykul (35), who observed that Cu atoms affect grain refinement in Ni-Cu alloys. Cu atoms can restrain the surface diffusion of Ni atoms during the deposition process and inhibit the growth of crystallites.

The evolution of the crystallographic orientation of the Ni-Cu coatings produced with varying current

densities is shown in detail in Figure 3. It can be observed that a strong (111) fiber texture appeared in all the samples, while the (002) texture gradually decreased as the current density increased.

The μ values of different crystal planes are also used to evaluate the degree of crystallographic orientation (34). Moreover, the Ni-Cu coating electrodeposited at the current density of 40 mA/cm² was found to have a strong (111) texture.

The texture coefficient for every preference was calculated using Equation 4 to ascertain the preferred crystal orientation direction of each Ni-Cu alloy obtained at the various current densities, and the results are shown in Table 3 (32).

It seems that the texture coefficient was also dependent on the peak current, and the preferred orientation was the (111) plane. Li et al. (34) found that the higher the current density, the more dominant the (111) plane. The findings suggest that the (111) crystallographic orientation was preferable for all the Ni-Cu coatings electrodeposited at the tested current densities.

The lattice strain of the prepared coatings was determined using Equation 5, and Figure 4 illustrates the changes in the crystal size and lattice strain of the Ni-Cu coatings based on the current density applied in the plating bath.

The crystal size increased and the lattice strain decreased as the current density increased (36). This result aligns with that obtained by Devi et al. (33), who showed that the higher the current density, the more the

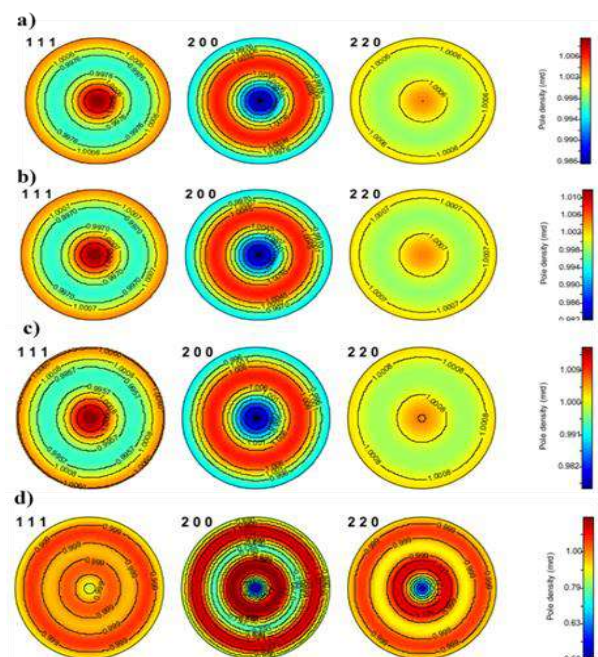


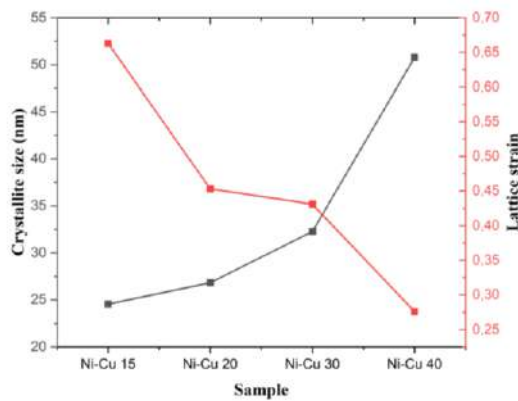
Figure 3. The simulated 2D pole figures for the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

TABLE 2. Parameters of the Ni-Cu alloys after Rietveld refinement using MAUD

Parameter	Sample			
	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40
Crystal structure	Cubic fcc			
Space group	Fm-3m			
Lattice constant (Å) $a = b = c$	3.582	3.560	3.554	3.545
Volume (Å ³)	45.975	45.152	44.905	44.557
d-spacing (Å)	1.791	1.780	1.695	1.691
Crystallite size (nm)	24.55	26.82	32.29	50.78
Rwp (100%)	3.640	4.484	5.394	5.139
GOF	1.94	1.72	2.06	2.03
Lattice strain	0.663	0.453	0.431	0.276

TABLE 3. Texture coefficient analysis of Ni-Cu deposits

Sample	μ (hkl)		
	[111]	[002]	[022]
Ni-Cu 15	1.12	0.86	0.77
Ni-Cu 20	1.17	0.74	0.81
Ni-Cu 30	1.18	0.74	0.78
Ni-Cu 40	1.48	0.34	0.32

**Figure 4.** The lattice strain and crystallize size of the Ni-Cu alloys coated on Al at various current densities

crystal size increased. A possible reason for this is that the composition of Ni increases as the current density increases.

3. 3. Surface Morphology EDS was used to determine the elemental composition of the Ni-Cu coatings, and the results are shown in Figure 5 and Table 4. Cu and Ni were the only elements present in the

deposits. The alloy composition was influenced by the current density: as the current density increased, the Cu content decreased. This phenomenon can be caused by the $[\text{Ni}^{2+}]/[\text{Cu}^{2+}]$ ratio in the bath, which changes the composition of Ni and Cu. Goranova et al. discovered that as the Cu content of deposits decreased, so did the CCE (37). This phenomenon occurs because of the orderly deposition of Ni and Cu (38). In regular deposition, increasing the current density leads to an increased proportion of less noble metals in the deposited material (39). In our scenario, Ni is the less noble metal. As a result, when the current density was higher, the deposits were richer in Ni.

Another notable feature was that as the current density increased, the peak shifted to the right (i.e., to higher 2θ values). The change in the alloy composition may have also caused this peak shift. The Ni concentration increased as the current density increased (see Table 4). Because Ni and Cu combine to produce a single-phase alloy, the diffraction peak shifted toward that of pure Ni as the Ni percentage increased. This finding is similar to the observations of Goranova et al. (17), who found that the fcc reflection for Ni-rich Ni-Cu alloy deposits shifted to the right as the Ni concentration increased. Indeed, it is logical to expect the Ni-Cu alloy peak to shift as the Ni content increase.

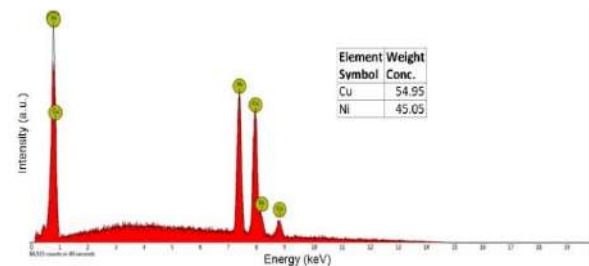
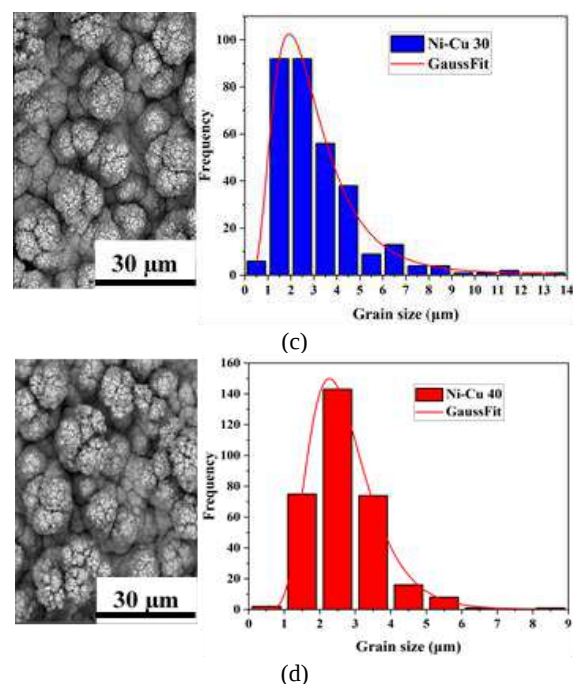
**Figure 5.** Eds graph of the Ni-Cu 15

TABLE 4. The chemical composition of Ni-Cu coatings on the Al substrate prepared at different current densities

Sample	Cu, wt%	Ni, wt%
Ni-Cu 15	54.95	45.05
Ni-Cu 20	39.83	60.17
Ni-Cu 30	29.80	70.20
Ni-Cu 40	19.64	80.36

The surface morphological structure and the cross section of the coated samples were observed using SEM. Figure 6 shows SEM micrographs of the four samples' surface morphological structures. The deposits developed a fine-grained and compact spherical shape when lower deposition current densities were applied (Figure 5(a)). Deo et al. (27) and Goranova et al. (37) also observed this morphology at low current densities. The shape changed to a coarser cauliflower form when higher current densities were applied (Figure 6(d)). A diffusion-limited deposition mechanism in which a multigeneration spherical diffusion layer creates a cauliflower shape is likely to produce this type of morphology (40). As the current density increased, the cauliflower-like protrusions became more spaced and separated, creating gaps. The Ni-Cu 40 sample, produced with the highest current density, was found to have the largest gaps between the cauliflower-like bulges.

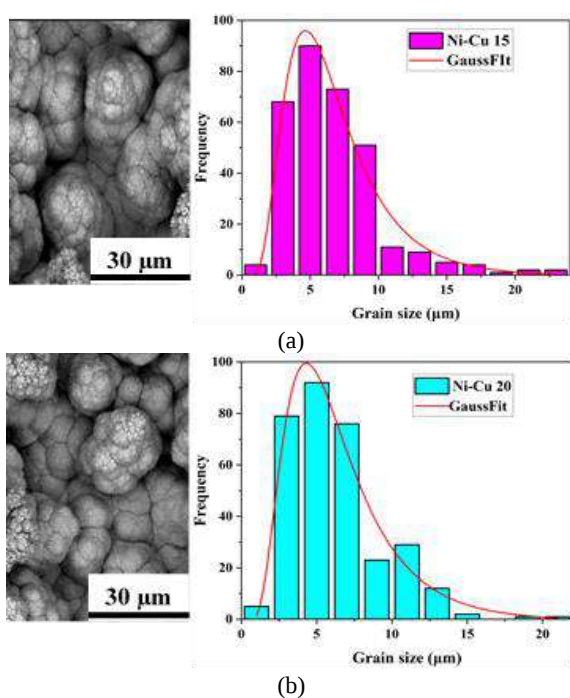
The increased nucleation rate can explain the observed decrease in grain size with increasing current density (41, 42). Ni-Cu ion flow to the cathode is faster at higher current densities. Further investigation is

**Figure 6.** Surface SEM images of the deposited Ni-Cu alloy coatings and plots showing the statistical distribution of the grain size

needed to determine the exact relationship between the current density and the grain size of the coating. In the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples, the peak that corresponded to the (111) plane shifted toward the right (see Figure 2b). The reduction in d-spacing is ascribed to residual stress induced at a higher deposition rate (43). The statistical results of the grain size distribution presented in Figure 6 indicate that the grain size ranged from 4.63 to 1.94 μm. The decrease in grain size with the increase in current density is evident in the data shown in Table 5.

Figure 7 depicts the relationship between the deposited alloy composition and the applied current density. EDS was used to determine the composition.

Figure 8 (a–d) displays SEM cross-section images of the produced Ni-Cu coatings. The absence of cracks between the substrate and coating demonstrates that appropriate adhesion occurred between the two entities (44). The thickness of the electrodeposited Ni-Cu coating was also measured for each sample (27), and the

**TABLE 5.** Average grain size found in each sample

Sample	Average grain size (μm)
Ni-Cu 15	4.63 ± 0.269
Ni-Cu 20	4.38 ± 0.365
Ni-Cu 30	2.28 ± 0.068
Ni-Cu 40	1.94 ± 0.032

following results were recorded: Ni-Cu 15 = 32 μm , Ni-Cu 20 = 42 μm , Ni-Cu 30 = 49 μm , and Ni-Cu 40 = 50 μm . The effect of the current density on the thickness of the Ni-Cu coating is depicted in Figure 8; the thickness increased as the current density increased (19). Hence, a higher current density results in more mass and a thicker coating. The findings presented in Figure 1 show that as the current density increased, so too did the CCE.

According to Faraday's law, when the deposition time remains constant for all samples, coatings formed at lower current densities will be thinner than those produced at higher current densities. A thinner covering may lead to severe interference from the Al substrate. The cathodic current density also affects the coating, as Deo et al. (27) discovered that increasing the current density improves the thickness of the film due to an increase in the CCE.

3. 4. Magnetic Properties Figure 9 depicts the magnetic characteristics and fluctuations in the current density magnetization measured with a VSM at room

temperature (45). The results of the VSM analysis demonstrate that the coatings in the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples displayed ferromagnetic activity. The low ferromagnetic activity of the $\text{Cu}_{54.95}\text{Ni}_{45.05}$ alloy film of Ni-Cu 15 could be attributed to Ni diffusion in the Cu matrix, as Cu is a diamagnetic metal and Ni is a ferromagnetic metal (46). The ferromagnetic properties of the Ni-Cu films of Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 increased with the Ni content of the alloy coatings.

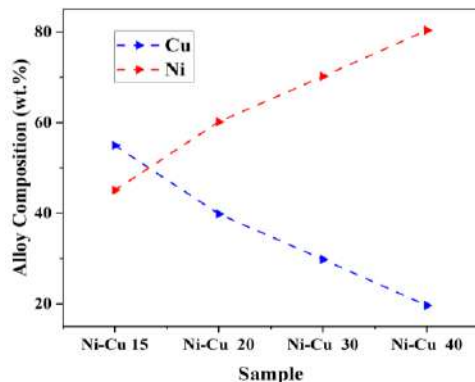


Figure 7. The dependence of the deposited alloy's composition (shown as wt% of the single electrolytes) on current density



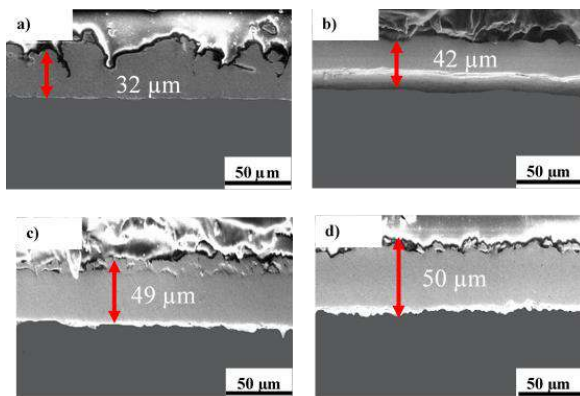



Figure 8. SEM cross-section images of the Ni-Cu coating on Al in the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

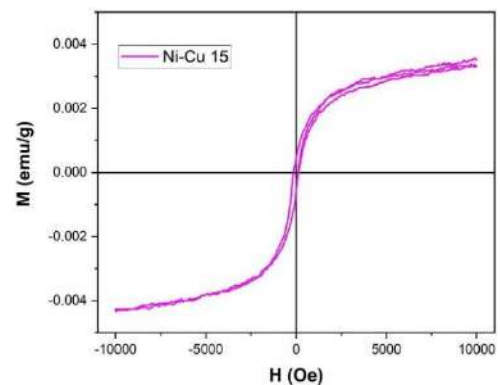

(a)

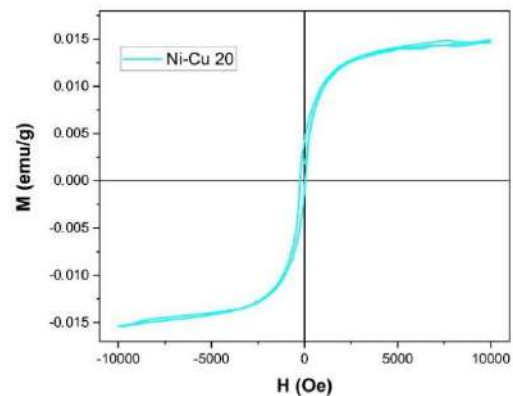

(b)

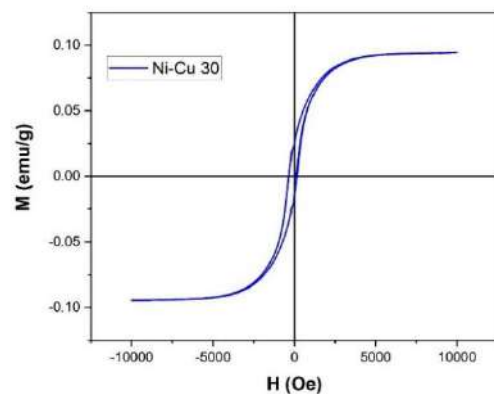

(c)

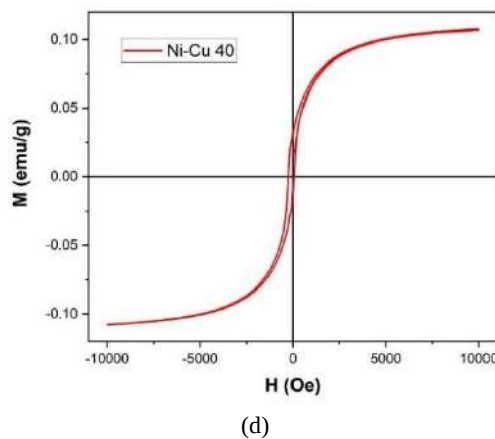


Figure 9. Hysteresis loops of multilayers generated at different current densities

As the Ni content of the Ni-Cu alloy coatings increased, so did the saturation magnetization (see Table 6). Wang et al. (43) reported that saturation magnetization depends on the Ni content of Ni-Cu alloy coatings. In addition, Awasthi (22) reported that magnetization is enhanced by increasing the coating thickness. A possible reason for this enhanced magnetization is the magnetic disorder caused by the coating. It has been shown that the trend in saturation magnetization enhancement is associated with the coating level (47). Demidenko et al. (48) found that monel has paramagnetic properties at room temperature, while the Ni-Cu alloys in this study had ferromagnetic properties. Here, we have improved upon the results of previous studies in which phosphorus (P) and tungsten (W) were added (25). In this study, the Ni-Cu 40 sample exhibited the strongest magnetic properties.

3. 5. Hardness Figure 10 depicts the dependence of the microhardness of the Ni-Cu coatings on the current density in the plating bath. From the data presented in Figure 10, it is clear that the coating of the Ni-Cu 40 sample had the highest microhardness value (404 HV). In general, the microhardness increased with the current density and was attributed to the grain size and thickness of the coatings (42). Pingale et al. (19) found that hardness increased with the thickness of the coating. The

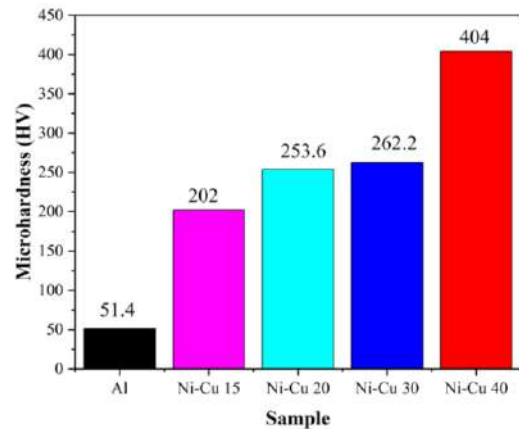


Figure 10. The microhardness of the electrodeposited Ni-Cu samples produced with different current densities

coating thickness could influence the hardness of Ni-Cu films (26).

The results indicate that alloys with a greater Ni content are mechanically harder. The overall dependence of hardness and microhardness on the percentage of Ni is shown in Figure 11, and the data indicate that microhardness increases as the percentage of Ni increase. This result is similar to Marenych's (49) finding that the hardness value is highest with the highest Ni composition.

Moreover, the hardness reported in previous studies that resulted from electrodeposition of Ni-Cu on Al in the presence of P was lower than that recorded in the present study (24). This is due to the smaller grain size that resulted from applying a different current density. In addition, the increase in microhardness reported here is related to the role that Ni atoms play in grain refinement (31). Ramkumar et al. (50) reported a monel hardness value of 165 HV, which is lower than the peak hardness value recorded in the current study.

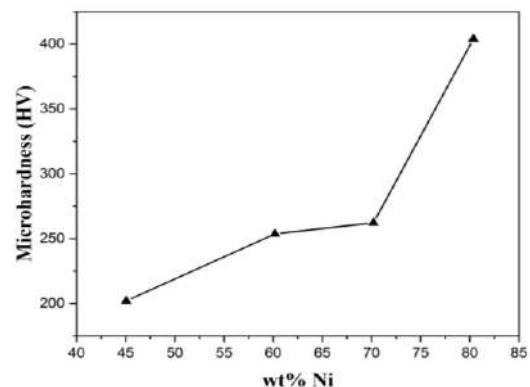


Figure 11. The relationship found between wt% Ni and microhardness, based on the data obtained from the four experimental samples

TABLE 6. The results of the magnetic analysis of the Ni-Cu/Al samples

Sample	Hc (Oe)	Mr (emu/g)	Ms (emu/g)
Ni-Cu 15	143.829	0.00047	0.003
Ni-Cu 20	140.081	0.004	0.015
Ni-Cu 30	256.215	0.025	0.094
Ni-Cu 40	144.023	0.032	0.108

4. CONCLUSION

In this study, Ni-Cu alloys were electrodeposited onto Al substrates using citrate baths. The effects of adding a citrate solution on the properties of the deposited coatings were studied, and the results illustrate that single-phase Ni-Cu alloy layers were produced on the Al surface at all current densities. The CCE increased as the current density increased. The coatings formed at lower current densities showed a more compact and spherical morphology, while those formed at higher current densities showed a less uniform structure with a cauliflower-like morphology. Both the surface morphology and composition of the coating showed a strong dependence on the current density. The Ni-Cu alloy coating deposited at a low current density had a layer thickness of 32 μm , while the coating deposited at a high current density had a thickness of 50 μm . The saturation magnetization of the coating increased with the Ni content in the Ni-Cu alloy and with the coating thickness. The hardness increased with the coating thickness, grain size, and Ni composition in the solution. The hardness of the produced Ni-Cu alloy coatings was found to be greater than that of monel.

5. ACKNOWLEDGMENTS

The authors extend their gratitude to the Ministry of Research, Technology and Higher Education of the Republic of Indonesia for the financial support of Hibah Penelitian Disertasi Doktor No: NKB-971/UN2.RST/HKP.05.00/2022.

6. REFERENCES

- Chen Z, Wang C, Tang C, Lek YZ, Kandukuri SY, Du H, et al. Microstructure and mechanical properties of a Monel K-500 alloy fabricated by directed energy deposition. *Materials Science and Engineering: A*. 2022;857:144113. <https://doi.org/10.1016/j.msea.2022.144113>
- Kukliński M, Bartkowska, A., and Przestacki, D. . Microstructure and selected properties of Monel 400 alloy after laser heat treatment and laser boriding using diode laser. *International Journal of Advanced Manufacturing Technology*. 2018;98(9-12): 3005–17. <https://doi.org/10.1007/s00170-018-2343-9>
- Mohaghehpour E, Larijani M, Rajabi M, Gholamipour R. Effect of Silver Clusters Deposition on Wettability and Optical Properties of Diamond-like Carbon Films. *International Journal of Engineering, Transactions C: Aspects*. 2021;34(3):706-13. <https://doi.org/10.5829/ije.2021.34.03c.15>
- Nady H, Negem M. Ni–Cu nano-crystalline alloys for efficient electrochemical hydrogen production in acid water. *RSC advances*. 2016;6(56):51111-9. <https://doi.org/10.1039/c6ra08348j>
- Negem M, Nady H. Electroplated Ni-Cu nanocrystalline alloys and their electrocatalytic activity for hydrogen generation using alkaline solutions. *international journal of hydrogen energy*. 2017;42(47):28386-96. <https://doi.org/10.1016/j.ijhydene.2017.09.147>
- Guisbiers G, Khanal S, Ruiz-Zepeda F, De La Puente JR, José-Yacamán M. Cu–Ni nano-alloy: mixed, core–shell or Janus nanoparticle? *Nanoscale*. 2014;6(24):14630-5. <https://doi.org/10.1039/c4nr05739b>
- Mae Y. What the Darken–Gurry plot means about the solubility of elements in metals. *Metallurgical and Materials Transactions A*. 2016;47(12):6498-506. <https://doi.org/10.1007/s11661-016-3730-1>
- Alizadeh M, Safaei H. Characterization of Ni-Cu matrix, Al₂O₃ reinforced nano-composite coatings prepared by electrodeposition. *Applied Surface Science*. 2018;456:195-203. <https://doi.org/10.1016/j.apsusc.2018.06.095>
- Toghraei M, Siadati H. Electrodeposited co-pi catalyst on α -Fe₂O₃ photoanode for water-splitting applications. *International Journal of Engineering*. 2018;31(12):2085-91. <https://doi.org/10.5829/ije.2018.31.12c.13>
- KK P. Experimental investigation by cryogenic treatment of aluminium 6063 and 8011 and nicow coating to improve hardness and wear. *International Journal of Engineering*. 2016;29(6):827-33. <https://doi.org/10.5829/idosi.ije.2016.29.06c.12>
- Kumar D, Angra S, Singh S. Mechanical properties and wear behaviour of stir cast aluminum metal matrix composite: a review. *International Journal of Engineering*. 2022;35(4):794-801. <https://doi.org/10.5829/IJE.2022.35.04A.19>
- Moosaei H, Zareei A, Salemi N. Elevated Temperature Performance of Concrete Reinforced with Steel, Glass, and Polypropylene Fibers and Fire-proofed with Coating. *International Journal of Engineering*. 2022;35(5):917-30. <https://doi.org/10.5829/ije.2022.35.05b.08>
- Poursaeidi E, Salarvand A. Comparison of properties of ti/tin/ticn/tialn film deposited by cathodic arc physical vapor and plasma-assisted chemical vapor deposition on custom 450 steel substrates. *International Journal of Engineering*. 2016;29(10):1459-68. <https://doi.org/10.5829/idosi.ije.2016.29.10a.17>
- Allahyarzadeh M, Aliofkhaezai M, Rouhaghdam AS, Torabinejad V. Gradient electrodeposition of Ni-Cu-W (alumina) nanocomposite coating. *Materials & Design*. 2016;107:74-81. <https://doi.org/10.1016/j.matdes.2016.06.019>
- Geramipour F, Khoei SM, Gughtapeh HS. Effect of shaped waveform on structure and electrochemical corrosion behavior of pulse electrodeposited NiCu alloy coatings. *Surface and Coatings Technology*. 2021;424:127643. <https://doi.org/10.1016/j.surfcoat.2021.127643>
- Thurber CR, Ahmad YH, Sanders SF, Al-Shenawa A, D'Souza N, Mohamed AM, et al. Electrodeposition of 70-30 Cu–Ni nanocomposite coatings for enhanced mechanical and corrosion properties. *Current Applied Physics*. 2016;16(3):387-96. <https://doi.org/10.1016/j.cap.2015.12.022>
- Goranova D, Rashkov R, Avdeev G, Tonchev V. Electrodeposition of Ni–Cu alloys at high current densities: details of the elements distribution. *Journal of Materials Science*. 2016;51:8663-73. <https://doi.org/10.1007/s10853-016-0126-y>
- Lee W-H, Chung K. Investigation of a copper–nickel alloy resistor using co-electrodeposition. *Journal of Applied Electrochemistry*. 2020;50:535-47. <https://doi.org/10.1007/s10800-020-01398-0>
- Pingale AD, Belgamwar SU, Rathore JS. Effect of graphene nanoplatelets addition on the mechanical, tribological and corrosion properties of Cu–Ni/Gr nanocomposite coatings by electro-co-deposition method. *Transactions of the Indian Institute of Metals*. 2020;73:99-107. <https://doi.org/10.1007/s12666-019-01807-9>

20. Hughes RA, Menumov E, Neretina S. When lithography meets self-assembly: a review of recent advances in the directed assembly of complex metal nanostructures on planar and textured surfaces. *Nanotechnology*. 2017;28(28):282002. <https://doi.org/10.1088/1361-6528/aa77ce>
21. Kamel M, Anwer Z, Abdel-Salam I, Ibrahim I. Electrodeposition of nanocrystalline Ni–Cu alloy from environmentally friendly lactate bath. *Surface and Interface Analysis*. 2014;46(7):442-8. <https://doi.org/10.1002/sia.5525>
22. Awasthi S, Pandey SK, Balani K. Tuning the magnetism and tribological behaviour of electrodeposited Ni/Cu bi-layer by selective reinforcement of carbon nanotubes. *Journal of Alloys and Compounds*. 2020;818:153287. <https://doi.org/10.1016/j.jallcom.2019.153287>
23. Heidarzadeh A, Saeid T. Correlation between process parameters, grain size and hardness of friction-stir-welded Cu–Zn alloys. *Rare Metals*. 2018;37:388-98. <https://doi.org/10.1007/s12598-016-0704-9>
24. Karunakaran M, Pugazhavadu M, Gunasegaran V, Gowtham G. Electrodeposition of Cu-Ni-PW Composite on Al-6063 Substrate. 2018. <https://doi.org/10.26438/ijrps/v6i3.5964>
25. Karunakaran M, Vadivu MP. Magnetic and micro-mechanical behavior of Cu-Ni-PW-TiO₂ hybrid composite electroplating on Al alloy substrate. *Journal of Magnetism and Magnetic Materials*. 2019;475:359-67. <https://doi.org/10.1016/j.jmmm.2018.11.077>
26. Soegijono B, Susetyo F, editors. *Magnetic field exposure on electroplating process of ferromagnetic nickel ion on copper substrate*. Journal of Physics: Conference Series; 2022: IOP Publishing.
27. Deo Y, Guha S, Sarkar K, Mohanta P, Pradhan D, Mondal A. Electrodeposited Ni-Cu alloy coatings on mild steel for enhanced corrosion properties. *Applied Surface Science*. 2020;515:146078. <https://doi.org/10.1016/j.apsusc.2020.146078>
28. Seakr R. Microstructure and crystallographic characteristics of nanocrystalline copper prepared from acetate solutions by electrodeposition technique. *Transactions of Nonferrous Metals Society of China*. 2017;27(6):1423-30. [https://doi.org/10.1016/S1003-6326\(17\)60164-X](https://doi.org/10.1016/S1003-6326(17)60164-X)
29. Dolabella S, Borzi A, Dommann A, Neels A. Lattice strain and defects analysis in nanostructured semiconductor materials and devices by high-resolution X-ray diffraction: theoretical and practical aspects. *Small Methods*. 2022;6(2):2100932. <https://doi.org/10.1002/smt.202100932>
30. Budi S, Tawwab RA, Cahyana U, Paristiwati M. Saccharin-assisted galvanostatic electrodeposition of nanocrystalline FeCo films on a flexible substrate. *International Journal of Electrochemical Science*. 2020;15(7):6682-94. <https://doi.org/10.20964/2020.07.74>
31. Syamsuir S, Soegijono B, Yudianto SD, Basori B, Ajiriyanto MK, Nanto D, et al. Electrolyte Temperature Dependency of Electrodeposited Nickel in Sulfate Solution on the Hardness and Corrosion Behaviors. *International Journal of Engineering, Transactions C: Aspects*. 2023;36(6):1193-200. <https://doi.org/10.5829/ije.2023.36.06c.18>
32. Soegijono B, Susetyo FB, Fajrah MC. Electrodeposition of Paramagnetic Copper Film under Magnetic Field on Paramagnetic Aluminum Alloy Substrates. *e-Journal of Surface Science and Nanotechnology*. 2020;18:281-8. <https://doi.org/10.1380/EJSSNT.2020.281>
33. Devi C, Ashokkumar R. INFLUENCE OF DIFFERENT CURRENT DENSITY ON CHARACTERISTICS OF NiFeP NANO ALLOY THIN FILMS. *Rasayan Journal of Chemistry*. 2018;11(3). <https://doi.org/10.31788/RJC.2018.1133088>
34. Li B, Mei T, Li D, Du S. Ultrasonic-assisted electrodeposition of Ni-Cu/TiN composite coating from sulphate-citrate bath: Structural and electrochemical properties. *Ultrasonics sonochemistry*. 2019;58:104680. <https://doi.org/10.1016/j.ultsonch.2019.104680>
35. Sarac U, Baykul MC. Morphological and microstructural properties of two-phase Ni–Cu films electrodeposited at different electrolyte temperatures. *Journal of alloys and compounds*. 2013;552:195-201. <https://doi.org/10.1016/j.jallcom.2012.10.071>
36. Arasteh J. Microhardness Optimization of Al–TiC Nanocomposite Produced by Mechanical Milling and Heat Treatment. *Advanced Ceramics Progress*. 2021;7(1):35-45. <https://doi.org/10.30501/ACP.2021.265197.1052>
37. Goranova D, Avdeev G, Rashkov R. Electrodeposition and characterization of Ni–Cu alloys. *Surface and Coatings Technology*. 2014;240:204-10. <https://doi.org/10.1016/j.surfcoat.2013.12.014>
38. Hu G, Huang R, Wang H, Zhao Q, Zhang X. Facile galvanic replacement deposition of nickel on copper substrate in deep eutectic solvent and its activation ability for electroless Ni–P plating. *Journal of Solid State Electrochemistry*. 2022;26(5):1313-22. <https://doi.org/10.1007/s10008-022-05172-4>
39. Niu J, Song M, Zhang Y, Zhang Z. Dealloying induced nanoporosity evolution of less noble metals in Mg ion batteries. *Journal of Magnesium and Alloys*. 2021;9(6):2122-32. <https://doi.org/10.1016/j.jma.2021.04.003>
40. Wang S, Guo X, Yang H, Dai J, Zhu R, Gong J, et al. Electrodeposition mechanism and characterization of Ni–Cu alloy coatings from a eutectic-based ionic liquid. *Applied Surface Science*. 2014;288:530-6. <https://doi.org/10.1016/j.apsusc.2013.10.065>
41. Nwaeju CC, Eboh, A. O., and Edoziuno, F. O. . Grain size evolution mechanical and corrosion behaviour of precipitate strengthened Cu-Ni alloy. *Acta Metallurgica Slovaca*. 2022;28(4):188–96. <https://doi.org/10.36547/ams.28.4.1609>
42. Ameri Ekhtiarabadi T, Zandrahimi M, Ebrahimifar H. The Impact of Current Density of Electroplating on Microstructure and Mechanical Properties of Ni-ZrO₂-TiO₂ Composite Coating. *Advanced Ceramics Progress*. 2020;6(1):22-9. <https://doi.org/10.30501/acp.2020.233518.1038>
43. Wang C, Hossain Bhuiyan ME, Moreno S, Minary-Jolandan M. Direct-write printing copper–nickel (Cu/Ni) alloy with controlled composition from a single electrolyte using co-electrodeposition. *ACS applied materials & interfaces*. 2020;12(16):18683-91. <https://doi.org/10.1021/acsami.0c01100>
44. Hanachi M, Seyedraoufi Z, Abouei V. Investigation of Microstructure, Hardness, and Corrosion Resistance of Ni-P-GO Electroless Nanocomposite Coating on AZ31D Alloy Surface. *Advanced Ceramics Progress*. 2020;6(3):55-62. <https://doi.org/10.30501/acp.2020.233518.1038>
45. Dhara B, Jha PK, Gupta K, Bind VK, Ballav N. Diamagnetic Molecules Exhibiting Room-Temperature Ferromagnetism in Supramolecular Aggregates. *The Journal of Physical Chemistry C*. 2017;121(22):12159-67. <https://doi.org/10.1021/acs.jpcc.7b02145>
46. Qasim I, Waqee-ur-Rehman M, Mumtaz M, Hussain G, Nadeem K, Shehzad K. Ferromagnetic (Ni) nanoparticles–CuTi-1223 superconductor composites. *Journal of Magnetism and Magnetic Materials*. 2016;403:60-7. <https://doi.org/10.1016/j.jmmm.2015.11.066>
47. Padmapriya G, Manikandan A, Krishnasamy V, Jaganathan SK, Antony SA. Enhanced catalytic activity and magnetic properties of spinel Mn x Zn 1–x Fe 2 O 4 (0.0 ≤ x ≤ 1.0) nano-photocatalysts by microwave irradiation route. *Journal of Superconductivity and Novel Magnetism*. 2016;29:2141-9. <https://doi.org/10.1007/s10948-016-3527-x>

48. Demidenko O, Zhyvulka A, Yanushkevich K, Galias A, Constantin V, Neacsu E, et al. Magnetic properties of stainless steels under corrosive action of based on choline chloride ionic liquids. *Journal of Magnetism and Magnetic Materials*. 2019;477:74-6. <https://doi.org/10.1016/j.jmmm.2019.01.034>
49. Marenych O, Ding D, Pan Z, Kostryzhev A, Li H, van Duin S. Effect of chemical composition on microstructure, strength and wear resistance of wire deposited Ni-Cu alloys. *Additive Manufacturing*. 2018;24:30-6. <https://doi.org/10.1016/j.addma.2018.08.003>
50. Ramkumar KD, Joshi V, Pandit S, Agrawal M, Kumar OS, Periwal S, et al. Investigations on the microstructure and mechanical properties of multi-pass pulsed current gas tungsten arc weldments of Monel 400 and Hastelloy C276. *Materials & Design*. 2014;64:775-82. <https://doi.org/10.1016/j.matdes.2014.08.055>

COPYRIGHTS

©2024 The author(s). This is an open access article distributed under the terms of the Creative Commons Attribution (CC BY 4.0), which permits unrestricted use, distribution, and reproduction in any medium, as long as the original authors and source are cited. No permission is required from the authors or the publishers.



Persian Abstract

چکیده

پوشش‌های آلیاژی تک فاز نیکل مسغنی از نیکل (Ni) بر روی بسترهای آلومینیومی (Al) با رسوب الکتریکی در حمام سیترات تثبیت شده تولید شدند. آزمایش‌های رسوب الکتریکی در چهار چگالی جریان مختلف انجام شد. افزایش چگالی جریان منجر به افزایش سرعت رسوب فلز سریعتر از نرخ تکامل هیدروژن شد. بنابراین، راندمان جریان کاتدی افزایش یافت. سیستم‌های کریستالی آلیاژهای Ni-Cu مکعبی در مرکز سطح (FCC) بودند، با صفحه (۱۱۱) به عنوان صفحه کریستالی ترجیحی. میکروسکوپ الکترونی روبشی با اندازه‌گیری‌های طیف‌سنجی پرتو ایکس پراکنده انرژی (SEM-EDS) نشان داد که محتوای نیکل در پوشش با افزایش چگالی جریان افزایش می‌یابد. نمونه Ni-Cu 40 بیشترین مقدار نیکل را داشت و مورفولوژی همگن و فشرده را نشان داد. مشخص شد که هر چه غلظت نیکل در محلول بیشتر باشد، اندازه دانه کوچکتر است. اندازه‌گیری‌های ثبت‌شده با یک مغناطیس‌سنج نمونه ارتعاشی (VSM) نشان داد که نمونه Ni-Cu 40 اشباع مغناطیسی را ارائه می‌کند، با بالاترین مقدار ۰.۱۰۸ emu/g. روش میکروسختی HV ۴۰۴ بر روی نمونه Ni-Cu 40 تولید کرد. در نتیجه، چگالی جریان بالاتر با ترکیب نیکل بالاتر و افزایش ضخامت همراه بود که مسئول افزایش خواص مغناطیسی و سختی بود.

Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

by Cahaya Rosyidan FTKE

Submission date: 29-Jan-2024 10:21PM (UTC+0700)

Submission ID: 2207546240

File name: IJE_Volume_37_Issue_2_Pages_213-223.pdf (1.07M)

Word count: 6646

Character count: 34857



Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

C. Rosyidan^{a,b}, B. Kurniawan^{a*}, B. Soegijono^c, V. G. Vidia Putra^d, D. R. Munazat^a, F. B. Susetyo^e

^aDepartment of Physics, Universitas Indonesia, Depok, Indonesia

^bDepartment of Petroleum, Universitas Trisakti, Jakarta, Indonesia

^cDepartment of Geoscience, Universitas Indonesia, Depok, Indonesia

^dPlasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, Indonesia

^eDepartment of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta, Indonesia

PAPER INFO

Paper history:

Received 28 July 2023

Received in revised form 08 September 2023

Accepted 30 September 2023

Keywords:

Cathodic Current Efficiency

Microhardness

Ni-Cu Coating

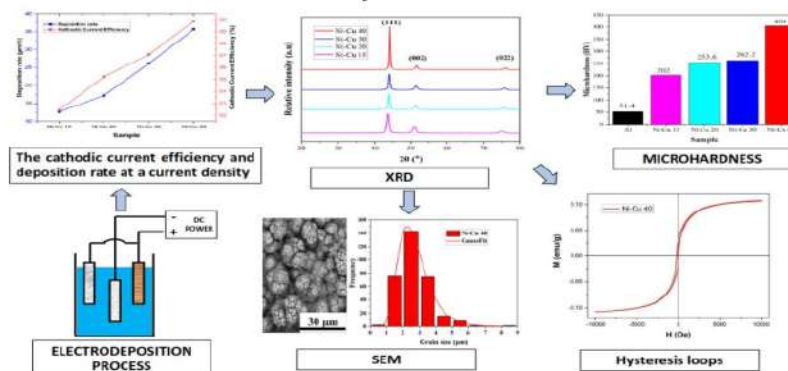
Vibrating Sample Magnetometer

ABSTRACT

Nickel (Ni)-rich single-phase nickel-copper (Ni-Cu) alloy coatings were produced on aluminum (Al) substrates by electrodeposition in stabilized citrate baths. Electrodeposition experiments were performed at four different current densities. Increasing the current density resulted in the metal deposition rate increasing faster than the hydrogen evolution rate; thus, the cathodic current efficiency increased. The crystal systems of the Ni-Cu alloys were face center cubic (fcc), with the (111) plane as the preferred crystal plane. Scanning electron microscopy with energy dispersive X-ray spectroscopy (SEM-EDS) measurements showed that the Ni content in the coating increased with increasing current density. The Ni-Cu 40 sample had the most Ni content and showed a homogeneous and compact morphology. It was found that the higher the concentration of Ni in the solution, the smaller the grain size. Measurements recorded with a vibrating sample magnetometer (VSM) showed that the Ni-Cu 40 sample provided magnetic saturation, with the highest value being 0.108 emu/g. The microhardness method produced 404 HV on the Ni-Cu 40 sample. In conclusion, higher current densities were associated with a higher Ni composition and increased thickness, which were responsible for the increases in the magnetic properties and hardness.

doi: 10.5829/ije.2024.37.02b.01

Graphical Abstract



*Corresponding author email: budhy.kurniawan@sci.ui.ac.id, (B. Kurniawan)

NOMENCLATURE

C_c	Cathodic current efficiency	W_i	Initial weight of the substrate
σ	Lattice strain	W_f	Weight
W_s	Final weight of the substrate	I	Total current
W_m	Ratio of the final weight of the substrate	t	Deposition time
μ	Texture coefficient of the unique plane	F	Faraday's constant
$I(hkl)$	Measured intensity	f_{Ni}	Nickel deposit weight ratio
m_{Cu}	Copper's atomic weight	m_{Ni}	Nickel's atomic weight

1. INTRODUCTION

Researchers widely study nickel (Ni) and copper (Cu) alloys as engineering materials due to their unique mechanical, magnetic, and anti-corrosion properties (1, 2). Ni-Cu alloys are known as monel in the industry and are typically comprised of 70 wt% Ni and 30 wt% Cu (3). These alloys have outstanding capabilities in acidic and alkaline environments (4). Ni-Cu alloys are single-phase alloys throughout their composition on the phase diagram, and these alloys formed because Ni and Cu are fully soluble in their solid and liquid states (5). Ni and Cu both have a face center cubic (fcc) crystal structure, and they have almost similar electronegativity and atomic radii (6, 7).

Given that conventional casting as a manufacturing method for monel results in substantial production costs and that Ni-Cu alloy coated on aluminum (Al) has potential as a replacement for monel as a bulk material (8), Al-based metals have received considerable attention (9, 10). They are lightweight and demonstrate high resistance to wear and corrosion and a high strength–stiffness combination (11).

Several techniques have been proposed to successfully modify the surface morphology and chemical composition, including sol-gel, chemical etching, chemical vapor deposition, thermal embossing, and electrodeposition (12, 13). The electrodeposition technique is a cost-effective, scalable, and easy-to-control process for coating Ni-Cu alloy (14). Specific methods have also been developed to determine the structure, morphology, and phase composition of the coated Ni-Cu alloys (15, 16). Goranova et al. (17) investigated how changing the concentration of Ni ions and the current density affected the structure and composition of Ni-Cu alloys formed by electrodeposition in alkaline citrate baths. Higher concentrations of Ni ions in the bath led to notably smoother deposits and enhanced current efficiency. However, producing a uniform Ni-Cu coating can be challenging due to the difference in reduction potential between Ni and Cu. The reduction potential of Ni atoms is -0.25 V vs. SHE, and that of Cu atoms is +0.34 V vs. SHE (18). As a result, controlling the concentrations of Ni and Cu is vital. Complexing agents must be added to narrow the potential difference between Ni and Cu. The most frequently used complexing agent is citrate due to its low toxicity, cost-effectiveness, and buffering characteristics (19).

The electrodeposition process affects the physical properties of the resultant Ni-Cu alloy, as does the current density. A high current density causes the crystal plane to be oriented in the (111) plane, the lattice size to be smaller, and the atomic distance to be less (20). The grain size becomes smaller when the current density is high, and the morphological shape resembles that of a cauliflower (21). As a result of a high current density, the coating will be thicker, and the composition of the Ni weight fraction will also be higher. The amount of Ni deposited on the substrate and the thickness of the coating both have an impact on the product's magnetic properties (22). In addition, a smaller grain size results in an increase in hardness (23). Karunakaran et al. (24) reported a hardness of 153 HV when the current density was 40 mA/cm², and Karunakaran and Pugazh (25) Vadivu reported a magnetic saturation value of 0.0004 emu/g at 40 mA/cm². Nevertheless, the researchers did not examine the impact of the coating electrodeposition factors, structure, and morphology on the magnetic and hardness properties.

The aims of this research were 1) to produce a Ni-rich Ni-Cu alloy coating on Al via electrodeposition and 2) to investigate the link between magnetic and hardness properties and the coating's microstructure and surface morphology. We varied the current density, and the process was conducted at room temperature. We examined the influence of various process variables on the cathodic current efficiency, structure, morphology, composition, grain size, and thickness of the produced coatings. Finally, the magnetic properties and hardness of the coatings were investigated.

19

2. MATERIAL AND METHODS**2.1. Material and Electrodeposition Process**

The chemical composition of the Al substrate (cathode) used was Fe = 1.63 wt%, Mg = 1.49 wt%, and Al = 96.88 wt%. The chemical composition of the Ni (anode) used was Al = 0.02 wt%, Ca = 0.04 wt%, Fe = 0.23 wt%, Y = 1.61 wt%, Zr = 0.04 wt%, Nb = 0.05 wt%, and Ni = 98.01 wt%. The chemical composition of the Cu (anode) used was P = 0.22 wt%, Cd = 0.684 wt%, Si = 0.137 wt%, and Cu = 98.959 wt%. The Al was cleaned from the oxide coating with sandpaper before deposition using DELTA D68H for 5 min. Ni-Cu electrodeposition was carried out using a SANFIX 305 E DC power supply. The samples produced using a current density of

15 mA/cm², 20 mA/cm², 30 mA/cm², and 40 mA/cm² were designated as Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40, respectively. Table 1 summarized the bath composition and deposition parameters.

2. 2. Characterization The deposition rate was calculated using the previously reported method (26). The following formula, Equation 1, was used to calculate the efficiency of the cathodic current (27):

$$C_p = \frac{W_m}{W_f} \quad (1)$$

W_m and W_f were calculated using Faraday's law, as shown in Equations 2 and 3.

$$W_m = W_s - W_i \quad (2)$$

$$W_f = \{(m_{Ni}/2) * f_{Ni} + (m_{Cu}/2) * f_{Cu}\} * I * \frac{t}{F} \quad (3)$$

The crystal structure of the Ni-Cu coating was determined using X-ray diffraction (XRD-PANalytical Aeris Instrument Suit) (Cu-K α radiation, $\lambda = 0.15418$ nm). XRD data were collected from 20° to 80° with a step size of 0.020°. The Materials Analysis Using Diffraction (MAUD) program was used to determine the crystal parameters of the sample after Rietveld refinement. The preferential crystallite orientation was determined from the texture coefficient μ , as shown in Equation 4 (28):

$$\mu = \frac{I(hkl)/I_0(hkl)}{\sum \{I(hkl)/I_0(hkl)\}} \quad (4)$$

Based on XRD results, the lattice strain σ was calculated using Equation (5) (29):

$$\sigma = \left(\frac{\beta}{4 \times \tan \theta} \right) \quad (5)$$

SEM-EDS (Thermofisher Quanta 650 EDAX EDS Analyzer) with 1000 $\times$ magnification was used to analyze the surface morphology of the Ni-Cu coatings. EDS was used to determine the chemical composition of the coatings, and the statistical distribution of grain sizes was calculated using ImageJ software. The cross sections of the coated samples were also examined to assess how the current density and CCE affected the

coating thickness. Measurement of magnetic properties was conducted using a vibrating sample magnetometer (VSM, Oxford 1.2H). The hardness of the Ni-Cu coatings was measured using a MicroMct® 5100 Series Microindentation Hardness Tester. The ATM E384 standard was used for the tests, which were performed with a load of 100 g for 10 s at five places.

3. RESULTS AND DISCUSSION

3. 1. Cathodic Current Efficiency and Deposition Rate

Figure 1 depicts the relationship between the average CCE and deposition rate in the citrate electrolyte bath. The CCE was found to be high, with a value of 82–89%. The basic concept of current efficiency can be understood as the fraction of total current used for metal plating (30). Apart from metal deposition, hydrogen evolution is the only other necessary process that must occur on the substrate surface. Ni and Cu precipitation are both antagonistic to the hydrogen evolution reaction. In this study, the metal deposition rate increased faster than the hydrogen evolution rate when the current density increased from 15 to 40 mA/cm²; hence, the CCE increased. The highest CCE (89.96%) was associated with the Ni-Cu 40 sample, and the lowest CCE (82.55%) was associated with the Ni-Cu 15 sample. Basori et al. and Syamsuir et al. (31) found that the deposition rate and current efficiency are considered linear.

3. 2. Structural Properties Figure 2(a) depicts the XRD spectra of the Ni-Cu alloy samples produced at various current densities. According to the XRD analysis results, each Ni-Cu alloy sample consisted of a single phase with an fcc structure. The evolution of the lattice parameters of the Ni-rich (111) phase over the range of current densities is shown in Figure 2(b). The

TABLE 1. Bath composition and deposition parameters

Bath composition and condition	Quantity
NiSO ₄ ·6H ₂ O (Merck)	0.5 M
CuSO ₄ ·5H ₂ O (Merck)	0.04 M
Na ₂ C ₂ H ₃ O ₇ (Merck)	0.2 M
pH	4.2
Temperature	25 °C
Deposition time	1 h

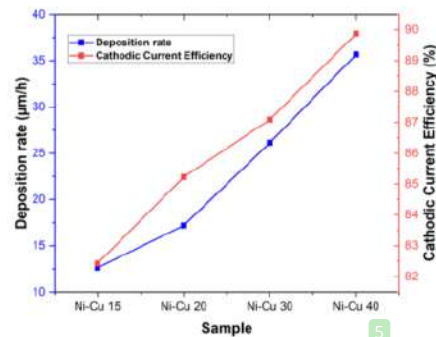


Figure 1. The cathodic current efficiency and deposition rate at a current density of 15, 20, 30, and 40 mA/cm²

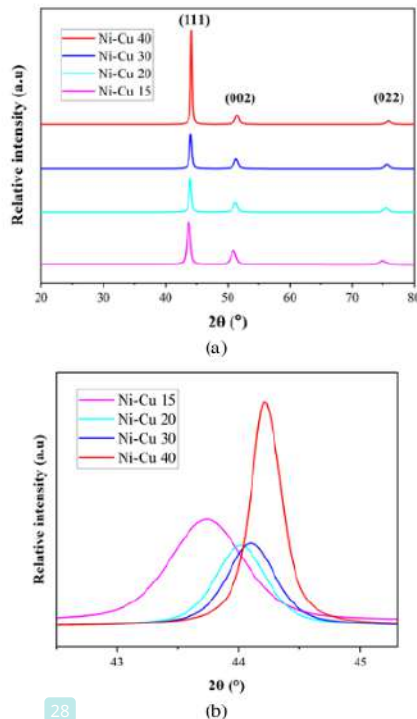


Figure 2. (a) X-ray diffraction spectra of Ni-Cu coatings electrodeposited at various current densities and (b) the extended view of the Ni-Cu (111) plane, showing peak shifts

peaks of each sample were found between the peaks of the fcc of $2\theta = 43.3^\circ$ for pure Cu and $2\theta = 44.5^\circ$ for pure Ni (32, 33). As the Ni content of the alloy coating increased, the diffraction angle also increased.

Crystal size calculation using MAUD resolved refinement was used to determine the size of the crystallites in the Ni-Cu alloys, and the results (Table 2) show that the crystallite size of the Ni-Cu coating ranged from approximately 24 to 50 nm. The crystallite size of a pure Ni layer is 60 nm, meaning that the Ni-Cu alloys had smaller crystallite sizes than a pure Ni layer. This result is also similar to that obtained by Li et al. (34). In contrast to the typical watt-Ni coating, we found that the presence of a sodium citrate complexing agent resulted in a finer crystallite size. This is consistent with the findings of Sarac and Baykul (35), who observed that Cu atoms affect grain refinement in Ni-Cu alloys. Cu atoms can restrain the surface diffusion of Ni atoms during the deposition process and inhibit the growth of crystallites.

The evolution of the crystallographic orientation of the Ni-Cu coatings produced with varying current

densities is shown in detail in Figure 3. It can be observed that a strong (111) fiber texture appeared in all the samples, while the (002) texture gradually decreased as the current density increased.

The μ values of different crystal planes are also used to evaluate the degree of crystallographic orientation (34). Moreover, the Ni-Cu coating electrodeposited at the current density of 40 mA/cm^2 was found to have a strong (111) texture.

The texture coefficient for every preference was calculated using Equation 4 to ascertain the preferred crystal orientation direction of each Ni-Cu alloy obtained at the various current densities, and the results are shown in Table 3 (32).

It seems that the texture coefficient was also dependent on the peak current, and the preferred orientation was the (111) plane. Li et al. (34) found that the higher the current density, the more dominant the (111) plane. The findings suggest that the (111) crystallographic orientation was preferable for all the Ni-Cu coatings electrodeposited at the tested current densities.

The lattice strain of the prepared coatings was determined using Equation 5, and Figure 4 illustrates the changes in the crystal size and lattice strain of the Ni-Cu coatings based on the current density applied in the plating bath.

The crystal size increased and the lattice strain decreased as the current density increased (36). This result aligns with that obtained by Devi et al. (33), who showed that the higher the current density, the more the

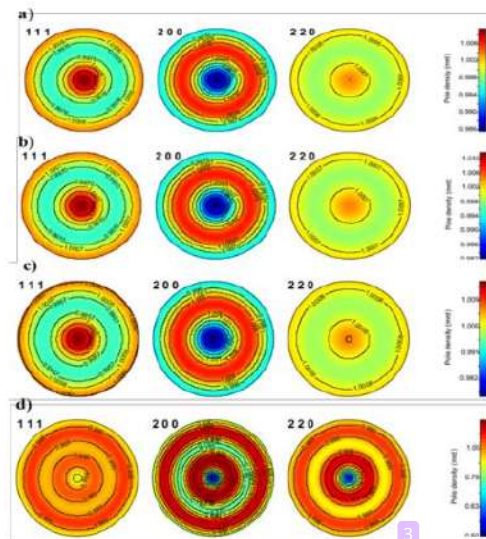


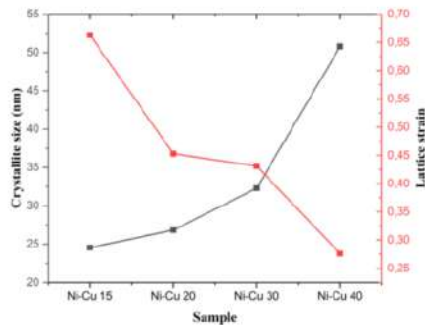
Figure 3. The simulated 2D pole figures for the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

TABLE 2. Parameters of the Ni-Cu alloys after Rietveld refinement using MAUD

Parameter	Sample			
	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40
Crystal structure	Cubic fcc			
Space group	Fm-3m			
Lattice constant ($\text{\AA}$) $a = b = c$	3.582	3.560	3.554	3.545
Volume ($\text{\AA}^3$)	45.975	45.152	44.905	44.557
d-spacing ($\text{\AA}$)	1.791	1.780	1.695	1.691
Crystallite size (nm)	24.55	26.82	32.29	50.78
Rwp (100%)	3.640	4.484	5.394	5.139
GOF	1.94	1.72	2.06	2.03
Lattice strain	0.663	0.453	0.431	0.276

TABLE 3. Texture coefficient analysis of Ni-Cu deposits

Sample	μ (hkl)		
	[111]	[002]	[022]
Ni-Cu 15	1.12	0.86	0.77
Ni-Cu 20	1.17	0.74	0.81
Ni-Cu 30	1.18	0.74	0.78
Ni-Cu 40	1.48	0.34	0.32

**Figure 4.** The lattice strain and crystallize size of the Ni-Cu alloys coated on Al at various current densities

crystal size increased. A possible reason for this is that the composition of Ni increases as the current density increases.

3. 3. Surface Morphology EDS was used to determine the elemental composition of the Ni-Cu coatings, and the results are shown in Figure 5 and Table 4. Cu and Ni were the only elements present in the

deposits. The alloy composition was influenced by the current density: as the current density increased, the Cu content decreased. This phenomenon can be caused by the $[\text{Ni}^{2+}]/[\text{Cu}^{2+}]$ ratio in the bath, which changes the composition of Ni and Cu. Goranova et al. discovered that as the Cu content of deposits decreased, so did the CCE (37). This phenomenon occurs because of the orderly deposition of Ni and Cu (38). In regular deposition, increasing the current density leads to an increased proportion of less noble metals in the deposited material (39). In our scenario, Ni is the less noble metal. As a result, when the current density was higher, the deposits were richer in Ni.

Another notable feature was that as the current density increased, the peak shifted to the right (i.e., to higher 2θ values). The change in the alloy composition may have also caused this peak shift. The Ni concentration increased as the current density increased (see Table 4). Because Ni and Cu combine to produce a single-phase alloy, the diffraction peak shifted toward that of pure Ni as the Ni percentage increased. This finding is similar to the observations of Goranova et al. (17), who found that the fcc reflection for Ni-rich Ni-Cu alloy deposits shifted to the right as the Ni concentration increased. Indeed, it is logical to expect the Ni-Cu alloy peak to shift as the Ni content increase.


**Figure 5.** Eds graph of the Ni-Cu 15

TABLE 4. The chemical composition of Ni-Cu coatings on the Al substrate prepared at different current densities

Sample	Cu, wt%	Ni, wt%
Ni-Cu 15	54.95	45.05
Ni-Cu 20	39.83	60.17
Ni-Cu 30	29.80	70.20
Ni-Cu 40	19.64	80.36

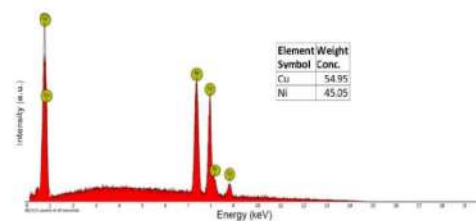The surface morphological structure and the cross section of the coated samples were observed using SEM. Figure 6 shows SEM micrographs of the four samples' surface morphological structures. The deposits developed a fine-grained and compact spherical shape when lower deposition current densities were applied (Figure 5(a)). Deo et al. (27) and Goranova et al. (37) also observed this morphology at low current densities. The shape changed to a coarser cauliflower form when higher current densities were applied (Figure 6(d)). A diffusion-limited deposition mechanism in which a multigeneration spherical diffusion layer creates a cauliflower shape is likely to produce this type of morphology (40). As the current density increased, the cauliflower-like protrusions became more spaced and separated, creating gaps. The Ni-Cu 40 sample, produced with the highest current density, was found to have the largest gaps between the cauliflower-like bulges.

The increased nucleation rate can explain the observed decrease in grain size with increasing current density (41, 42). Ni-Cu ion flow to the cathode is faster at higher current densities. Further investigation is

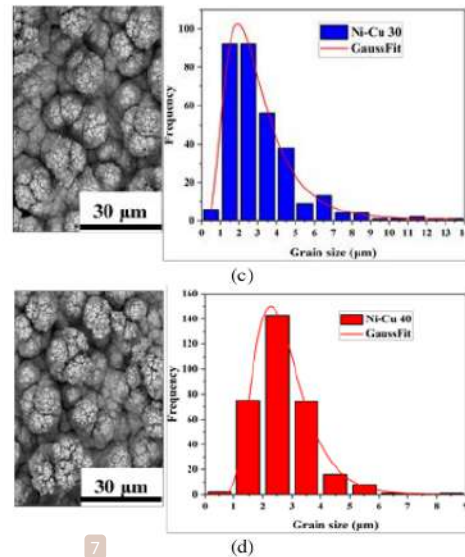
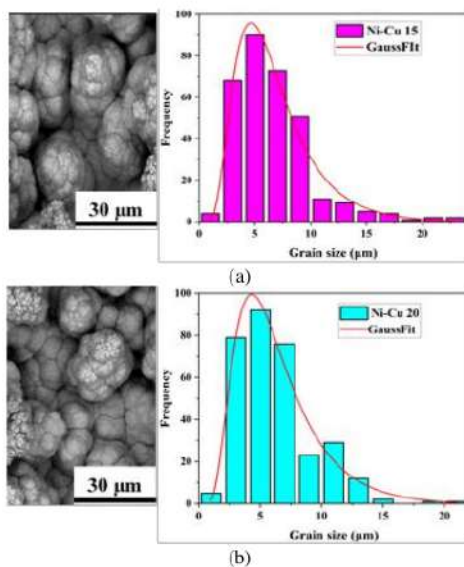


Figure 6. Surface SEM images of the deposited Ni-Cu alloy coatings and plots showing the statistical distribution of the grain size

needed to determine the exact relationship between the current density and the grain size of the coating. In the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples, the peak that corresponded to the (111) plane shifted toward the right (see Figure 2b). The reduction in d-spacing is ascribed to residual stress induced at a higher deposition rate (43). The statistical results of the grain size distribution presented in Figure 6 indicate that the grain size ranged from 4.63 to 1.94 μm . The decrease in grain size with the increase in current density is evident in the data shown in Table 5.

Figure 7 depicts the relationship between the deposited alloy composition and the applied current density. EDS was used to determine the composition.

Figure 8 (a-d) displays SEM cross-section images of the produced Ni-Cu coatings. The absence of cracks between the substrate and coating demonstrates that appropriate adhesion occurred between the two entities (44). The thickness of the electrodeposited Ni-Cu coating was also measured for each sample (27), and the

TABLE 5. Average grain size found in each sample

Sample	Average grain size (μm)
Ni-Cu 15	4.63 ± 0.269
Ni-Cu 20	4.38 ± 0.365
Ni-Cu 30	2.28 ± 0.068
Ni-Cu 40	1.94 ± 0.032

following results were recorded: Ni-Cu 15 = 32 μm , Ni-Cu 20 = 42 μm , Ni-Cu 30 = 49 μm , and Ni-Cu 40 = 50 μm . The effect of the current density on the thickness of the Ni-Cu coating is depicted in Figure 8; the thickness increased as the current density increased (19). Hence, a higher current density results in more mass and a thicker coating. The findings presented in Figure 1 show that as the current density increased, so too did the CCE.

According to Faraday's law, when the deposition time remains constant for all samples, coatings formed at lower current densities will be thinner than those produced at higher current densities. A thinner covering may lead to severe interference from the Al substrate. The cathodic current density also affects the coating, as Deo et al. (27) discovered that increasing the current density improves the thickness of the film due to an increase in the CCE.

3. 4. Magnetic Properties Figure 9 depicts the magnetic characteristics and fluctuations in the current density magnetization measured with a VSM at room

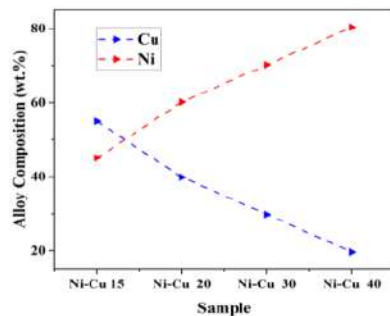


Figure 7. The dependence of the deposited alloy's composition (shown as wt% of the single electrolytes) on current density



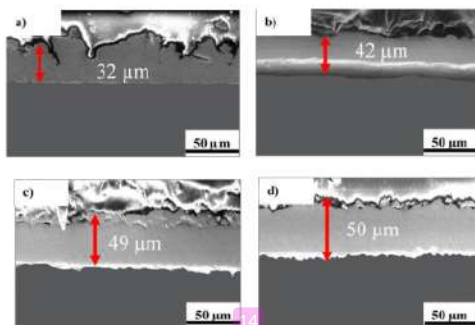


Figure 8. SEM cross-section images of the Ni-Cu coating on Al in the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

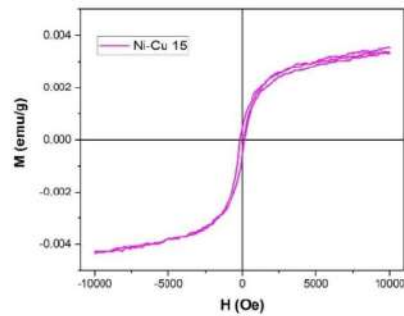
temperature (45). The results of the VSM analysis demonstrate that the coatings in the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples displayed ferromagnetic activity. The low ferromagnetic activity of the $\text{Cu}_{54.95}\text{Ni}_{45.05}$ alloy film of Ni-Cu 15 could be attributed to Ni diffusion in the Cu matrix, as Cu is a diamagnetic metal and Ni is a ferromagnetic metal (46). The ferromagnetic properties of the Ni-Cu films of Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 increased with the Ni content of the alloy coatings.




(a)

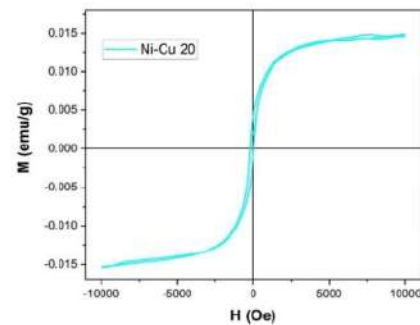

(b)

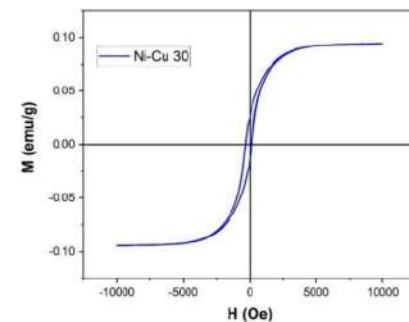

(c)

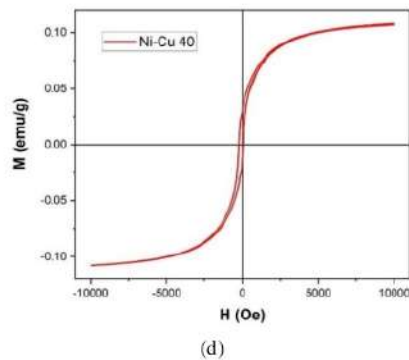

(d)
Figure 9. Hysteresis loops of multilayers generated at different current densities

As the Ni content of the Ni-Cu alloy coatings increased, so did the saturation magnetization (see Table 6). Wang et al. (43) reported that saturation magnetization depends on the Ni content of Ni-Cu alloy coatings. In addition, Awasthi (22) reported that magnetization is enhanced by increasing the coating thickness. A possible reason for this enhanced magnetization is the magnetic disorder caused by the coating. It has been shown that the trend in saturation magnetization enhancement is associated with the coating level (47). Demidenko et al. (48) found that monel has paramagnetic properties at room temperature, while the Ni-Cu alloys in this study had ferromagnetic properties. Here, we have improved upon the results of previous studies in which phosphorus (P) and tungsten (W) were added (25). In this study, the Ni-Cu 40 sample exhibited the strongest magnetic properties.

3. 5. Hardness Figure 10 depicts the dependence of the microhardness of the Ni-Cu coatings on the current density in the plating bath. From the data presented in Figure 10, it is clear that the coating of the Ni-Cu 40 sample had the highest microhardness value (404 HV). In general, the microhardness increased with the current density and was attributed to the grain size and thickness of the coatings (42). Pingale et al. (19) found that hardness increased with the thickness of the coating. The

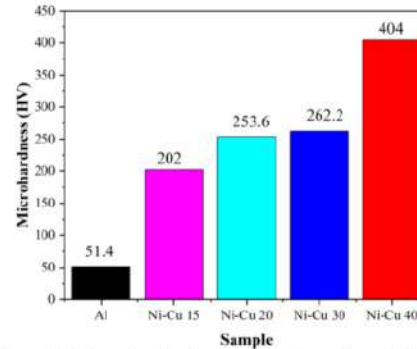


Figure 10. The microhardness of the electrodeposited Ni-Cu samples produced with different current densities

coating thickness could influence the hardness of Ni-Cu films (26).

The results indicate that alloys with a greater Ni content are mechanically harder. The overall dependence of hardness and microhardness on the percentage of Ni is shown in Figure 11, and the data indicate that microhardness increases as the percentage of Ni increase. This result is similar to Marenych's (49) finding that the hardness value is highest with the highest Ni composition.

Moreover, the hardness reported in previous studies that resulted from electrodeposition of Ni-Cu on Al in the presence of P was lower than that recorded in the present study (24). This is due to the smaller grain size that resulted from applying a different current density. In addition, the increase in microhardness reported here is related to the role that Ni atoms play in grain refinement (31). Ramkumar et al. (50) reported a monel hardness value of 165 HV, which is lower than the peak hardness value recorded in the current study.

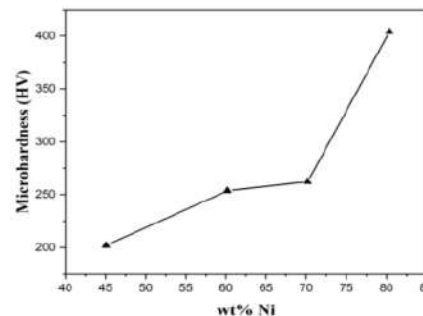


Figure 11. The relationship found between wt% Ni and microhardness, based on the data obtained from the four experimental samples

TABLE 6. The results of the magnetic analysis of the Ni-Cu/Al samples

Sample	Hc (Oe)	Mr (emu/g)	Ms (emu/g)
Ni-Cu 15	143.829	0.00047	0.003
Ni-Cu 20	140.081	0.004	0.015
Ni-Cu 30	256.215	0.025	0.094
Ni-Cu 40	144.023	0.032	0.108

20. Hughes RA, Menumov E, Neretina S. When lithography meets self-assembly: a review of recent advances in the directed assembly of complex metal nanostructures on planar and textured surfaces. *Nanotechnology*. 2017;28(28):282002. <https://doi.org/10.1088/1361-6528/aa77ce>
21. Kamel M, Anwer Z, Abdel-Salam I, Ibrahim I. Electrodeposition of nanocrystalline Ni-Cu alloy from environmentally friendly lactate bath. *Surface and Interface Analysis*. 2014;46(7):442-8. <https://doi.org/10.1002/sia.5525>
22. Awasthi S, Pandey SK, Balani K. Tuning the magnetism and tribological behaviour of electrodeposited Ni/Cu bi-layer by selective reinforcement of carbon nanotubes. *Journal of Alloys and Compounds*. 2020;818:153287. <https://doi.org/10.1016/j.jallcom.2019.153287>
23. Heidarzadeh A, Saad T. Correlation between process parameters, grain size and hardness of friction-stir-welded Cu-Zn alloys. *Rare Metals*. 2018;37:388-98. <https://doi.org/10.1007/s12598-016-0704-9>
24. Karunakaran M, Pugazhavadu M, Gunasegaran V, Gowtham G. Electrodeposition of Cu-Ni-PW Composite on Al-6063 Substrate. 2018. <https://doi.org/10.26438/ijscpas/v6i3.5964>
25. Karunakaran M, Vadivu MP. Magnetic and micro-mechanical behavior of Cu-Ni-PW-TiO₂ hybrid composite electroplating on Al alloy substrate. *Journal of Magnetism and Magnetic Materials*. 2019;475:359-67. <https://doi.org/10.1016/j.jmmm.2018.11.077>
26. Soegijono B, Susetyo F, editors. Magnetic field exposure on electroplating process of ferromagnetic nickel ion on copper substrate. *Journal of Physics: Conference Series*; 2022: IOP Publishing.
27. Deo Y, Guha S, Sarkar K, Mohanta P, Pradhan D, Mondal A. Electrodeposited Ni-Cu alloy coatings on mild steel for enhanced corrosion properties. *Applied Surface Science*. 2020;515:146078. <https://doi.org/10.1016/j.apsusc.2020.146078>
28. Seakr R. Microstructure and crystallographic characteristics of nanocrystalline copper prepared from acetate solutions by electrodeposition technique. *Transactions of Nonferrous Metals Society of China*. 2017;27(6):1423-30. [https://doi.org/10.1016/S1003-6326\(17\)60164-X](https://doi.org/10.1016/S1003-6326(17)60164-X)
29. Dolabella S, Borzi A, Dommann A, Neels A. Lattice strain and defects analysis in nanostructured semiconductor materials and devices by high-resolution X-ray diffraction: theoretical and practical aspects. *Small Methods*. 2022;6(2):2100932. <https://doi.org/10.1002/smt.202100932>
30. Budi S, Tawwab RA, Cahyana U, Paristiwati M. Saccharin-assisted galvanostatic electrodeposition of nanocrystalline FeCo films on a flexible substrate. *International Journal of Electrochemical Science*. 2020;15(7):6682-94. <https://doi.org/10.20964/2020.07.74>
31. Syamsuir S, Soegijono B, Yudanto SD, Basori B, Ajiriyanto MK, Nanto D, et al. Electrolyte Temperature Dependency of Electrodeposited Nickel in Sulfate Solution on the Hardness and Corrosion Behaviors. *International Journal of Engineering, Transactions C: Aspects*. 2023;36(6):1193-200. <https://doi.org/10.5829/ije.2023.36.06c18>
32. Soegijono B, Susetyo FB, Fajrah MC. Electrodeposition of Paramagnetic Copper Film under Magnetic Field on Paramagnetic Aluminum Alloy Substrates. *e-Journal of Surface Science and Nanotechnology*. 2020;18:281-8. <https://doi.org/10.1380/EJSSNT.2020.281>
33. Devi C, Ashokkumar R. INFLUENCE OF DIFFERENT CURRENT DENSITY ON CHARACTERISTICS OF NiFeP NANO ALLOY THIN FILMS. *Rasayan Journal of Chemistry*. 2018;11(3). <https://doi.org/10.31788/RJC.2018.1133088>
34. Li B, Mei T, Li D, Du S. Ultrasonic-assisted electrodeposition of Ni-Cu/TiN composite coating from sulphate-citrate bath: Structural and electrochemical properties. *Ultrasonics sonochemistry*. 2019;58:104680. <https://doi.org/10.1016/j.ultsonch.2019.104680>
35. Sarac U, Baykul MC. Morphological and microstructural properties of two-phase Ni-Cu films electrodeposited at different electrolyte temperatures. *Journal of alloys and compounds*. 2013;552:195-201. <https://doi.org/10.1016/j.jallcom.2012.10.071>
36. Arasteh J. Microhardness Optimization of Al-TiC Nanocomposite Produced by Mechanical Milling and Heat Treatment. *Advanced Ceramics Progress*. 2021;7(1):35-45. <https://doi.org/10.30501/ACP.2021.265197.1052>
37. Goranova D, Avdeev G, Rashkov R. Electrodeposition and characterization of Ni-Cu alloys. *Surface and Coatings Technology*. 2014;240:204-10. <https://doi.org/10.1016/j.surfcoat.2013.12.014>
38. Hu G, Huang R, Wang H, Zhao Q, Zhang X. Facile galvanic replacement deposition of nickel on copper substrate in deep eutectic solvent and its activation ability for electroless Ni-P plating. *Journal of Solid State Electrochemistry*. 2022;26(5):1313-22. <https://doi.org/10.1007/s10008-022-05172-4>
39. Niu J, Song M, Zhang Y, Zhang Z. Dealloying induced nanoporosity evolution of less noble metals in Mg ion batteries. *Journal of Magnesium and Alloys*. 2021;9(6):2122-32. <https://doi.org/10.1016/j.jma.2021.04.003>
40. Wang S, Guo X, Yang H, Dai J, Zhu R, Gong J, et al. Electrodeposition mechanism and characterization of Ni-Cu alloy coatings from a eutectic-based ionic liquid. *Applied Surface Science*. 2014;288:530-6. <https://doi.org/10.1016/j.apsusc.2013.10.065>
41. Nwaeju CC, Eboh, A. O., and Edoziuno, F. O. Grain size evolution mechanical and corrosion behaviour of precipitate strengthened Cu-Ni alloy. *Acta Metallurgica Slovaca*. 2022;28(4):188-96. <https://doi.org/10.36547/ams.28.4.1609>
42. Ameri Ekhtiarabadi T, Zandrahimi M, Ebrahimi H. The Impact of Current Density of Electroplating on Microstructure and Mechanical Properties of Ni-ZrO₂-TiO₂ Composite Coating. *Advanced Ceramics Progress*. 2020;6(1):22-9. <https://doi.org/10.30501/acp.2020.233518.1038>
43. Wang C, Hossain Bhuiyan ME, Moreno S, Minary-Jolandan M. Direct-write printing copper-nickel (Cu/Ni) alloy with controlled composition from a single electrolyte using co-electrodeposition. *ACS applied materials & interfaces*. 2020;12(16):18683-91. <https://doi.org/10.1021/acsami.0c01100>
44. Hanachi M, Seyedraoufi Z, Abouei V. Investigation of Microstructure, Hardness, and Corrosion Resistance of Ni-P-GO Electroless Nanocomposite Coating on AZ31D Alloy Surface. *Advanced Ceramics Progress*. 2020;6(3):55-62. <https://doi.org/10.30501/acp.2020.233518.1038>
45. Dhara B, Jha PK, Gupta K, Bind VK, Ballav N. Diamagnetic Molecules Exhibiting Room-Temperature Ferromagnetism in Supramolecular Aggregates. *The Journal of Physical Chemistry C*. 2017;121(22):12159-67. <https://doi.org/10.1021/acs.jpcc.7b02145>
46. Qasim I, Waqee-ur-Rehman M, Mumtaz M, Hussain G, Nadeem K, Shehzad K. Ferromagnetic (Ni) nanoparticles-CuTi-1223 superconductor composites. *Journal of Magnetism and Magnetic Materials*. 2016;403:60-7. <https://doi.org/10.1016/j.jmmm.2015.11.066>
47. Padmapriya G, Manikandan A, Krishnasamy V, Jaganathan SK, Antony SA. Enhanced catalytic activity and magnetic properties of spinel Mn_xZn_{1-x}Fe₂O₄ (0.0 ≤ x ≤ 1.0) nano-photocatalysts by microwave irradiation route. *Journal of Superconductivity and Novel Magnetism*. 2016;29:2141-9. <https://doi.org/10.1007/s10948-016-3527-x>

48. Demidenko O, Zhyvulka A, Yanushkevich K, Galias A, Constantin V, Neacsu E, et al. Magnetic properties of stainless steels under corrosive action of based on choline chloride ionic liquids. *Journal of Magnetism and Magnetic Materials*. 2019;477:74-6. <https://doi.org/10.1016/j.jmmm.2019.01.034>
49. Marenych O, Ding D, Pan Z, Kostryzhov A, Li H, van Duin S. Effect of chemical composition on microstructure, strength and wear resistance of wire deposited Ni-Cu alloys. *Additive Manufacturing*. 2018;24:30-6. <https://doi.org/10.1016/j.addma.2018.08.003>
50. Ramkumar KD, Joshi V, Pandit S, Agrawal M, Kumar OS, Perival S, et al. Investigations on the microstructure and mechanical properties of multi-pass pulsed current gas tungsten arc weldments of Monel 400 and Hastelloy C276. *Materials & Design*. 2014;64:775-82. <https://doi.org/10.1016/j.matdes.2014.08.055>

COPYRIGHTS

©2024 The author(s). This is an open access article distributed under the terms of the Creative Commons Attribution (CC BY 4.0), which permits unrestricted use, distribution, and reproduction in any medium, as long as the original authors and source are cited. No permission is required from the authors or the publishers.



Persian Abstract

چکیده

پوشش‌های آلیاژی تک فاز نیکل مسغنی از نیکل (Ni) بر روی بسترهای آلومینیومی (Al) با رسوب الکتریکی در حمام سترات تثبیت شده تولید شدند. آزمایش‌های رسوب الکتریکی در چهار چگالی جریان مختلف انجام شد. افزایش چگالی جریان منجر به افزایش سرعت رسوب فاز سریعتر از نرخ تکامل هیدروژن شد. بنابراین، راندمان جریان کاتدی افزایش یافت. سیستم‌های کریستالی آلیاژهای Ni-Cu مکعبی در مرکز سطح (FCC) بودند، با صفحه (۱۱۱) به عنوان صفحه کریستالی ترجیحی. میکروسکوپ الکترونی روبشی با اندازه‌گیری‌های طیفسنجی پرتو ایکس پراکنده انرژی (SEM-EDS) نشان داد که محتوای نیکل در پوشش با افزایش چگالی جریان افزایش می‌یابد. نمونه Ni-Cu 40 بیشترین مقدار نیکل را داشت و مورفولوژی همگن و فشرده را نشان داد. مشخص شد که هر چه غلظت نیکل در محلول بیشتر باشد، اندازه دانه کوچکتر است. اندازه‌گیری‌های ثبت‌شده با یک مغناطیس‌سنج نمونه ارتعاشی (VSM) نشان داد که نمونه Ni-Cu 40 اشباع مغناطیسی را ارائه می‌کند، با بالاترین مقدار 0.108 emu/g . روش میکروسختی HV ۴۰۰ بر روی نمونه Ni-Cu 40 تولید کرد. در نتیجه، چگالی جریان بالاتر با ترکیب نیکل بالاتر و افزایش ضخامت همراه بود که مسئول افزایش خواص مغناطیسی و سختی بود.

Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

ORIGINALITY REPORT

17%

SIMILARITY INDEX

7%

INTERNET SOURCES

17%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Yashwardhan Deo, Sounak Guha, Kuntal Sarkar, Puspanjali Mohanta, Debabrata Pradhan, Avik Mondal. "Electrodeposited Ni-Cu alloy coatings on mild steel for enhanced corrosion properties", Applied Surface Science, 2020

Publication

3%
- 2 Norman B. Pilling, Robert E. Bedworth. "Oxidation of Copper-Nickel Alloys at High Temperatures.", Industrial & Engineering Chemistry, 1925

Publication

2%
- 3 Shikha Awasthi, Sarvesh Kumar Pandey, Kantesh Balani. "Tuning the magnetism and tribological behaviour of electrodeposited Ni/Cu bi-layer by selective reinforcement of carbon nanotubes", Journal of Alloys and Compounds, 2020

Publication

1%

4

Fatih Doğan, Mehmet Uysal, Erhan Duru, Hatem Akbulut, Serdar Aslan. "Pulsed electrodeposition of Ni-B/TiN composites: effect of current density on the structure, mechanical, tribological, and corrosion properties", Journal of Asian Ceramic Societies, 2020

Publication

1 %

5

www.mdpi.com

Internet Source

1 %

6

R. SEAKR. "Microstructure and crystallographic characteristics of nanocrystalline copper prepared from acetate solutions by electrodeposition technique", Transactions of Nonferrous Metals Society of China, 2017

Publication

1 %

7

Morteza Alizadeh, Hamed Safaei. "Characterization of Ni-Cu matrix, Al₂O₃ reinforced nano-composite coatings prepared by electrodeposition", Applied Surface Science, 2018

Publication

1 %

8

Muthusankar Ganesan, Chao-Chen Liu, Sabarison Pandiyarajan, Chen-Ta Lee, Ho-Chiao Chuang. "Post-supercritical CO₂ electrodeposition approach for Ni-Cu alloy fabrication: An innovative eco-friendly

1 %

strategy for high-performance corrosion resistance with durability", Applied Surface Science, 2021

Publication

9

Weiwei Zhang, Wenzhe Xia, Baosong Li, Mingyuan Li, Ming Hong, Zhen Zhang. "Influences of Co and process parameters on structure and corrosion properties of nanocrystalline Ni-W-Co ternary alloy film fabricated by electrodeposition at low current density", Surface and Coatings Technology, 2022

Publication

1 %

10

nagaokaut.repo.nii.ac.jp

Internet Source

1 %

11

www.scielo.br

Internet Source

1 %

12

Begum Unveroglu. "Electrodeposition and Characterization of Ni-Cu Alloy and Submicron-Sized CeO₂ Reinforced Ni-Cu Metal Matrix Composite Coatings", Arabian Journal for Science and Engineering, 2022

Publication

<1 %

13

Haifeng Tan, Wenchao Yang, Mingzhu Hao, Chao Wang, Jie Yang, Haixuan Sunyu, Yunhe Ling, Guihong Song, Chunlin He. "Effect of Current Density on the Corrosion Resistance and Photocatalytic Properties of Cu-Ni-

<1 %

Zn_{0.96}Ni_{0.02}Cu_{0.02}O Nanocomposite Coatings", Materials, 2023

Publication

14

Pengyuan Zhang, Guozhe Meng, Yanqiu Wang, Bing Lei, Fuhui Wang. "Significantly enhanced corrosion resistance of Ni-Cu coating modified by minor cerium", Corrosion Communications, 2021

Publication

<1 %

15

japsonline.com

Internet Source

<1 %

16

M. Karunakaran, M. Pugazh Vadivu. "Magnetic and micro-mechanical behavior of Cu-Ni-P-W-TiO₂ hybrid composite electroplating on Al alloy substrate", Journal of Magnetism and Magnetic Materials, 2018

Publication

<1 %

17

Sarac, Umut, and M. Celalettin Baykul. "Morphological and microstructural properties of two-phase Ni-Cu films electrodeposited at different electrolyte temperatures", Journal of Alloys and Compounds, 2013.

Publication

<1 %

18

F. Geramipour, S.M. Mousavi Khoei, H. Shooshtari Gugtapeh. "Effect of shaped waveform on structure and electrochemical corrosion behavior of pulse electrodeposited

<1 %

Ni Cu alloy coatings", Surface and Coatings Technology, 2021

Publication

19

www.acerp.ir

Internet Source

<1 %

20

Kyle D. Gilroy, Aleksey Ruditskiy, Hsin-Chieh Peng, Dong Qin, Younan Xia. "Bimetallic Nanocrystals: Syntheses, Properties, and Applications", Chemical Reviews, 2016

Publication

<1 %

21

Shaohua Wang, Xingwu Guo, Haiyan Yang, JiChun Dai, Rongyu Zhu, Jia Gong, Liming Peng, Wenjiang Ding. "Electrodeposition mechanism and characterization of Ni-Cu alloy coatings from a eutectic-based ionic liquid", Applied Surface Science, 2014

Publication

<1 %

22

Yuan Yuan, Yuanwei Chen, Jia-Hui Liu, Haifang Wang, Yuanfang Liu. "Biodistribution and fate of nanodiamonds in vivo", Diamond and Related Materials, 2009

Publication

<1 %

23

Submitted to Birla Institute of Technology and Science Pilani

Student Paper

<1 %

24

P. Gupta. "Effect of annealing current density on the microstructure of nanocrystalline

<1 %

25

Baosong Li, Tianyong Mei, Dandan Li, Shengsong Du. "Ultrasonic-assisted electrodeposition of Ni-Cu/TiN composite coating from sulphate-citrate bath: Structural and electrochemical properties", Ultrasonics Sonochemistry, 2019

Publication

<1 %

26

D. Goranova, R. Rashkov, G. Avdeev, V. Tonchev. "Electrodeposition of Ni-Cu alloys at high current densities: details of the elements distribution", Journal of Materials Science, 2016

Publication

<1 %

27

Torabinejad, V., M. Aliofkhazraei, S. Assareh, M.H. Allahyarzadeh, and A. Sabour Rouhaghdam. "Electrodeposition of Ni-Fe alloys, composites, and nano coatings-A review", Journal of Alloys and Compounds, 2017.

Publication

<1 %

28

Zuveria Firdouz, Pragya Tripathi, K. Mondal, Kantesh Balani. "Effect of carbonaceous reinforcements on anticorrosive and magnetic properties of Ni Cu based composite coatings prepared by pulsed

<1 %

electrodeposition", Surface and Coatings Technology, 2022

Publication

Exclude quotes On

Exclude matches < 15 words

Exclude bibliography On

Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/0

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9

PAGE 10

PAGE 11

BUKTI KORESPONDENSI
ARTIKEL JURNAL INTERNASIONAL BEREPUTASI

Judul Artikel : Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy
Coated on Al via Electrodeposition

Jurnal : International Journal of Engineering

Penulis : C. Rosyidana,, B. Kurniawan, B. Soegijono, V. G. Vidia Putra, D. R. Munazat, F. B.
Susetyo

No	Perihal	Tanggal
1	Bukti konfirmasi submit artikel dan artikel yang disubmit	28 Juli 2023
2	Bukti konfirmasi reviewer	2 September 2023
3	Bukti menjawab reviewer	7 September 2023
4	Keputusan Editor	30 September 2023
5	Bukti artikel terbit	2 Febuari 2024

1. Bukti konfirmasi submit artikel
dan artikel yang disubmit
(28 Juli 2023)

Bukti melalui OJS



International Journal of Engineering



[Home](#) [News](#) [Browse](#) [Journal Info](#) [Guide for Authors](#) [Submit Manuscript](#) [Reviewers](#) [Contact Us](#) [Cahaya Rosyidan](#) [Logout](#)

[My Home](#) / [Author](#) / [Submissions with a Decision](#)

#	Manuscript ID	Manuscript Type	Manuscript Title	Submit Date	Current Status	Modify Date	Email	Manuscript Main File	Acceptance Certificate	Publish Certificate
1	IJE-2307-7328 (R1)	Original Article	Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition	2023-07-28	Manuscript Published (Online)	2023-11-18				



Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Over Al Substrate by Electrodeposition Method

C. Rosyidan^{a,d}, B. Kurniawan^{a*}, B. Soegijono^b, V. G. Vidia Putra^c, D. R. Munazat^a, F. B. Susetyo^e

^aDepartment of Physics, Universitas Indonesia, Depok, 16424, Indonesia

^bDepartment of Geoscience, Universitas Indonesia, Depok, 16424, Indonesia

^cPlasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, 40272, Indonesia

^dDepartment of Petroleum, Universitas Trisakti, Jakarta, 11440, Indonesia

^eDepartment of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta 13220, Indonesia

PAPER INFO

Paper history:

Received 10 November 2017

Received in revised form 23 December 2017

Accepted 04 January 2018

Keywords:

Cathodic current efficiency

SEM-EDS

Vibrating Sample Magnetometer

XRD

ABSTRACT

Ni-rich single-phase Ni-Cu alloy coatings were obtained on Al substrates by electrodeposition from stabilized citrate baths. Electrodeposition experiments were carried out at four different current densities. Increasing the current density can increase the cathodic current efficiency, so the change in metal deposition rate has increased faster than the rate of hydrogen evolution, thus increasing the cathodic current efficiency. In this study, all the resulting crystal systems of Ni-Cu alloys are fcc, according to x-ray diffraction (XRD) data, with the (111) plane as the preferred crystal plane. Scanning electron microscopy with energy dispersive x-ray spectroscopy (SEM-EDS) measurements showed that the Ni content in the coating increased with increasing current density. The Ni-Cu 40 sample obtained the most Ni content and showed a homogeneous and compact morphology. This study found that the higher the concentration of Ni in solution, the smaller the grain size. The measurements of the vibrating sample magnetometer (VSM) found that the Ni-Cu 40 sample provided magnetic saturation with the highest value at 0.108 emu/g. The microhardness method produces 404 HV on Ni-Cu 40. In conclusion, higher current densities result in higher Ni composition and increased thickness, which are responsible for the higher magnetic properties and hardness.

doi: 10.5829/ije.2023.36.01a.00

NOMENCLATURE			
k	Constant of 0.9	W_i	Initial weight of the substrate
β	Full width at half maximum (FWHM)	W_f	Weight
λ	X-ray wavelength (Cu K α is 0.154 nm)	I	Total current
θ	Bragg's angle	t	Deposition time
μ	Texture coefficient of the unique plane	F	Faraday's constant
$I(hkl)$	Measured intensity	f_{ni}	Nickel deposit weight ratio
C_e	Cathodic current efficiency	m_{ni}	Nickel's atomic weight
W_m	Ratio of the final weight of the substrate	m_{cu}	Copper's atomic weight
W_s	Final weight of the substrate	σ	Lattice strain

1. INTRODUCTION

Researchers widely study nickel (Ni) and copper (Cu) alloys as engineering materials due to their unique

mechanical, magnetic, and anti-corrosion properties [1, 2]. Ni-Cu alloys are known as monel in the industry, with a composition of 70 wt% Ni and 30 wt%Cu. This alloy has outstanding capabilities in acidic and alkaline

*Corresponding Author Email: budhy.kurniawan@sci.ui.ac.id. (B. Kurniawan)

environments [3]. Ni-Cu alloys are single-phase alloys throughout their composition on the phase diagram. This alloy is formed because Ni and Cu are fully soluble in solid and liquid states [4]. Ni-Cu alloys have an face center cubic (fcc) crystal structure and have almost similar electronegativity and atomic radii that are not much different [5, 6]. Using conventional casting as a manufacturing method for monel leads to substantial production costs. Ni-Cu alloys coating on aluminum (Al) is known to have many potentials to replace monel as a bulk material [7]. Since then, Al-based metals have received considerable attention due to their lightweight, high corrosion resistance, high strength-stiffness combination, and wear resistance [8].

Several techniques have been proposed to successfully modify surface morphology and chemical composition, including sol-gel, chemical etching, chemical vapor deposition, thermal embossing, and electrodeposition [9, 10]. The electrodeposition technique is a cost-effective, scalable, and easy-to-control process for coating Ni-Cu alloy [11]. Researchers can obtain the Ni-Cu alloy's structure, morphology, and phase composition by employing specific methods [12, 13]. Goranova et al. investigated how changing the concentration of Ni ions and current density affected the structure and composition of Ni-Cu alloys formed by electrodeposition in alkaline citrate baths [14]. Higher concentrations of Ni ions in the bath led to notably smoother deposits and enhanced current efficiency. However, making the Ni-Cu coating together takes work due to the difference in reduction potential between Ni atoms and Cu atoms. As known, Ni atoms has a reduction potential (-0.25 V vs. SHE) and Cu atoms (+0.34 V vs. SHE) [15]. As a result, controlling the concentration of Ni and Cu is very important. Complexing agents need to be added to narrow the potential difference between Ni and Cu. The most frequently used complexing agent is citrate due to its low toxicity, cost-effectiveness, and buffering characteristics [16].

The electrodeposition process with variations in current density, will affect to the crystal plane that is oriented in the (111) plane; besides that, it will also affect the smaller lattice size and the closer atomic distance [17]. The grain size becomes smaller due to the influence of the current density, and the morphological shape resembles to be cauliflower [18]. As a result of the influence of the current density, the thickness of the coating will be thicker, and the composition of the Ni weight fraction will also be higher. The amount of Ni deposited on the substrate and the thickness of the coating both have an impact on the magnetic properties [19]. Hardness properties will be higher due to the smaller grain size [20]. M. Kanukaran found a hardness of 153 HV at a current density of 40 mA/cm² [21]. It is also reported a magnetic saturation value of 0.0004

emu/g at 40 mA/cm² [22]. Nevertheless, the researchers did not examine the impact of coating electrodeposition factors, structure, and morphology on the magnetic and hardness properties.

This research aims to obtain electrodeposition of a Ni-rich Ni-Cu alloy coating on Al and investigate the link between magnetic and hardness properties and the coating's microstructure and surface morphology. This study used some variations in current density and was conducted at room temperature. Coatings were studied, and the influence of various process variables on cathodic current efficiency, structure, morphology, composition, grain size, and thickness was investigated. Finally, the behavior of magnetic properties and hardness of the coatings were investigated.

2. MATERIAL AND METHODS

2. 1. Material and Electrodeposition process The chemical composition of the Al substrate (Fe = 1.63 wt.%; Mg = 1.49 wt.%; Al = 96.88 wt.%). The chemical composition of pure Ni (Al = 0.02 wt.%; Ca = 0.04 wt.%; Fe = 0.23 wt.%; Y = 1.61 wt.%; Zr = 0.04 wt.%; Nb = 0.05 wt.%; Ni = 98.01 wt.%). The chemical composition of pure Cu (P = 0.22 wt.%; Cd = 0.684 wt.%; Si = 0.137 wt.%; Cu = 98.959 wt.%). Al was cleaned of the oxide coating with sandpaper before deposition using DELTA D68H for 5 minutes. Ni-Cu electrodeposition was carried out using SANFIX 305 E DC power supply. The sample was designated as Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 for current density 15 mA/cm², 20 mA/cm², 30 mA/cm², and 40 mA/cm², respectively. Table 1 depicts the bath composition and parameters.

TABLE 1. Bath composition and deposition parameters.

Bath composition and condition	Quantity
NiSO ₄ .6H ₂ O (Merck)	0.5 M
CuSO ₄ .5H ₂ O (Merck)	0.04 M
Na ₃ C ₆ H ₅ O ₇ (Merck)	0.2 M
pH	4.2
Temperature	25 °C
Time deposition	1 h

2. 2. Characterization The cathodic current efficiency (CCE) was calculated similarly by the method as was previously reported [23]. The following formula is used to calculate the efficiency of the cathodic current. Equation 1 [23]:

$$C_e = \frac{W_m}{W_f} \quad (1)$$

W_m and W_f is calculated by Faraday's law, as shown in Equations (2) and (3).

$$W_m = W_s - W_i, \quad (2)$$

$$W_f = \{(m_{ni}/2) * f_{ni} + (m_{cu}/2) * f_{cu}\} * I \cdot \frac{t}{F}. \quad (3)$$

The crystal structure of the Ni-Cu coating was determined by using XRD (Panalytical Aeris) (Cu-K α radiation, $\lambda = 0.15418$ nm). XRD data were collected from 20° to 80° with a step size of 0.020°. MAUD (Materials Analysis Using Diffraction) was used to observe the crystal parameters of the sample after Rietveld refinement. The calculation of crystal size was measured using the Debye-Scherrer formula, Equation 4 [24]:

$$D = \frac{0.9\lambda}{\beta \cos \theta} \quad (4)$$

The preferential crystallite orientation determined from the texture coefficient as follows in Equation 5 [25]:

$$\mu = \frac{I(hkl)/I_0(hkl)}{(\frac{1}{N}) \sum [I(hkl)/I_0(hkl)]}, \quad (5)$$

Where μ is the texture coefficient of the specific (hkl) . $I(hkl)$ and $I_0(hkl)$ are the (hkl) peak intensities of the coatings and standard Ni-Cu powders, respectively.

The lattice strain is calculated using Equation (6) based on XRD results [26]:

$$\sigma = \left(\frac{\beta}{4 \times \tan \theta} \right) \quad (6)$$

Where β is the full width at half maximum (FWHM) and θ the Bragg's angle corresponding to fcc (111) peak.

SEM-EDS (Thermofisher Quanta 650 EDAX EDS Analyzer) with 1000 magnification was used to analyze the surface morphology of a Ni-Cu coating experiment on Al. EDS was used to determine the chemical composition of the coatings and the statistical distribution of grain sizes was calculated using ImageJ software. The coated samples' cross-sections were also examined to see how current density and cathodic current efficiency affect coating thickness. Measurement of magnetic properties was conducted using a vibrating sample magnetometer (VSM Oxford 1.2H). The hardness of the Ni-Cu coating was measured using a MicroMct® 5100 Series Microindentation Hardness Tester. The ATM E384 standard was used for the tests, which were performed with a load of 100 g for 10 seconds at five places.

3. RESULT AND DISCUSSION

3. 1. Cathodic Current Efficiency Figure 1 depicts the relationship between average cathodic current efficiency and current density in a citrate electrolyte bath. A high cathodic current efficiency of 82–89% has been found. The basic concept of current efficiency can be understood as the fraction of total current used for current-efficient metal plating [27]. Aside from metal deposition, hydrogen evolution is the only necessary process on the substrate surface. Ni and Cu precipitation are both antagonistic to the hydrogen evolution reaction. The metal deposition rate has increased faster than the rate of hydrogen evolution from 15 to 40 mA/cm², cathodic current efficiency increases. The 40 mA/cm² sample had the maximum current efficiency, around 89%, while the 15 mA/cm² sample had the lowest, around 82%.

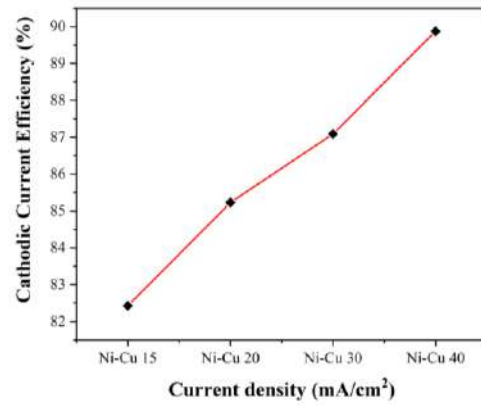


Figure 1. Effect of current efficiency at current density 15, 20, 30 and 40 mA/cm²

3. 2. Structural properties Figure 2(a) depicts a Ni-Cu alloy's XRD at various current densities. According to XRD analysis, the Ni-Cu alloy was a single phase with an fcc structure. The evolution of the lattice parameters of the Ni-rich (111) phase with current density is shown in Figure 2(b). Each alloy's peaks were found between the peaks of the fcc of $2\theta = 43.3$ for pure Cu and $2\theta = 44.5$ for pure Ni [28, 29]. As the Ni atoms content of the alloy coating increased, the diffraction angle shifted to a higher angle.

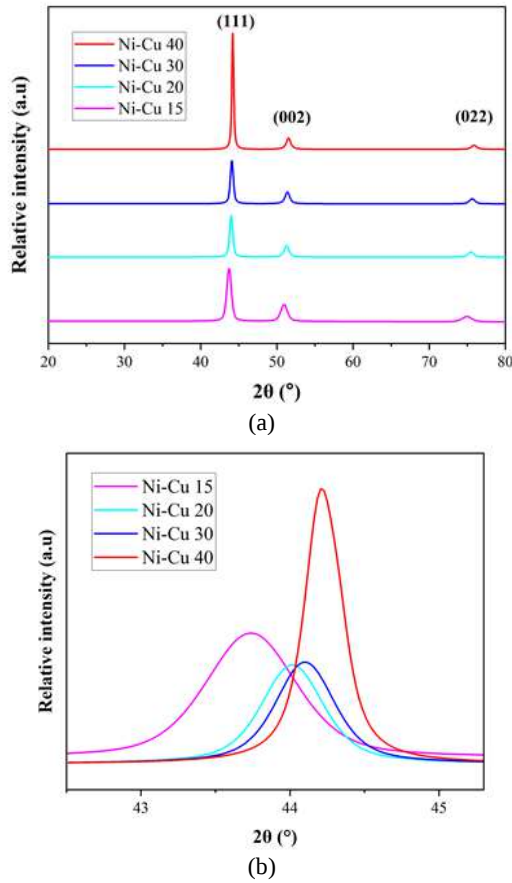


Figure 2. (a) XRD spectrum of Ni-Cu coatings electrodeposited at various current densities and (b) extended view of Ni-Cu (111) plane showing shifting.

Based on Scherrer Equation 4, the size of crystallites in the Ni-Cu alloy was determined and reported in Table 2. It shows that the crystallite size of the Ni-Cu coating increases to 10-20 nm. Meanwhile, the pure Ni layer has a crystallite size of 60 nm, meaning that the Ni-Cu alloy has a smaller crystallite size than the pure Ni layer. This result is also similar to that obtained by Li et al. [30]. In contrast to the typical watt-Ni coating, the presence of a sodium citrate complexing agent results in a finer crystallite size. This is consistent with Sarac and Baykul [31], who observed Cu atoms affect to grain refinement

TABLE 2. Parameters of Ni-Cu after rietveld refinement using MAUD

Parameters	Sample			
	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40
Crystal structure	Cubic FCC			
Space Group	Fm-3m			
Lattice constant (Å) $a = b = c$	3.582	3.560	3.554	3.545
Volume (Å ³)	45.975	45.152	44.905	44.557
d-spacing (Å)	1.791	1.780	1.695	1.691
Crystallite Size (nm)	10.74	15.91	16.47	20.98
Rwp (100%)	3.640	4.484	5.394	5.139
GOF	1.94	1.72	2.06	2.03
Lattice strain	0.663	0.453	0.431	0.276

in Ni-Cu alloys. Cu atoms can restrain the surface diffusion of Ni atoms during the deposition process and inhibit the growth of crystallites.

The detailed crystallographic orientation evolution of the Ni-Cu coating with varying current density is shown in Figure 3. It can be observed that a strong (111) fiber texture appears in all samples, while the (002) texture gradually decreases with increasing current density.

The μ (the relative texture coefficient) values of different crystal planes are also used to evaluate the degree of crystallographic orientation [30]. Moreover, strong (111) texture is present on Ni-Cu coating electrodeposited at the current density of 40 mA/cm².

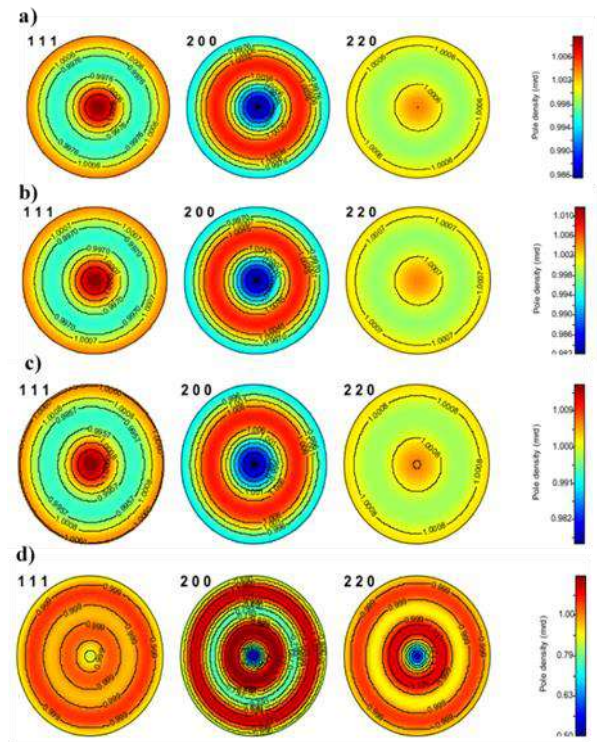


Figure 3. The simulated 2D pole figure (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40

The texture coefficient for every preference was calculated using Equation (5) to ascertain the preferred direction of the crystal orientation of Ni-Cu deposits obtained at various current densities [28]. The texture coefficient values are shown in Table 3.

It can be seen from Figure 2(a) that the most intensive peak is the (111) plane. This indicates the (111) plane is the preferred orientation. It seems that the texture coefficient also depends on the peak current. As shown by μ values calculated in Table 3, the preferred orientation is the (111) plane. Li et al. [30] found that the higher the current density, the (111) plane is dominated. The findings suggest that the (111) crystallographic orientation is favoured in all Ni-Cu coatings electrodeposited with different current density variations in the citrate bath.

TABLE 3. Texture coefficient analysis of Ni-Cu deposits

Sample	$\mu(hkl)$		
	[111]	[002]	[022]
Ni-Cu 15	1.12	0.86	0.77
Ni-Cu 20	1.17	0.74	0.81
Ni-Cu 30	1.18	0.74	0.78
Ni-Cu 40	1.48	0.34	0.32

The lattice strain of the prepared coatings is determined using Equation 6, and Figure 4 illustrates the changes in crystal size and lattice strain of the Ni-Cu coating based on the current density applied in the plating bath. It is seen that the crystal size increases and the lattice strain decreases with the increasing function of the variation of current density in the plating bath. This result is the same as that obtained by Devi et al. [29], the higher the current density, the more the crystal size increases. The possible reason is that the composition of Ni increases as the current density increases.

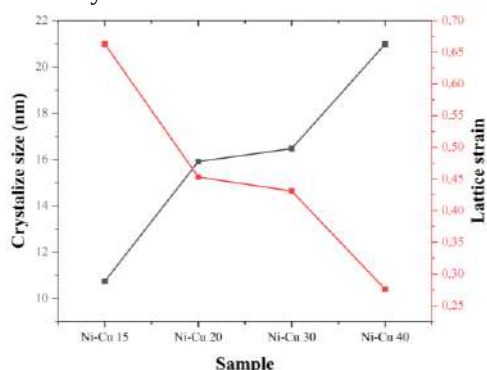


Figure 4. Ni-Cu lattice strain and size on Al at various current densities in the plating bath.

3. 3. Surface Morphological EDS was used to determine the elemental composition of the coating; Cu and Ni were the only elements present in the deposit; Table 4 reveals the Ni-Cu composition. The alloy composition is influenced by variations in the current density. As the current density increases, the deposit's Cu content decreases. This phenomenon can be caused by the bath's $[Ni^{2+}]/[Cu^{2+}]$ ratio, which changes the composition of Ni and Cu. Goranova et al. discovered that as the Cu content of the deposit fell, so did the cathodic current efficiency [32]. This phenomenon occurs because of the orderly deposition process of Ni and Cu [33]. In regular deposition, increasing current density leads to an increased proportion of less noble metals in the deposited material [34]. Ni is the less noble metal in this scenario. As a result, when the current density increases, the deposit gets richer in Ni. Another essential feature is that as the current density increases, the peak shifts to the right, i.e. to higher 2θ values. The change in alloy composition could also cause the peak shift. The Ni concentration increases as the current density increases (see Table 4). Because Ni and Cu constitute a single-phase alloy, the diffraction peak will shift toward pure Ni as the Ni percentage increases. This is similar to the observations of Goranova et al. [14], who found that the fcc reflection for Ni-rich Ni-Cu alloy deposits shifts to the right as the Ni concentration increases. Indeed, it is logical to expect the Ni-Cu alloy peak to change.

TABLE 4. The Chemical composition of Ni-Cu on Al coating prepared at the different current density

Samples	Cu, wt. %	Ni, wt. %
Ni-Cu 15	54.95	45.05
Ni-Cu 20	39.83	60.17
Ni-Cu 30	29.80	70.20
Ni-Cu 40	19.64	80.36

The surface morphological structure, as well as the cross-section of the coated samples, were observed using SEM. Figure 5 shows SEM micrographs of the four samples' surface morphological structures. The deposits develop a fine-grained and compact spherical shape at lower deposition current densities (Figure 5(a)). Deo et al. [23] and Goranova et al. [32] also observed this morphology at low current densities. The shape shifts to a coarser cauliflower form at greater current densities (Figure 5(d)). A diffusion-limited deposition mechanism in which a multigeneration spherical diffusion layer creates a cauliflower shape is likely to produce this type of

morphology [35]. As the current density increases, the cauliflower-like protrusions become more spaced and separated, creating gaps. The Ni-Cu 40 sample with the highest current density had the largest gap between the cauliflower bulges.

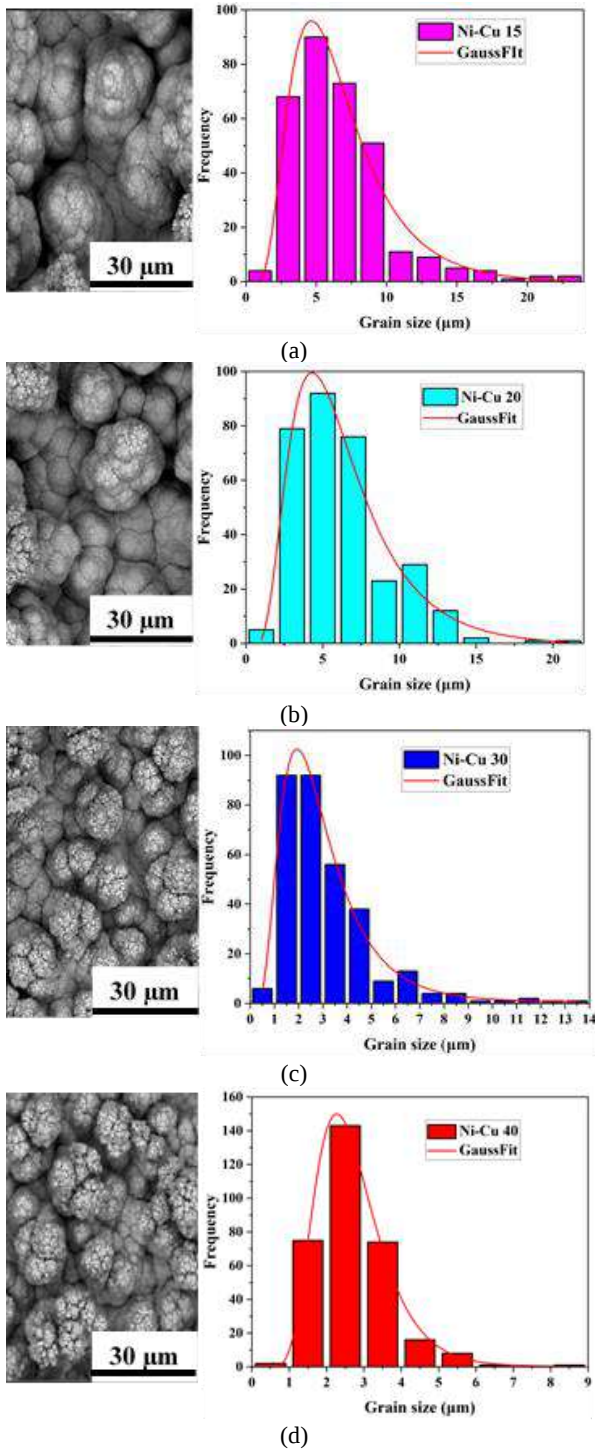


Figure 5. Surface SEM image of the deposited pure Ni-Cu alloy coating and statistical distribution of grain size.

The increased nucleation rate can explain the decrease in grain size with increasing current density [36]. Ni-Cu ion flow to the cathode is faster at higher current densities. Further investigation is needed to determine the exact relationship between the coating's current density and the grain size. At a coating current density of Ni-Cu 15, Ni-Cu 20, Ni-Cu 30 and Ni-Cu 40, the peak corresponding to the (111) plane has shifted towards the right (see Figure 2b). The reduction in d-spacing is ascribed to residual stress induced at a higher deposition rate [37]. The statistical results of the grain size distribution in Figure 5 indicate that the grain size is in the range of 4.63 to 1.94 nm. The decrease in grain size with the increase in current density is evident in Table 5.

TABLE 5. The result of calculating the average grain size

Sample	Grain size average (μm)
Ni-Cu 15	4.63 ± 0.269
Ni-Cu 20	4.38 ± 0.365
Ni-Cu 30	2.28 ± 0.068
Ni-Cu 40	1.94 ± 0.032

Figure 6 depicts the relationship between the deposited alloy composition and the applied current density. EDS was used to determine the composition.

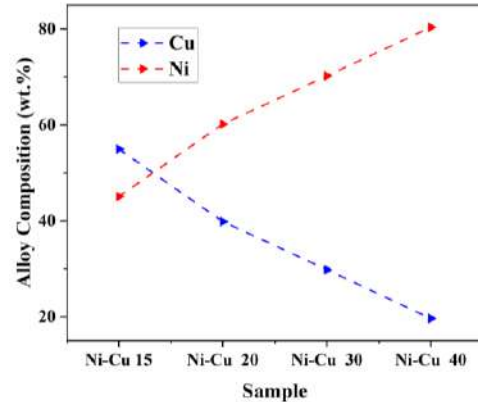


Figure 6. The dependence of the alloy composition deposited from the single electrolyte on current density

Figure 7 (a-d) displays the SEM cross-section of the Ni-Cu coating, which demonstrates appropriate adhesion between the substrate and the coating due to the absence of cracks between them. At different current densities, the thickness of the Ni-Cu coating electrodeposited was measured [23]. The thickness of Ni-Cu 15 32 μm, Ni-Cu 20 42 μm, Ni-Cu 30 49 μm, and Ni-Cu 40 50 μm. The effect of various current densities on the thickness of the Ni-Cu coating is depicted in Figure 7; the thickness increases as the current density increases [16]. As a result, a higher current density means more mass and a

higher coating. Compared to Figure 1, it can be seen a shift to the higher current density on electrodeposited Ni-Cu coatings, delivering a higher cathodic current efficiency.

According to Faraday's law, when the deposition time remains constant for all samples, coatings formed at lower current densities will have a lesser thickness than those produced at higher current densities. A thinner covering may cause severe interference from the Al substrate. The cathodic current density also affects the coating, as Deo et al. [23] discovered that increasing the current density improves the thickness of the film due to an increase in cathodic current efficiency.



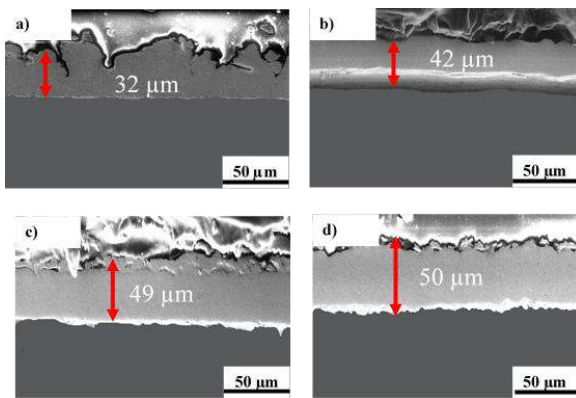


Figure 7. SEM cross section of the Ni-Cu over Al at (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40

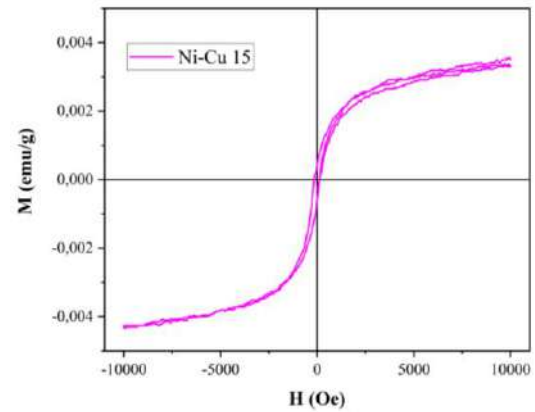
3. 4. Magnetic Properties Figure 8 depicts the magnetic characteristics and fluctuations in current density magnetization measured with a VSM at room temperature [38]. The VSM analysis demonstrated that the coatings created using Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 displayed ferromagnetic activity among the four types of Ni-Cu alloy films studied. The low ferromagnetic activity of the $\text{Cu}_{54.95}\text{Ni}_{45.05}$ alloy film at Ni-Cu 15 could be attributed to Ni diffusion in the Cu matrix, as Cu is diamagnetic and Ni is a ferromagnetic metal [39]. The ferromagnetic properties of the Ni-Cu films at Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 were discovered, and the ferromagnetic properties increased with the increasing in Ni content of the alloy coatings.



(a)

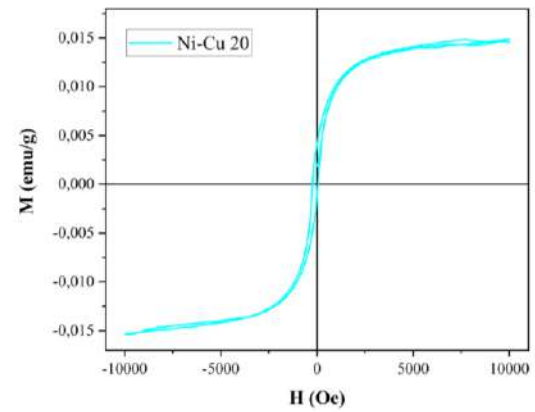

(b)

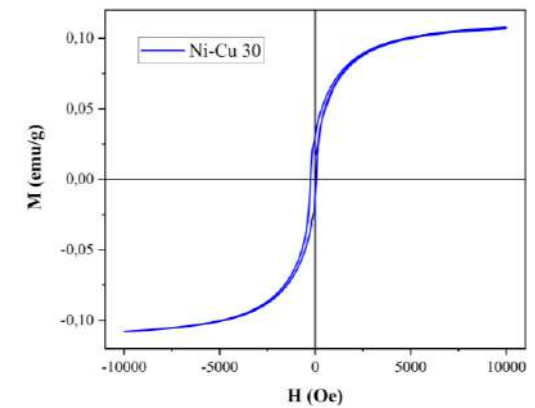

(c)

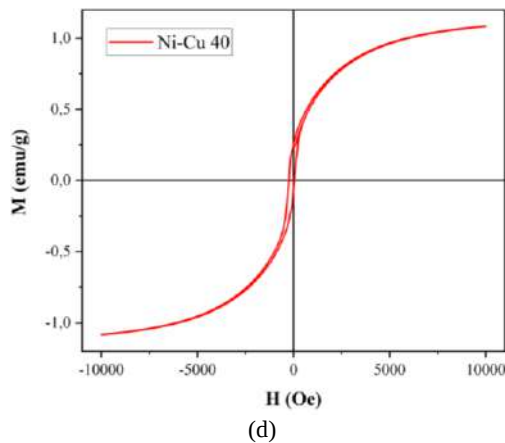


Figure 8. Hysteresis loops of multilayers grown at different various current density

As the Ni content of Ni-Cu alloy coatings increases, so does their saturation magnetization (see Table 6). Wang et al. reported on the dependence of saturation magnetization on the Ni content of Ni-Cu alloy coatings [37]. Awasthi reported that magnetization is enhanced by increasing the coating thickness [19]. The possible reason for this magnetization-enhanced phenomenon might be the magnetic disorder caused by the coating. The trend in the saturation magnetization enhancement is associated with the coating level [40]. Demidenko et al. [41] found that monel has paramagnetic properties at room temperature, while the Ni-Cu alloy in this study has ferromagnetic properties. The current study was able to improve on the results of previous studies that added phosphorus (P) and tungsten (W) [22]. Therefore the Ni-Cu 40 sample produces the highest magnetic properties.

TABLE 6. The results of the magnetic analysis of the Ni-Cu/Al

Sample	Hc (Oe)	Mr (emu/g)	Ms (emu/g)
Ni-Cu 15	143.829	0.00047	0.003
Ni-Cu 20	140.081	0.004	0.015
Ni-Cu 30	256.215	0.025	0.094
Ni-Cu 40	144.023	0.032	0.108

3. 5. Hardness Figure 9 depicts the dependence of the microhardness of Ni-Cu coatings on the variation of current density in the plating bath. From Figure 9, it is clearly visible that the microhardness of Ni-Cu 40 coatings is higher than else. In general, it increases with the variation in current density in the plating bath. Ni-Cu 40 coating shows a maximum microhardness value of 404 HV. The increase in microhardness coatings is attributed to the grain size refinement and thickness. Pingale et al. found that hardness increases with the

thickness of the coating [16]. The thickness could influence the hardness of Ni-Cu films [42].

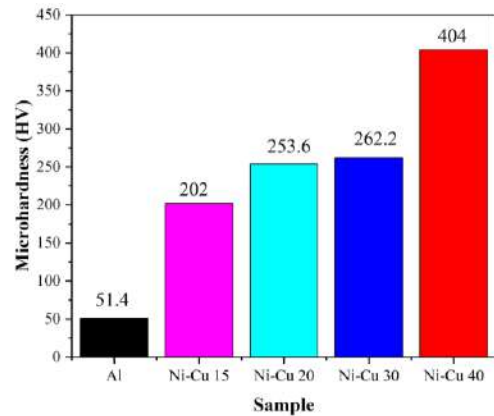


Figure 9. Variation in microhardness electrodeposited Ni-Cu coatings at various current densities

A larger percentage of Ni indicates that alloys with a greater Ni content are mechanically harder. The overall dependence of hardness and microhardness on the percentage of Ni is shown in Figure 10, indicating that microhardness increases. This result is similar to what Marenych found: the hardness value is highest with the highest Ni composition [43].

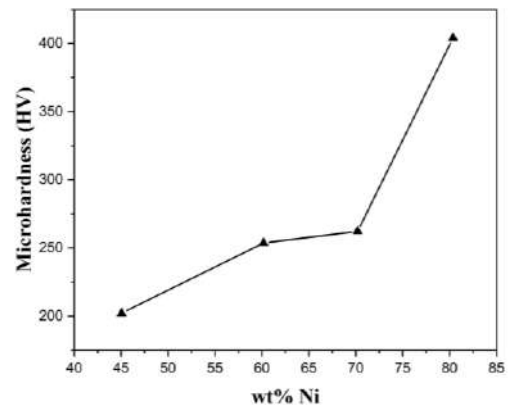


Figure 10. Relation wt% Ni vs microhardness

Moreover, compared to previous studies, the electrodeposition of Ni-Cu over Al by adding phosphorus (P) resulted in lower hardness than the present study [21]. This is due to the smaller grain size resulting from the change in current density. In addition, the increase in microhardness is related to the role of Ni atoms in grain refinement [44]. Ramkumar et al. [45] reported a monel hardness value of 165 HV. This result is lower than the hardness value in the current study.

4. CONCLUSION

Ni-Cu atoms were electrodeposited onto Al substrates using citrate baths in the present study. The effects of adding citrate solutions on the properties of the deposited layers were studied, and the following results are reported:

1. Electrodeposition was used to create single-phase Ni-Cu alloy coatings on Al surfaces at all current densities.
2. The cathodic current efficiency is affected by hydrogen evolution. The cathodic current efficiency increases if the metal deposition rate exceeds the hydrogen evolution rate.
3. Coatings formed at lower current densities exhibit a more compact and globular morphology, whereas those formed at higher current densities display a less uniform structure with a cauliflower-like morphology.
4. Both the surface morphology and composition of the coating showed a strong dependence on the current density.
5. Ni-Cu alloy samples deposited at low current densities have a coating thickness of 32 μm , while samples deposited at high current densities have a coating thickness of 50 μm .
6. Saturation magnetization increases with the increase in Ni content in the Ni-Cu alloy and also with the thickness of the coating.
7. Hardness increases as the current density increases. Hardness increases as the composition of Ni in the solution increases. In addition, hardness is also affected by grain size and coating thickness. The hardness of the Ni-Cu alloy is harder than that of monel.

5. ACKNOWLEDGMENTS

The authors would like to extend the gratitude to the Ministry of Research, Technology and Higher Education of the Republic of Indonesia for the financial support of Hibah Penelitian Disertasi Doktor No: NKB-971/UN2.RST/HKP.05.00/2022.

6. REFERENCES

1. Chen, Z., Wang, C., Tang, C., Lek, Y. Z., Kandukuri, S. Y., Du, H., Gao, H., and Zhou, K. "Microstructure and mechanical properties of a Monel K-500 alloy fabricated by directed energy deposition." *Materials Science and Engineering A*, Vol. 857, No. July, (2022), 144113. <https://doi.org/10.1016/j.msea.2022.144113>
2. Kukliński, M., Bartkowska, A., and Przystacki, D. "Microstructure and selected properties of Monel 400 alloy after laser heat treatment and laser boriding using diode laser." *International Journal of Advanced Manufacturing Technology*, Vol. 98, No. 9–12, (2018), 3005–3017. <https://doi.org/10.1007/s00170-018-2343-9>
3. Nady, H., and Negem, M. "Ni-Cu nano-crystalline alloys for efficient electrochemical hydrogen production in acid water." *RSC Advances*, Vol. 6, No. 56, (2016), 51111–51119. <https://doi.org/10.1039/c6ra08348j>
4. Negem, M., and Nady, H. "Electroplated Ni-Cu nanocrystalline alloys and their electrocatalytic activity for hydrogen generation using alkaline solutions." *International Journal of Hydrogen Energy*, Vol. 42, No. 47, (2017), 28386–28396. <https://doi.org/10.1016/j.ijhydene.2017.09.147>
5. Guisbiers, G., Khanal, S., Ruiz-Zepeda, F., Roque De La Puente, J., and José-Yacaman, M. "Cu-Ni nano-alloy: Mixed, core-shell or Janus nano-particle?" *Nanoscale*, Vol. 6, No. 24, (2014), 14630–14635. <https://doi.org/10.1039/c4nr05739b>
6. Mae, Y. "What the Darken–Gurry Plot Means About the Solubility of Elements in Metals." *Metallurgical and Materials Transactions A: Physical Metallurgy and Materials Science*, Vol. 47, No. 12, (2016), 6498–6506. <https://doi.org/10.1007/s11661-016-3730-1>
7. Alizadeh, M., and Safaei, H. "Characterization of Ni-Cu matrix, Al 2 O 3 reinforced nano-composite coatings prepared by electrodeposition." *Applied Surface Science*, Vol. 456, No. June, (2018), 195–203. <https://doi.org/10.1016/j.apsusc.2018.06.095>
8. Kumar, D., Angra, S., and Singh, S. "Mechanical Properties and Wear Behaviour of Stir Cast Aluminum Metal Matrix Composite: A Review." *International Journal of Engineering, Transactions A: Basics*, Vol. 35, No. 4, (2022), 794–801. <https://doi.org/10.5829/IJE.2022.35.04A.19>
9. Moosaei, H. R., Zareei, A. R., and Salemi, N. "Elevated Temperature Performance of Concrete Reinforced with Steel, Glass, and Polypropylene Fibers and Fire-proofed with Coating." *International Journal of Engineering, Transactions B: Applications*, Vol. 35, No. 5, (2022), 917–930. <https://doi.org/10.5829/ije.2022.35.05b.08>
10. Poursaiedi, E., and Salarvand, A. "Comparison of properties of Ti/TiN/TiCN/TiAlN Film deposited by cathodic arc physical vapor and plasma-assisted chemical vapor deposition on custom 450 steel substrates." *International Journal of Engineering, Transactions A: Basics*, Vol. 29, No. 10, (2016), 1459–1468. <https://doi.org/10.5829/idosi.ije.2016.29.10a.17>
11. Allahyarzadeh, M. H., Aliofkhae, M., Rouhaghdam, A. R. S., and Torabinejad, V. "Gradient electrodeposition of Ni-Cu-W(alumina) nanocomposite coating." *Materials and Design*, Vol. 107, (2016), 74–81. <https://doi.org/10.1016/j.matdes.2016.06.019>
12. Geramipour, F., Mousavi Khoei, S. M., and Shoostari Gugtafeh, H. "Effect of shaped waveform on structure and electrochemical corrosion behavior of pulse electrodeposited Ni[sbnd]Cu alloy coatings." *Surface and Coatings Technology*, Vol. 424, No. July, (2021). <https://doi.org/10.1016/j.surfcoat.2021.127643>
13. Thurber, C. R., Ahmad, Y. H., Sanders, S. F., Al-Shenawa, A., D'Souza, N., Mohamed, A. M. A., and Golden, T. D. "Electrodeposition of 70-30 Cu-Ni nanocomposite coatings for enhanced mechanical and corrosion properties." *Current Applied Physics*, Vol. 16, No. 3, (2016), 387–396. <https://doi.org/10.1016/j.cap.2015.12.022>
14. Goranova, D., Rashkov, R., Avdeev, G., and Tonchev, V. "Electrodeposition of Ni–Cu alloys at high current densities: details of the elements distribution." *Journal of Materials Science*, Vol. 51, No. 18, (2016), 8663–8673. <https://doi.org/10.1007/s10853-016-0126-y>
15. Lee, W. H., and Chung, K. C. "Investigation of a copper–nickel alloy resistor using co-electrodeposition." *Journal of Applied Electrochemistry*, Vol. 50, No. 5, (2020), 535–547. <https://doi.org/10.1007/s10800-020-01398-0>
16. Pingale, A. D., Belgamwar, S. U., and Rathore, J. S. "Effect of Graphene Nanoplatelets Addition on the Mechanical, Tribological and Corrosion Properties of Cu–Ni/Gr Nanocomposite Coatings by Electro-co-deposition Method." *Transactions of the Indian Institute of Metals*, Vol. 73, No. 1, (2020), 99–107. <https://doi.org/10.1007/s12666-019-01807-9>
17. Hughes, R. A., Menumerov, E., and Neretina, S. "When lithography meets self-Assembly: A review of recent advances

- in the directed assembly of complex metal nanostructures on planar and textured surfaces." *Nanotechnology*, Vol. 28, No. 28, (2017), 0–41. <https://doi.org/10.1088/1361-6528/aa77ce>
18. Kamel, M. M., Anwer, Z. M., Abdel-Salam, I. T., and Ibrahim, I. S. "Electrodeposition of nanocrystalline Ni-Cu alloy from environmentally friendly lactate bath." *Surface and Interface Analysis*, Vol. 46, No. 7, (2014), 442–448. <https://doi.org/10.1002/sia.5525>
 19. Awasthi, S., Pandey, S. K., and Balani, K. "Tuning the magnetism and tribological behaviour of electrodeposited Ni/Cu bi-layer by selective reinforcement of carbon nanotubes." *Journal of Alloys and Compounds*, Vol. 818, , (2020), 1–12. <https://doi.org/10.1016/j.jallcom.2019.153287>
 20. Heidarzadeh, A., and Saedi, T. "Correlation between process parameters, grain size and hardness of friction-stir-welded Cu–Zn alloys." *Rare Metals*, Vol. 37, No. 5, (2018), 388–398. <https://doi.org/10.1007/s12598-016-0704-9>
 21. Karunakaran, M., Pugazhavadivu, M., Gunasegaran, V., and Gowtham, G. "Electrodeposition of Cu-Ni-P-W Composite on Al-6063 Substrate." *International Journal of Scientific Research in Physics and Applied Sciences*, (2018). <https://doi.org/10.26438/ijrps/v6i3.5964>
 22. Karunakaran, M., and Pugazh Vadivu, M. "Magnetic and micro-mechanical behavior of Cu-Ni-P-W-TiO₂ hybrid composite electroplating on Al alloy substrate." *Journal of Magnetism and Magnetic Materials*, Vol. 475, No. November 2018, (2019), 359–367. <https://doi.org/10.1016/j.jmmm.2018.11.077>
 23. Deo, Y., Guha, S., Sarkar, K., Mohanta, P., Pradhan, D., and Mondal, A. "Electrodeposited Ni-Cu alloy coatings on mild steel for enhanced corrosion properties." *Applied Surface Science*, Vol. 515, No. March, (2020), 146078. <https://doi.org/10.1016/j.apsusc.2020.146078>
 24. Ebrahimi, N., Hosseinzadeh, A. S. A., Vaezi, M., and Mozafari, M. "Evaluation of Corrosion Resistance of Bi-layered Plasma-sprayed Coating on Titanium Implants." *International Journal of Engineering, Transactions A: Basics*, Vol. 35, No. 4, (2022), 635–643. <https://doi.org/10.5829/ije.2022.35.04a.03>
 25. SEAKR, R. "Microstructure and crystallographic characteristics of nanocrystalline copper prepared from acetate solutions by electrodeposition technique." *Transactions of Nonferrous Metals Society of China (English Edition)*, Vol. 27, No. 6, (2017), 1423–1430. [https://doi.org/10.1016/S1003-6326\(17\)60164-X](https://doi.org/10.1016/S1003-6326(17)60164-X)
 26. Dolabella, S., Borzi, A., Dommann, A., and Neels, A. "Lattice Strain and Defects Analysis in Nanostructured Semiconductor Materials and Devices by High-Resolution X-Ray Diffraction: Theoretical and Practical Aspects." *Small Methods*, Vol. 6, No. 2, (2022). <https://doi.org/10.1002/smt.202100932>
 27. Budi, S., Tawwab, R. A., Cahyana, U., Afriza, and Paristiwati, M. "Saccharin-assisted galvanostatic electrodeposition of nanocrystalline FeCo films on a flexible substrate." *International Journal of Electrochemical Science*, Vol. 15, , (2020), 6682–6694. <https://doi.org/10.20964/2020.07.74>
 28. Soegijono, B., Susetyo, F. B., Yusmaniar, and Fajrah, M. C. "Electrodeposition of paramagnetic copper film under magnetic field on paramagnetic aluminum alloy substrates." *e-Journal of Surface Science and Nanotechnology*, Vol. 18, , (2020), 281–288. <https://doi.org/10.1380/EJSSNT.2020.281>
 29. Devi, C., and Ashokkumar, R. "Influence of different current density on characteristics of nifep nano alloy thin films." *Rasayan Journal of Chemistry*, Vol. 11, No. 3, (2018), 1144–1150. <https://doi.org/10.31788/RJC.2018.1133088>
 30. Li, B., Mei, T., Li, D., and Du, S. "Ultrasonic-assisted electrodeposition of Ni-Cu/TiN composite coating from sulphate-citrate bath: Structural and electrochemical properties." *Ultrasonics Sonochemistry*, Vol. 58, No. July, (2019). <https://doi.org/10.1016/j.ultsonch.2019.104680>
 31. Sarac, U., and Baykul, M. C. "Morphological and microstructural properties of two-phase Ni-Cu films electrodeposited at different electrolyte temperatures." *Journal of Alloys and Compounds*, (2013). <https://doi.org/10.1016/j.jallcom.2012.10.071>
 32. Goranova, D., Avdeev, G., and Rashkov, R. "Electrodeposition and characterization of Ni-Cu alloys." *Surface and Coatings Technology*, Vol. 240, , (2014), 204–210. <https://doi.org/10.1016/j.surfcoat.2013.12.014>
 33. Hu, G., Huang, R., Wang, H., Zhao, Q., and Zhang, X. "Facile galvanic replacement deposition of nickel on copper substrate in deep eutectic solvent and its activation ability for electroless Ni–P plating." *Journal of Solid State Electrochemistry*, Vol. 26, No. 5, (2022), 1313–1322. <https://doi.org/10.1007/s10008-022-05172-4>
 34. Niu, J., Song, M., Zhang, Y., and Zhang, Z. "Dealloying induced nanoporosity evolution of less noble metals in Mg ion batteries." *Journal of Magnesium and Alloys*, Vol. 9, No. 6, (2021), 2122–2132. <https://doi.org/10.1016/j.jma.2021.04.003>
 35. Wang, S., Guo, X., Yang, H., Dai, J., Zhu, R., Gong, J., Peng, L., and Ding, W. "Electrodeposition mechanism and characterization of Ni-Cu alloy coatings from a eutectic-based ionic liquid." *Applied Surface Science*, Vol. 288, , (2014), 530–536. <https://doi.org/10.1016/j.apsusc.2013.10.065>
 36. Nwaeju, C. C., Eboh, A. O., and Edoziuno, F. O. "G Grain size evolution mechanical and corrosion behaviour of precipitate strengthened Cu-Ni alloy." *Acta Metallurgica Slovaca*, Vol. 28, No. 4, (2022), 188–196. <https://doi.org/10.36547/ams.28.4.1609>
 37. Wang, C., Hossain Bhuiyan, M. E., Moreno, S., and Minary-Jolandan, M. "Direct-Write Printing Copper-Nickel (Cu/Ni) Alloy with Controlled Composition from a Single Electrolyte Using Co-Electrodeposition." *ACS Applied Materials and Interfaces*, Vol. 12, No. 16, (2020), 18683–18691. <https://doi.org/10.1021/acsami.0c01100>
 38. Dhara, B., Jha, P. K., Gupta, K., Bind, V. K., and Ballav, N. "Diamagnetic Molecules Exhibiting Room-Temperature Ferromagnetism in Supramolecular Aggregates." *Journal of Physical Chemistry C*, Vol. 121, No. 22, (2017), 12159–12167. <https://doi.org/10.1021/acs.jpcc.7b02145>
 39. Qasim, I., Waqee-Ur-Rehman, M., Mumtaz, M., Hussain, G., Nadeem, K., and Shehzad, K. "Ferromagnetic (Ni) nanoparticles-CuTi-1223 superconductor composites." *Journal of Magnetism and Magnetic Materials*, Vol. 403, , (2016), 60–67. <https://doi.org/10.1016/j.jmmm.2015.11.066>
 40. Padmapriya, G., Manikandan, A., Krishnasamy, V., Jaganathan, S. K., and Antony, S. A. "Enhanced Catalytic Activity and Magnetic Properties of Spinel Mn_xZn_{1-x}Fe₂O₄ (0.0 ≤ x ≤ 1.0) Nano-Photocatalysts by Microwave Irradiation Route." *Journal of Superconductivity and Novel Magnetism*, Vol. 29, No. 8, (2016), 2141–2149. <https://doi.org/10.1007/s10948-016-3527-x>
 41. Demidenko, O., Zhyvulka, A., Yanushkevich, K., Galias, A., Constantin, V., Neacsu, E. I., Donath, C., and Popescu, A. M. "Magnetic properties of stainless steels under corrosive action of based on choline chloride ionic liquids." *Journal of Magnetism and Magnetic Materials*, Vol. 477, No. January, (2019), 74–76. <https://doi.org/10.1016/j.jmmm.2019.01.034>
 42. Basori, Soegijono, B., and Susetyo, F. B. "Magnetic field exposure on electroplating process of ferromagnetic nickel ion on copper substrate." *Journal of Physics: Conference Series*, Vol. 2377, No. 1, (2022). <https://doi.org/10.1088/1742-6596/2377/1/012002>
 43. Marenych, O. O., Ding, D., Pan, Z., Kostyryzh, A. G., Li, H., and van Duin, S. "Effect of chemical composition on microstructure, strength and wear resistance of wire deposited Ni-Cu alloys." *Additive Manufacturing*, Vol. 24, No. August, (2018), 30–36. <https://doi.org/10.1016/j.addma.2018.08.003>
 44. Syamsuir, S., Soegijono, B., Yudanto, S. D., Basori, B., Ajiriyanto, M. K., Nanto, D., and Susetyo, F. B. "Electrolyte Temperature Dependency of Electrodeposited Nickel in Sulfate Solution on the Hardness and Corrosion Behaviors." *International Journal of Engineering, Transactions C:*

Aspects, Vol. 36, No. 06, (2023), 1193–1200. doi: 10.5829/IJE.2023.36.06C.18

Monel 400 and Hastelloy C276.” *Materials and Design*, Vol. 64, (2014), 775–782. <https://doi.org/10.1016/j.matdes.2014.08.055>

45. Devendranath Ramkumar, K., Joshi, V., Pandit, S., Agrawal, M., Kumar, O. S., Periwai, S., Manikandan, M., and Arivazhagan, N. “Investigations on the microstructure and mechanical properties of multi-pass pulsed current gas tungsten arc weldments of

Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Over Al Substrate by Electrodeposition Method

C. Rosyidan^{a,d}, B. Soegijono^b, V. G. Vidia Putra^c, D. R. Munazat^a, B. Kurniawan^{a*}, F. B. Susetyo^e

^aDepartment of Physics, Universitas Indonesia, Depok, 16424, Indonesia

^bDepartment of Geoscience, Universitas Indonesia, Depok, 16424, Indonesia

^cPlasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, 40272, Indonesia

^dDepartment of Petroleum, Universitas Trisakti, Jakarta, 11440, Indonesia

^eDepartment of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta 13220, Indonesia

P A P E R I N F O

چکیده

Paper history:

Received 10 November 2017

Received in revised form 23 December 2017

Accepted 04 January 2018

چکیده فارسی باید با فونت B Lotus و سایز 9 باشد

Keywords:

Cathodic current efficiency

SEM-EDS

Vibrating Sample Magnetometer

XRD

doi: 10.5829/ije.2018.31.04a.01

2. Bukti konfirmasi Review (2 September 2023)

Bukti di Email

Acknowledgement of Revision (#IJE-2307-7328 (R1))

Eksternal





International Journal of Engineering <editorial@e-mail.sinaweb.net>
kepada saya, budhy.kurniawan, naufal, valentinus, dicky.rezky, fbudhi, office ▾

Jum, 8 Sep 2023, 07:19



 [Terjemahkan ke Indonesia](#)

X

Manuscript ID: IJE-2307-7328 (R1)

Manuscript Title: **Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition**

Authors: Cahaya Rosyidan, Budhy Kurniawan, Bambang Soegijono, Valentinus Galih Vidia Putra, Dicky Rezky Munazat, Ferry Budhi Susetyo

Date: 2023-07-28

Dear Respectful Author Prof./ Dr. Mr. Cahaya Rosyidan

Thank you for submitting the revised file of your manuscript to the **International Journal of Engineering**

The Editorial Office will proceed on your manuscript and inform you in the earliest time.

If there is anything else, please do not hesitate to contact us.

Truly yours,

Executive Managing Director of **International Journal of Engineering**



Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

C. Rosyidan^{a,d}, B. Kurniawan^a, B. Soegijono^b, V. G. Vidia Putra^c, D. R. Munazat^a, F. B. Susetyo^e

^aDepartment of Physics, Universitas Indonesia, Depok, 16424, Indonesia

^bDepartment of Geoscience, Universitas Indonesia, Depok, 16424, Indonesia

^cPlasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, 40272, Indonesia

^dDepartment of Petroleum, Universitas Trisakti, Jakarta, 11440, Indonesia

^eDepartment of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta 13220, Indonesia

PAPER INFO

Paper history:

Received 10 November 2017

Received in revised form 23 December 2017

Accepted 4 January 2018

Keywords:

Cathodic current efficiency

SEM-EDS

Microhardness

Ni-Cu coating

Vibrating sample magnetometer

ABSTRACT

Nickel (Ni)-rich single-phase nickel-copper (Ni-Cu) alloy coatings were produced on aluminum (Al) substrates by electrodeposition in stabilized citrate baths. Electrodeposition experiments were performed at four different current densities. Increasing the current density resulted in the metal deposition rate increasing faster than the hydrogen evolution rate; thus, the cathodic current efficiency increased. The crystal systems of the Ni-Cu alloys were face center cubic (fcc), with the (111) plane as the preferred crystal plane. Scanning electron microscopy with energy dispersive X-ray spectroscopy (SEM-EDS) measurements showed that the Ni content in the coating increased with increasing current density. The Ni-Cu 40 sample had the most Ni content and showed a homogeneous and compact morphology. It was found that the higher the concentration of Ni in the solution, the smaller the grain size. Measurements recorded with a vibrating sample magnetometer (VSM) showed that the Ni-Cu 40 sample provided magnetic saturation, with the highest value being 0.108 emu/g. The microhardness method produced 404 HV on the Ni-Cu 40 sample. In conclusion, higher current densities were associated with a higher Ni composition and increased thickness, which were responsible for the increases in the magnetic properties and hardness.

doi: 10.5829/ije.2023.36.01a.00

Formatted: Highlight

Commented [WU1]: Add Ni-Cu coating

Commented [H2R1]: Ni-Cu coating was added. Thank you

NOMENCLATURE

ζ_k	Cathodic current efficiency	Constant of 0.9	W_i	Initial weight of the substrate
$\sigma\beta$	Lattice strain	Full-width at half maximum (FWHM)	W_f	Weight
W_s	Final weight of the substrate	X-ray wavelength (Cu K α = 0.154 nm)	I	Total current
W_{s0}	Ratio of the final weight of the substrate	Bragg's angle	t	Deposition time
μ	Texture coefficient of the unique plane		F	Faraday's constant
$I(hkl)$	Measured intensity		f_{Ni}	Nickel deposit weight ratio
m_{Cu}	Copper's atomic weight	Cathodic current efficiency	m_{Ni}	Nickel's atomic weight

1. INTRODUCTION

*Corresponding author: email: budhy.kurniawan@sci.ui.ac.id. (B. Kurniawan)

Please cite this article as: Authors name in Cambria 8 (with comma between them), Title must be Cambria 8, *International Journal of Engineering, Transactions A: Basics*, Vol. 36, No. 01, (2023), 1-9

Researchers widely study nickel (Ni) and copper (Cu) alloys as engineering materials due to their unique mechanical, magnetic, and anti-corrosion properties [1, 2]. Ni-Cu alloys are known as monel in the industry and are typically comprised of 70 wt% Ni and 30 wt% Cu [3]. These alloys have outstanding capabilities in acidic and alkaline environments [4]. Ni-Cu alloys are single-phase alloys throughout their composition on the phase diagram, and these alloys formed because Ni and Cu are fully soluble in their solid and liquid states [5]. Ni and Cu both have a face center cubic (fcc) crystal structure, and they have almost similar electronegativity and atomic radii [6, 7].

Given that conventional casting as a manufacturing method for monel results in substantial production costs and that Ni-Cu alloy coated on aluminum (Al) has potential as a replacement for monel as a bulk material [8], Al-based metals have received considerable attention [9, 10]. They are lightweight and demonstrate high resistance to wear and corrosion and a high strength–stiffness combination [11].

Several techniques have been proposed to successfully modify the surface morphology and chemical composition, including sol-gel, chemical etching, chemical vapor deposition, thermal embossing, and electrodeposition [12, 13]. The electrodeposition technique is a cost-effective, scalable, and easy-to-control process for coating Ni-Cu alloy [14]. Specific methods have also been developed to determine the structure, morphology, and phase composition of the coated Ni-Cu alloys [15, 16]. Goranova et al. investigated how changing the concentration of Ni ions and the current density affected the structure and composition of Ni-Cu alloys formed by electrodeposition in alkaline citrate baths [17]. Higher concentrations of Ni ions in the bath led to notably smoother deposits and enhanced current efficiency. However, producing a uniform Ni-Cu coating can be challenging due to the difference in reduction potential between Ni and Cu. The reduction potential of Ni atoms is -0.25 V vs. SHE, and that of Cu atoms is +0.34 V vs. SHE [18]. As a result, controlling the concentrations of Ni and Cu is vital. Complexing agents must be added to narrow the potential difference between Ni and Cu. The most frequently used complexing agent is citrate due to its low toxicity, cost-effectiveness, and buffering characteristics [19].

The electrodeposition process affects the physical properties of the resultant Ni-Cu alloy, as does the current density. A high current density causes the crystal plane to be oriented in the (111) plane, the lattice size to be smaller, and the atomic distance to be less [20]. The grain size becomes smaller when the current density is high, and the morphological shape resembles that of a cauliflower [21]. As a result of a high current density, the coating will be thicker, and the composition of the

Ni weight fraction will also be higher. The amount of Ni deposited on the substrate and the thickness of the coating both have an impact on the product’s magnetic properties [22]. In addition, a smaller grain size results in an increase in hardness [23]. Kanukaran et al. reported a hardness of 153 HV when the current density was 40 mA/cm² [24], and Karunakaran and Pugazh Vadivu reported a magnetic saturation value of 0.0004 emu/g at 40 mA/cm² [25]. Nevertheless, the researchers did not examine the impact of the coating electrodeposition factors, structure, and morphology on the magnetic and hardness properties.

The aims of this research were 1) to produce a Ni-rich Ni-Cu alloy coating on Al via electrodeposition and 2) to investigate the link between magnetic and hardness properties and the coating’s microstructure and surface morphology. We varied the current density, and the process was conducted at room temperature. We examined the influence of various process variables on the cathodic current efficiency, structure, morphology, composition, grain size, and thickness of the produced coatings. Finally, the magnetic properties and hardness of the coatings were investigated.

2. MATERIAL AND METHODS

2. 1. Material and Electrodeposition Process

The chemical composition of the Al substrate (cathode) used was Fe = 1.63 wt%, Mg = 1.49 wt%, and Al = 96.88 wt%. The chemical composition of the pure Ni (anode) used was Al = 0.02 wt%, Ca = 0.04 wt%, Fe = 0.23 wt%, Y = 1.61 wt%, Zr = 0.04 wt%, Nb = 0.05 wt%, and Ni = 98.01 wt%. The chemical composition of the pure Cu (anode) used was P = 0.22 wt%, Cd = 0.684 wt%, Si = 0.137 wt%, and Cu = 98.959 wt%. The Al was cleaned from the oxide coating with sandpaper before deposition using DELTA D68H for 5 min. Ni-Cu electrodeposition was carried out using a SANFIX 305 E DC power supply. The samples produced using a current density of 15 mA/cm², 20 mA/cm², 30 mA/cm², and 40 mA/cm² were designated as Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40, respectively. Table 1 shows the bath composition and deposition parameters.

TABLE 1. Bath composition and deposition parameters

Bath composition and condition	Quantity
NiSO ₄ .6H ₂ O (Merck)	0.5 M
CuSO ₄ .5H ₂ O (Merck)	0.04 M
Na ₂ C ₆ H ₅ O ₇ (Merck)	0.2 M
pH	4.2
Temperature	25 °C
Deposition time	1 h

2. 2. Characterization The cathodic current efficiency (CCE) deposition rate was calculated using the previously reported method [26] [24]. The following

Commented [WU3]: Why are these two materials mentioned?

Commented [H4R3]: I apologize there is a little mistake in the writing, it should be Ni and Cu.

Formatted: Highlight

formula, Equation 1, was used to calculate the efficiency of the cathodic current [27]:

$$C_e = \frac{W_m}{W_f} \quad (1)$$

W_m and W_f were calculated using Faraday's law, as shown in Equations (2) and (3).

$$W_m = W_s - W_i, \quad (2)$$

$$W_f = \{(m_{ni}/2) * f_{ni} + (m_{cu}/2) * f_{cu}\} * I * \frac{t}{F}. \quad (3)$$

The crystal structure of the Ni-Cu coating was determined using X-ray diffraction (XRD-PANalytical Aeris Instrument Suit) (Cu-K α radiation, $\lambda = 0.15418$ nm). XRD data were collected from 20° to 80° with a step size of 0.020° . The Materials Analysis Using Diffraction (MAUD) program was used to determine the crystal parameters of the sample after Rietveld refinement. The crystallite size was calculated using the Debye-Scherrer formula, as shown in Equation 4 [24]:

$$D = \frac{0.9\lambda}{\beta \cos \theta} \quad (4)$$

The preferential crystallite orientation was determined from the texture coefficient μ , as shown in Equation 5-4 [28]:

$$\mu = \frac{I(hkl)/I_0(hkl)}{\left(\frac{1}{N}\right) \sum [I(hkl)/I_0(hkl)]}, \quad (5.4)$$

Based on the XRD results, the lattice strain σ was calculated using Equation (6.5) [29]:

$$\sigma = \left(\frac{\beta}{4 \times \tan \theta} \right) \quad (6.5)$$



SEM-EDS (Thermofisher Quanta 650 EDAX EDS Analyzer) with $1000\times$ magnification was used to analyze the surface morphology of the Ni-Cu coatings. EDS was used to determine the chemical composition of the coatings, and the statistical distribution of grain sizes was calculated using ImageJ software. The cross sections of the coated samples were also examined to assess how the current density and CCE affected the coating thickness. Measurement of magnetic properties was conducted using a vibrating sample magnetometer (VSM, Oxford 1.2H). The hardness of the Ni-Cu coatings was measured using a MicroMct® 5100 Series Microindentation Hardness Tester. The ATM E384

standard was used for the tests, which were performed with a load of 100 g for 10 s at five places.

3. RESULTS AND DISCUSSION

3. 1. Cathodic Current Efficiency and Deposition rate

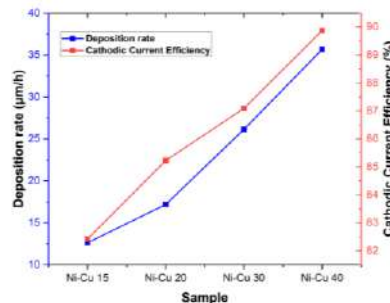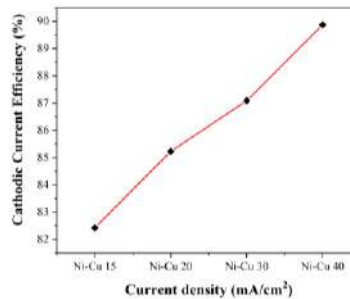Figure 1 depicts the relationship between the average CCE and deposition rate and current density in the citrate electrolyte bath. The CCE was found to be high, with a value of 82–89%. The basic concept of current efficiency can be understood as the fraction of total current used for metal plating [30]. Apart from metal deposition, hydrogen evolution is the only other necessary process that must occur on the substrate surface. Ni and Cu precipitation are both antagonistic to the hydrogen evolution reaction. In this study, the metal deposition rate increased faster than the hydrogen evolution rate when the current density increased from 15 to 40 mA/cm^2 ; hence, the CCE increased. The highest CCE (89.96%) was associated with the Ni-Cu 40 sample, and the lowest CCE (82.55%) was associated with the Ni-Cu 15 sample. Basori et. al [26] and Syamsuir et. al [31] found that the deposition rate and current efficiency are considered linear.



Formatted: Highlight

Commented [WU7]: is this consistent with similar research?

Commented [H8R7]: Yes, this is consistent with other studies, we add the deposition rate graph and the same study.

Formatted: Highlight

Formatted: Highlight

Commented [WU5]: Why is not crystallite size measured by Rietveld, which has higher accuracy?

Commented [H6R5]: Thanks for your input, the crystal size has been recalculated with the Rietveld refinement method. In Rietveld refinement, we can model the entire crystal structure and parameters in one analysis. This analysis includes parameters such as crystal structure, lattice parameter, gof, rwp, atomic position, diffraction pattern, including intensity and position of diffraction peaks, which enables a more comprehensive analysis. So that it can provide a complete picture of the influence of inter-parameters. Therefore, we deleted the explanation by using Debye-Scherrer and replace it with Rietveld refinement method. It can improve the accuracy of crystallite size measurement.

Formatted: Highlight

Formatted: Highlight

Formatted: Highlight

Formatted: Justified, Space Before: 0 pt, After: 0 pt

Formatted: Highlight

Formatted: Highlight

Formatted Table

Figure 1. The cathodic current efficiency and deposition rate at a current density of 15, 20, 30, and 40 mA/cm²

3. 2. Structural Properties Figure 2(a) depicts the XRD spectra of the Ni-Cu alloy samples produced at various current densities. According to the XRD analysis results, each Ni-Cu alloy sample consisted of a single phase with an fcc structure. The evolution of the lattice parameters of the Ni-rich (111) phase over the range of current densities is shown in Figure 2(b). The peaks of each sample were found between the peaks of the fcc of $2\theta = 43.3^\circ$ for pure Cu and $2\theta = 44.5^\circ$ for pure Ni [32, 33]. As the Ni content of the alloy coating increased, the diffraction angle also increased.

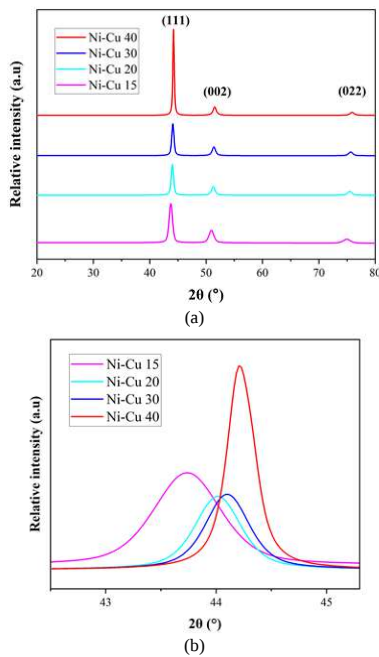


Figure 2. (a) X-ray diffraction spectra of Ni-Cu coatings electrodeposited at various current densities and (b) the extended view of the Ni-Cu (111) plane, showing peak shifts

Crystal size calculation using MAUD resolved refinement The Debye-Scherrer formula (Equation 4) was used to determine the size of the crystallites in the Ni-Cu alloys, and the results (Table 2) show that the crystallite size of the Ni-Cu coating ranged from

approximately 10-24 to 20-50 nm. The crystallite size of a pure Ni layer is 60 nm, meaning that the Ni-Cu alloys had smaller crystallite sizes than a pure Ni layer. This result is also similar to that obtained by Li et al. [34]. In contrast to the typical watt-Ni coating, we found that the presence of a sodium citrate complexing agent resulted in a finer crystallite size. This is consistent with the findings of Sarac and Baykul [35], who observed that Cu atoms affect grain refinement in Ni-Cu alloys. Cu atoms can restrain the surface diffusion of Ni atoms during the deposition process and inhibit the growth of crystallites.

The evolution of the crystallographic orientation of the Ni-Cu coatings produced with varying current densities is shown in detail in Figure 3. It can be observed that a strong (111) fiber texture appeared in all the samples, while the (002) texture gradually decreased as the current density increased.

The μ values of different crystal planes are also used to evaluate the degree of crystallographic orientation [34]. Moreover, the Ni-Cu coating electrodeposited at the current density of 40 mA/cm² was found to have a strong (111) texture.

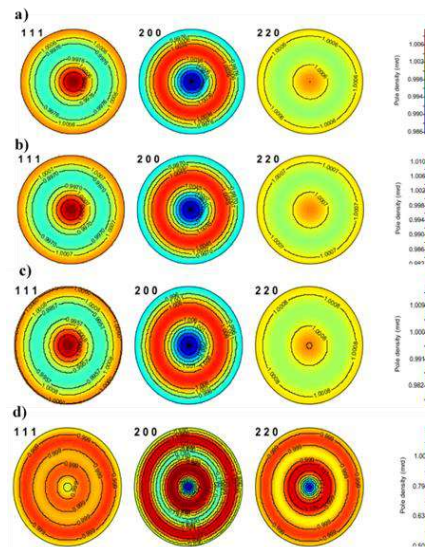


Figure 3. The simulated 2D pole figures for the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

TABLE 2. Parameters of the Ni-Cu alloys after Rietveld refinement using MAUD

Sample

Formatted Table

Parameter	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40
Crystal structure	Cubic fcc			
Space group	Fm-3m			
Lattice constant (Å) $a = b = c$	3.582	3.560	3.554	3.545
Volume (Å ³)	45.975	45.152	44.905	44.557
d-spacing (Å)	1.791	1.780	1.695	1.691
Crystallite size (nm)	40.74 24.55	45.91 26.82	46.42 32.29	20.98 50.78
Rwp (100%)	3.640	4.484	5.394	5.139
GOF	1.94	1.72	2.06	2.03
Lattice strain	0.663	0.453	0.431	0.276

The texture coefficient for every preference was calculated using Equation 54 to ascertain the preferred crystal orientation direction of each Ni-Cu alloy obtained at the various current densities, and the results are shown in Table 3 [32].

It seems that the texture coefficient was also dependent on the peak current, and the preferred orientation was the (111) plane. Li et al. [34] found that the higher the current density, the more dominant the (111) plane. The findings suggest that the (111) crystallographic orientation was preferable for all the Ni-Cu coatings electrodeposited at the tested current densities.

TABLE 3. Texture coefficient analysis of Ni-Cu deposits

Sample	μ (hkl)		
	[111]	[002]	[022]
Ni-Cu 15	1.12	0.86	0.77
Ni-Cu 20	1.17	0.74	0.81
Ni-Cu 30	1.18	0.74	0.78
Ni-Cu 40	1.48	0.34	0.32

The lattice strain of the prepared coatings was determined using Equation 56, and Figure 4 illustrates the changes in the crystal size and lattice strain of the Ni-Cu coatings based on the current density applied in the plating bath. The crystal size increased and the lattice strain decreased as the current density increased [36]. This result aligns with that obtained by Devi et al. [33], who showed that the higher the current density, the more the crystal size increased. A possible reason for this is that the composition of Ni increases as the current density increases.

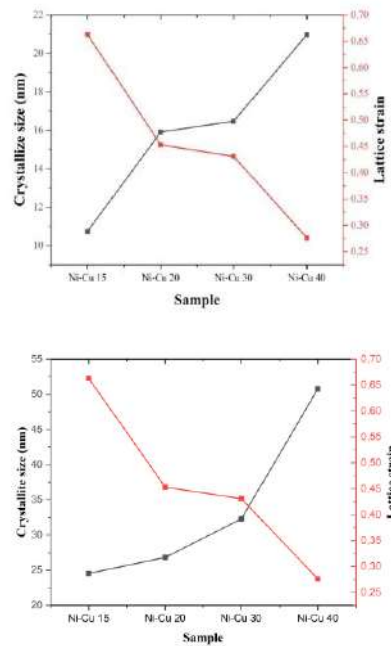


Figure 4. The lattice strain and crystallite size of the Ni-Cu alloys coated on Al at various current densities

3. 3. Surface Morphology EDS was used to determine the elemental composition of the Ni-Cu coatings, and the results are shown in Figure 5 and Table 4. Cu and Ni were the only elements present in the deposits. The alloy composition was influenced by the current density: as the current density increased, the Cu content decreased. This phenomenon can be caused by the $[\text{Ni}^{2+}]/[\text{Cu}^{2+}]$ ratio in the bath, which changes the composition of Ni and Cu. Goranova et al. discovered that as the Cu content of deposits decreased, so did the CCE [37]. This phenomenon occurs because of the orderly deposition of Ni and Cu [38]. In regular

Formatted: Highlight

Formatted: Highlight

Formatted Table

Commented [WU9]: Why is there a significant difference in the results for Ni-Cu 40 sample?

Commented [H10R9]: According to Figure 2(b), the FWHM for peak (111) decrease with increasing current density. This result is consistent with earlier studies in which increasing current density reduces FWHM. DOI: [10.24203/ajias.v8i4.6287](https://doi.org/10.24203/ajias.v8i4.6287)

Commented [WU11]: Is eds accurate enough to determine chemical composition? The change in composition is very impressive.

Commented [H12R11]: Yes accurate. The chemical composition of small objects is determined using the EDS method, which involves placing the material in a vacuum chamber and lighting it from above with a focused electron beam. Ionised atoms emit discrete energy X-ray quanta characteristic of the chemical contents of the material under analysis.

Formatted: Highlight

deposition, increasing the current density leads to an increased proportion of less noble metals in the deposited material [39]. In our scenario, Ni is the less noble metal. As a result, when the current density was higher, the deposits were richer in Ni.

Another notable feature was that as the current density increased, the peak shifted to the right (i.e., to higher 2 θ values). The change in the alloy composition may have also caused this peak shift. The Ni concentration increased as the current density increased (see Table 4). Because Ni and Cu combine to produce a single-phase alloy, the diffraction peak shifted toward that of pure Ni as the Ni percentage increased. This finding is similar to the observations of Goranova et al. [17], who found that the fcc reflection for Ni-rich Ni-Cu alloy deposits shifted to the right as the Ni concentration increased. Indeed, it is logical to expect the Ni-Cu alloy peak to shift as the Ni content increase.

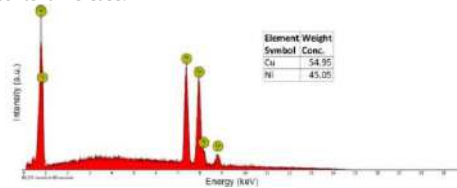



Figure 5. Eds graph of the Ni-Cu 15

Another notable feature was that as the current density increased, the peak shifted to the right (i.e., to higher 2 θ values). The change in the alloy composition may have also caused this peak shift. The Ni concentration increased as the current density increased (see Table 4). Because Ni and Cu combine to produce a single-phase alloy, the diffraction peak shifted toward that of pure Ni as the Ni percentage increased. This finding is similar to the observations of Goranova et al. [17], who found that the fcc reflection for Ni-rich Ni-Cu alloy deposits shifted to the right as the Ni concentration increased. Indeed, it is logical to expect the Ni-Cu alloy peak to shift as the Ni content increase.

TABLE 4. The chemical composition of Ni-Cu coatings on the Al substrate prepared at different current densities

Sample	Cu, wt%	Ni, wt%
Ni-Cu 15	54.95	45.05
Ni-Cu 20	39.83	60.17
Ni-Cu 30	29.80	70.20
Ni-Cu 40	19.64	80.36

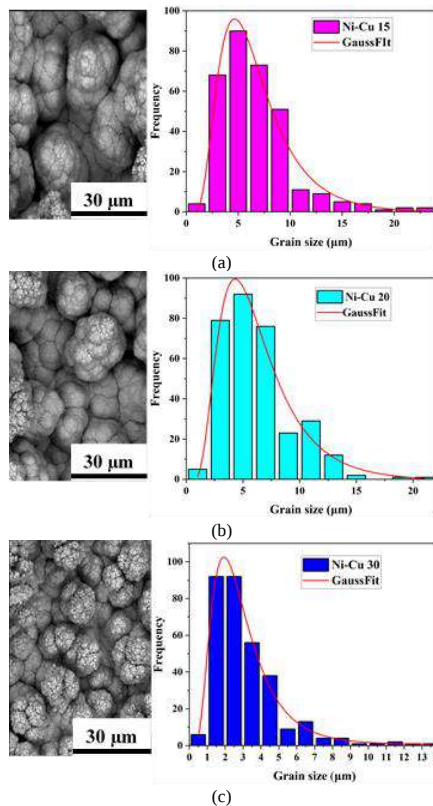The surface morphological structure and the cross section of the coated samples were observed using SEM. Figure 65 shows SEM micrographs of the four samples' surface morphological structures. The deposits developed a fine-grained and compact spherical shape when lower deposition current densities were applied (Figure 5(a)). Deo et al. [27] and Goranova et al. [37] also observed this morphology at low current densities. The shape changed to a coarser cauliflower form when higher current densities were applied (Figure 65(d)). A diffusion-limited deposition mechanism in which a multigeneration spherical diffusion layer creates a cauliflower shape is likely to produce this type of morphology [40]. As the current density increased, the cauliflower-like protrusions became more spaced and separated, creating gaps. The Ni-Cu 40 sample, produced with the highest current density, was found to have the largest gaps between the cauliflower-like bulges.



Formatted Table

Formatted: Justified

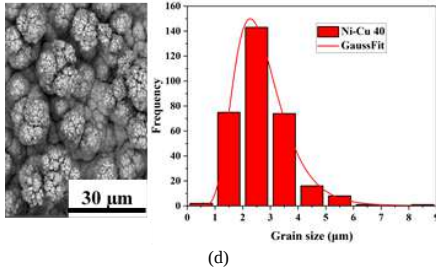


Figure 65. Surface SEM images of the deposited Ni-Cu alloy coatings and plots showing the statistical distribution of the grain size

The increased nucleation rate can explain the observed decrease in grain size with increasing current density [41][42]. Ni-Cu ion flow to the cathode is faster at higher current densities. Further investigation is needed to determine the exact relationship between the current density and the grain size of the coating. In the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples, the peak that corresponded to the (111) plane shifted toward the right (see Figure 2b). The reduction in d-spacing is ascribed to residual stress induced at a higher deposition rate [43]. The statistical results of the grain size distribution presented in Figure 65 indicate that the grain size ranged from 4.63 to 1.94 μm . The decrease in grain size with the increase in current density is evident in the data shown in Table 5.

TABLE 5. Average grain size found in each sample

Sample	Average grain size (μm)
Ni-Cu 15	4.63 ± 0.269
Ni-Cu 20	4.38 ± 0.365
Ni-Cu 30	2.28 ± 0.068
Ni-Cu 40	1.94 ± 0.032

Figure 76 depicts the relationship between the deposited alloy composition and the applied current density. EDS was used to determine the composition.


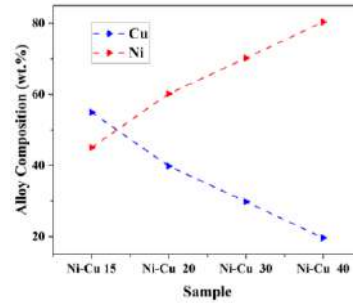


Figure 76. The dependence of the deposited alloy's composition (shown as wt% of the single electrolytes) on current density

Figure 78 (a–d) displays SEM cross-section images of the produced Ni-Cu coatings. The absence of cracks between the substrate and coating demonstrates that appropriate adhesion occurred between the two entities [44]. The thickness of the electrodeposited Ni-Cu coating was also measured for each sample [27], and the following results were recorded: Ni-Cu 15 = 32 μm , Ni-Cu 20 = 42 μm , Ni-Cu 30 = 49 μm , and Ni-Cu 40 = 50 μm . The effect of the current density on the thickness of the Ni-Cu coating is depicted in Figure 87; the thickness increased as the current density increased [19]. Hence, a higher current density results in more mass and a thicker coating. The findings presented in Figure 1 show that as the current density increased, so too did the CCE.

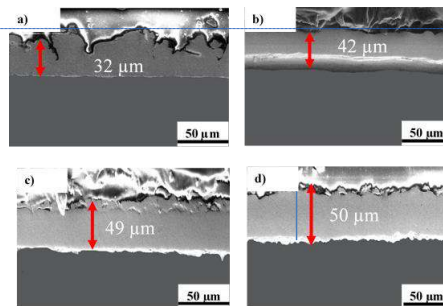According to Faraday's law, when the deposition time remains constant for all samples, coatings formed at lower current densities will be thinner than those produced at higher current densities. A thinner covering may lead to severe interference from the Al substrate. The cathodic current density also affects the coating, as Deo et al. [27] discovered that increasing the current density improves the thickness of the film due to an increase in the CCE.




Commented [WU13]: EdS graph and table is added for at least one sample


Commented [H14R13]: Eds graph and table have been added in figure 5. Thank you

Figure 78. SEM cross-section images of the Ni-Cu coating on Al in the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

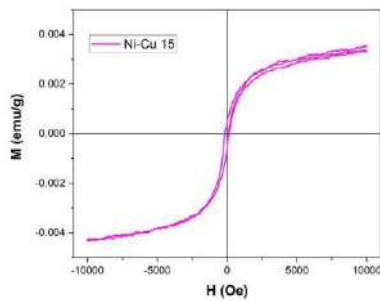
3. 4. Magnetic Properties Figure 98 depicts the magnetic characteristics and fluctuations in the current density magnetization measured with a VSM at room temperature [45]. The results of the VSM analysis demonstrate that the coatings in the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples displayed ferromagnetic activity. The low ferromagnetic activity of the $\text{Cu}_{54.95}\text{Ni}_{45.05}$ alloy film of Ni-Cu 15 could be attributed to Ni diffusion in the Cu matrix, as Cu is a diamagnetic metal and Ni is a ferromagnetic metal [46]. The ferromagnetic properties of the Ni-Cu films of Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 increased with the Ni content of the alloy coatings.




(a)

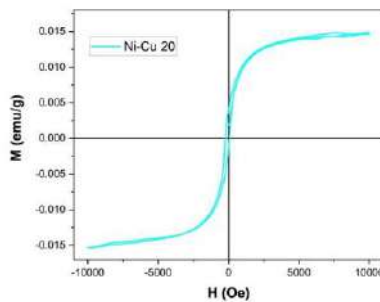

(b)

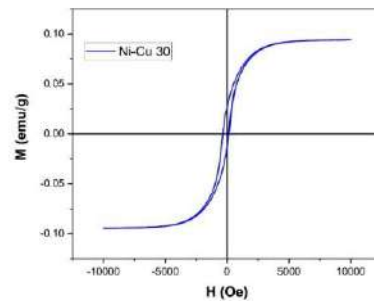

(c)

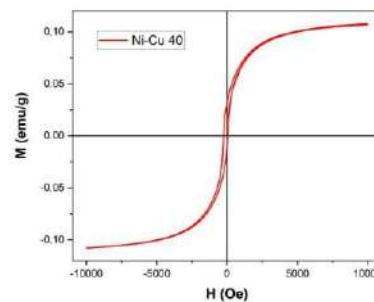

(d)

Figure 98. Hysteresis loops of multilayers generated at different current densities

As the Ni content of the Ni-Cu alloy coatings increased, so did the saturation magnetization (see Table 6). Wang et al. reported that saturation magnetization depends on the Ni content of Ni-Cu alloy coatings [43]. In addition, Awasthi reported that magnetization is enhanced by increasing the coating thickness [22]. A possible reason for this enhanced magnetization is the magnetic disorder caused by the coating. It has been shown that the trend in saturation magnetization enhancement is associated with the coating level [47]. Demidenko et al. [48] found that monel has paramagnetic properties at room temperature, while the Ni-Cu alloys in this study had ferromagnetic properties. Here, we have improved upon the results of previous studies in which phosphorus (P) and tungsten (W) were added [25]. In this study, the Ni-Cu 40 sample exhibited the strongest magnetic properties.

TABLE 6. The results of the magnetic analysis of the Ni-Cu/Al samples

Sample	Hc (Oe)	Mr (emu/g)	Ms (emu/g)
--------	---------	------------	------------

Ni-Cu 15	143.829	0.00047	0.003
Ni-Cu 20	140.081	0.004	0.015
Ni-Cu 30	256.215	0.025	0.094
Ni-Cu 40	144.023	0.032	0.108

3. 5. Hardness Figure 109 depicts the dependence of the microhardness of the Ni-Cu coatings on the current density in the plating bath. From the data presented in Figure 109, it is clear that the coating of the Ni-Cu 40 sample had the highest microhardness value (404 HV). In general, the microhardness increased with the current density and was attributed to the grain size and thickness of the coatings [42]. Pingale et al. found that hardness increased with the thickness of the coating [19]. The coating thickness could influence the hardness of Ni-Cu films [26].

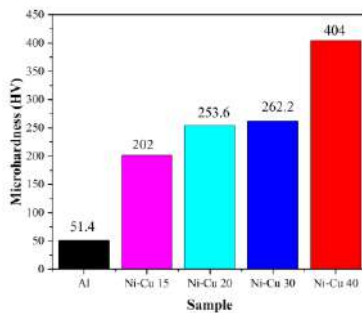


Figure 910. The microhardness of the electrodeposited Ni-Cu coatings of the samples produced with different current densities

The results indicate that alloys with a greater Ni content are mechanically harder. The overall dependence of hardness and microhardness on the percentage of Ni is shown in Figure 110, and the data indicate that microhardness increases as the percentage of Ni increase. This result is similar to Marenych's finding that the hardness value is highest with the highest Ni composition [49].

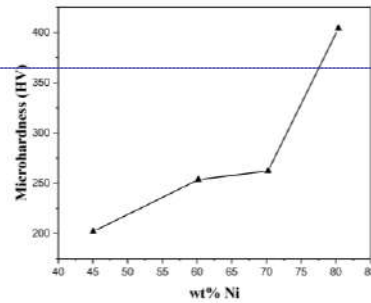


Figure 110. The relationship found between wt% Ni and microhardness, based on the data obtained from the four experimental samples

Moreover, the hardness reported in previous studies that resulted from electrodeposition of Ni-Cu on Al in the presence of P was lower than that recorded in the present study [24]. This is due to the smaller grain size that resulted from applying a different current density. In addition, the increase in microhardness reported here is related to the role that Ni atoms play in grain refinement [31]. Ramkumar et al. [50] reported a monel hardness value of 165 HV, which is lower than the peak hardness value recorded in the current study.

4. CONCLUSION

In this study, Ni-Cu alloys were electrodeposited onto Al substrates using citrate baths. The effects of adding a citrate solution on the properties of the deposited coatings were studied, and the results illustrate that single-phase Ni-Cu alloy layers were produced on the Al surface at all current densities. The CCE increased as the current density increased. The coatings formed at lower current densities showed a more compact and spherical morphology, while those formed at higher current densities showed a less uniform structure with a cauliflower-like morphology. Both the surface morphology and composition of the coating showed a strong dependence on the current density. The Ni-Cu alloy coating deposited at a low current density had a layer thickness of 32 μm , while the coating deposited at a high current density had a thickness of 50 μm . The saturation magnetization of the coating increased with the Ni content in the Ni-Cu alloy and with the coating thickness. The hardness increased with the coating thickness, grain size, and Ni composition in the solution. The hardness of the produced Ni-Cu alloy coatings was found to be greater than that of monel.

5. ACKNOWLEDGMENTS

The authors extend their gratitude to the Ministry of Research, Technology and Higher Education of the

Commented [WU15]: Hc of Ni-Cu 3, why is it high?

Commented [H16R15]: The largest Hc means that this sample is difficult to demagnetized. It is due to magnetic anisotropy. It is predicted, since Ni-Cu 30 has the largest Hc, it revealed that the magnetic anisotropy in the Ni-Cu 30 is also the highest

Formatted: Highlight

Formatted: Highlight

Republic of Indonesia for the financial support of Hibah Penelitian Disertasi Doktor No: NKB-971/UN2.RST/HKP.05.00/2022.

6. REFERENCES

- Chen, Z., Wang, C., Tang, C., Lek, Y. Z., Kandukuri, S. Y., Du, H., Gao, H., and Zhou, K. "Microstructure and mechanical properties of a Monel K-500 alloy fabricated by directed energy deposition." *Materials Science and Engineering A*, Vol. 857, No. July, (2022), 144113. <https://doi.org/10.1016/j.msea.2022.144113>
- Kukliński, M., Bartkowska, A., and Przestacki, D. "Microstructure and selected properties of Monel 400 alloy after laser heat treatment and laser boriding using diode laser." *International Journal of Advanced Manufacturing Technology*, Vol. 98, No. 9–12, (2018), 3005–3017. <https://doi.org/10.1007/s00170-018-2343-9>
- Mohagheghpour, E., Larijani, M. M., Rajabi, M., and Gholamipour, R. "Effect of silver clusters deposition on wettability and optical properties of diamond-like carbon films." *International Journal of Engineering Transactions C: Aspects*, Vol. 34, No. 3, (2021), 706–713. <https://doi.org/10.5829/ije.2021.34.03c.15>
- Nady, H., and Negem, M. "Ni-Cu nano-crystalline alloys for efficient electrochemical hydrogen production in acid water." *RSC Advances*, Vol. 6, No. 56, (2016), 51111–51119. <https://doi.org/10.1039/c6ra08348j>
- Negem, M., and Nady, H. "Electroplated Ni-Cu nanocrystalline alloys and their electrocatalytic activity for hydrogen generation using alkaline solutions." *International Journal of Hydrogen Energy*, Vol. 42, No. 47, (2017), 28386–28396. <https://doi.org/10.1016/j.ijhydene.2017.09.147>
- Guisbiers, G., Khanal, S., Ruiz-Zepeda, F., Roque De La Puente, J., and José-Yacamán, M. "Cu-Ni nano-alloy: Mixed, core-shell or Janus nano-particle?" *Nanoscale*, Vol. 6, No. 24, (2014), 14630–14635. <https://doi.org/10.1039/c4nr05739b>
- Mae, Y. "What the Darken–Gurry Plot Means About the Solubility of Elements in Metals." *Metallurgical and Materials Transactions A: Physical Metallurgy and Materials Science*, Vol. 47, No. 12, (2016), 6498–6506. <https://doi.org/10.1007/s11661-016-3730-1>
- Alizadeh, M., and Safaei, H. "Characterization of Ni-Cu matrix, Al₂O₃ reinforced nano-composite coatings prepared by electrodeposition." *Applied Surface Science*, Vol. 456, No. June, (2018), 195–203. <https://doi.org/10.1016/j.apsusc.2018.06.095>
- Toghraei, M., and Siadati, H. "Electrodeposited Co-Pi Catalyst on α -Fe₂O₃ Photoanode for Water-Splitting Applications." *International Journal of Engineering, Transactions C: Aspects*, Vol. 31, No. 12, (2018), 2085–2091. doi: 10.5829/ije.2018.31.12c.13
- Padmanabhan, K. K., and Prabhu, G. "Experimental Investigation by Cryogenic Treatment of Aluminium 6063 and 8011 and NiCoW Coating to Improve Hardness and Wear." *International Journal of Engineering, Transactions C: Aspects, International Journal of Engineering*, Vol. 29, No. 6, (2016), 827–833. <https://doi.org/10.5829/idosi.ije.2016.29.06c.12>
- Kumar, D., Angra, S., and Singh, S. "Mechanical Properties and Wear Behaviour of Stir Cast Aluminum Metal Matrix Composite: A Review." *International Journal of Engineering, Transactions A: Basics*, Vol. 35, No. 4, (2022), 794–801. <https://doi.org/10.5829/IJE.2022.35.04A.19>
- Moosaei, H. R., Zareei, A. R., and Salemi, N. "Elevated Temperature Performance of Concrete Reinforced with Steel, Glass, and Polypropylene Fibers and Fire-proofed with Coating." *International Journal of Engineering, Transactions B: Applications*, Vol. 35, No. 5, (2022), 917–930. <https://doi.org/10.5829/ije.2022.35.05b.08>
- Poursaiedi, E., and Salarvand, A. "Comparison of properties of Ti/TiN/TiCN/TiAlN Film deposited by cathodic arc physical vapor and plasma-assisted chemical vapor deposition on custom 450 steel substrates." *International Journal of Engineering, Transactions A: Basics*, Vol. 29, No. 10, (2016), 1459–1468. <https://doi.org/10.5829/idosi.ije.2016.29.10a.17>
- Allahyarzadeh, M. H., Aliofkhaezai, M., Rouhaghdam, A. R. S., and Torabinejad, V. "Gradient electrodeposition of Ni-Cu-W(alumina) nanocomposite coating." *Materials and Design*, Vol. 107, (2016), 74–81. <https://doi.org/10.1016/j.matdes.2016.06.019>
- Geramipour, F., Mousavi Khoei, S. M., and Shoohtari Gugtaph, H. "Effect of shaped waveform on structure and electrochemical corrosion behavior of pulse electrodeposited Ni[sbnd]Cu alloy coatings." *Surface and Coatings Technology*, Vol. 424, No. July, (2021). <https://doi.org/10.1016/j.surfcoat.2021.127643>
- Thurber, C. R., Ahmad, Y. H., Sanders, S. F., Al-Shenawa, A., D'Souza, N., Mohamed, A. M. A., and Golden, T. D. "Electrodeposition of 70-30 Cu-Ni nanocomposite coatings for enhanced mechanical and corrosion properties." *Current Applied Physics*, Vol. 16, No. 3, (2016), 387–396. <https://doi.org/10.1016/j.cap.2015.12.022>
- Goranova, D., Rashkov, R., Avdeev, G., and Tonchev, V. "Electrodeposition of Ni-Cu alloys at high current densities: details of the elements distribution." *Journal of Materials Science*, Vol. 51, No. 18, (2016), 8663–8673. <https://doi.org/10.1007/s10853-016-0126-y>
- Lee, W. H., and Chung, K. C. "Investigation of a copper-nickel alloy resistor using co-electrodeposition." *Journal of Applied Electrochemistry*, Vol. 50, No. 5, (2020), 535–547. <https://doi.org/10.1007/s10800-020-01398-0>
- Pingale, A. D., Belgamwar, S. U., and Rathore, J. S. "Effect of Graphene Nanoplatelets Addition on the Mechanical, Tribological and Corrosion Properties of Cu-Ni/Gr Nanocomposite Coatings by Electro-co-deposition Method." *Transactions of the Indian Institute of Metals*, Vol. 73, No. 1, (2020), 99–107. <https://doi.org/10.1007/s12666-019-01807-9>
- Hughes, R. A., Menumerov, E., and Neretina, S. "When lithography meets self-Assembly: A review of recent advances in the directed assembly of complex metal nanostructures on planar and textured surfaces." *Nanotechnology*, Vol. 28, No. 28, (2017), 0–41. <https://doi.org/10.1088/1361-6528/aa77ce>
- Kamel, M. M., Anwer, Z. M., Abdel-Salam, I. T., and Ibrahim, I. S. "Electrodeposition of nanocrystalline Ni-Cu alloy from environmentally friendly lactate bath." *Surface and Interface Analysis*, Vol. 46, No. 7, (2014), 442–448. <https://doi.org/10.1002/sia.5525>
- Awasthi, S., Pandey, S. K., and Balani, K. "Tuning the magnetism and tribological behaviour of electrodeposited Ni/Cu bi-layer by selective reinforcement of carbon nanotubes." *Journal of Alloys and Compounds*, Vol. 818, (2020), 1–12. <https://doi.org/10.1016/j.jallcom.2019.153287>
- Heidarzadeh, A., and Saeid, T. "Correlation between process parameters, grain size and hardness of friction-stir-welded Cu-Zn alloys." *Rare Metals*, Vol. 37, No. 5, (2018), 388–398. <https://doi.org/10.1007/s12598-016-0704-9>
- Karunakaran, M., Pugazhavadivu, M., Gunasegaran, V., and Gowtham, G. "Electrodeposition of Cu-Ni-P-W Composite on Al-6063 Substrate." *International Journal of Scientific Research in Physics and Applied Sciences*, (2018). <https://doi.org/10.26438/ijsrpas/v6i3.5964>
- Karunakaran, M., and Pugazh Vadivu, M. "Magnetic and micro-mechanical behavior of Cu-Ni-P-W-TiO₂ hybrid

Formatted: Font color: Auto

- composite electroplating on Al alloy substrate." *Journal of Magnetism and Magnetic Materials*, Vol. 475, No. November 2018, (2019), 359–367. <https://doi.org/10.1016/j.jmmm.2018.11.077>
26. Basori, Soegijono, B., and Susetyo, F. B. "Magnetic field exposure on electroplating process of ferromagnetic nickel ion on copper substrate." *Journal of Physics: Conference Series*, Vol. 2377, No. 1, (2022). <https://doi.org/10.1088/1742-6596/2377/1/012002>
 27. Deo, Y., Guha, S., Sarkar, K., Mohanta, P., Pradhan, D., and Mondal, A. "Electrodeposited Ni-Cu alloy coatings on mild steel for enhanced corrosion properties." *Applied Surface Science*, Vol. 515, No. March, (2020), 146078. <https://doi.org/10.1016/j.apsusc.2020.146078>
 28. SEAKR, R. "Microstructure and crystallographic characteristics of nanocrystalline copper prepared from acetate solutions by electrodeposition technique." *Transactions of Nonferrous Metals Society of China (English Edition)*, Vol. 27, No. 6, (2017), 1423–1430. [https://doi.org/10.1016/S1003-6326\(17\)60164-X](https://doi.org/10.1016/S1003-6326(17)60164-X)
 29. Dolabella, S., Borzi, A., Dommann, A., and Neels, A. "Lattice Strain and Defects Analysis in Nanostructured Semiconductor Materials and Devices by High-Resolution X-Ray Diffraction: Theoretical and Practical Aspects." *Small Methods*, Vol. 6, No. 2, (2022). <https://doi.org/10.1002/smt.202100932>
 30. Budi, S., Tawwab, R. A., Cahyana, U., Afriza, and Paristiwati, M. "Saccharin-assisted galvanostatic electrodeposition of nanocrystalline FeCo films on a flexible substrate." *International Journal of Electrochemical Science*, Vol. 15, (2020), 6682–6694. <https://doi.org/10.20964/2020.07.74>
 31. Syamsuir, S., Soegijono, B., Yudanto, S. D., Basori, B., Ajriyanto, M. K., Nanto, D., and Susetyo, F. B. "Electrolyte Temperature Dependency of Electrodeposited Nickel in Sulfate Solution on the Hardness and Corrosion Behaviors." *International Journal of Engineering, Transactions C: Aspects*, Vol. 36, No. 06, (2023), 1193–1200. [doi: 10.5829/ije.2023.36.06c.18](https://doi.org/10.5829/ije.2023.36.06c.18)
 32. Soegijono, B., Susetyo, F. B., Yusmaniar, and Fajrah, M. C. "Electrodeposition of paramagnetic copper film under magnetic field on paramagnetic aluminum alloy substrates." *e-Journal of Surface Science and Nanotechnology*, Vol. 18, (2020), 281–288. <https://doi.org/10.1380/EJSSNT.2020.281>
 33. Devi, C., and Ashokkumar, R. "Influence of different current density on characteristics of nifep nano alloy thin films." *Rasayan Journal of Chemistry*, Vol. 11, No. 3, (2018), 1144–1150. <https://doi.org/10.31788/RJC.2018.1133088>
 34. Li, B., Mei, T., Li, D., and Du, S. "Ultrasonic-assisted electrodeposition of Ni-Cu/TiN composite coating from sulphate-citrate bath: Structural and electrochemical properties." *Ultrasonics Sonochemistry*, Vol. 58, No. July, (2019). <https://doi.org/10.1016/j.ulsonch.2019.104680>
 35. Sarac, U., and Baykul, M. C. "Morphological and microstructural properties of two-phase Ni-Cu films electrodeposited at different electrolyte temperatures." *Journal of Alloys and Compounds*, (2013). <https://doi.org/10.1016/j.jallcom.2012.10.071>
 36. Arasteh, H., Milling, M., and Treatment, H. "Microhardness Optimization of Al-TiC Nanocomposite Produced by Mechanical Milling and Heat Treatment." *Advanced Ceramics Progress*, Vol. 7, No. 1, (2021), 35–45. <https://doi.org/10.30501/ACP.2021.265197.1052>
 37. Goranova, D., Avdeev, G., and Rashkov, R. "Electrodeposition and characterization of Ni-Cu alloys." *Surface and Coatings Technology*, Vol. 240, (2014), 204–210. <https://doi.org/10.1016/j.surfcoat.2013.12.014>
 38. Hu, G., Huang, R., Wang, H., Zhao, Q., and Zhang, X. "Facile galvanic replacement deposition of nickel on copper substrate in deep eutectic solvent and its activation ability for electroless Ni-P plating." *Journal of Solid State Electrochemistry*, Vol. 26, No. 5, (2022), 1313–1322. <https://doi.org/10.1007/s10008-022-05172-4>
 39. Niu, J., Song, M., Zhang, Y., and Zhang, Z. "Dealloying induced nanoporosity evolution of less noble metals in Mg ion batteries." *Journal of Magnesium and Alloys*, Vol. 9, No. 6, (2021), 2122–2132. <https://doi.org/10.1016/j.jma.2021.04.003>
 40. Wang, S., Guo, X., Yang, H., Dai, J., Zhu, R., Gong, J., Peng, L., and Ding, W. "Electrodeposition mechanism and characterization of Ni-Cu alloy coatings from a eutectic-based ionic liquid." *Applied Surface Science*, Vol. 288, (2014), 530–536. <https://doi.org/10.1016/j.apsusc.2013.10.065>
 41. Nwaeju, C. C., Eboh, A. O., and Edoziuno, F. O. "Grain size evolution mechanical and corrosion behaviour of precipitate strengthened Cu-Ni alloy." *GRAIN SIZE EVOLUTION, MECHANICAL AND CORROSION BEHAVIOUR OF PRECIPITATE STRENGTHENED Cu-Ni ALLOY*. *Acta Metallurgica Slovaca*, Vol. 28, No. 4, (2022), 188–196. <https://doi.org/10.36547/ams.28.4.1609>
 42. Ekhtiarabadi, T. A., Zandrahimi, M., and Ebrahimifar, H. "The Impact of Current Density of Electroplating on Microstructure and Mechanical Properties of Ni-ZrO₂-TiO₂ Composite Coating." *Advanced Ceramics Progress*, Vol. 6, No. 1, (2020), 22–29. <https://doi.org/10.30501/acp.2020.233518.1038>
 43. Wang, C., Hossain Bhuiyan, M. E., Moreno, S., and Minary-Jolandan, M. "Direct-Write Printing Copper-Nickel (Cu/Ni) Alloy with Controlled Composition from a Single Electrolyte Using Co-Electrodeposition." *ACS Applied Materials and Interfaces*, Vol. 12, No. 16, (2020), 18683–18691. <https://doi.org/10.1021/acsami.0c01100>
 44. Hanachi, M., Seyedraoufi, Z. S., and Abouei, V. "Advanced Ceramics Progress Investigation of Microstructure, Hardness, and Corrosion Resistance of Ni-P-GO Electroless Nanocomposite Coating on AZ31D Alloy Surface." *Advanced Ceramics Progress*, Vol. 6, No. 3, (2020), 55–62. Retrieved from <https://doi.org/10.30501/acp.2020.233518.1038>
 45. Dhara, B., Jha, P. K., Gupta, K., Bind, V. K., and Ballav, N. "Diamagnetic Molecules Exhibiting Room-Temperature Ferromagnetism in Supramolecular Aggregates." *Journal of Physical Chemistry C*, Vol. 121, No. 22, (2017), 12159–12167. <https://doi.org/10.1021/acs.jpcc.7b02145>
 46. Qasim, I., Waqee-Ur-Rehman, M., Mumtaz, M., Hussain, G., Nadeem, K., and Shehzad, K. "Ferromagnetic (Ni) nanoparticles-CuTi-1223 superconductor composites." *Journal of Magnetism and Magnetic Materials*, Vol. 403, (2016), 60–67. <https://doi.org/10.1016/j.jmmm.2015.11.066>
 47. Padmapriya, G., Manikandan, A., Krishnasamy, V., Jaganathan, S. K., and Antony, S. A. "Enhanced Catalytic Activity and Magnetic Properties of Spinel Mn_xZn_{1-x}Fe₂O₄ (0.0 ≤ x ≤ 1.0) Nano-Photocatalysts by Microwave Irradiation Route." *Journal of Superconductivity and Novel Magnetism*, Vol. 29, No. 8, (2016), 2141–2149. <https://doi.org/10.1007/s10948-016-3527-x>
 48. Demidenko, O., Zhyvulka, A., Yanushkevich, K., Galias, A., Constantin, V., Neacsu, E. I., Donath, C., and Popescu, A. M. "Magnetic properties of stainless steels under corrosive action of based on choline chloride ionic liquids." *Journal of Magnetism and Magnetic Materials*, Vol. 477, No. January, (2019), 74–76. <https://doi.org/10.1016/j.jmmm.2019.01.034>
 49. Marenich, O. O., Ding, D., Pan, Z., Kostyrychev, A. G., Li, H., and van Duin, S. "Effect of chemical composition on microstructure, strength and wear resistance of wire deposited Ni-Cu alloys." *Additive Manufacturing*, Vol. 24,

- No. August, (2018), 30–36. tungsten arc weldments of Monel 400 and Hastelloy C276.”
https://doi.org/10.1016/j.addma.2018.08.003
50. Devendranath Ramkumar, K., Joshi, V., Pandit, S., Agrawal, **Materials and Design**, Vol. 64, , (2014), 775–782.
M., Kumar, O. S., Periwai, S., Manikandan, M., and https://doi.org/10.1016/j.matdes.2014.08.055
Arivazhagan, N. “Investigations on the microstructure and
mechanical properties of multi-pass pulsed current gas

Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

C. Rosyidan^{a,d}, B. Kurniawan^a, B. Soegijono^b, V. G. Vidia Putra^c, D. R. Munazat^a, F. B. Susetyo^e

^aDepartment of Physics, Universitas Indonesia, Depok, 16424, Indonesia

^bDepartment of Geoscience, Universitas Indonesia, Depok, 16424, Indonesia

^cPlasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, 40272, Indonesia

^dDepartment of Petroleum, Universitas Trisakti, Jakarta, 11440, Indonesia

^eDepartment of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta 13220, Indonesia

P A P E R I N F O

Paper history:

Received 10 November 2017

Received in revised form 23 December 2017

Accepted 4 January 2018

چکیده

و سائز 9 باشد B Lotus چکیده فارسی باید با فونت

Keywords:

Cathodic current efficiency

SEM-EDS

Microhardness

Vibrating sample magnetometer

doi: 10.5829/ije.2018.31.04a.01

3. Bukti menjawab reviewer (7 September 2023)

Title : Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

Authors : Cahaya Rosyidan, Budhy Kurniawan, Bambang Soegijono, Valentinus Galih Vidia Putra, Dicky Rezky Munazat, Ferry Budhi Susetyo

Corresponding author : Budhy Kurniawan

#Editorial Office of International Journal of Engineering

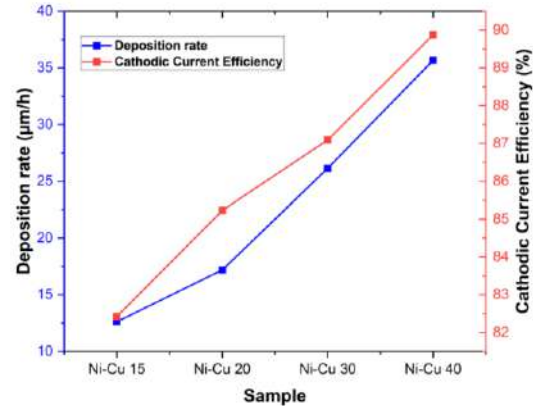
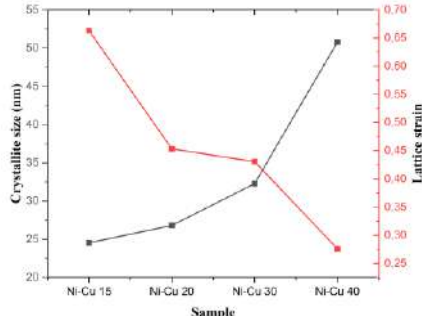
Please cite IJE's recent published articles related to your work. DOI for all references required.


Response:

Seven IJE-published papers were related, and we have cited them with pleasure (ref 3, 9, 10, 11, 12, 13, 31, 36, 42, and 44). We would recommend our colleagues for IJE's recently published paper for future publication in any journal. We hope IJE's ranking always increases shortly. DOI, all listed references have been added. Thank you.

#Reviewer 1

No.	Comment from Reviewer	Revision																				
1	Add Ni-Cu coating	Ni-Cu coating was added. Thank you																				
2	Why are these two materials mentioned?	I apologize there is a little mistake in the writing, it should be Ni and Cu alloy																				
3	Why is not crystallite size measured by Rietveld, which has higher accuracy?	Thanks for your input, the crystal size has been recalculated with the Rietveld refinement method. In Rietveld refinement, we can model the entire crystal structure and parameters in one analysis. This analysis includes parameters such as crystal structure, lattice parameter, gof, rwp, atomic position, diffraction pattern, including intensity and position of diffraction peaks, which enables a more comprehensive analysis. So that it can provide a complete picture of the influence of inter-parameters. Therefore, it can improve the accuracy of crystallite size measurement. <table><tr><th colspan="5">Sample</th></tr><tr><th>Parameter</th><th>Ni-Cu 15</th><th>Ni-Cu 20</th><th>Ni-Cu 30</th><th>Ni-Cu 40</th></tr><tr><td>Crystal structure</td><td colspan="4">Cubic fcc</td></tr><tr><td>Space group</td><td colspan="4">Fm-3m</td></tr></table>	Sample					Parameter	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40	Crystal structure	Cubic fcc				Space group	Fm-3m			
Sample																						
Parameter	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40																		
Crystal structure	Cubic fcc																					
Space group	Fm-3m																					

		Lattice constant ($\text{\AA}$) $a = b = c$ 3.582 3.560 3.554 3.545 Volume ($\text{\AA}^3$) 45.975 45.152 44.905 44.557 d-spacing ($\text{\AA}$) 1.791 1.780 1.695 1.691 Crystallite size (nm) 24.55 26.82 32.29 50.78 Rwp (100%) 3.640 4.484 5.394 5.139 GOF 1.94 1.72 2.06 2.03 Lattice strain 0.663 0.453 0.431 0.276															
4	is this consistent with similar research?	Yes, this is consistent with other studies, we add the deposition rate graph and the same study.  <table border="1"> <caption>Data for Deposition Rate and Cathodic Current Efficiency</caption> <thead> <tr> <th>Sample</th> <th>Deposition rate ($\mu\text{m/h}$)</th> <th>Cathodic Current Efficiency (%)</th> </tr> </thead> <tbody> <tr> <td>Ni-Cu 15</td> <td>~12.5</td> <td>~82.5</td> </tr> <tr> <td>Ni-Cu 20</td> <td>~17.5</td> <td>~85.5</td> </tr> <tr> <td>Ni-Cu 30</td> <td>~26.5</td> <td>~87.5</td> </tr> <tr> <td>Ni-Cu 40</td> <td>~36.5</td> <td>~89.5</td> </tr> </tbody> </table>	Sample	Deposition rate ($\mu\text{m/h}$)	Cathodic Current Efficiency (%)	Ni-Cu 15	~12.5	~82.5	Ni-Cu 20	~17.5	~85.5	Ni-Cu 30	~26.5	~87.5	Ni-Cu 40	~36.5	~89.5
Sample	Deposition rate ($\mu\text{m/h}$)	Cathodic Current Efficiency (%)															
Ni-Cu 15	~12.5	~82.5															
Ni-Cu 20	~17.5	~85.5															
Ni-Cu 30	~26.5	~87.5															
Ni-Cu 40	~36.5	~89.5															
5	Why is there a significant difference in the results for Ni-Cu 40 sample?	According to Figure 2(b), the FWHM for peak (111) decrease with increasing current density. This result is consistent with earlier studies in which increasing current density reduces FWHM. DOI: 10.24203/ajas.v8i4.6287  <table border="1"> <caption>Data for Crystallite Size and Lattice Strain</caption> <thead> <tr> <th>Sample</th> <th>Crystallite size (nm)</th> <th>Lattice strain</th> </tr> </thead> <tbody> <tr> <td>Ni-Cu 15</td> <td>~24.5</td> <td>~0.66</td> </tr> <tr> <td>Ni-Cu 20</td> <td>~26.8</td> <td>~0.45</td> </tr> <tr> <td>Ni-Cu 30</td> <td>~32.3</td> <td>~0.43</td> </tr> <tr> <td>Ni-Cu 40</td> <td>~50.8</td> <td>~0.28</td> </tr> </tbody> </table>	Sample	Crystallite size (nm)	Lattice strain	Ni-Cu 15	~24.5	~0.66	Ni-Cu 20	~26.8	~0.45	Ni-Cu 30	~32.3	~0.43	Ni-Cu 40	~50.8	~0.28
Sample	Crystallite size (nm)	Lattice strain															
Ni-Cu 15	~24.5	~0.66															
Ni-Cu 20	~26.8	~0.45															
Ni-Cu 30	~32.3	~0.43															
Ni-Cu 40	~50.8	~0.28															
6	Is eds accurate enough to determine chemical composition? The change in composition is very impressive	Yes accurate. The chemical composition of small objects is determined using the EDS method, which involves placing the material in a vacuum chamber and lighting it from above with a focused electron beam. Ionised atoms emit discrete energy X-ray quanta characteristic of the chemical contents of the material under analysis. Besides using EDS, there are also using XRF and AAS. The advantages of the XRF method are that the samples analyzed do not need to be tampered with, have high accuracy, can determine the elements in the material in the absence of standards, and can determine the mineral content in biological materials and the body directly. The disadvantage of the XRF method is that it cannot analyze elements below atomic number 10. Samples are solutions, and mostly water. Thus those of interest to study such as soils, animal tissues, plants, and minerals require complex preparation to form test-ready analytes. The decomposition of these materials usually requires harsh treatment at high															

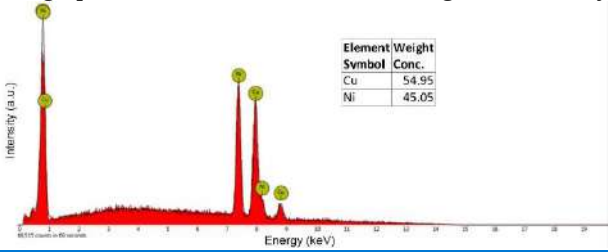		temperatures, resulting in the potential loss of analytes by evaporation or as particulates in the smoke. Can only measure metals in total, cannot distinguish between species such as oxidation state, free metal or bound to other molecules such as metalloproteins, organometallics, etc.									
7	EdS graph and table is added for at least one sample	Eds graph and table have been added in figure 5. Thank you  <table border="1" data-bbox="861 414 965 481"> <thead> <tr> <th>Element</th> <th>Weight Symbol</th> <th>Conc.</th> </tr> </thead> <tbody> <tr> <td>Cu</td> <td></td> <td>54.95</td> </tr> <tr> <td>Ni</td> <td></td> <td>45.05</td> </tr> </tbody> </table>	Element	Weight Symbol	Conc.	Cu		54.95	Ni		45.05
Element	Weight Symbol	Conc.									
Cu		54.95									
Ni		45.05									
8	Hc of Ni-Cu 3, why is it high?	The largest Hc means that this sample is difficult to demagnetized. It is due to magnetic anisotropy. It is predicted, since Ni-Cu 30 has the largest Hc, it revealed that the magnetic anisotropy in the Ni-Cu 30 is also highest.									

#Reviewer 2

No.	Comment from Reviewer	Revision
1	Please update references and try to use some references from the following journals: International journal of engineering Advanced ceramic progress or ACERP published by MERC	Yes, A reference journal has been added. Thank you. We have cited them with pleasure (ref 3, 9, 10, 11, 12, 13, 31, 36, 42, and 44)

4. Keputusan Editor (30 September 2023)

Bukti dari Email

Acceptance of Manuscript (#IJE-2307-7328 (R1))

Eksternal



International Journal of Engineering <editorial@e-mail.sinaweb.net>
kepada saya, budhy,kurniawan, naufal, valentinus, dicky.rezky, fbudhi ▾

Sab, 30 Sep 2023, 05.02



Terjemahkan ke Indonesia



Manuscript ID: IJE-2307-7328 (R1)

Manuscript Title: **Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition**

Authors: Cahaya Rosyidan, Budhy Kurniawan, Bambang Soegijono, Valentinus Galih Vidia Putra, Dicky Rezky Munazat, Ferry Budhi Susetyo

Dear respectful IJE author Mr. Cahaya Rosyidan

This is my great pleasure to confirm that after technical and in-house evaluation, the above mentioned manuscript has been finalized and accepted for publication in IJE journal.

IJE's Editor in Chief shall contact you for the unmarked manuscript in the exact IJE's template for the required steps to follow IJE's format, in order to prepare proof of your accepted manuscript while communicating with the corresponding author.

IJE is indexed by Scopus, Web of Science and Emerging Sources Citation Index since January 2017. Thanks for your valued scientific contributions. Looking forward to see more original research papers as new submissions. Please share your published articles in social media and recommend citing IJE's published articles to your colleagues and friends.

Truly yours,

Editorial Office of **International Journal of Engineering**

Note:

IJE editorial office appreciates if you upload the pdf file of your article in Social Media Sites such as Facebook, Twitter, LinkedIn, ResearchGate, Academia, Instagram, etc. for more visibility and possible for citation.

Article Acceptance Certificate

This certificate confirms that the following paper has been accepted for publication in
International Journal of Engineering

Title: Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via
Electrodeposition

ID: IJE-2307-7328 (R1)

Authors: Cahaya Rosyidan, Budhy Kurniawan, Bambang Soegijono, Valentinus Galih Vidia Putra,
Dicky Rezky Munazat, Ferry Budhi Susetyo

Submit Date: 28 July 2023

Accept Date: 30 September 2023

Prof. Ghasem Darzi Najafpour

Editor-in-Chief of International Journal of Engineering

5. Bukti Artikel Terbit (2 Febuari 2024)



Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition

C. Rosyidan^{a,b}, B. Kurniawan^{*a}, B. Soegijono^c, V. G. Vidia Putra^d, D. R. Munazat^a, F. B. Susetyo^e

^a Department of Physics, Universitas Indonesia, Depok, Indonesia

^b Department of Petroleum, Universitas Trisakti, Jakarta, Indonesia

^c Department of Geoscience, Universitas Indonesia, Depok, Indonesia

^d Plasma and Nanomaterial Research Group, Politeknik STTT Bandung, Bandung, Indonesia

^e Department of Mechanical Engineering, Universitas Negeri Jakarta, Jakarta, Indonesia

PAPER INFO

Paper history:

Received 28 July 2023

Received in revised form 08 September 2023

Accepted 30 September 2023

Keywords:

Cathodic Current Efficiency

Microhardness

Ni-Cu Coating

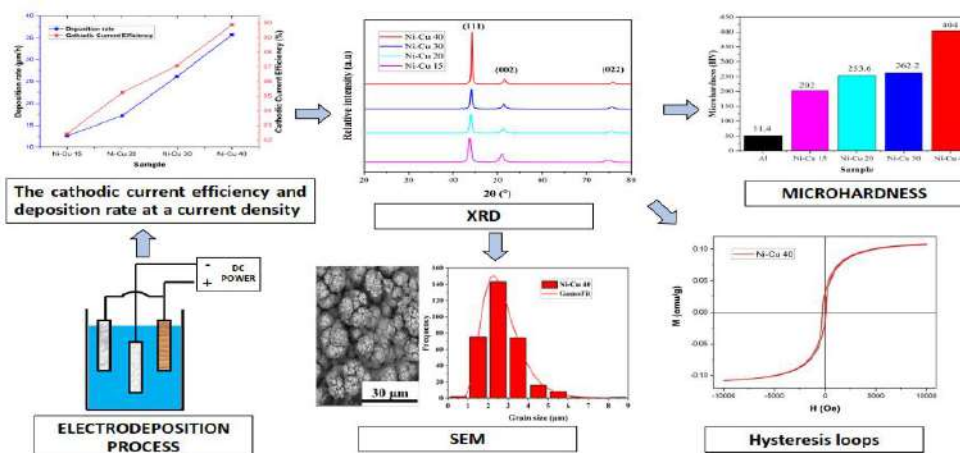
Vibrating Sample Magnetometer

ABSTRACT

Nickel (Ni)-rich single-phase nickel-copper (Ni-Cu) alloy coatings were produced on aluminum (Al) substrates by electrodeposition in stabilized citrate baths. Electrodeposition experiments were performed at four different current densities. Increasing the current density resulted in the metal deposition rate increasing faster than the hydrogen evolution rate; thus, the cathodic current efficiency increased. The crystal systems of the Ni-Cu alloys were face center cubic (fcc), with the (111) plane as the preferred crystal plane. Scanning electron microscopy with energy dispersive X-ray spectroscopy (SEM-EDS) measurements showed that the Ni content in the coating increased with increasing current density. The Ni-Cu 40 sample had the most Ni content and showed a homogeneous and compact morphology. It was found that the higher the concentration of Ni in the solution, the smaller the grain size. Measurements recorded with a vibrating sample magnetometer (VSM) showed that the Ni-Cu 40 sample provided magnetic saturation, with the highest value being 0.108 emu/g. The microhardness method produced 404 HV on the Ni-Cu 40 sample. In conclusion, higher current densities were associated with a higher Ni composition and increased thickness, which were responsible for the increases in the magnetic properties and hardness.

doi: 10.5829/ije.2024.37.02b.01

Graphical Abstract



*Corresponding author email: budhy.kurniawan@sci.ui.ac.id. (B. Kurniawan)

Please cite this article as: Rosyidan C, Kurniawan B, Soegijono B, Vidia Putra VG, Munazat DR, Susetyo FB. Effect of Current Density on Magnetic and Hardness Properties of Ni-Cu Alloy Coated on Al via Electrodeposition. International Journal of Engineering, Transactions B: Applications. 2024;37(02):213-23.

NOMENCLATURE

C_e	Cathodic current efficiency	W_i	Initial weight of the substrate
σ	Lattice strain	W_f	Weight
W_s	Final weight of the substrate	I	Total current
W_m	Ratio of the final weight of the substrate	t	Deposition time
μ	Texture coefficient of the unique plane	F	Faraday's constant
$I(hkl)$	Measured intensity	f_{ni}	Nickel deposit weight ratio
m_{cu}	Copper's atomic weight	m_{ni}	Nickel's atomic weight

1. INTRODUCTION

Researchers widely study nickel (Ni) and copper (Cu) alloys as engineering materials due to their unique mechanical, magnetic, and anti-corrosion properties (1, 2). Ni-Cu alloys are known as monel in the industry and are typically comprised of 70 wt% Ni and 30 wt% Cu (3). These alloys have outstanding capabilities in acidic and alkaline environments (4). Ni-Cu alloys are single-phase alloys throughout their composition on the phase diagram, and these alloys formed because Ni and Cu are fully soluble in their solid and liquid states (5). Ni and Cu both have a face center cubic (fcc) crystal structure, and they have almost similar electronegativity and atomic radii (6, 7).

Given that conventional casting as a manufacturing method for monel results in substantial production costs and that Ni-Cu alloy coated on aluminum (Al) has potential as a replacement for monel as a bulk material (8), Al-based metals have received considerable attention (9, 10). They are lightweight and demonstrate high resistance to wear and corrosion and a high strength–stiffness combination (11).

Several techniques have been proposed to successfully modify the surface morphology and chemical composition, including sol-gel, chemical etching, chemical vapor deposition, thermal embossing, and electrodeposition (12, 13). The electrodeposition technique is a cost-effective, scalable, and easy-to-control process for coating Ni-Cu alloy (14). Specific methods have also been developed to determine the structure, morphology, and phase composition of the coated Ni-Cu alloys (15, 16). Goranova et al. (17) investigated how changing the concentration of Ni ions and the current density affected the structure and composition of Ni-Cu alloys formed by electrodeposition in alkaline citrate baths. Higher concentrations of Ni ions in the bath led to notably smoother deposits and enhanced current efficiency. However, producing a uniform Ni-Cu coating can be challenging due to the difference in reduction potential between Ni and Cu. The reduction potential of Ni atoms is -0.25 V vs. SHE, and that of Cu atoms is +0.34 V vs. SHE (18). As a result, controlling the concentrations of Ni and Cu is vital. Complexing agents must be added to narrow the potential difference between Ni and Cu. The most frequently used complexing agent is citrate due to its low toxicity, cost-effectiveness, and buffering characteristics (19).

The electrodeposition process affects the physical properties of the resultant Ni-Cu alloy, as does the current density. A high current density causes the crystal plane to be oriented in the (111) plane, the lattice size to be smaller, and the atomic distance to be less (20). The grain size becomes smaller when the current density is high, and the morphological shape resembles that of a cauliflower (21). As a result of a high current density, the coating will be thicker, and the composition of the Ni weight fraction will also be higher. The amount of Ni deposited on the substrate and the thickness of the coating both have an impact on the product's magnetic properties (22). In addition, a smaller grain size results in an increase in hardness (23). Karunakaran et al. (24) reported a hardness of 153 HV when the current density was 40 mA/cm², and Karunakaran and Pugazh (25) Vadivu reported a magnetic saturation value of 0.0004 emu/g at 40 mA/cm². Nevertheless, the researchers did not examine the impact of the coating electrodeposition factors, structure, and morphology on the magnetic and hardness properties.

The aims of this research were 1) to produce a Ni-rich Ni-Cu alloy coating on Al via electrodeposition and 2) to investigate the link between magnetic and hardness properties and the coating's microstructure and surface morphology. We varied the current density, and the process was conducted at room temperature. We examined the influence of various process variables on the cathodic current efficiency, structure, morphology, composition, grain size, and thickness of the produced coatings. Finally, the magnetic properties and hardness of the coatings were investigated.

2. MATERIAL AND METHODS

2. 1. Material and Electrodeposition Process

The chemical composition of the Al substrate (cathode) used was Fe = 1.63 wt%, Mg = 1.49 wt%, and Al = 96.88 wt%. The chemical composition of the Ni (anode) used was Al = 0.02 wt%, Ca = 0.04 wt%, Fe = 0.23 wt%, Y = 1.61 wt%, Zr = 0.04 wt%, Nb = 0.05 wt%, and Ni = 98.01 wt%. The chemical composition of the Cu (anode) used was P = 0.22 wt%, Cd = 0.684 wt%, Si = 0.137 wt%, and Cu = 98.959 wt%. The Al was cleaned from the oxide coating with sandpaper before deposition using DELTA D68H for 5 min. Ni-Cu electrodeposition was carried out using a SANFIX 305 E DC power supply. The samples produced using a current density of

15 mA/cm², 20 mA/cm², 30 mA/cm², and 40 mA/cm² were designated as Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40, respectively. Table 1 summarized the bath composition and deposition parameters.

2. 2. Characterization The deposition rate was calculated using the previously reported method (26). The following formula, Equation 1, was used to calculate the efficiency of the cathodic current (27):

$$C_e = W_m / W_f \quad (1)$$

W_m and W_f were calculated using Faraday's law, as shown in Equations 2 and 3.

$$W_m = W_s - W_i, \quad (2)$$

$$W_f = \{(m_{ni}/2) * f_{ni} + (m_{cu}/2) * f_{cu}\} * I * \frac{t}{F}. \quad (3)$$

The crystal structure of the Ni-Cu coating was determined using X-ray diffraction (XRD-PANalytical Aeris Instrument Suit) (Cu-K α radiation, $\lambda = 0.15418$ nm). XRD data were collected from 20° to 80° with a step size of 0.020°. The Materials Analysis Using Diffraction (MAUD) program was used to determine the crystal parameters of the sample after Rietveld refinement. The preferential crystallite orientation was determined from the texture coefficient μ , as shown in Equation 4 (28):

$$\mu = \frac{I(hkl)/I_0(hkl)}{(\frac{1}{N}) \sum [I(hkl)/I_0(hkl)]}, \quad (4)$$

Based on XRD results, the lattice strain σ was calculated using Equation (5) (29):

$$\sigma = \left(\frac{\beta}{4 \times \tan \theta} \right) \quad (5)$$

SEM-EDS (Thermofisher Quanta 650 EDAX EDS Analyzer) with 1000 $\times$ magnification was used to analyze the surface morphology of the Ni-Cu coatings. EDS was used to determine the chemical composition of the coatings, and the statistical distribution of grain sizes was calculated using ImageJ software. The cross sections of the coated samples were also examined to assess how the current density and CCE affected the

coating thickness. Measurement of magnetic properties was conducted using a vibrating sample magnetometer (VSM, Oxford 1.2H). The hardness of the Ni-Cu coatings was measured using a MicroMct® 5100 Series Microindentation Hardness Tester. The ATM E384 standard was used for the tests, which were performed with a load of 100 g for 10 s at five places.

3. RESULTS AND DISCUSSION

3. 1. Cathodic Current Efficiency and Deposition Rate

Figure 1 depicts the relationship between the average CCE and deposition rate in the citrate electrolyte bath. The CCE was found to be high, with a value of 82–89%. The basic concept of current efficiency can be understood as the fraction of total current used for metal plating (30). Apart from metal deposition, hydrogen evolution is the only other necessary process that must occur on the substrate surface. Ni and Cu precipitation are both antagonistic to the hydrogen evolution reaction. In this study, the metal deposition rate increased faster than the hydrogen evolution rate when the current density increased from 15 to 40 mA/cm²; hence, the CCE increased. The highest CCE (89.96%) was associated with the Ni-Cu 40 sample, and the lowest CCE (82.55%) was associated with the Ni-Cu 15 sample. Basori et al. and Syamsuir et al. (31) found that the deposition rate and current efficiency are considered linear.

3. 2. Structural Properties Figure 2(a) depicts the XRD spectra of the Ni-Cu alloy samples produced at various current densities. According to the XRD analysis results, each Ni-Cu alloy sample consisted of a single phase with an fcc structure. The evolution of the lattice parameters of the Ni-rich (111) phase over the range of current densities is shown in Figure 2(b). The

TABLE 1. Bath composition and deposition parameters

Bath composition and condition	Quantity
NiSO ₄ .6H ₂ O (Merck)	0.5 M
CuSO ₄ .5H ₂ O (Merck)	0.04 M
Na ₃ C ₆ H ₅ O ₇ (Merck)	0.2 M
pH	4.2
Temperature	25 °C
Deposition time	1 h

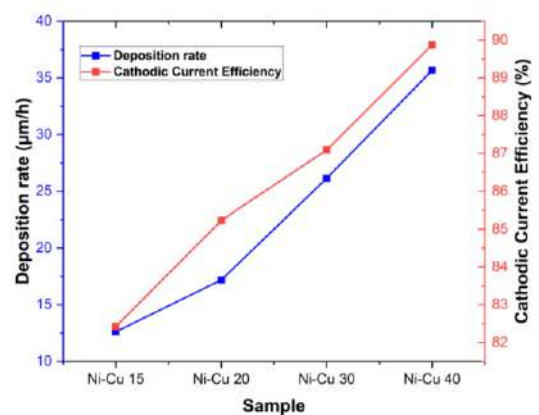


Figure 1. The cathodic current efficiency and deposition rate at a current density of 15, 20, 30, and 40 mA/cm²

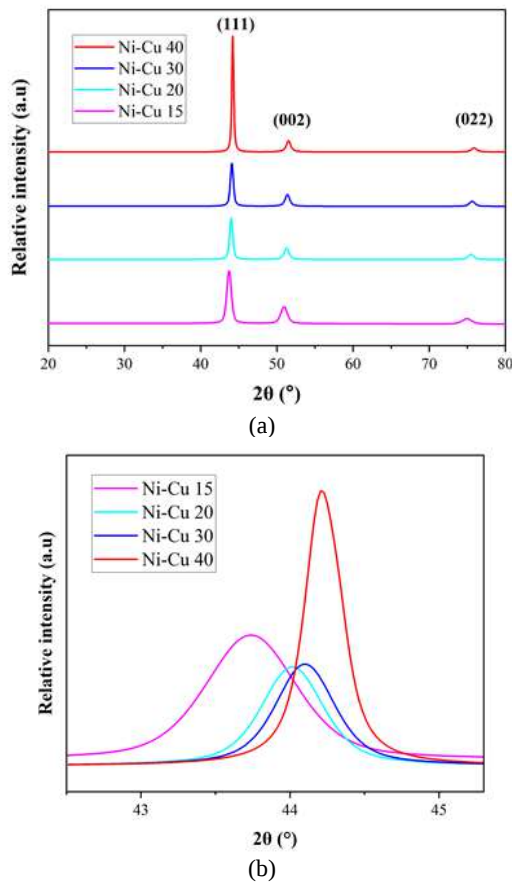


Figure 2. (a) X-ray diffraction spectra of Ni-Cu coatings electrodeposited at various current densities and (b) the extended view of the Ni-Cu (111) plane, showing peak shifts

peaks of each sample were found between the peaks of the fcc of $2\theta = 43.3^\circ$ for pure Cu and $2\theta = 44.5^\circ$ for pure Ni (32, 33). As the Ni content of the alloy coating increased, the diffraction angle also increased.

Crystal size calculation using MAUD resolved refinement was used to determine the size of the crystallites in the Ni-Cu alloys, and the results (Table 2) show that the crystallite size of the Ni-Cu coating ranged from approximately 24 to 50 nm. The crystallite size of a pure Ni layer is 60 nm, meaning that the Ni-Cu alloys had smaller crystallite sizes than a pure Ni layer. This result is also similar to that obtained by Li et al. (34). In contrast to the typical watt-Ni coating, we found that the presence of a sodium citrate complexing agent resulted in a finer crystallite size. This is consistent with the findings of Sarac and Baykul (35), who observed that Cu atoms affect grain refinement in Ni-Cu alloys. Cu atoms can restrain the surface diffusion of Ni atoms during the deposition process and inhibit the growth of crystallites.

The evolution of the crystallographic orientation of the Ni-Cu coatings produced with varying current

densities is shown in detail in Figure 3. It can be observed that a strong (111) fiber texture appeared in all the samples, while the (002) texture gradually decreased as the current density increased.

The μ values of different crystal planes are also used to evaluate the degree of crystallographic orientation (34). Moreover, the Ni-Cu coating electrodeposited at the current density of 40 mA/cm² was found to have a strong (111) texture.

The texture coefficient for every preference was calculated using Equation 4 to ascertain the preferred crystal orientation direction of each Ni-Cu alloy obtained at the various current densities, and the results are shown in Table 3 (32).

It seems that the texture coefficient was also dependent on the peak current, and the preferred orientation was the (111) plane. Li et al. (34) found that the higher the current density, the more dominant the (111) plane. The findings suggest that the (111) crystallographic orientation was preferable for all the Ni-Cu coatings electrodeposited at the tested current densities.

The lattice strain of the prepared coatings was determined using Equation 5, and Figure 4 illustrates the changes in the crystal size and lattice strain of the Ni-Cu coatings based on the current density applied in the plating bath.

The crystal size increased and the lattice strain decreased as the current density increased (36). This result aligns with that obtained by Devi et al. (33), who showed that the higher the current density, the more the

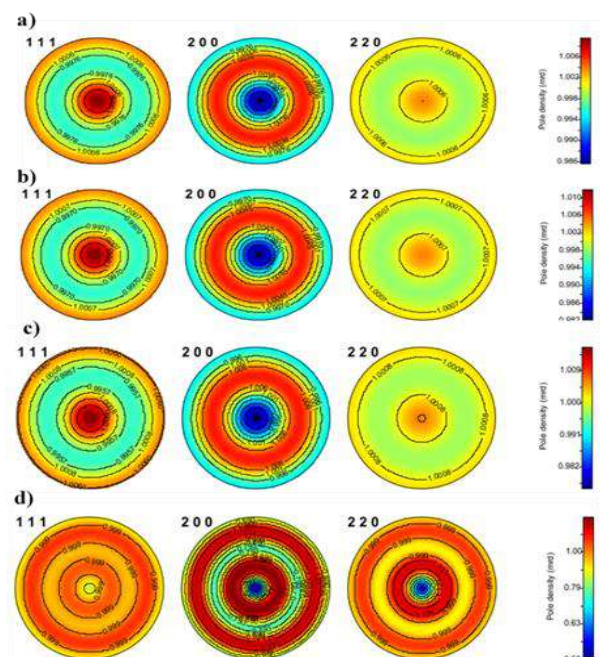


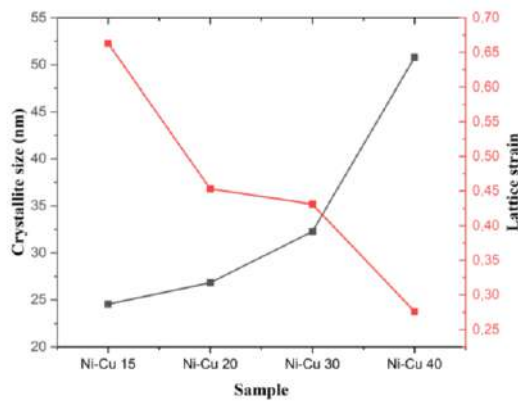
Figure 3. The simulated 2D pole figures for the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

TABLE 2. Parameters of the Ni-Cu alloys after Rietveld refinement using MAUD

Parameter	Sample			
	Ni-Cu 15	Ni-Cu 20	Ni-Cu 30	Ni-Cu 40
Crystal structure	Cubic fcc			
Space group	Fm-3m			
Lattice constant (Å) $a = b = c$	3.582	3.560	3.554	3.545
Volume (Å ³)	45.975	45.152	44.905	44.557
d-spacing (Å)	1.791	1.780	1.695	1.691
Crystallite size (nm)	24.55	26.82	32.29	50.78
Rwp (100%)	3.640	4.484	5.394	5.139
GOF	1.94	1.72	2.06	2.03
Lattice strain	0.663	0.453	0.431	0.276

TABLE 3. Texture coefficient analysis of Ni-Cu deposits

Sample	μ (hkl)		
	[111]	[002]	[022]
Ni-Cu 15	1.12	0.86	0.77
Ni-Cu 20	1.17	0.74	0.81
Ni-Cu 30	1.18	0.74	0.78
Ni-Cu 40	1.48	0.34	0.32

**Figure 4.** The lattice strain and crystallize size of the Ni-Cu alloys coated on Al at various current densities

crystal size increased. A possible reason for this is that the composition of Ni increases as the current density increases.

3. 3. Surface Morphology EDS was used to determine the elemental composition of the Ni-Cu coatings, and the results are shown in Figure 5 and Table 4. Cu and Ni were the only elements present in the

deposits. The alloy composition was influenced by the current density: as the current density increased, the Cu content decreased. This phenomenon can be caused by the $[\text{Ni}^{2+}]/[\text{Cu}^{2+}]$ ratio in the bath, which changes the composition of Ni and Cu. Goranova et al. discovered that as the Cu content of deposits decreased, so did the CCE (37). This phenomenon occurs because of the orderly deposition of Ni and Cu (38). In regular deposition, increasing the current density leads to an increased proportion of less noble metals in the deposited material (39). In our scenario, Ni is the less noble metal. As a result, when the current density was higher, the deposits were richer in Ni.

Another notable feature was that as the current density increased, the peak shifted to the right (i.e., to higher 2θ values). The change in the alloy composition may have also caused this peak shift. The Ni concentration increased as the current density increased (see Table 4). Because Ni and Cu combine to produce a single-phase alloy, the diffraction peak shifted toward that of pure Ni as the Ni percentage increased. This finding is similar to the observations of Goranova et al. (17), who found that the fcc reflection for Ni-rich Ni-Cu alloy deposits shifted to the right as the Ni concentration increased. Indeed, it is logical to expect the Ni-Cu alloy peak to shift as the Ni content increase.

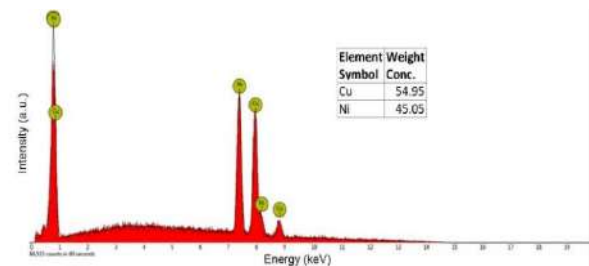
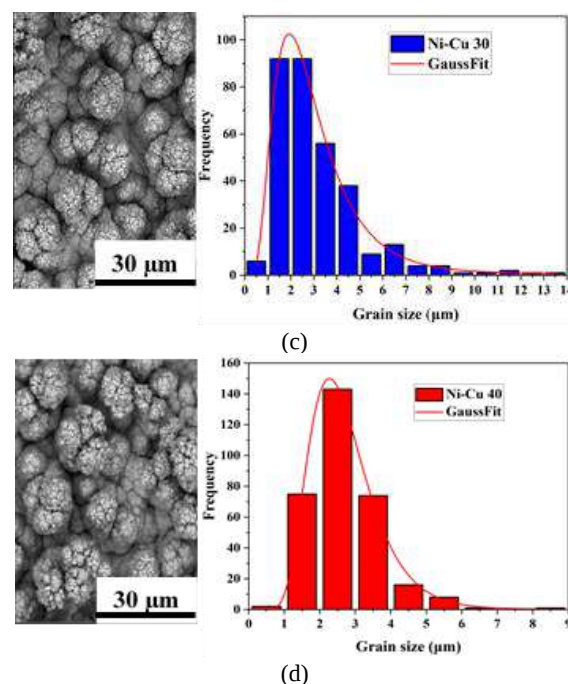
**Figure 5.** Eds graph of the Ni-Cu 15

TABLE 4. The chemical composition of Ni-Cu coatings on the Al substrate prepared at different current densities

Sample	Cu, wt%	Ni, wt%
Ni-Cu 15	54.95	45.05
Ni-Cu 20	39.83	60.17
Ni-Cu 30	29.80	70.20
Ni-Cu 40	19.64	80.36

The surface morphological structure and the cross section of the coated samples were observed using SEM. Figure 6 shows SEM micrographs of the four samples' surface morphological structures. The deposits developed a fine-grained and compact spherical shape when lower deposition current densities were applied (Figure 5(a)). Deo et al. (27) and Goranova et al. (37) also observed this morphology at low current densities. The shape changed to a coarser cauliflower form when higher current densities were applied (Figure 6(d)). A diffusion-limited deposition mechanism in which a multigeneration spherical diffusion layer creates a cauliflower shape is likely to produce this type of morphology (40). As the current density increased, the cauliflower-like protrusions became more spaced and separated, creating gaps. The Ni-Cu 40 sample, produced with the highest current density, was found to have the largest gaps between the cauliflower-like bulges.

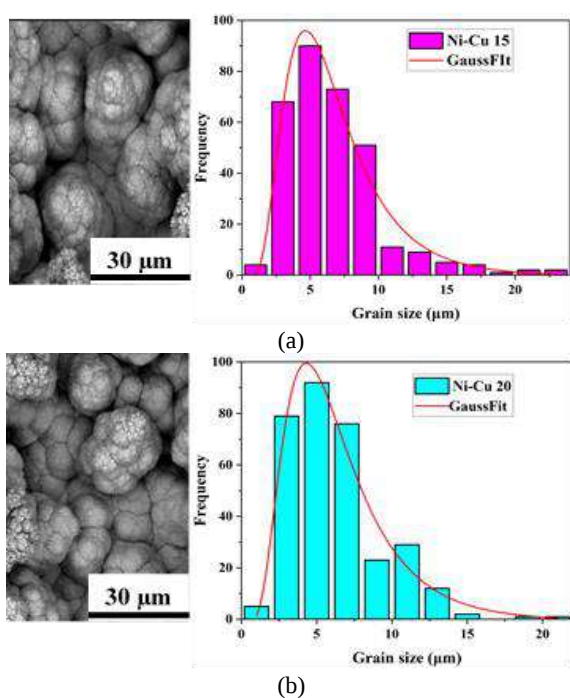
The increased nucleation rate can explain the observed decrease in grain size with increasing current density (41, 42). Ni-Cu ion flow to the cathode is faster at higher current densities. Further investigation is

**Figure 6.** Surface SEM images of the deposited Ni-Cu alloy coatings and plots showing the statistical distribution of the grain size

needed to determine the exact relationship between the current density and the grain size of the coating. In the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples, the peak that corresponded to the (111) plane shifted toward the right (see Figure 2b). The reduction in d-spacing is ascribed to residual stress induced at a higher deposition rate (43). The statistical results of the grain size distribution presented in Figure 6 indicate that the grain size ranged from 4.63 to 1.94 μm . The decrease in grain size with the increase in current density is evident in the data shown in Table 5.

Figure 7 depicts the relationship between the deposited alloy composition and the applied current density. EDS was used to determine the composition.

Figure 8 (a–d) displays SEM cross-section images of the produced Ni-Cu coatings. The absence of cracks between the substrate and coating demonstrates that appropriate adhesion occurred between the two entities (44). The thickness of the electrodeposited Ni-Cu coating was also measured for each sample (27), and the

**TABLE 5.** Average grain size found in each sample

Sample	Average grain size (μm)
Ni-Cu 15	4.63 ± 0.269
Ni-Cu 20	4.38 ± 0.365
Ni-Cu 30	2.28 ± 0.068
Ni-Cu 40	1.94 ± 0.032

following results were recorded: Ni-Cu 15 = 32 μm , Ni-Cu 20 = 42 μm , Ni-Cu 30 = 49 μm , and Ni-Cu 40 = 50 μm . The effect of the current density on the thickness of the Ni-Cu coating is depicted in Figure 8; the thickness increased as the current density increased (19). Hence, a higher current density results in more mass and a thicker coating. The findings presented in Figure 1 show that as the current density increased, so too did the CCE.

According to Faraday's law, when the deposition time remains constant for all samples, coatings formed at lower current densities will be thinner than those produced at higher current densities. A thinner covering may lead to severe interference from the Al substrate. The cathodic current density also affects the coating, as Deo et al. (27) discovered that increasing the current density improves the thickness of the film due to an increase in the CCE.

3. 4. Magnetic Properties Figure 9 depicts the magnetic characteristics and fluctuations in the current density magnetization measured with a VSM at room

temperature (45). The results of the VSM analysis demonstrate that the coatings in the Ni-Cu 15, Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 samples displayed ferromagnetic activity. The low ferromagnetic activity of the $\text{Cu}_{54.95}\text{Ni}_{45.05}$ alloy film of Ni-Cu 15 could be attributed to Ni diffusion in the Cu matrix, as Cu is a diamagnetic metal and Ni is a ferromagnetic metal (46). The ferromagnetic properties of the Ni-Cu films of Ni-Cu 20, Ni-Cu 30, and Ni-Cu 40 increased with the Ni content of the alloy coatings.

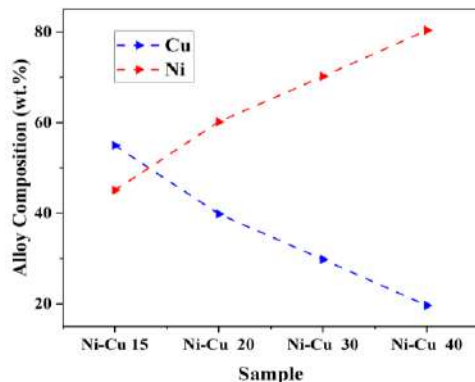


Figure 7. The dependence of the deposited alloy's composition (shown as wt% of the single electrolytes) on current density



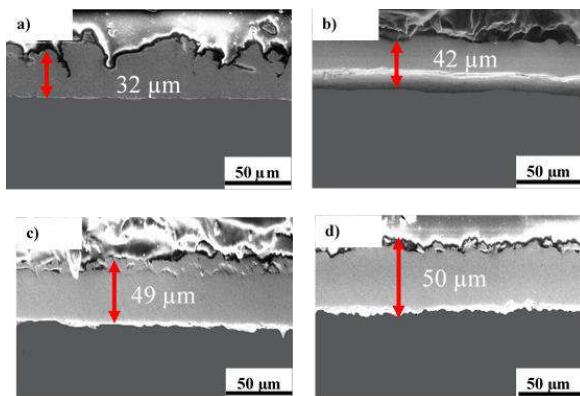



Figure 8. SEM cross-section images of the Ni-Cu coating on Al in the (a) Ni-Cu 15, (b) Ni-Cu 20, (c) Ni-Cu 30, and (d) Ni-Cu 40 samples

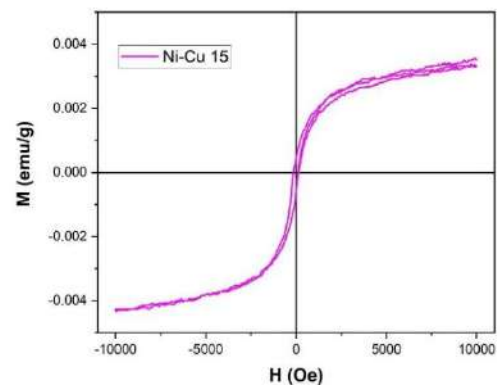

(a)

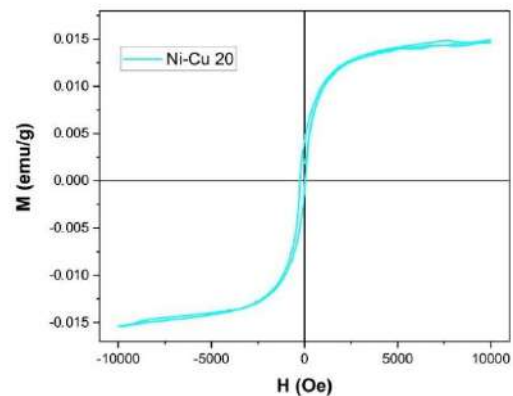

(b)

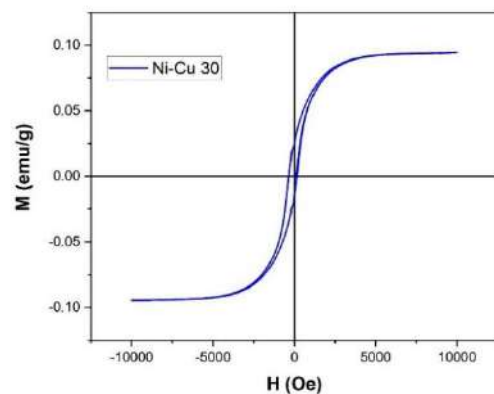

(c)

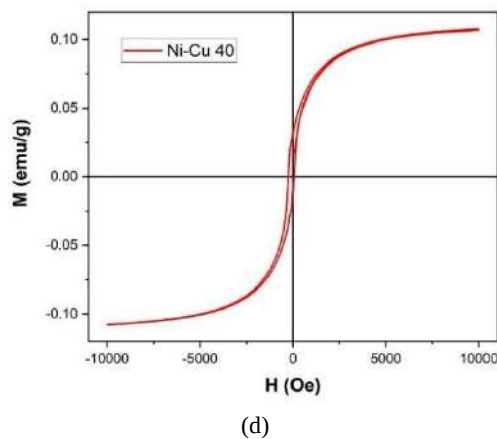


Figure 9. Hysteresis loops of multilayers generated at different current densities

As the Ni content of the Ni-Cu alloy coatings increased, so did the saturation magnetization (see Table 6). Wang et al. (43) reported that saturation magnetization depends on the Ni content of Ni-Cu alloy coatings. In addition, Awasthi (22) reported that magnetization is enhanced by increasing the coating thickness. A possible reason for this enhanced magnetization is the magnetic disorder caused by the coating. It has been shown that the trend in saturation magnetization enhancement is associated with the coating level (47). Demidenko et al. (48) found that monel has paramagnetic properties at room temperature, while the Ni-Cu alloys in this study had ferromagnetic properties. Here, we have improved upon the results of previous studies in which phosphorus (P) and tungsten (W) were added (25). In this study, the Ni-Cu 40 sample exhibited the strongest magnetic properties.

3. 5. Hardness Figure 10 depicts the dependence of the microhardness of the Ni-Cu coatings on the current density in the plating bath. From the data presented in Figure 10, it is clear that the coating of the Ni-Cu 40 sample had the highest microhardness value (404 HV). In general, the microhardness increased with the current density and was attributed to the grain size and thickness of the coatings (42). Pingale et al. (19) found that hardness increased with the thickness of the coating. The

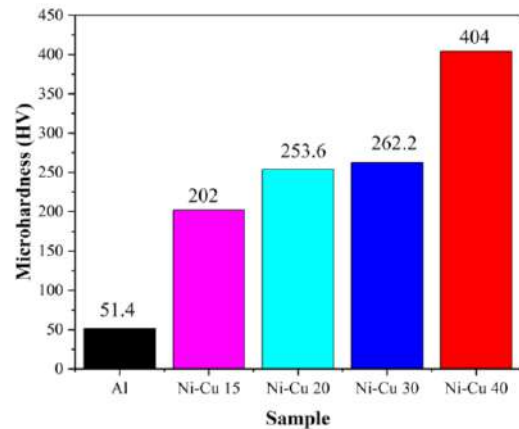


Figure 10. The microhardness of the electrodeposited Ni-Cu samples produced with different current densities

coating thickness could influence the hardness of Ni-Cu films (26).

The results indicate that alloys with a greater Ni content are mechanically harder. The overall dependence of hardness and microhardness on the percentage of Ni is shown in Figure 11, and the data indicate that microhardness increases as the percentage of Ni increase. This result is similar to Marenych's (49) finding that the hardness value is highest with the highest Ni composition.

Moreover, the hardness reported in previous studies that resulted from electrodeposition of Ni-Cu on Al in the presence of P was lower than that recorded in the present study (24). This is due to the smaller grain size that resulted from applying a different current density. In addition, the increase in microhardness reported here is related to the role that Ni atoms play in grain refinement (31). Ramkumar et al. (50) reported a monel hardness value of 165 HV, which is lower than the peak hardness value recorded in the current study.

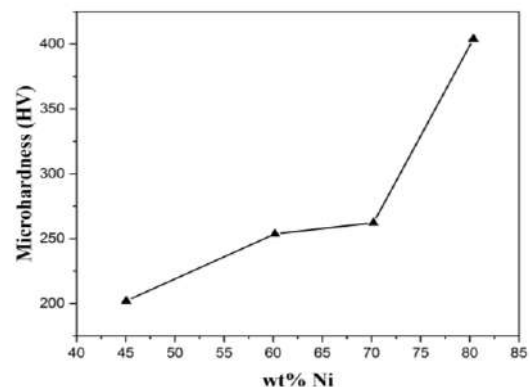


Figure 11. The relationship found between wt% Ni and microhardness, based on the data obtained from the four experimental samples

TABLE 6. The results of the magnetic analysis of the Ni-Cu/Al samples

Sample	Hc (Oe)	Mr (emu/g)	Ms (emu/g)
Ni-Cu 15	143.829	0.00047	0.003
Ni-Cu 20	140.081	0.004	0.015
Ni-Cu 30	256.215	0.025	0.094
Ni-Cu 40	144.023	0.032	0.108

4. CONCLUSION

In this study, Ni-Cu alloys were electrodeposited onto Al substrates using citrate baths. The effects of adding a citrate solution on the properties of the deposited coatings were studied, and the results illustrate that single-phase Ni-Cu alloy layers were produced on the Al surface at all current densities. The CCE increased as the current density increased. The coatings formed at lower current densities showed a more compact and spherical morphology, while those formed at higher current densities showed a less uniform structure with a cauliflower-like morphology. Both the surface morphology and composition of the coating showed a strong dependence on the current density. The Ni-Cu alloy coating deposited at a low current density had a layer thickness of 32 μm , while the coating deposited at a high current density had a thickness of 50 μm . The saturation magnetization of the coating increased with the Ni content in the Ni-Cu alloy and with the coating thickness. The hardness increased with the coating thickness, grain size, and Ni composition in the solution. The hardness of the produced Ni-Cu alloy coatings was found to be greater than that of monel.

5. ACKNOWLEDGMENTS

The authors extend their gratitude to the Ministry of Research, Technology and Higher Education of the Republic of Indonesia for the financial support of Hibah Penelitian Disertasi Doktor No: NKB-971/UN2.RST/HKP.05.00/2022.

6. REFERENCES

- Chen Z, Wang C, Tang C, Lek YZ, Kandukuri SY, Du H, et al. Microstructure and mechanical properties of a Monel K-500 alloy fabricated by directed energy deposition. *Materials Science and Engineering: A*. 2022;857:144113. <https://doi.org/10.1016/j.msea.2022.144113>
- Kukliński M, Bartkowska, A., and Przestacki, D. . Microstructure and selected properties of Monel 400 alloy after laser heat treatment and laser boriding using diode laser. *International Journal of Advanced Manufacturing Technology*. 2018;98(9-12): 3005–17. <https://doi.org/10.1007/s00170-018-2343-9>
- Mohaghehpour E, Larijani M, Rajabi M, Gholamipour R. Effect of Silver Clusters Deposition on Wettability and Optical Properties of Diamond-like Carbon Films. *International Journal of Engineering, Transactions C: Aspects*. 2021;34(3):706-13. <https://doi.org/10.5829/ije.2021.34.03c.15>
- Nady H, Negem M. Ni–Cu nano-crystalline alloys for efficient electrochemical hydrogen production in acid water. *RSC advances*. 2016;6(56):51111-9. <https://doi.org/10.1039/c6ra08348j>
- Negem M, Nady H. Electroplated Ni-Cu nanocrystalline alloys and their electrocatalytic activity for hydrogen generation using alkaline solutions. *international journal of hydrogen energy*. 2017;42(47):28386-96. <https://doi.org/10.1016/j.ijhydene.2017.09.147>
- Guisbiers G, Khanal S, Ruiz-Zepeda F, De La Puente JR, José-Yacamán M. Cu–Ni nano-alloy: mixed, core–shell or Janus nanoparticle? *Nanoscale*. 2014;6(24):14630-5. <https://doi.org/10.1039/c4nr05739b>
- Mae Y. What the Darken–Gurry plot means about the solubility of elements in metals. *Metallurgical and Materials Transactions A*. 2016;47(12):6498-506. <https://doi.org/10.1007/s11661-016-3730-1>
- Alizadeh M, Safaei H. Characterization of Ni-Cu matrix, Al₂O₃ reinforced nano-composite coatings prepared by electrodeposition. *Applied Surface Science*. 2018;456:195-203. <https://doi.org/10.1016/j.apsusc.2018.06.095>
- Toghraei M, Siadati H. Electrodeposited co-pi catalyst on α -Fe₂O₃ photoanode for water-splitting applications. *International Journal of Engineering*. 2018;31(12):2085-91. <https://doi.org/10.5829/ije.2018.31.12c.13>
- KK P. Experimental investigation by cryogenic treatment of aluminium 6063 and 8011 and nicow coating to improve hardness and wear. *International Journal of Engineering*. 2016;29(6):827-33. <https://doi.org/10.5829/idosi.ije.2016.29.06c.12>
- Kumar D, Angra S, Singh S. Mechanical properties and wear behaviour of stir cast aluminum metal matrix composite: a review. *International Journal of Engineering*. 2022;35(4):794-801. <https://doi.org/10.5829/IJE.2022.35.04A.19>
- Moosaei H, Zareei A, Salemi N. Elevated Temperature Performance of Concrete Reinforced with Steel, Glass, and Polypropylene Fibers and Fire-proofed with Coating. *International Journal of Engineering*. 2022;35(5):917-30. <https://doi.org/10.5829/ije.2022.35.05b.08>
- Poursaeidi E, Salarvand A. Comparison of properties of ti/tin/ticn/tialn film deposited by cathodic arc physical vapor and plasma-assisted chemical vapor deposition on custom 450 steel substrates. *International Journal of Engineering*. 2016;29(10):1459-68. <https://doi.org/10.5829/idosi.ije.2016.29.10a.17>
- Allahyarzadeh M, Aliofkhazraei M, Rouhaghdam AS, Torabinejad V. Gradient electrodeposition of Ni-Cu-W (alumina) nanocomposite coating. *Materials & Design*. 2016;107:74-81. <https://doi.org/10.1016/j.matdes.2016.06.019>
- Geramipour F, Khoei SM, Gughtapeh HS. Effect of shaped waveform on structure and electrochemical corrosion behavior of pulse electrodeposited NiCu alloy coatings. *Surface and Coatings Technology*. 2021;424:127643. <https://doi.org/10.1016/j.surfcoat.2021.127643>
- Thurber CR, Ahmad YH, Sanders SF, Al-Shenawa A, D'Souza N, Mohamed AM, et al. Electrodeposition of 70-30 Cu–Ni nanocomposite coatings for enhanced mechanical and corrosion properties. *Current Applied Physics*. 2016;16(3):387-96. <https://doi.org/10.1016/j.cap.2015.12.022>
- Goranova D, Rashkov R, Avdeev G, Tonchev V. Electrodeposition of Ni–Cu alloys at high current densities: details of the elements distribution. *Journal of Materials Science*. 2016;51:8663-73. <https://doi.org/10.1007/s10853-016-0126-y>
- Lee W-H, Chung K. Investigation of a copper–nickel alloy resistor using co-electrodeposition. *Journal of Applied Electrochemistry*. 2020;50:535-47. <https://doi.org/10.1007/s10800-020-01398-0>
- Pingale AD, Belgamwar SU, Rathore JS. Effect of graphene nanoplatelets addition on the mechanical, tribological and corrosion properties of Cu–Ni/Gr nanocomposite coatings by electro-co-deposition method. *Transactions of the Indian Institute of Metals*. 2020;73:99-107. <https://doi.org/10.1007/s12666-019-01807-9>

20. Hughes RA, Menumerov E, Neretina S. When lithography meets self-assembly: a review of recent advances in the directed assembly of complex metal nanostructures on planar and textured surfaces. *Nanotechnology*. 2017;28(28):282002. <https://doi.org/10.1088/1361-6528/aa77ce>
21. Kamel M, Anwer Z, Abdel-Salam I, Ibrahim I. Electrodeposition of nanocrystalline Ni–Cu alloy from environmentally friendly lactate bath. *Surface and Interface Analysis*. 2014;46(7):442-8. <https://doi.org/10.1002/sia.5525>
22. Awasthi S, Pandey SK, Balani K. Tuning the magnetism and tribological behaviour of electrodeposited Ni/Cu bi-layer by selective reinforcement of carbon nanotubes. *Journal of Alloys and Compounds*. 2020;818:153287. <https://doi.org/10.1016/j.jallcom.2019.153287>
23. Heidarzadeh A, Saeid T. Correlation between process parameters, grain size and hardness of friction-stir-welded Cu–Zn alloys. *Rare Metals*. 2018;37:388-98. <https://doi.org/10.1007/s12598-016-0704-9>
24. Karunakaran M, Pugazhavadu M, Gunasegaran V, Gowtham G. Electrodeposition of Cu-Ni-PW Composite on Al-6063 Substrate. 2018. <https://doi.org/10.26438/ijrsras/v6i3.5964>
25. Karunakaran M, Vadivu MP. Magnetic and micro-mechanical behavior of Cu-Ni-PW-TiO₂ hybrid composite electroplating on Al alloy substrate. *Journal of Magnetism and Magnetic Materials*. 2019;475:359-67. <https://doi.org/10.1016/j.jmmm.2018.11.077>
26. Soegijono B, Susetyo F, editors. *Magnetic field exposure on electroplating process of ferromagnetic nickel ion on copper substrate*. Journal of Physics: Conference Series; 2022: IOP Publishing.
27. Deo Y, Guha S, Sarkar K, Mohanta P, Pradhan D, Mondal A. Electrodeposited Ni-Cu alloy coatings on mild steel for enhanced corrosion properties. *Applied Surface Science*. 2020;515:146078. <https://doi.org/10.1016/j.apsusc.2020.146078>
28. Seakr R. Microstructure and crystallographic characteristics of nanocrystalline copper prepared from acetate solutions by electrodeposition technique. *Transactions of Nonferrous Metals Society of China*. 2017;27(6):1423-30. [https://doi.org/10.1016/S1003-6326\(17\)60164-X](https://doi.org/10.1016/S1003-6326(17)60164-X)
29. Dolabella S, Borzi A, Dommann A, Neels A. Lattice strain and defects analysis in nanostructured semiconductor materials and devices by high-resolution X-ray diffraction: theoretical and practical aspects. *Small Methods*. 2022;6(2):2100932. <https://doi.org/10.1002/smt.202100932>
30. Budi S, Tawwabbin RA, Cahyana U, Paristiwati M. Saccharin-assisted galvanostatic electrodeposition of nanocrystalline FeCo films on a flexible substrate. *International Journal of Electrochemical Science*. 2020;15(7):6682-94. <https://doi.org/10.20964/2020.07.74>
31. Syamsuir S, Soegijono B, Yudianto SD, Basori B, Ajiriyanto MK, Nanto D, et al. Electrolyte Temperature Dependency of Electrodeposited Nickel in Sulfate Solution on the Hardness and Corrosion Behaviors. *International Journal of Engineering, Transactions C: Aspects*. 2023;36(6):1193-200. <https://doi.org/10.5829/ije.2023.36.06c.18>
32. Soegijono B, Susetyo FB, Fajrah MC. Electrodeposition of Paramagnetic Copper Film under Magnetic Field on Paramagnetic Aluminum Alloy Substrates. *e-Journal of Surface Science and Nanotechnology*. 2020;18:281-8. <https://doi.org/10.1380/EJSSNT.2020.281>
33. Devi C, Ashokkumar R. INFLUENCE OF DIFFERENT CURRENT DENSITY ON CHARACTERISTICS OF NiFeP NANO ALLOY THIN FILMS. *Rasayan Journal of Chemistry*. 2018;11(3). <https://doi.org/10.31788/RJC.2018.1133088>
34. Li B, Mei T, Li D, Du S. Ultrasonic-assisted electrodeposition of Ni-Cu/TiN composite coating from sulphate-citrate bath: Structural and electrochemical properties. *Ultrasonics sonochemistry*. 2019;58:104680. <https://doi.org/10.1016/j.ultsonch.2019.104680>
35. Sarac U, Baykul MC. Morphological and microstructural properties of two-phase Ni–Cu films electrodeposited at different electrolyte temperatures. *Journal of alloys and compounds*. 2013;552:195-201. <https://doi.org/10.1016/j.jallcom.2012.10.071>
36. Arasteh J. Microhardness Optimization of Al–TiC Nanocomposite Produced by Mechanical Milling and Heat Treatment. *Advanced Ceramics Progress*. 2021;7(1):35-45. <https://doi.org/10.30501/ACP.2021.265197.1052>
37. Goranova D, Avdeev G, Rashkov R. Electrodeposition and characterization of Ni–Cu alloys. *Surface and Coatings Technology*. 2014;240:204-10. <https://doi.org/10.1016/j.surfcoat.2013.12.014>
38. Hu G, Huang R, Wang H, Zhao Q, Zhang X. Facile galvanic replacement deposition of nickel on copper substrate in deep eutectic solvent and its activation ability for electroless Ni–P plating. *Journal of Solid State Electrochemistry*. 2022;26(5):1313-22. <https://doi.org/10.1007/s10008-022-05172-4>
39. Niu J, Song M, Zhang Y, Zhang Z. Dealloying induced nanoporosity evolution of less noble metals in Mg ion batteries. *Journal of Magnesium and Alloys*. 2021;9(6):2122-32. <https://doi.org/10.1016/j.jma.2021.04.003>
40. Wang S, Guo X, Yang H, Dai J, Zhu R, Gong J, et al. Electrodeposition mechanism and characterization of Ni–Cu alloy coatings from a eutectic-based ionic liquid. *Applied Surface Science*. 2014;288:530-6. <https://doi.org/10.1016/j.apsusc.2013.10.065>
41. Nwaeju CC, Eboh, A. O., and Edoziuno, F. O. . Grain size evolution mechanical and corrosion behaviour of precipitate strengthened Cu-Ni alloy. *Acta Metallurgica Slovaca*. 2022;28(4):188–96. <https://doi.org/10.36547/ams.28.4.1609>
42. Ameri Ekhtiarabadi T, Zandrahimi M, Ebrahimifar H. The Impact of Current Density of Electroplating on Microstructure and Mechanical Properties of Ni-ZrO₂-TiO₂ Composite Coating. *Advanced Ceramics Progress*. 2020;6(1):22-9. <https://doi.org/10.30501/acp.2020.233518.1038>
43. Wang C, Hossain Bhuiyan ME, Moreno S, Minary-Jolandan M. Direct-write printing copper–nickel (Cu/Ni) alloy with controlled composition from a single electrolyte using co-electrodeposition. *ACS applied materials & interfaces*. 2020;12(16):18683-91. <https://doi.org/10.1021/acsami.0c01100>
44. Hanachi M, Seyedraoufi Z, Abouei V. Investigation of Microstructure, Hardness, and Corrosion Resistance of Ni-P-GO Electroless Nanocomposite Coating on AZ31D Alloy Surface. *Advanced Ceramics Progress*. 2020;6(3):55-62. <https://doi.org/10.30501/acp.2020.233518.1038>
45. Dhara B, Jha PK, Gupta K, Bind VK, Ballav N. Diamagnetic Molecules Exhibiting Room-Temperature Ferromagnetism in Supramolecular Aggregates. *The Journal of Physical Chemistry C*. 2017;121(22):12159-67. <https://doi.org/10.1021/acs.jpcc.7b02145>
46. Qasim I, Waqee-ur-Rehman M, Mumtaz M, Hussain G, Nadeem K, Shehzad K. Ferromagnetic (Ni) nanoparticles–CuTi-1223 superconductor composites. *Journal of Magnetism and Magnetic Materials*. 2016;403:60-7. <https://doi.org/10.1016/j.jmmm.2015.11.066>
47. Padmapriya G, Manikandan A, Krishnasamy V, Jaganathan SK, Antony SA. Enhanced catalytic activity and magnetic properties of spinel Mn x Zn 1–x Fe 2 O 4 (0.0 ≤ x ≤ 1.0) nano-photocatalysts by microwave irradiation route. *Journal of Superconductivity and Novel Magnetism*. 2016;29:2141-9. <https://doi.org/10.1007/s10948-016-3527-x>

48. Demidenko O, Zhyvulka A, Yanushkevich K, Galias A, Constantin V, Neacsu E, et al. Magnetic properties of stainless steels under corrosive action of based on choline chloride ionic liquids. *Journal of Magnetism and Magnetic Materials*. 2019;477:74-6. <https://doi.org/10.1016/j.jmmm.2019.01.034>
49. Marenych O, Ding D, Pan Z, Kostryzhev A, Li H, van Duin S. Effect of chemical composition on microstructure, strength and wear resistance of wire deposited Ni-Cu alloys. *Additive Manufacturing*. 2018;24:30-6. <https://doi.org/10.1016/j.addma.2018.08.003>
50. Ramkumar KD, Joshi V, Pandit S, Agrawal M, Kumar OS, Periwal S, et al. Investigations on the microstructure and mechanical properties of multi-pass pulsed current gas tungsten arc weldments of Monel 400 and Hastelloy C276. *Materials & Design*. 2014;64:775-82. <https://doi.org/10.1016/j.matdes.2014.08.055>

COPYRIGHTS

©2024 The author(s). This is an open access article distributed under the terms of the Creative Commons Attribution (CC BY 4.0), which permits unrestricted use, distribution, and reproduction in any medium, as long as the original authors and source are cited. No permission is required from the authors or the publishers.



Persian Abstract

چکیده

پوشش‌های آلیاژی تک فاز نیکل مسغنی از نیکل (Ni) بر روی بسترهای آلومینیومی (Al) با رسوب الکتریکی در حمام سیترات تثبیت شده تولید شدند. آزمایش‌های رسوب الکتریکی در چهار چگالی جریان مختلف انجام شد. افزایش چگالی جریان منجر به افزایش سرعت رسوب فلز سریعتر از نرخ تکامل هیدروژن شد. بنابراین، راندمان جریان کاتدی افزایش یافت. سیستم‌های کریستالی آلیاژهای Ni-Cu مکعبی در مرکز سطح (FCC) بودند، با صفحه (۱۱۱) به عنوان صفحه کریستالی ترجیحی. میکروسکوپ الکترونی روبشی با اندازه‌گیری‌های طیف‌سنجی پرتو ایکس پراکنده انرژی (SEM-EDS) نشان داد که محتوای نیکل در پوشش با افزایش چگالی جریان افزایش می‌یابد. نمونه Ni-Cu 40 بیشترین مقدار نیکل را داشت و مورفولوژی همگن و فشرده را نشان داد. مشخص شد که هر چه غلظت نیکل در محلول بیشتر باشد، اندازه دانه کوچکتر است. اندازه‌گیری‌های ثبت‌شده با یک مغناطیس‌سنج نمونه ارتعاشی (VSM) نشان داد که نمونه Ni-Cu 40 اشباع مغناطیسی را ارائه می‌کند، با بالاترین مقدار ۰.۱۰۸ emu/g. روش میکروسختی HV ۴۰۴ بر روی نمونه Ni-Cu 40 تولید کرد. در نتیجه، چگالی جریان بالاتر با ترکیب نیکل بالاتر و افزایش ضخامت همراه بود که مسئول افزایش خواص مغناطیسی و سختی بود.