



IMWA 2022 CONFERENCE

RECONNECT

CHRISTCHURCH TOWN HALL
6-10 NOVEMBER 2022



James Pope • Christian Wolkersdorfer • Rachel Rait • Dave Trumm •
Hana Christenson • Karoline Wolkersdorfer

IMWA 2022 – Reconnect

IMWA 2022 – Reconnect

**Proceedings of the
International Mine Water Association
Conference**

November 6 – 10, 2022

Christchurch, New Zealand

Editors

**James Pope
Christian Wolkersdorfer
Rachel Rait
Dave Trumm
Hana Christenson
Karoline Wolkersdorfer**

International Mine Water Association 2022 Conference
Reconnect
2022, Christchurch, New Zealand

ISBN 978-3-9825293-0-1

© International Mine Water Association 2023

Editors

James Pope, Christian Wolkersdorfer, Rachel Rait, Dave Trumm, Hana Christenson, Karoline Wolkersdorfer

Cover Design

Anna Johanna Sotiralis

Layout and Typesetting

Jigsaw Graphic Design & Christian Wolkersdorfer

Cover Photographs

Christian Wolkersdorfer

Kiwi Artwork

The kiwi vectors are kindly provided from Vectors by Vecteezy.

All abstracts were reviewed by 2 – 3 experts of the International Scientific Committee.

All full papers were reviewed by 1 – 2 experts of the International Scientific Committee.

www.IMWA.info

Organisers



International Mine Water Association

Verum Group

International Mine Water Association

International Scientific Committee (ISC)

Teresa Albuquerque, Portugal	Jabulani Gumbo, South Africa	Khuliso Hope Mudau, South Africa
Carlos Felipe Aravena, Chile	Amy L Hudson, USA	Ritva Muhlbauer, South Africa
Thitiphan Assawincharo- enkij, Thailand	Andrew Kinnon Hughes, United Kingdom	Damian Onwudiwe, South Africa
Selina Mary Bamforth, United Kingdom	Altus Huisamen, South Africa	Steven Richard Pearce, United Kingdom
Andre Banning, Ireland	Jo Hulley, South Africa	Pierre Rousseau, Austra- lia
Sod-Erdene Bazardorj, Mongolia	Sajjad Jannesar Mala- kooti, Iran	Hanna Runtti, Finland
Andrey Bogomolov, Rus- sia	Ewa Janson, Poland	Liudmila Rybnikova, Rus- sia
Jo Burgess, South Africa	David Richard Jones, Australia	David Anthony Salmon, Australia
Karen Clode, South Africa	Lisa Bithell Kirk, USA	Abhay Soni, India
Kajetan d'Obyrn, Poland	Bob Kleinmann, USA	Wilfried Spierenburg, South Africa
Camilo Raul de los Hoyos, Argentina	Anthony Le Beux, France	Peter Clive Stanley, Uni- ted Kingdom
Scott Allan Effner, USA	Jorge Loreda, Spain	Jacek Szczepiński, Poland
Lee Evans, Australia	Simon Antony Lorentz, South Africa	Teresa Maria Valente, Portugal
Adriano Fiorucci, Italy	Michael Losavio, USA	Denys Villa Gomez, Aus- tralia
Elvis Fosso-Kankeu, South Africa	Rudzani Lusunzi, South Africa	Changshen Wang, China
Rudy Sayoga Gautama, Indonesia	Justin Kambale Maganga, Kenya	Anne Weber, Germany
Marwan Ghanem, Pales- tinian Territories	Thirumurugan Mari- muthu, India	Walter Weinig, USA
William Mario Goodman, USA	Cherie McCullough, Aus- tralia	Phil Whittle, Australia
Bashan Govender, South Africa	Jean Carlo Menezes, Bra- zil	Christian Wolkersdorfer, South Africa
Ros Green, Australia	Michael Arthur Milczarek, USA	

Local Organizing Committee (LOC)

James Pope (Chair)
Paul Weber
Rachel Rait
Dave Trumm
Hana Christenson
Karoline Wolkersdorfer

IMWA 2022 Sponsors

Host

Verum Group

Gold Sponsor

The BHP logo consists of the letters "BHP" in a bold, orange, sans-serif font.

Silver Sponsors



Bronze Sponsors



Partners



Table of Contents

Abraham, Daniel Arulraj; Jin, Fei; Okeme, Ilemona; Sapsford, Devin Detection And Measurement Of Dissolved Metals In Mine Water Using Cation-Binding Resins And Field Portable XRF	1
Bamforth, Selina Mary; Satterley, Christopher Evaluating Manganese in Mine Water in UK Coal Authority Mine Water Schemes	7
Barroso, Ana; Valente, Teresa Maria; Horta Ribeiro Antunes, Isabel Margarida; Marinho Reis, Amélia Paula; Canovas, Carlos Ruiz Evaporation-dissolution Cycles In Highly Acidic Mine-influenced Waters And Their Control Over The Secondary Paragenesis Of Sulfate Salt Efflorescences	15
Blanchard, Ryan; Kofoed, Val; Green, Mitchell Integrity Assessment of a Tailings Storage Facility Characterized with the Willowstick Method	21
Bothe-Fiekert, Mareike; Binder, Angela; Langefeld, Oliver Historic Mining Infrastructure as An Opportunity for Regional Water- & Energy Supply (Harz Mountains, Germany)	27
Cairns, Stuart; Todd, Aaron Martin Lawrence; Robertson, Iain; Byrne, Patrick Metals Removal from Acid Mine Water by Wood-Ash Amended Biochar	33
Choopani, Atefe; Ronchi, Benedicta; Declercq, Pierre-Yves; Devleeschouwer, Xavier Ground Deformations Related to an Old Drainage Adit in The Abandoned Coal Concession Around Saint-Vaast (Wallonia, Belgium) Analyzed Using PS-InSAR and Piezometric Wells Time Series	39
Christenson, Hana Kirsten; Skews, Rachel; Trumm, Dave; Pope, James; Newman, Nigel; Lee, Gavin; Ross, Duncan; Boyt, Charlotte Enhanced Passive Treatment of Sulfate and Nitrate Enriched Mine Water: Laboratory Optimisation Experiments	47
Coetzee, Henk; Cole, Patrick; Ramugondo, Sealelo Estimation of Mine Water Ingress Volumes for the Witwatersrand Goldfields	53
Craw, David; Rufaut, Cathy; Pillai, Dhana; Kerr, Gemma Rehabilitation of Extreme Chemical Substrates on Mine Sites Without Soil in a Semiarid Climate, New Zealand	59

Dale, Caroline Jane; Jogand, Henri	
A Holistic Approach to Water and Salt Management in Mining : Biological Treatment Solution to Allow Direct Discharge of Excess Water Instead of Brine Production Through Reverse Osmosis treatment	65
Devleeschouwer, Xavier; Chooani, Atefe; Declercq, Pierre-Yves	
Ground Deformations Observed for Three Decades (199–2022) above Old and Deep Coal Mines Reused for Deep Gas Storage Sites (Wallonia, Belgium) Using PS-InSAR Time-series	71
Ferrier, Ainsley Camille; Clauson, Shane	
Integrating Water Planning into Operational Mine Planning	81
Flores, Hernan; Rudolph, Tobias; Möllerherm, Stefan	
Hyperspectral Sensing To Boost Mine Waste Characterization And Water Monitoring	83
Fosso-Kankeu, Elvis; Masindi, Vhahangwele; Maree, Johannes; Mamba, Bhekie; Nkambule, Thabo	
Effective Attenuation of AMD Pollution Potential Using By-product from Municipal Wastewater Treatment	91
Gautama, Rudy Sayoga; Putri, Rara Aulia; Kusuma, Ginting Jalu; Badhurahman, Abie; Dwiki, Sendy	
Study of Mining Void Utilization Model as a Flood Control in Tropical Region	99
Gcasamba, Sisanda Prudence; Ramasenya, K.; Lekgothoane, M.; Nyale, S.M.; Vadapalli, V.R.K.; Madzivire, G.; Coetzee, Henk; Sinthumule, Ethel; Morokane, Molefe	
In situ Mine Water Treatment of Flooded Underground Mines Using Waste Concrete: A Feasibility Study	105
Gemson, Wijnand; Harck, Terry; Burgess, Ryan	
Nitrate Dynamics at Mine Sites – Broader Context, Source and Management Considerations	111
Genth, Till; Rose, Lisa Jasmin; Jasnowski-Peters, Henning; Melchers, Christian	
Bulk- and Clay-mineral Quantification in the Upper Cretaceous Emscher Formation – Evaluating a Potential Hydraulic Barrier During Mine Water Rebound in the Ruhr District	115
Gómez-Arias, Alba; Yesares, Lola; Castillo, Julio; Vermeulen, Danie; Purcell, Walter	
Phalaborwa Complex: from Rock Drainage Characterization to Waste Revalorization	121
Green, Ros; Chapman, John	
Critical Decisions for AMD Management	127

Haanpää, Kirsi-Marja; Picken, Päivi; Lauri, Hannu; Wichmann, Anneli; Isaksson, Linus Lejon	
Nordic Experiences in Climate Change Analysis in Modelling Mining Area Environmental Impacts	133
Hansen, Robert Neill	
Analysis of Shallow Groundwater Monitoring data of a Platinum Mine, Bushveld Complex, South Africa – Implications for Post-Closure	139
Hayton, Stephanie; Trumm, Dave; Horton, Travis; Pope, James; Ross, Duncan; Williams, Megan	
Passive Treatment For Elevated Iron And Arsenic In Circum-Neutral Mine Affected Water	147
Hoekstra, David Pieter; Saavedra, Victor Munoz; Milad, Carolina	
Development of a Streamflow Model Incorporating Stochastic Daily Climate, Climate Change, and El Niño La Niña Effects	153
Huisamen, Altus; Glendinning, John Edward	
Post-Mining Hydrogeology of Underground Collieries – Effects of Hanging Wall Subsidence	161
Jasnowski-Peters, Henning; Melchers, Christian	
Natural Tracers For Mine Water Fingerprinting II – a multi tracer approach to unravel underground fluid movements during Mine Water Rebound in the Ruhr District Area	167
Kennedy, Julia	
Circular Economy Potential of Widescale Implementation of Sodium Carbonate Dosing for Circumneutral Zinc-rich Mine Water in Wales	175
Kerr, Gemma; Craw, David; Pope, James	
Dissolution Rates of Arsenic Minerals in Natural and Mining Environments, New Zealand	181
Kleinmann, Bob; Sobolewski, André; Skousen, Jeff	
The Evolving Nature of Active, Passive, and Semi-Passive Mine Water Treatment Technologies	187
Kurukulasuriya, Devmi; Howcroft, William; Meredith, Karina; Timms, Wendy	
The Conundrum of Incongruent Multiple Age Tracer Results in Mine Water	195
Kusuma, Ginting Jalu; Gautama, Rudy Sayoga; Dwiki, Sendy; Badhurahman, Abie; Abfertiawan, Muhammad Sonny	
Performance of Fly Ash and Bottom Ash as Coal Combustion Product to Prevent Acid Mine Drainage Generation: Preliminary Result on A Pilot Scale	201

Kuznetsova, Alsu; Afzal, Iram; Suri, Navreet; Kuznetsov, Petr; Siddique, Tariq	
Inhibition of Methanogenesis through Redox Processes in Oil Sands Tailings	209
Lemos, Mariana; Valente, Teresa Maria; Marinho Reis, Paula; Fonseca, Rita; Delbem, Itamar; Filho, José Gregório; Guabiroba, Fernanda; Pantaleão, João; Magalhães, Marcus	
Geoenvironmental Characterization of Gold Mine Tailings from Minas Gerais and Goiás, Brazil	217
Ligavha-Mbelengwa, Lufuno; Madzivire, Godfrey; Nolakana, Pamela; Coetzee, Henk; Gomo, Modreck	
Potential Use Of Emerging Organic Contaminants As Pollution Source Tracers	223
Lukas, Eelco; Vermeulen, Danie; Gomez Arias, Alba	
Recharge Flooding	229
Lusunzi, Rudzani; Wandeers, Frans	
Speciation of Metals in Sediments of the Sabie River System by Sequential Extraction	237
Madzivire, Godfrey; Ligavha-Mbelengwa, Lufuno; Nolakana, Pamela; Coetzee, Henk	
Evaluation Of The Changes In Mine Water Quality In The Witwatersrand Basin: Basis For Proactive Long-term Solution	243
McCullough, Cherie; O'Grady, Ben	
Closure Of An Australian Pit Lake With AMD Using A Terminal Water Balance As An Evaporative Sink	247
McLachlan, Christine Jane; Walker, Barry	
Determination of acid producing potential using pXRF: A case study from Cypress Mine, Stockton Plateau	253
Molaba, Leshego Esther; Wolkersdorfer, Christian	
Investigating the Effects of Temperature on Density Stratification in a flooded Analogue Model Mine	259
Moreno, Raul; Olias, Manuel; Ruiz Cánovas, Carlos; Macias, Francisco	
Update Of Hydrological Study And Prediction Of Flood Levels Of Acidic Pit Lakes (Tharsis) mines, Spain	267
Mosai, Alseno; Richards, Heidi; Tutu, Hlanganani	
Modelling The Transport Of Pollutants From Mine Dump And Landfill Sites To Groundwater And Surface Water	273

Mothetha, Matome; Msagati, Titus; Masindi, Vhahangwele; Kebede, Kefeni Application of Pulverized Kaolin Clay for Remediation of Acid Mine Drainage	281
Mphahlele, Malehlogonolo Ramogohlo Rosemary; Kotzé, Izak Aldert; Mosai, Alseno Kagiso; Tutu, Hlanganani Recovery Of Pt And Pd From Aqueous Solutions By N,N-di(trimethoxysilylpropyl)-N'-benzoylthiourea Modified Silica Gel	291
Muedi, Khathutshelo Lilith; Masindi, Vhahangwele; Maree, Jannie; Brink, Hendrik Gideon Rapid Removal of Cr(VI) from Aqueous Solution Using Polycationic/di-metallic Adsorbent Synthesized Using Fe ³⁺ /Al ³⁺ Recovered from Real Acid Mine Drainage	299
Mugova, Elke; Wolkersdorfer, Christian Insights into the First Flush Effect – The Flooded Underground Mine as a Chemical Reactor	305
Mulliner, Tim; McLachlan, Christine Oxidation Modelling to Optimise Waste Rock Storage	311
Murray, Jodi; Walker, Barry Stockton Coal Mine. Management of AMD Sludge	317
Navarro, Leo; Hayton, Stephanie; Williams, Megan; Weber, Paul Globe Progress Lake – Closure performance monitoring and adaptive management	323
Netshitungulwana, Khashane Robert Tshishonga; Gauert, Christoph; Vermeulen, Danie; Yibas, Bisrat; Shai, Mateo; Lusunzi, Rudzani Geochemical Characterisation of the Witbank Coalfield Geological Strata and Assessment of Potential Metal Impact on the Receiving Environment	329
Nigéus, Susanne Pia Teresia; Maurice, Christian; Lindblom, Jenny Water Retention Capacity As a Measure to Evaluate the Effectiveness of a Green Liquor Dregs-amended Till to Cover Sulfidic Mine Waste	337
Nkele, Kgoofelo Masegare; Mpenyana-Monyatsi, Lizzy; Masindi, Vhahangwele Effective Removal Of Manganese From Mine Effluent Contaminated River Water Using Ca-Mg-(OH) ₂ Nanocomposite	345
Nolakana, Pamela; Ligavha-Mbelengwa, Lufuno; Madzivire, Godfrey; Coetzee, Henk Evaluation Of The Water Quality Impacts Associated With Relaxation Of Environmental Critical Levels: A Case Study In The West Rand Basin, South Africa	353

Nordstrom, D. Kirk; Campbell, Kate M.; Alpers, Charles N.	
Quantifying Mineral Precipitation Processes during Dilution, Mixing, and Neutralization of Acid Rock Drainage	359
Oldham, Carolyn; Singh, Ana Catarina; Kanse, Lisette; Bourgault, Chantal	
Developing The Business Case For Responsible Acid And Metalliferous Drainage (AMD) Management	365
Parhi, Pradeep Kumar; Rao, M. S.; Asnani, C. K.	
Groundwater Hydrology Studies around a Carbonate Hosted Flatly Dipping Uranium Deposit and Environmental Management	373
Paulsson, Oscar; Widerlund, Anders	
Geochemical Loading Rates from Open Pit Walls at the Åkerberg and Laver Mine Sites in Relation to Pit Lake Water Quality	379
Potgieter, Gerhard; Jacobs, Karin; Cason, Errol; DeFlaun, Mary; van Heerden, Estariëthe	
Optimizing Denitrification Efficiencies at Low-Temperature Conditions for the Enhancement of Site-Specific Bioremediations Solutions	385
Primo Doncel, Maria de la Paloma; Möllerherm, Stefan; Rudolph, Tobias; Goerke-Mallet, Peter	
PostMinQuake: Diagnosis Of Post-Mining Induced Seismicity In Former European Hard Coal Basins	393
Ramugondo, Selaelo Jacqueline; Molapo, Donald; Coetzee, Henk; Tegegn, Kefyalew	
The effectiveness of upgrading the Van Ryn Canal as an option to reduce water ingress into the underground mine workings in the East Rand of the Witwatersrand Basin in Gauteng Province, South Africa	397
Robinson, James; Dodd, Jason; Andrews, Ian; Milton Thompson, Olivia	
Successful Construction of a Full Scale Passive Sulfate Treatment System	403
Romero Matos, Jonatan; Ruiz Cánovas, Carlos; Macías Suárez, Francisco; León Cortegano, Rafalen; Millán Becerro, Ricardo	
Wildfire Effects On A Watercourse Affected By Acid Mine Drainage (Odiel River, SW Spain)	411
Rose, Lisa Jasmin; Genth, Till; Jasnowski-Peters, Henning; Melchers, Christian	
First Petrophysical Data Compilation on the Effectiveness of an Extensive Hydraulic Barrier During Mine Water Rebound in the Ruhr District – the Upper Cretaceous Emscher Formation	417
Rufaut, Cathy; Craw, David; Weightman, Erin; Pillai, Dhana; Lee, Gavin	
The Macraes Gold Mine Irrigation Project, New Zealand	421

Ruiz Cánovas, Carlos

Towards a Sustainable Restoration of a Watershed Strongly Polluted by Acid Mine Drainage (AMD): the Case of the Odiel River (SW Spain) 427

Ryanta, Albert; Saputra, Muhammad Nur Wangsa; Senduk, Marco; Anggoro, Dhoni; Husodo, Ibnu

Successful Installation of Indonesia's First Dual ESP System for Dewatering Applications 433

Sartz, Lotta; Bäckström, Mattias

Mesocosm Experiments Performed in 1975, 1993 and 2017 to Determine Changes in Release Rates of Zinc from Sediments Affected by an Old Mining Operation 439

Saxby, Tim; Buckley, Sarah

Central Region Water Resilience Project - Sustaining production in a changing climate 445

Schmidt, Nadja; Eulenberger, Sven; Jenk, Ulf

Final Flooding of the Königstein Uranium Mine – Supporting Activities and Implications for Monitoring 453

Shabalala, Ayanda Nomaswazi

Comparative Study Of Leaching of Metals From Pervious Concrete Incorporating Coal Fly Ash And Ground-granulated Blast-furnace Slag 459

Simcock, Robyn

Mediating Risk of Acid Generation – The Roles of Vegetation Direct Transfer 467

Sinclair, Eden; Weber, Paul

Managing Legacy AMD to Achieve Successful Mine Closure 469

Stanley, Peter Clive; Thorn, Peter; Williams, Tom; Siddorn, Louise; Cooke, Dave

A River System Approach to Mine Water Mitigation and Management 483

Szczepiński, Jacek

Impact of Dewatering of the Planned Lignite Open Pit in Poland on the Water Environment on the Basis of Groundwater Flow Model 491

Todd, Aaron Martin Lawrence; Robertson, Iain; Walsh, Rory P.D.; Byrne, Patrick; Edwards, Paul; Williams, Tom

Using Tracer Injection and Synoptic Sampling, and Salt Dilution Flow to Gauge Metal Fluxes in a Temperate Watershed in the UK 497

Totsche, Oliver; Kunze, Katja

Rehabilitation of the Lusatian Water Balance, in Consideration of Climate Change and the End of Lignite Mining 503

Trumm, Dave; Moynihan, Eamon; Young, Jill; Pope, James	
Passive Treatment Of AMD Using a Full-Scale Upflow Mussel Shell Reactor, Echo Coal Mine, New Zealand	511
Tuck, Jeff; Hayton, Stephanie; Hartwell, Sioban	
Predictive Water Balance and Mass Load Modelling for Mine Water Through a Passive Treatment System	517
Tuheteru, Edy Jamal; Kusuma, Ginting Jalu; Gautama, Rudy Sayoga; Pranoto, Kris; Palinggi, Josef	
Comparison of Pit Wall Leaching Test in the Field and Laboratory	519
Vadapalli, Viswanath Ravi Kumar; Coetzee, Henk; Gcasamba, Sisanda; Ramasenya, Koena; Ntholi, Thakane; Nyale, Sammy; Sinthumule, Ethel; Morokane, Molefe	
Integrated and Sustainable Mine Water Management Solution for Witwatersrand Gold Fields	529
Vaezihir, Abdorreza; Mahjoubi, Reza; Aghili, Somayeh; Mazaheri, Nader; Haji Ahmadi, Morteza	
The Role of Natural Attenuation in Decrease of Metal Concentration in a River Polluted by AMD Released from Sungun Mine (NW of Iran)	535
Walter, Stefanie; Mugova, Elke; Wolkersdorfer, Christian	
Public Opinion on Mine Water in Three Former German Hard Coal Mining Regions	541
Walton-Day, Katherine; Gusek, James; Newman, Connor	
Opportunities to Improve Water Quality during Abandoned Mine-Tunnel Reclamation	545
Wang, Jiaqi; Zhang, Qiang; Wang, Yunbo; Gao, Difa	
Detection and Sealing Technology of River-goaf Water Supply Channel and Their Application	553
Author Index	xix
Subject Index	xxv

Comparison of Pit Wall Leaching Test in the Field and Laboratory

Edy Jamal Tuheteru^{1,2}, Ginting Jalu Kusuma¹, Rudy Sayoga Gautama¹, Kris Pranoto³,
Yosef Palinggi³

¹Mining Engineering Research Group, Faculty of Mining and Petroleum Engineering, Institut Teknologi Bandung, Indonesia

²Department of Mining, Faculty of Earth and Energy Technology, Universitas Trisakti, Indonesia

³Department of Environment, PT Kaltim Prima Coal, East of Kalimantan, Indonesia

*Correspondence author: jaluku@mining.itb.ac.id

Abstract

Mining activities will eventually end, while one of the options for the use of post-mining land is to make it a pit lake. To ensure the management of the pit lake in the future, it requires a study about geochemistry of the water to be formed. Quality of the developing water is results in the reaction between water and rock on pit wall. This research was conducted with the aim of identifying quality of the water to be formed. To determine quality of the water, a direct test was conducted in the field using the pit wall leaching method. The location of this test was in PT Kaltim Prima Coal, one of the largest coal producers in Indonesia. There were three locations considered to represent rock stratification exposed on the pit wall. Dimensions in test was 1 x 1 meter, while leachate yield was 2 liters. Test cycle was conducted in daily, three-day, and weekly cycles. Based on the result of static tests, sample A was classified as NAF rock, while samples B and C were classified as PAF rock. Meanwhile, leachate test shows the result that range of pH values was from 7.61 to 8.02 for sample A, from 1.99 to 2.77 for sample B, and from 2.89 to 4.09 for sample C. Based on test result, the most dominant metals were SO₄, Mg, and Fe. The conclusion of this research is that the exposed rock on pit wall is dominated by PAF rock, thus having a potency to form acid mine drainage.




Keywords: Pit wall leaching, Geochemical characterization, Acid mine drainage

Introduction

Mining activities will end, while the final pit can be backfilled at mines having more than one pit or multi-pit. In some cases, former mining pits cannot be backfilled and are used as postmining lakes, termed mine pit lakes or pit lakes (Blanchette and Lund, 2016) (Castendyk, Eary and Balistrieri, 2015) (Vandenberg and Litke, 2018). One factor that needs to be considered during the process of forming a pit lake is quality of the water that will be formed. This is related to the continued use of pit lake. The water formed can be acidic or alkaline. The acid mine drainage formed affects the surrounding environment (Akcil and Koldas, 2006) (Blodau, 2006) (Acharya and Kharel, 2020). Issues of acid mine drainage in pit lakes can be seen for example in coal mining areas in Lusatia District, Germany (Gerke, Molson and Frind, 1998) and gold mining in

the Iberian pyrite belt (Cánovas *et al.*, 2015) (Sánchez España *et al.*, 2005). Considering the impact brought by acid mine drainage, it is necessary to predict quality of the pit lake water that will form.

Acid mine drainage is caused by the oxidation of rocks containing sulfide minerals and the presence of water. Acid mine drainage is characterized by a pH value below 6. In addition to a low pH value, acid mine drainage also contains metals, namely Fe and Mn. Reaction for the formation of acid mine drainage is shown in formula as follows (Kefeni, Msagati and Mamba, 2017):



Several factors that need to be considered in predicting pit lake water quality include groundwater inflow, precipitation, evaporation, pit wall runoff, rock wall washing (Castendyk, Eary and Balistrieri, 2015), biological processes, lake hydrodynamics, and geochemical equilibrium (Eary, 1999). Regarding rock wall washing, what needs to be done at an early stage is to determine the distribution of rocks forming acid mine drainage and rocks without potency to form acid mine drainage. Geochemical characterization of these rocks can be performed by running a series of tests. Tests in the field can be conducted using the pit wall leaching method, while test in the laboratory can be carried out using several tests, including mineralogy, static and kinetic tests (Castendyk, Mauk and Webster, 2005).

Pit wall leaching test was conducted using Minewall approach to estimate the geochemical effects of pit walls. Minewall was developed as a formal standard technique for Canadian MEND Program in the 1990s (Morin and Hutt, 2001). The application of this method has been carried out in several mining locations, such as Indonesia (Kusuma *et al.*, 2020), which was carried out in coal mines. Only in this study, the pit wall leaching test was tested once. In ore mining, the application of the Minewall method is carried out by (Andrade and Mountjoy, 2015). Compared to static and kinetic tests in the laboratory, with pit wall test it is better to obtain an overview of the water quality that will be formed, because it is directly carried out on exposed rock walls.

At the end of mining, quality of the water that will be formed must be predictable. One way to predict water quality is to determine the quality of leachate which is the reaction of rainwater and rocks on the pit walls. This research was conducted to comprehend the quality of water that will be formed and to compare hydrogeochemical tests carried out in field and laboratory. The results that have been obtained were then used to zoning the distribution area of PAF and NAF rocks which can finally simulate the prediction of water quality of the pit lake that will be formed.

Method

This research was conducted in the Peri pit which is the Coal Contract of Work area of PT. Kaltim Prima Coal (Figure 1) (Tuheteru *et al.*, 2021). Mining in Pit Peri has been carried out since 2010 and still continues to date. The mining plan ended in 2021. Pit Peri has 5 coal seams with a thickness from 0.54 to 3.42 meters. The planned coal production from 2010 to 2021 is approximately 6.5 million tons with a stripping ratio of 9.02. Pit wall leaching tests were carried out on mining pit walls in three locations with codes A, B, and C. The lithology of three samples was different, namely claystone, mudstone, and sandstone. Location A was dominated by clay rocks at an elevation of 60 - 70 masl, location B had organic elements because of coal layer at an elevation of 50 masl, while location C was dominated by sandstone, located the same with location B, at an elevation of 50 masl (Figure 2).

The research was conducted by applying mine wall or pit wall leaching method. The application of this method is very suitable for active mines, because pit walls are still open and will be reactive with water, making leachate water samples capable of being taken easily. This method was designed for the prediction of pit lake water quality as required for mine closure assessment (Andrade and Mountjoy, 2015). The procedure for this test was conducted from the development of a procedure by (Morin and Hutt, 2004). The pit wall leaching test was carried out by cleaning the rock surface first, until obtaining a fresh rock sample surface. Dimensions of the pit wall surface tested were 1 m². Distilled water, inserted into sprayer with a capacity of two liters was used for watering the pit wall. Leachate from the spray was collected in a container. This reservoir was also used to collect leachate resulting from washing using rainwater. Location C was not carried out of shelter, because the rock surface was hard. The collected leachate was then put into a sample bottle with a capacity of 2 liters and taken to a laboratory owned by PT Kaltim Prima Coal for water physical testing. Besides physical tests, metal content tests were also carried out in laboratories which are partners of PT Kaltim Prima Coal.

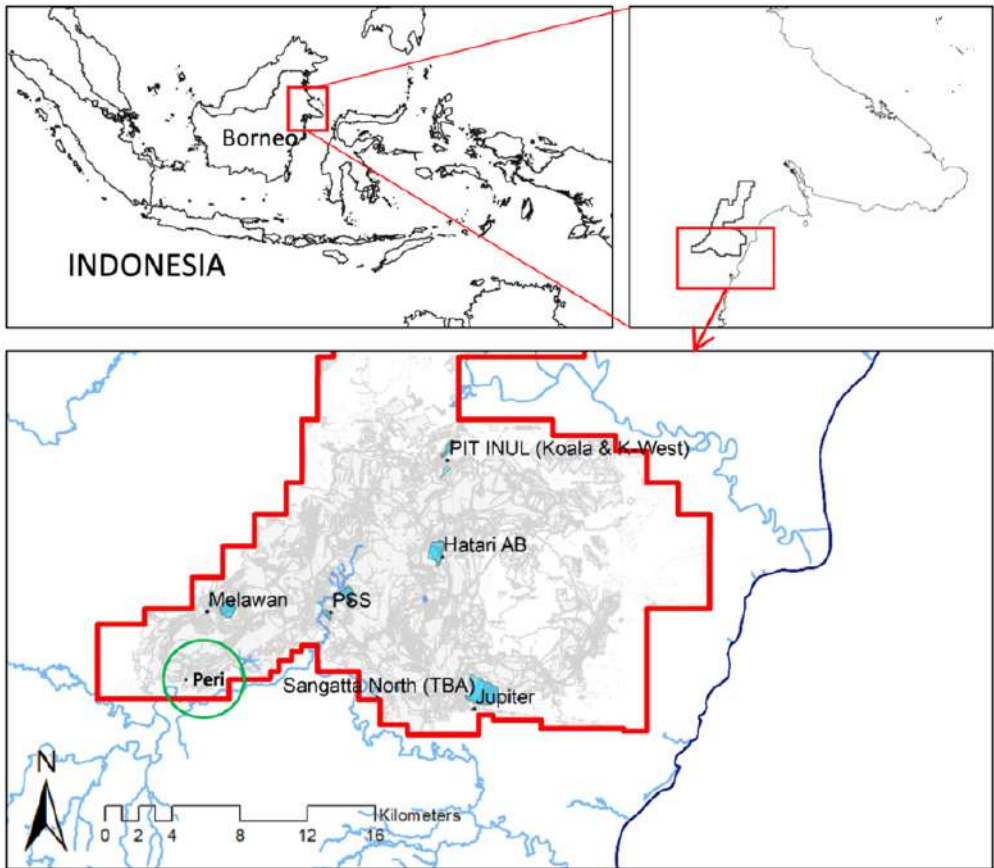


Figure 1 Research Location

The test was conducted in a long period of time, about 2 months, to determine the quality of leachate water over a long period of time. In this time period, tests were conducted in several cycles, namely daily, three-day, and weekly cycles. The daily cycle was carried out 26 times, three-day cycle was carried out 5 times, and weekly cycle was carried out once in location A. Test location A was mined, while tests were conducted twice in locations B and C. This pit wall leaching test activity was conducted in early December 2019 until the end of January 2020. The water used in the leaching process was distilled water. The distilled water used for watering was taken as much as 40 liters.

Rocks from each location were taken and tested in the laboratory, through static, mineralogy, and kinetic tests. Static and mineralogical tests were conducted

in Mining Environment Laboratory and the Hydrogeology and Hydrogeochemical Laboratory owned by the Faculty of Mining and Petroleum Engineering, Bandung Institute of Technology. Static test was the first step to characterize rocks. This test was designed to calculate the balance between acid-forming components (e.g., sulphide minerals) and acid consuming components, mainly carbonate minerals, in rock samples. Several tests conducted were pH, Total Sulphur, Acid Base Accounting (ABA), and Net Acid Generating (NAG) test. The test procedure was carried out according to the instructions on Amira International.

Mineralogy tests conducted were XRD (X-Ray Diffraction) and XRF (X-Ray Fluorescence) tests. XRD test was used to analyse the composition of phases or compounds in materials and to characterize



Figure 2 Distribution of pit wall leaching test locations Distribution of pit wall leaching test locations

crystals, while XRF test was generally used to analyse elements in minerals or rocks. Elemental analysis was conducted qualitatively and quantitatively. Qualitative analysis was conducted to analyse types of elements in the rock, while quantitative analysis was conducted to determine the concentration of elements in the rock.

Kinetic test in the laboratory was conducted using Free Column Drained Test (FDCLT) method, to investigate a long-term reaction between water and rock. Through this test, an overview of acid and wet generation of the reaction products was obtained. FDCLT was performed by placing rock samples in a Buchner funnel which was irradiated with the help of a light bulb, then watering was carried out in daily, three-day, and weekly cycles. The leachate water was accommodated in one container, which was then followed by a leachate water quality test.

Result and Discussion

Static Test

Result of the static test is shown in Table 1. Based on the result, sample A has a high pH

value of 7.19, while samples B and C had 2.32 and 3.35. The value of Net Acid Generation (NAG) pH was 7.19 in sample A, 2.19 for sample B, and 3.08 for sample C. The value of Acid Neutral Capacity (NAC) was 23.61 for sample A, while samples B and C had no value. The sulfur content in each sample was 0.54 for sample A, 2.83 for sample B, and 1.70 for sample C. Total sulfur test results show that sample A was lower than samples B and C, namely 0.54% in sample A, 2.83% in sample B, and 1.70% in sample C. In sample A, Acidity Neutral Capacity (ANC) value was 23.61, while samples B and C had no value. The NAPP value indicates that sample A was negative with a value of -7.07, while samples B and C were positive with a value of 86.67 and 52.06, respectively.

With the geochemical characterization of rocks published by AMIRA that correlates the NAPP and NAG pH values, sample A was categorized as rock without potency to form acid mine drainage (NAF), while samples B and C were included in the category of rock forming acid mine drainage (PAF). Geochemical characterization shows that sample A was NAF as supported by other

Table 1 Geochemical Characterization Results

No.	Sample	pH Paste	Net Acid Generating (NAG)			Acid Base Accounting				Classification
			NAG pH	NAG pH	NAG pH 7	Total	MPA	ANC	NAPP	
				4.5		Sulphur				
				(kg H ₂ SO ₄ /ton)		(%)	(kg H ₂ SO ₄ /ton)			
1	A	7.54	7.19	0	0	0.54	16.54	23.61	-7.07	NAF
2	B	2.32	2.19	76.44	122.5	2.83	86.67	0	86.67	PAF
3	C	3.35	3.08	13.23	21.854	1.70	52.06	0	52.06	PAF

parameters. The pH value in paste was high, NAG pH was also high, sulfur value was low, and ANC value affected acid neutralization independently. Samples B and C were classified as PAF, supported by low paste pH values, low NAG pH, high total sulfur and no ANC content.

Mineralogy Test

In XRD test result as shown in Figure 3, minerals in rock sample A were quartz (SiO₂), kaolinite (Al₂Si₂O₉), calcite (CaCO₃), periclase (MgO), montmorillonite [(Na,Ca)0.33(Al,Mg) 2(Si₄O₁₀)(OH)₂·nH₂O], and siderite (FeCO₃). Minerals in rock sample B were quartz (SiO₂), kaolinite (Al₂Si₂O₉), jarosite [KFe₃(SO₄)₂(OH)₆], pyrite (FeS₂) and magnetite (Fe₃O₄). Minerals in rock sample C were quartz (SiO₂), kaolinite (Al₂Si₂O₉), magnetite (Fe₃O₄), pyrite (FeS₂), and jarosite [KFe₃(SO₄)₂(OH)₆]. Based on the results of geochemical characterization, sample A had calcite and montmorillonite minerals which tended to neutralize acids, because capable of absorbing hydrogen content in acid mine drainage (Gautama, 2014), so sample A is classified as rock without potency to form acid mine drainage. Samples B and C were classified as Potential Acid Forming (PAF) rocks, due to the presence of pyrite minerals as the main sulphide mineral (Castendyk, Eary and Balistrieri, 2015) (Eary, 1999) and

jarosite minerals as secondary minerals from the weathering of sulphide minerals (Gautama, 2014).

The result of XRF in Table 2 shows that mineral elements in three samples were Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, Rb, Sr, and Zr. Sample C had As elements. Sample A had 3 dominant elements, namely Si (64.1%), Al (20.5%), and Fe (8.57%). Dominant elements in sample B were Si (52.9%), Al (20.9), and Cu (8.22%). Sample C had dominant elements, namely Si (72.8%), Al (15.6%), and Fe (6.23%). Content of elements in each sample is shown in Table 2.

Leachate Water Quality

Sample A was a rock with a predominance of clay. Based on the result of field test, pH value was in the range of 7.11-7.90 for daily cycle, in the range of 7.61-8.02, for three-day cycle, while weekly cycle only had 1 value because it has only been tested once with a pH value of 7.9. Sample B was rock containing carbon. Based on the result of pit wall leaching test, pH value was in the range of 1.99-2.77 for daily cycle, in the range of 2.07-2.5 for three-day cycle, and in the range of 2.07-2.5 for weekly cycle. Sample C was a rock dominated by sandstone. Based on the result of pit wall leaching test, pH value was in the range of 3.10-3.96 for daily cycle, in the range of 2.89-4.09 for three-day cycle, and in the range of

**Figure 3** Hasil Uji XRD

Table 2 XRD and XRF test results

Sample.	XRD	XRF
A	Quartz, kaolinite, calcite, periclase, montmorillonite, siderite	Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, Rb, Sr, Zr
B	Quartz, kaolinite, jarosite, pyrite, magnetite	Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, Rb, Sr, Zr
C	Quartz, kaolinite, jarosite, pyrite, magnetite.	Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, As, Rb, Sr, Zr

3.26-3.46 for weekly cycle. Sample B shows the similarity of pH value in the result of kinetic test using rock samples from veryta blocks from different pits, where the result of kinetic test on a weekly cycle was in the range of 1.5 – 2.5 (Abfertiawan *et al.*, 2020).

Based on Figure 4, it can be seen that the ORP value in the pit wall leaching activity shows that the ORP value of sample A is negative which is in the range of -100 to 0 mV. Samples B and C have ORP values in the range of 150 to 300 mV and have positive values. It can be seen in the figure which shows that along with the high pH value, the ORP value will decrease, on the contrary if the pH value is low, the ORP value will be high.

For value of Total Dissolved Solids (TDS) from the result of leachate test and the pit wall leaching test, each sample is shown in Figure 4. Sample A had a TDS value range of 124 - 595 ppm in the daily cycle, in the range of 135 – 309.7 in three-day cycle, and 1 measurement with a value of 247.9 ppm in weekly cycle. Sample B had a higher TDS value than other two samples, with a value range of 2,853 – 4,388 ppm for daily cycle, in the range of 960 – 4,533 ppm for three-day cycle, and in the range of 5,126 – 5,428 ppm for weekly cycle. Sample C had a TDS value in the range of 53 - 816 ppm for daily cycle, in the range of 126 - 348 ppm for three-day cycle, and in the range of 558 – 1,088 ppm for weekly cycle. TDS value in sample B was higher than that in samples A and C. High content of TDS in sample B was due to the high sulfate content in leachate.

Based on the classification of pit lake types to be formed and leachate in the field and laboratory, there were two pit lake types (Figure 5), namely Acidic - High TDS and Circumneutral - Low TDS types (Eary, 1999). Based on classification, sample in location A was included in the Circumneutral TDS and sample B was in Acid-high TDS zone, and sample C was in Acid-low TDS zone.

Chemical Content Test

Based on the results of metal test on leachate, value of Fe in sample B was the highest, compared with other samples. High Fe content was due to a low pH value. Metals that have been environmental quality standards issued by Indonesian government are Fe and Mn. Based on the results of metal test in Table 3, there is a tendency for high Fe values to exceed the quality standard limit of 6 mg/L, while Fe in leachate water was greater than the quality standard, particularly in sample B in the range of 104 - 836 mg/L. Mn metal in leachate of all samples was still below the specified quality standard of 4mg/L.

The same applied to SO₄ content, where sample B was the highest, compared with other two samples. Besides these two metals, other metals (e.g., Al, Mn, and Mg) were dominant in sample B. High values of Fe and SO₄ in sample B were due to the presence of pyrite content in sample B.

Conclusion

The geochemical characterization of rock on the rock wall was then verified by laboratory test as a reference for the industry to predict water quality to be formed when a former mining pit will be used as a pit lake. The results based on static test indicate that locations B and C are rocks categorized into Potential Acid Forming (PAF) as characterized by the presence of sulfide minerals, namely pyrite, in these rocks. Meanwhile, for sample A, rocks are categorized into Non Acid Forming rocks (NAF). Kinetic test, pH value in particular, shows that there was a similar trend between values in pit wall leaching and kinetic tests in the laboratory. Based on the relation between pH and TDS, sample A was in the Circumneutral - Low TDS zone, while samples B and C were in the acidic - High TDS zone. Metal content (Fe and Mn in particular) as the requirements for environmental quality

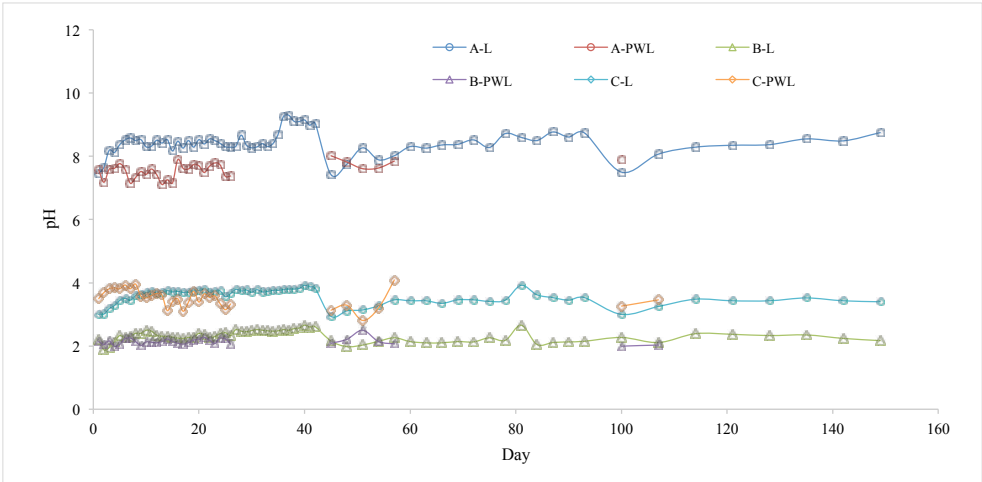


Figure 4 pH value of leachate water

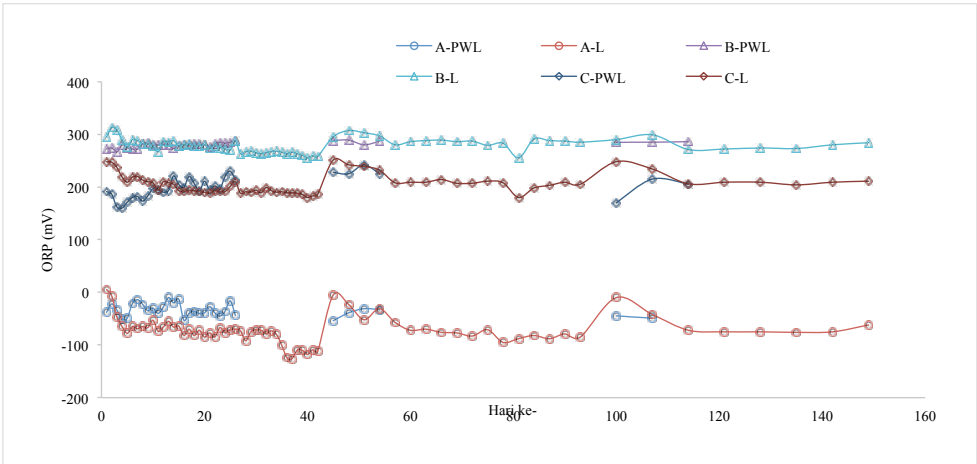


Figure 4 ORP value of leachate water

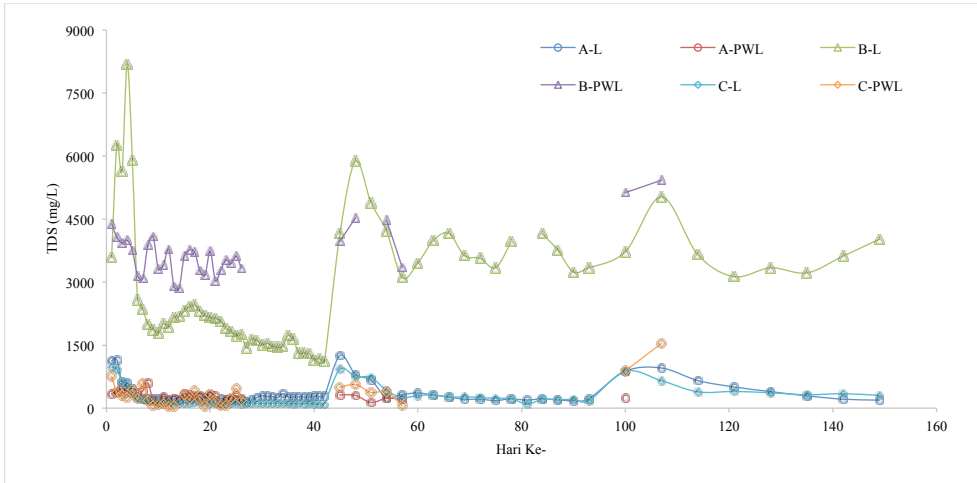


Figure 4 TDS value of leachate water

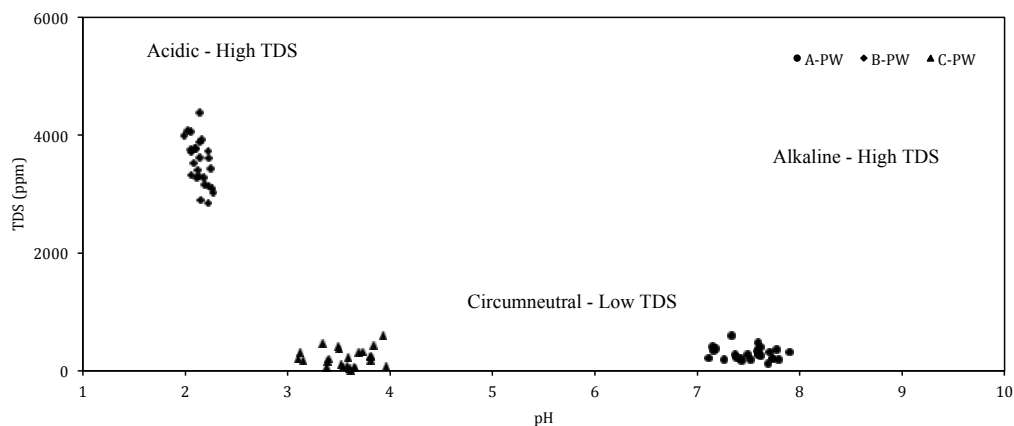


Figure 5 Category of Pit Lake from Leachate Result

standards in Indonesia, got the highest value in samples B and A.

References

- Abfertiawan, M.S. *et al.* (2020) 'Evaluation of Non-Acid-Forming material layering for the prevention of acid mine drainage of pyrite and jarosite', *Heliyon*, 6(11), p. e05590. Available at: <https://doi.org/10.1016/j.heliyon.2020.e05590>.
- Acharya, B.S. and Kharel, G. (2020) 'Acid mine drainage from coal mining in the United States – An overview', *Journal of Hydrology*, 588, p. 125061. Available at: <https://doi.org/10.1016/j.jhydrol.2020.125061>.
- Akcil, A. and Koldas, S. (2006) 'Acid Mine Drainage (AMD): causes, treatment and case studies', *Journal of Cleaner Production*, 14(12–13), pp. 1139–1145. Available at: <https://doi.org/10.1016/j.jclepro.2004.09.006>.
- Andrade, C. and Mountjoy, K. (2015) 'Minewall Stations and Mass Loadings at an Epithermal High Sulfidation Deposit, What, No Scaling?' 10th International Conference on Acid Rock Drainage & IMWA Annual Conference.
- Blanchette, M.L. and Lund, M.A. (2016) 'Pit lakes are a global legacy of mining: an integrated approach to achieving sustainable ecosystems and value for communities', *Current Opinion*

Table 3 Chemical content of leachate

Parameter	Day 1 (Beginning)			Day 13 (Intermediate)			Day 26 (End)			Day 35 (three-day)			Day 55 (Weekly)	
Na (mg/L)	14.6	2.58	3.92	10.7	0.58	0	8.96	0.76	0.55	5.22	0	0	0.84	0.61
Ca (mg/L)	45.9	45.9	214	28	61.1	2.69	27	71.8	23.7	22.9	21.7	5.62	209	28.2
K (mg/L)	18.8	0	1.2	12.7	0	0	13.8	0	0	11.4	0	0	0	0.59
Mg (mg/L)	52.6	345	137.0	43	124	1.1	41.7	159	8.27	37	33.5	6.18	286	11.2
Al (mg/L)	0.505	62.2	5.7	0.847	51.2	0.112	0.48	292	2.7	0.75	50.7	12.1	557	3.08
Fe (mg/L)	14.3	817	16.9	0.71	408	0.89	42.2	348	1.84	71.9	104	36.4	836	4.02
Mn (mg/L)	1.53	5.4	3.23	1.39	6.16	0	0.944	5.52	1.38	1.46	3.14	1.21	3.74	1.57
Cr (mg/L)	0	0	0	0	0.0841	0	0	0.082	0	0	0.0415	0	0.0553	0
Cd (mg/L)	0	0.006	0.003	0.0025	0	0	0	0.003	0	0	0	0	0.0053	0
SO ₄ (mg/L)	332	4000	1100	210	2270	19	183	3840	121	93	879	264	3620	167
NH ₃ -N (mg/L)	0	0.05	0.2	0.34	0	0	0.21	0.66	0.15	0.55	0.67	0.17	0.41	0.14
F (mg/L)	0.91	0.27	1.18	0.88	0.87	0.22	0.63	0.74	0.7	0.74	1.28	0.91	0.16	0.79
I (mg/L)	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Cl (mg/L)	4.4	0	3.3	1.6	0	0	8.96	9.8	0	0	0	0	0	0
NO ₃ ⁻ (mg/L)	0	1.28	0	0	0.911	0.015	0	0.846	0	0	0.015	0	1.6	0.006



- in *Environmental Sustainability*, 23, pp. 28–34. Available at: <https://doi.org/10.1016/j.cosust.2016.11.012>.
- Blodau, C. (2006) 'A review of acidity generation and consumption in acidic coal mine lakes and their watersheds', *Science of The Total Environment*, 369(1–3), pp. 307–332. Available at: <https://doi.org/10.1016/j.scitotenv.2006.05.004>.
- Cánovas, C.R. *et al.* (2015) 'Geochemical processes in a highly acidic pit lake of the Iberian Pyrite Belt (SW Spain)', *Chemical Geology*, 395, pp. 144–153. Available at: <https://doi.org/10.1016/j.chemgeo.2014.12.007>.
- Castendyk, D.N., Eary, L.E. and Balistrieri, L.S. (2015) 'Modeling and management of pit lake water chemistry 1: Theory', *Applied Geochemistry*, 57, pp. 267–288. Available at: <https://doi.org/10.1016/j.apgeochem.2014.09.004>.
- Castendyk, D.N., Mauk, J.L. and Webster, J.G. (2005) 'A mineral quantification method for wall rocks at open pit mines, and application to the Martha Au–Ag mine, Waihi, New Zealand', *Applied Geochemistry*, 20(1), pp. 135–156. Available at: <https://doi.org/10.1016/j.apgeochem.2004.07.001>.
- Eary, L.E. (1999) 'Geochemical and equilibrium trends in mine pit lakes', *Applied Geochemistry*, 14(8), pp. 963–987. Available at: [https://doi.org/10.1016/S0883-2927\(99\)00049-9](https://doi.org/10.1016/S0883-2927(99)00049-9).
- Gautama, R.S. (2014) *Pembentukan, Pengendalian dan Pengelolaan Air Asam Tambang*. Bandung, Indonesia: Penerbit ITB.
- Gerke, H.H., Molson, J.W. and Frind, E.O. (1998) 'Modelling the effect of chemical heterogeneity on acidification and solute leaching in overburden mine spoils', *Journal of Hydrology*, 209(1–4), pp. 166–185. Available at: [https://doi.org/10.1016/S0022-1694\(98\)00106-1](https://doi.org/10.1016/S0022-1694(98)00106-1).
- Kefeni, K.K., Msagati, T.A.M. and Mamba, B.B. (2017) 'Acid mine drainage: Prevention, treatment options, and resource recovery: A review', *Journal of Cleaner Production*, 151, pp. 475–493. Available at: <https://doi.org/10.1016/j.jclepro.2017.03.082>.
- Kusuma, G.J. *et al.* (2020) 'Prediksi Pembentukan dan Kualitas Air Pit Lake: Berdasarkan Kondisi Hidrologi dan Geokimia Batuan', *Prosiding Temu Profesi Tahunan PERHAPI*, 1(1), pp. 761–770. Available at: <https://doi.org/10.36986/ptptp.v1i1.118>.
- Morin, A. and Hutt, M. (2004) 'The Minewall Approach for Estimating the Geochemical Effects of Mine Walls on Pit Lakes', in *Pit Lakes 2004*. Nevada: United States Environmental Protection Agency, pp. 1–19.
- Morin, K.A. and Hutt, N.M. (2001) 'Prediction of water chemistry in mine lakes: The minewall technique', *Ecological Engineering*, 17(2–3), pp. 125–132. Available at: [https://doi.org/10.1016/S0925-8574\(00\)00153-1](https://doi.org/10.1016/S0925-8574(00)00153-1).
- Sánchez España, J. *et al.* (2005) 'Acid mine drainage in the Iberian Pyrite Belt (Odiel river watershed, Huelva, SW Spain): Geochemistry, mineralogy and environmental implications', *Applied Geochemistry*, 20(7), pp. 1320–1356. Available at: <https://doi.org/10.1016/j.apgeochem.2005.01.011>.
- Tuheteru, E.J. *et al.* (2021) 'Water Balance of Pit Lake Development in the Equatorial Region', *Water*, 13(21), p. 3106. Available at: <https://doi.org/10.3390/w13213106>.
- Vandenberg, J. and Litke, S. (2018) 'Beneficial Use of Springer Pit Lake at Mount Polley Mine', *Mine Water and the Environment*, 37(4), pp. 663–672. Available at: <https://doi.org/10.1007/s10230-017-0504-y>.

Comparison of Pit Wall Leaching Test in the Field and Laboratory

by Edy Jamal Tuheteru

Submission date: 09-May-2023 03:36PM (UTC+0700)

Submission ID: 2088414756

File name: IMWA2022_Tuheteru_519.pdf (2.2M)

Word count: 4793

Character count: 21743

Comparison of Pit Wall Leaching Test in the Field and Laboratory

Edy Jamal Tuheteru^{1,2}, Ginting Jalu Kusuma¹, Rudy Sayoga Gautama¹, Kris Pranoto³,
Yosef Palinggi³

4

¹Mining Engineering Research Group, Faculty of Mining and Petroleum Engineering, Institut Teknologi Bandung, Indonesia

²Department of Mining, Faculty of Earth and Energy Technology, Universitas Trisakti, Indonesia

³Department of Environment, PT Kaltim Prima Coal, East of Kalimantan, Indonesia

*Correspondence author: jaluku@mining.itb.ac.id

Abstract

Mining activities will eventually end, while one of the options for the use of post-mining land is to make it a pit lake. To ensure the management of the pit lake in the future, it requires a study about geochemistry of the water to be formed. Quality of the developing water is results in the reaction between water and rock on pit wall. This research was conducted with the aim of identifying quality of the water to be formed. To determine quality of the water, a direct test was conducted in the field using the pit wall leaching method. The location of this test was in PT Kaltim Prima Coal, one of the largest coal producers in Indonesia. There were three locations considered to represent rock stratification exposed on the pit wall. Dimensions in test was 1 x 1 meter, while leachate yield was 2 liters. Test cycle was conducted in daily, three-day, and weekly cycles. Based on the result of static tests, sample A was classified as NAF rock, while samples B and C were classified as PAF rock. Meanwhile, leachate test shows the result that range of pH values was from 7.61 to 8.02 for sample A, from 1.99 to 2.77 for sample B, and from 2.89 to 4.09 for sample C. Based on test result, the most dominant metals were SO₄, Mg, and Fe. The conclusion of this research is that the exposed rock on pit wall is dominated by PAF rock, thus having a potency to form acid mine drainage.





Keywords: Pit wall leaching, Geochemical characterization, Acid mine drainage

Introduction

Mining activities will end, while the final pit can be backfilled at mines having more than one pit or multi-pit. In some cases, former mining pits cannot be backfilled and are used as postmining lakes, termed mine pit lakes or pit lakes (Blanchette and Lund, 2016) (Castendyk, Eary and Balistreri, 2015) (Vandenberg and Litke, 2018). One factor that needs to be considered during the process of forming a pit lake is quality of the water that will be formed. This is related to the continued use of pit lake. The water formed can be acidic or alkaline. The acid mine drainage formed affects the surrounding environment (Akcil and Koldas, 2006) (Blodau, 2006) (Acharya and Kharel, 2020). Issues of acid mine drainage in pit lakes can be seen for example in coal mining areas in Lusatia District, Germany (Gerke, Molson and Frind, 1998) and gold mining in

the Iberian pyrite belt (Cánovas *et al.*, 2015) (Sánchez España *et al.*, 2005). Considering the impact brought by acid mine drainage, it is necessary to predict quality of the pit lake water that will form.

Acid mine drainage is caused by the oxidation of rocks containing sulfide minerals and the presence of water. Acid mine drainage is characterized by a pH value below 6. In addition to a low pH value, acid mine drainage also contains metals, namely Fe and Mn. Reaction for the formation of acid mine drainage is shown in formula as follows (Tefeni, Msagati and Mamba, 2017):



1

Several factors that need to be considered⁸ in predicting pit lake water quality include groundwater inflow, precipitation, evaporation, pit wall runoff, rock wall washing⁸ (Castendyk, Eary and Balistrieri, 2015), biological processes, lake hydrodynamics, and geochemical equilibrium (Eary, 1999). Regarding rock wall washing, what needs to be done at an early stage is to determine the distribution of rocks forming acid mine drainage and rocks without potency to form acid mine drainage. Geochemical characterization of these rocks can be performed by running a series of tests. Tests in the field can be conducted using the pit wall leaching method, while test in the laboratory can be carried out using several tests, including mineralogy, static and kinetic tests (Castendyk, Mauk and Webster, 2005).

Pit wall leaching test was conducted⁶ using Minewall approach to estimate the geochemical effects of pit walls. Minewall was developed as a formal standard technique for Canadian MEND Program in the 1990s (Morin and Hutt, 2001). The application of this method has been carried out in several mining locations, such as Indonesia (Kusuma *et al.*, 2020), which was carried out in coal mines. Only in this study, the pit wall leaching test was tested once. In ore mining, the application of the Minewall method is carried out by (Andrade and Mountjoy, 2015). Compared to static and kinetic tests in the laboratory, with pit wall test it is better to obtain an overview of the water quality that will be formed, because it is directly carried out on exposed rock walls.

At the end of mining, quality of the water that will be formed must be predictable. One way to predict water quality is to determine the quality of leachate which is the reaction of rainwater and rocks on the pit walls. This research was conducted to comprehend the quality of water that will be formed and to compare hydrogeochemical tests carried out in field and laboratory. The results that have been obtained were then used to zoning the distribution area of PAF and NAF rocks which can finally simulate the prediction of water quality of the pit lake that will be formed.

Method

This research was conducted in the Peri pit which is the Coal Contract of Work area of PT. Kaltim Prima Coal (Figure 1) (Tuheteru *et al.*, 2021). Mining in Pit Peri has been carried out since 2010 and still continues to date. The mining plan ended in 2021. Pit Peri has 5 coal seams with a thickness from 0.54 to 3.42 meters. The planned coal production from 2010 to 2021 is approximately 6.5 million tons with a stripping ratio of 9.02. Pit wall leaching tests were carried out on mining pit walls in three locations with codes A, B, and C. The lithology of three samples was different, namely claystone, mudstone, and sandstone. Location A was dominated by clay rocks at an elevation of 60 - 70 masl, location B had organic elements because of coal layer at an elevation of 50 masl, while location C was dominated by sandstone, located the same with location B, at an elevation of 50 masl (Figure 2).

The research was conducted by applying mine wall or pit wall leaching method. The application of this method is very suitable for active mines, because pit walls are still open and will be reactive with water, making leachate water samples capable of being taken easily. This method was designed for the prediction of pit lake water quality as required for mine closure assessment (Andrade and Mountjoy, 2015). The procedure for this test was conducted from the development of a procedure by (Morin and Hutt, 2004). The pit wall leaching test was carried out by cleaning the rock surface first, until obtaining a fresh rock sample surface. Dimensions of the pit wall surface tested were 1 m². Distilled water, inserted into sprayer with a capacity of two liters was used for watering the pit wall. Leachate from the spray was collected in a container. This reservoir was also used to collect leachate resulting from washing using rainwater. Location C was not carried out of shelter, because the rock surface was hard. The collected leachate was then put into a sample bottle with a capacity of 2 liters and taken to a laboratory owned by PT Kaltim Prima Coal for water physical testing. Besides physical tests, metal content tests were also carried out in laboratories which are partners of PT Kaltim Prima Coal.

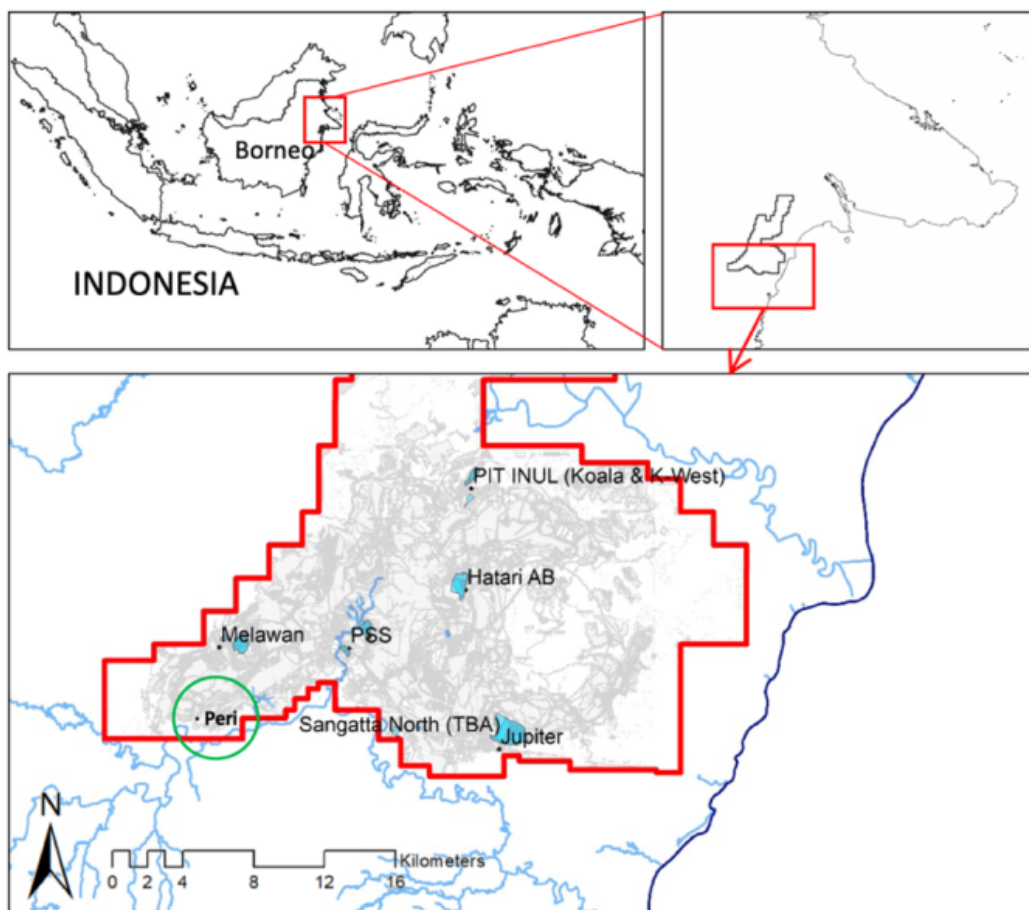


Figure 1 Research Location

The test was conducted in a long period of time, about 2 months, to determine the quality of leachate water over a long period of time. In this time period, tests were conducted in several cycles, namely daily, three-day, and weekly cycles. The daily cycle was carried out 26 times, three-day cycle was carried out 5 times, and weekly cycle was carried out once in location A. Test location A was mined, while tests were conducted twice in locations B and C. This pit wall leaching test activity was conducted in early December 2019 until the end of January 2020. The water used in the leaching process was distilled water. The distilled water used for watering was taken as much as 40 liters.

Rocks from each location were taken and tested in the laboratory, through static, mineralogy, and kinetic tests. Static and mineralogical tests were conducted

in Mining Environment Laboratory and the Hydrogeology and Hydrogeochemical Laboratory owned by the Faculty of Mining and Petroleum Engineering, Bandung Institute of Technology. Static test was the first step to characterize rocks. This test was designed to calculate the balance between acid-forming components (e.g., sulphide minerals) and acid consuming components, mainly carbonate minerals, in rock samples. Several tests conducted were pH, Total Sulphur, Acid Base Accounting (ABA), and Net Acid Generating (NAG) test. The test procedure was carried out according to the instructions on Amira International.

Mineralogy tests conducted were XRD (X-Ray Diffraction) and XRF (X-Ray Fluorescence) tests. XRD test was used to analyse the composition of phases or compounds in materials and to characterize



Figure 2 Distribution of pit wall leaching test locations Distribution of pit wall leaching test locations

crystals, while XRF test was generally used to analyse elements in minerals or rocks. Elemental analysis was conducted qualitatively and quantitatively. Qualitative analysis was conducted to analyse types of elements in the rock, while quantitative analysis was conducted to determine the concentration of elements in the rock.

Kinetic test in the laboratory was conducted using Free Column Drained Test (FDCLT) method, to investigate a long-term reaction between water and rock. Through this test, an overview of acid and wet generation of the reaction products was obtained. FDCLT was performed by placing rock samples in a Buchner funnel which was irradiated with the help of a light bulb, then watering was carried out in daily, three-day, and weekly cycles. The leachate water was accommodated in one container, which was then followed by a leachate water quality test.

Result and Discussion

Static Test

Result of the static test is shown in Table 1. Based on the result, sample A has a high pH

value of 7.5, while samples B and C had 2.32 and 3.35. The value of Net Acid Generation (NAG) pH was 7.19 in sample A, 2.19 for sample B, and 3.08 for sample C. The value of Acid Neutral Capacity (NAC) was 23.61 for sample A, while samples B and C had no value. The sulfur content in each sample was 0.54 for sample A, 2.83 for sample B, and 1.70 for sample C. Total sulfur test results show that sample A was lower than samples B and C, namely 0.54% in sample A, 2.83% in sample B, and 1.70% in sample C. In sample A, Acidity Neutral Capacity (ANC) value was 23.61, while samples B and C had no value. The NAPP value indicates that sample A was negative with a value of -7.07, while samples B and C were positive with a value of 86.67 and 52.06, respectively.

With the geochemical characterization of rocks published by AMIRA that correlates the NAPP and NAG pH values, sample A was categorized as rock without potency to form acid mine drainage (NAF), while samples B and C were included in the category of rock forming acid mine drainage (PAF). Geochemical characterization shows that sample A was NAF as supported by other



Table 1 Geochemical Characterization Results

No.	Sample	pH Paste	Net Acid Generating (NAG)			Acid Base Accounting			Classification	
			NAG pH	NAG pH 4.5	NAG pH 7	Total Sulphur	MPA	ANC		NAPP
1	A	7.54	7.19	0	0	0.54	16.54	23.61	-7.07	NAF
2	B	2.32	2.19	76.44	122.5	2.83	86.67	0	86.67	PAF
3	C	3.35	3.08	13.23	21.854	1.70	52.06	0	52.06	PAF

parameters. The pH value in paste was high, NAG pH was also high, sulfur value was low, and ANC value affected acid neutralization independently. Samples B and C were classified as PAF, supported by low paste pH values, low NAG pH, high total sulfur and no ANC content.

Mineralogy Test

In XRD test result as shown in Figure 3, minerals in rock sample A were quartz (SiO₂), kaolinite (Al₂Si₂O₉), calcite (CaCO₃), periclase (MgO), montmorillonite [(Na,Ca)0.33(Al,Mg) 2(Si₄O₁₀)(OH)₂·nH₂O], and siderite (FeCO₃). Minerals in rock sample B were quartz (SiO₂), kaolinite (Al₂Si₂O₉), jarosite [KFe₃(SO₄)₂(OH)₆], pyrite (FeS₂) and magnetite (Fe₃O₄). Minerals in rock sample C were quartz (SiO₂), kaolinite (Al₂Si₂O₉), magnetite (Fe₃O₄), pyrite (FeS₂), and jarosite [KFe₃(SO₄)₂(OH)₆]. Based on the results of geochemical characterization, sample A had calcite and montmorillonite minerals which tended to neutralize acids, because capable of absorbing hydrogen content in acid mine drainage (Gautama, 2014), so sample A is classified as rock without potency to form acid mine drainage. Samples B and C were classified as Potential Acid Forming (PAF) rocks, due to the presence of pyrite minerals as the main sulphide mineral (Castendyk, Eary and Balistreri, 2015) (Eary, 1999) and

jarosite minerals as secondary minerals from the weathering of sulphide minerals (Gautama, 2014).

The result of XRF in Table 2 shows that mineral elements in three samples were Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, Rb, Sr, and Zr. Sample C had As elements. Sample A had 3 dominant elements, namely Si (64.1%), Al (20.5%), and Fe (8.57%). Dominant elements in sample B were Si (52.9%), Al (20.9%), and Cu (8.22%). Sample C had dominant elements, namely Si (72.8%), Al (15.6%), and Fe (6.23%). Content of elements in each sample is shown in Table 2.

Leachate Water Quality

Sample A was a rock with a predominance of clay. Based on the result of field test, pH value was in the range of 7.11-7.90 for daily cycle, in the range of 7.61-8.02, for three-day cycle, while weekly cycle only had 1 value because it has only been tested once with a pH value of 7.9. Sample B was rock containing carbon. Based on the result of pit wall leaching test, pH value was in the range of 1.99-2.77 for daily cycle, in the range of 2.07-2.5 for three-day cycle, and in the range of 2.07-2.5 for weekly cycle. Sample C was a rock dominated by sandstone. Based on the result of pit wall leaching test, pH value was in the range of 3.10-3.96 for daily cycle, in the range of 2.89-4.09 for three-day cycle, and in the range of



Figure 3 Hasil Uji XRD

Table 2 XRD and XRF test results

Sample.	XRD	XRF
A	Quartz, kaolinite, calcite, periclase, montmorillonite, siderite	Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, Rb, Sr, Zr
B	Quartz, kaolinite, jarosite, pyrite, magnetite	Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, Rb, Sr, Zr
C	Quartz, kaolinite, jarosite, pyrite, magnetite.	Na, Mg, Al, Si, P, S, Cl, K, Ca, Ti, Fe, Cu, Zn, As, Rb, Sr, Zr

3.26-3.46 for weekly cycle. Sample B shows the similarity of pH value in the result of kinetic test using rock samples from veryta blocks from different pits, where the result of kinetic test on a weekly cycle was in the range of 1.5 – 2.5 (Abfertiawan *et al.*, 2020).

Based on Figure 4, it can be seen that the ORP value in the pit wall leaching activity shows that the ORP value of sample A is negative which is in the range of -100 to 0 mV. Samples B and C have ORP values in the range of 150 to 300 mV and have positive values. It can be seen in the figure which shows that along with the high pH value, the ORP value will decrease, on the contrary if the pH value is low, the ORP value will be high.

For value of Total Dissolved Solids (TDS) from the result of leachate test and the pit wall leaching test, each sample is shown in Figure 4. Sample A had a TDS value range of 124 - 595 ppm in the daily cycle, in the range of 135 - 309.7 in three-day cycle, and 1 measurement with a value of 247.9 ppm in weekly cycle. Sample B had a higher TDS value than other two samples, with a value range of 2,853 - 4,388 ppm for daily cycle, in the range of 960 - 4,533 ppm for three-day cycle, and in the range of 5,126 - 5,428 ppm for weekly cycle. Sample C had a TDS value in the range of 53 - 816 ppm for daily cycle, in the range of 126 - 348 ppm for three-day cycle, and in the range of 558 - 1,088 ppm for weekly cycle. TDS value in sample B was higher than that in samples A and C. High content of TDS in sample B was due to the high sulfate content in leachate.

Based on the classification of pit lake types to be formed and leachate in the field and laboratory, there were two pit lake types (Figure 5), namely Acidic - High TDS and Circumneutral - Low TDS types (Eary, 1999). Based on classification, sample in location A was included in the Circumneutral TDS and sample B was in Acid-high TDS zone, and sample C was in Acid-low TDS zone.

Chemical Content Test

Based on the results of metal test on leachate, value of Fe in sample B was the highest, compared with other samples. High Fe content was due to a low pH value. Metals that have been environmental quality standards issued by Indonesian government are Fe and Mn. Based on the results of metal test in Table 3, there is a tendency for high Fe values to exceed the quality standard limit of 6 mg/L, while Fe in leachate water was greater than the quality standard, particularly in sample B in the range of 104 - 836 mg/L. Mn metal in leachate of all samples was still below the specified quality standard of 4mg/L.

The same applied to SO₄ content, where sample B was the highest, compared with other two samples. Besides these two metals, other metals (e.g., Al, Mn, and Mg) were dominant in sample B. High values of Fe and SO₄ in sample B were due to the presence of pyrite content in sample B.

Conclusion

The geochemical characterization of rock on the rock wall was then verified by laboratory test as a reference for the industry to predict water quality to be formed when a former mining pit will be used as a pit lake. The results based on static test indicate that locations B and C are rocks categorized into Potential Acid Forming (PAF) as characterized by the presence of sulfide minerals, namely pyrite, in these rocks. Meanwhile, for sample A, rocks are categorized into Non Acid Forming rocks (NAF). Kinetic test, pH value in particular, shows that there was a similar trend between values in pit wall leaching and kinetic tests in the laboratory. Based on the relation between pH and TDS, sample A was in the Circumneutral - Low TDS zone, while samples B and C were in the acidic - High TDS zone. Metal content (Fe and Mn in particular) as the requirements for environmental quality

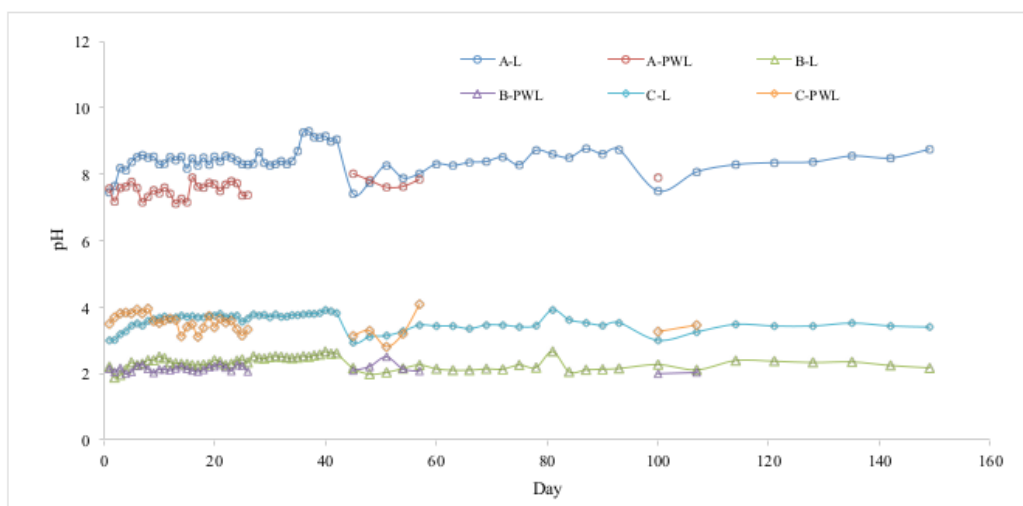


Figure 4 pH value of leachate water

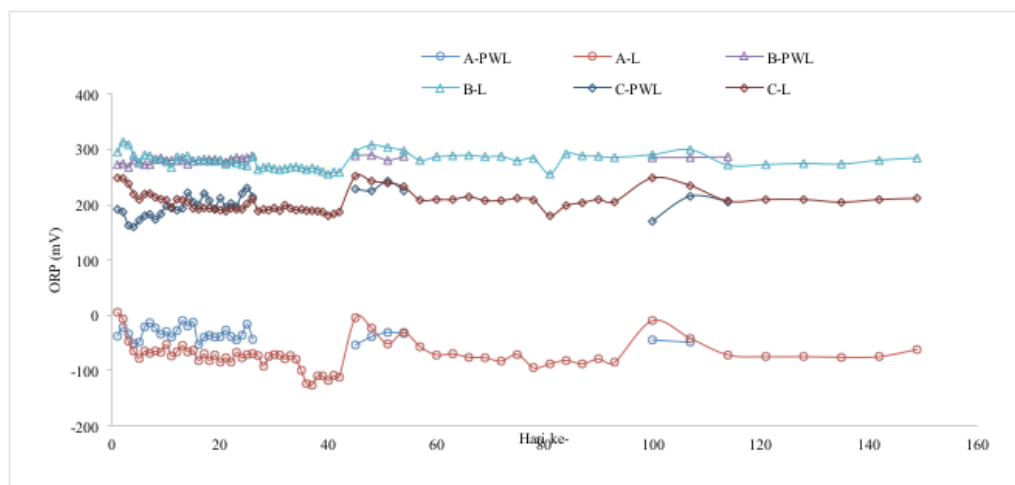


Figure 4 ORP value of leachate water

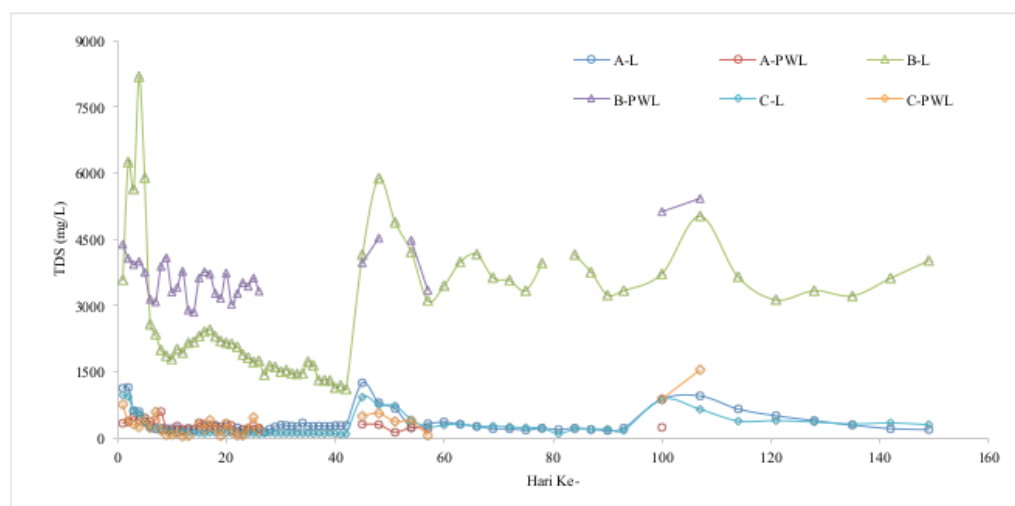


Figure 4 TDS value of leachate water

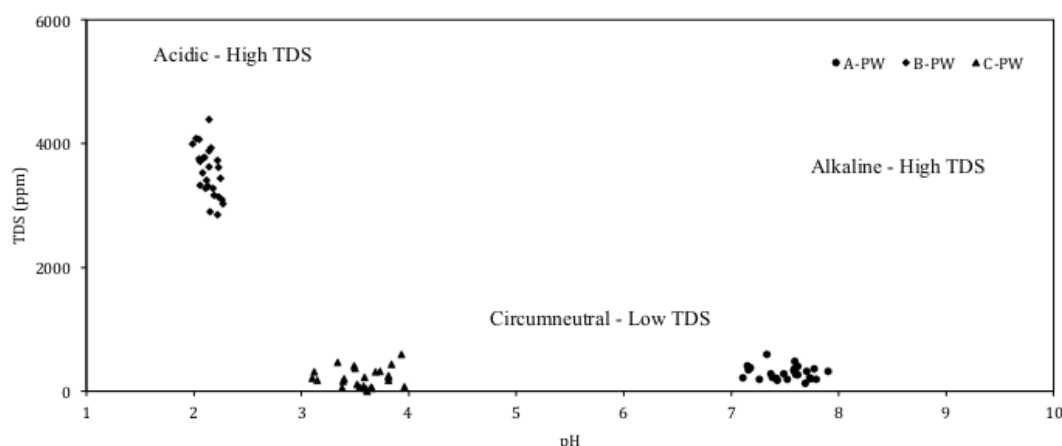


Figure 5 Category of Pit Lake from Leachate Result

standards in Indonesia, got the highest value in samples B and A.

References

- Abfertiawan, M.S. *et al.* (2020) 'Evaluation of Non-Acid-Forming material layering for the prevention of acid mine drainage of pyrite and jarosite', *Heliyon*, 6(11), p. e05590. Available at: <https://doi.org/10.1016/j.heliyon.2020.e05590>.
- Acharya, B.S. and Kharel, G. (2020) 'Acid mine drainage from coal mining in the United States – An overview', *Journal of Hydrology*, 588, p. 125061. Available at: <https://doi.org/10.1016/j.jhydrol.2020.125061>.
- Akcil, A. and Koldas, S. (2006) 'Acid Mine Drainage (AMD): causes, treatment and case studies', *Journal of Cleaner Production*, 14(12–13), pp. 1139–1145. Available at: <https://doi.org/10.1016/j.jclepro.2004.09.006>.
- Andrade, C. and Mountjoy, K. (2015) 'Minewall Stations and Mass Loadings at an Epithermal High Sulfidation Deposit, What, No Scaling?' 10th International Conference on Acid Rock Drainage & IMWA Annual Conference.
- Blanchette, M.L. and Lund, M.A. (2016) 'Pit lakes are a global legacy of mining: an integrated approach to achieving sustainable ecosystems and value for communities', *Current Opinion*

Table 3 Chemical content of leachate

Parameter	Day 1 (Beginning)			Day 13 (Intermediate)			Day 26 (End)			Day 35 (three-day)			Day 55 (Weekly)	
Na (mg/L)	14.6	2.58	3.92	10.7	0.58	0	8.96	0.76	0.55	5.22	0	0	0.84	0.61
Ca (mg/L)	45.9	45.9	214	28	61.1	2.69	27	71.8	23.7	22.9	21.7	5.62	209	28.2
K (mg/L)	18.8	0	1.2	12.7	0	0	13.8	0	0	11.4	0	0	0	0.59
Mg (mg/L)	52.6	345	137.0	43	124	1.1	41.7	159	8.27	37	33.5	6.18	286	11.2
Al (mg/L)	0.505	622	5.7	0.847	51.2	0.112	0.48	292	2.7	0.75	50.7	12.1	557	3.08
Fe (mg/L)	14.3	817	16.9	0.71	408	0.89	42.2	348	1.84	71.9	104	36.4	836	4.02
Mn (mg/L)	1.53	5.4	3.23	1.39	6.16	0	0.944	5.52	1.38	1.46	3.14	1.21	3.74	1.57
Cr (mg/L)	0	0	0	0	0.0841	0	0	0.082	0	0	0.0415	0	0.0553	0
Cd (mg/L)	0	0.006	0.003	0.0025	0	0	0	0.003	0	0	0	0	0.0053	0
SO ₄ (mg/L)	332	4000	1100	210	2270	19	183	3840	121	93	879	264	3620	167
NH ₃ -N (mg/L)	0	0.05	0.2	0.34	0	0	0.21	0.66	0.15	0.55	0.67	0.17	0.41	0.14
F ⁻ (mg/L)	0.91	0.27	1.18	0.88	0.87	0.22	0.63	0.74	0.7	0.74	1.28	0.91	0.16	0.79
I ⁻ (mg/L)	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Cl (mg/L)	4.4	0	3.3	1.6	0	0	8.96	9.8	0	0	0	0	0	0
NO ₃ ⁻ (mg/L)	0	1.28	0	0	0.911	0.015	0	0.846	0	0	0.015	0	1.6	0.006



- in *Environmental Sustainability*, 23, pp. 28–34. Available at: <https://doi.org/10.1016/j.cosust.2016.11.012>.
- Blodau, C. (2006) 'A review of acidity generation and consumption in acidic coal mine lakes and their watersheds', *Science of The Total Environment*, 369(1–3), pp. 307–332. Available at: <https://doi.org/10.1016/j.scitotenv.2006.05.004>.
- Cánovas, C.R. *et al.* (2015) 'Geochemical processes in a highly acidic pit lake of the Iberian Pyrite Belt (SW Spain)', *Chemical Geology*, 395, pp. 144–153. Available at: <https://doi.org/10.1016/j.chemgeo.2014.12.007>.
- Castendyk, D.N., Eary, L.E. and Balistreri, L.S. (2015) 'Modeling and management of pit lake water chemistry 1: Theory', *Applied Geochemistry*, 57, pp. 267–288. Available at: <https://doi.org/10.1016/j.apgeochem.2014.09.004>.
- Castendyk, D.N., Mauk, J.L. and Webster, J.G. (2005) 'A mineral quantification method for wall rocks at open pit mines, and application to the Martha Au–Ag mine, Waihi, New Zealand', *Applied Geochemistry*, 20(1), pp. 135–156. Available at: <https://doi.org/10.1016/j.apgeochem.2004.07.001>.
- Eary, L.E. (1999) 'Geochemical and equilibrium trends in mine pit lakes', *Applied Geochemistry*, 14(8), pp. 963–987. Available at: [https://doi.org/10.1016/S0883-2927\(99\)00049-9](https://doi.org/10.1016/S0883-2927(99)00049-9).
- Gautama, R.S. (2014) *Pembentukan, Pengendalian dan Pengelolaan Air Asam Tambang*. Bandung, Indonesia: Penerbit ITB.
- Gerke, H.H., Molson, J.W. and Frind, E.O. (1998) 'Modelling the effect of chemical heterogeneity on acidification and solute leaching in overburden mine spoils', *Journal of Hydrology*, 209(1–4), pp. 166–185. Available at: [https://doi.org/10.1016/S0022-1694\(98\)00106-1](https://doi.org/10.1016/S0022-1694(98)00106-1).
- Kefeni, K.K., Msagati, T.A.M. and Mamba, B.B. (2017) 'Acid mine drainage: Prevention, treatment options, and resource recovery: A review', *Journal of Cleaner Production*, 151, pp. 475–493. Available at: <https://doi.org/10.1016/j.jclepro.2017.03.082>.
- Kusuma, G.J. *et al.* (2020) 'Prediksi Pembentukan dan Kualitas Air Pit Lake: Berdasarkan Kondisi Hidrologi dan Geokimia Batuan', *Prosiding Temu Profesi Tahunan PERHAPI*, 1(1), pp. 761–770. Available at: <https://doi.org/10.36986/ptptp.v1i1.118>.
- Morin, A. and Hutt, M. (2004) 'The Minewall Approach for Estimating the Geochemical Effects of Mine Walls on Pit Lakes', in *Pit Lakes 2004*. Nevada: United States Environmental Protection Agency, pp. 1–19.
- Morin, K.A. and Hutt, N.M. (2001) 'Prediction of water chemistry in mine lakes: The minewall technique', *Ecological Engineering*, 17(2–3), pp. 125–132. Available at: [https://doi.org/10.1016/S0925-8574\(00\)00153-1](https://doi.org/10.1016/S0925-8574(00)00153-1).
- Sánchez España, J. *et al.* (2005) 'Acid mine drainage in the Iberian Pyrite Belt (Odiel river watershed, Huelva, SW Spain): Geochemistry, mineralogy and environmental implications', *Applied Geochemistry*, 20(7), pp. 1320–1356. Available at: <https://doi.org/10.1016/j.apgeochem.2005.01.011>.
- Tuheteru, E.J. *et al.* (2021) 'Water Balance of Pit Lake Development in the Equatorial Region', *Water*, 13(21), p. 3106. Available at: <https://doi.org/10.3390/w13213106>.
- Vandenberg, J. and Litke, S. (2018) 'Beneficial Use of Springer Pit Lake at Mount Polley Mine', *Mine Water and the Environment*, 37(4), pp. 663–672. Available at: <https://doi.org/10.1007/s10230-017-0504-y>.

Comparison of Pit Wall Leaching Test in the Field and Laboratory

ORIGINALITY REPORT

7 %

SIMILARITY INDEX

7 %

INTERNET SOURCES

3 %

PUBLICATIONS

3 %

STUDENT PAPERS

PRIMARY SOURCES

1

cronfa.swan.ac.uk

Internet Source

2 %

2

iss.rs

Internet Source

1 %

3

Submitted to University of Waikato

Student Paper

1 %

4

www.mdpi.com

Internet Source

1 %

5

rigeo.org

Internet Source

<1 %

6

www.mdag.com

Internet Source

<1 %

7

Roxana Bugoi, Alexandra Țârlea, Iulia Iliescu, Daniela Dimofte, Bogdan Manea, Daniele Ceccato. "Shedding new light on Late Antique pottery from Histria, Romania", Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms, 2023

Publication

<1 %

8

L.Edmond Eary. "Geochemical and equilibrium trends in mine pit lakes",
Applied Geochemistry, 1999

Publication

<1 %

9

crctime.com.au

Internet Source

<1 %

Exclude quotes Off

Exclude matches

< 15 words

Exclude bibliography On