



Journal of Integrated and Advanced Engineering



JOURNAL OF INTEGRATED AND ADVANCED ENGINEERING (JIAE)

ASOSIASI STAF AKADEMIK PERGURUAN TINGGI SELURUH INDONESIA

P-ISSN : 2774602X <> E-ISSN : 27746028



4.18182
Impact



325
Google Citations



Sinta 4
Current Accreditation

Google Scholar Garuda Website Editor Site

History Accreditation

2022

2023

2024

2025

2026





JOURNAL OF INTEGRATED AND ADVANCED ENGINEERING (JIAE)

! [ASOSIASI STAF AKADEMIK PERGURUAN TINGGI SELURUH INDONESIA](#)

" [P-ISSN : 2774602X](#) <> [E-ISSN : 27746038](#)



4.18182
Impact



325
Google
Citations



Sinta 4
Current
Accreditation

[Google Scholar](#) [Garuda](#) [Website](#) [Editor URL](#)

History Accreditation

2022 2023 2024 2025 2026

Garuda

[Google Scholar](#)

Search...

Identification of Alzheimer's disease using Convolutional Neural Network

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI) & [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 4, No 1 \(2024\) 77-86](#)

📅 2024 [DOI: 10.51662/jiae.v4i1.144](#) [Accred : Sinta 4](#)

Exergy analysis and Exergetic sustainability index of package boiler

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI) & [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 4, No 1 \(2024\) 31-40](#)

📅 2024 [DOI: 10.51662/jiae.v4i1.124](#) [Accred : Sinta 4](#)

The effect of rising prices of subsidized fuel on the use of private cars

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI) & [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 4, No 1 \(2024\) 41-50](#)

📅 2024 [DOI: 10.51662/jiae.v4i1.125](#) [Accred : Sinta 4](#)

The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI) & [Journal of](#)

Get More with
SINTA Insight

[Go to Insight](#)

Citation Per Year By Google Scholar



[Integrated and Advanced Engineering \(JIAE\) Vol 4, No 1 \(2024\) 1-8](#)

 2024  [DOI: 10.51662/jiae.v4i1.114](#)  [Accred : Sinta 4](#)

[Assessment of factors causing landslides using the Analytical Hierarchy Process \(AHP\) method](#)

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI)  [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 4, No 1 \(2024\) 51-64](#)

 2024  [DOI: 10.51662/jiae.v4i1.127](#)  [Accred : Sinta 4](#)

[Counting Various Vehicles using YOLOv4 and DeepSORT](#)

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI)  [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 3, No 1 \(2023\) 1-6](#)

 2023  [DOI: 10.51662/jiae.v3i1.68](#)  [Accred : Sinta 4](#)

[Identification of Whatsapp Digital Evidence on Android Smartphones using The Android Backup APK \(Application Package Kit\) Downgrade Method](#)

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI)  [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 3, No 1 \(2023\) 7-22](#)

 2023  [DOI: 10.51662/jiae.v3i1.70](#)  [Accred : Sinta 4](#)

[Design and Simulation High Pass Filter Second Order and C-Type Filter for Reducing Harmonics as Power Quality Repair Effort in the Automotive Industry](#)

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI)  [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 3, No 1 \(2023\) 23-36](#)

 2023  [DOI: 10.51662/jiae.v3i1.79](#)  [Accred : Sinta 4](#)

[Learning a Multimodal 3D Face Embedding for Robust RGBD Face Recognition](#)

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI)  [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 3, No 1 \(2023\) 37-46](#)

 2023  [DOI: 10.51662/jiae.v3i1.84](#)  [Accred : Sinta 4](#)

[Design of Smart Shoes for Blind People](#)

Asosiasi Staf Akademik Perguruan Tinggi Seluruh Indonesia (ASASI)  [Journal of Integrated and Advanced Engineering \(JIAE\) Vol 3, No 1 \(2023\) 79-86](#)

 2023  [DOI: 10.51662/jiae.v3i1.89](#)  [Accred : Sinta 4](#)

Journal By Google Scholar

	All	Since 2020
Citation	325	322
h-index	11	11
i10-index	14	14



Journal of Integrated and Advanced Engineering

JIAE

E-ISSN: 2774-6038
P-ISSN: 2774-602X

www.asasijournal.id/index.php/jiae

HOMEABOUTLOGINREGISTERSEARCHCURRENTARCHIVESANNOUNCEMENTS

EDITORIAL TEAM
REVIEWERS
FOCUS AND SCOPE
AUTHOR GUIDELINES
ONLINE SUBMISSION
PUBLICATION ETHICS
PUBLICATION CHARGES
ABSTRACTING AND INDEXING
COPYRIGHT TRANSFER AGREEMENT

Home > Archives > Vol 4, No 1 (2024)

VOL 4, NO 1 (2024)

DOI: <https://doi.org/10.51662/jiae.v4i1>

TABLE OF CONTENTS

ARTICLES

The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode	1-8	
 Dody Prayitna, Joko Riyono		
 DOI: 10.51662/jiae.v4i1.114  Abstract: 212 Viewers  PDF: 189 Viewers		
Collision avoidance of mobile robot using Alexnet and NVIDIA Jetson Nano B01	9-20	
 Ferryawan Harris Kristanto, Zendi Iklima		
 DOI: 10.51662/jiae.v4i1.118  Abstract: 408 Viewers  PDF: 320 Viewers		
Enzymatic hydrolysis of cellulose banana stem (alkaline microwave-assisted pre-treatment)	21-30	
 Faras Saskia Samara, Novia Novia, Elda Melwita		
 DOI: 10.51662/jiae.v4i1.120  Abstract: 328 Viewers  PDF: 245 Viewers		
Exergy analysis and Exergetic sustainability index of package boiler	31-40	
 Muhammad Djoni Bustan, Sri Haryati, Serigianto Serigianto		
 DOI: 10.51662/jiae.v4i1.124  Abstract: 192 Viewers  PDF: 210 Viewers		
The effect of rising prices of subsidized fuel on the use of private cars	41-50	
 Yosritzal Yosritzal, Zahra Anisa, Elsa Eka Putri		
 DOI: 10.51662/jiae.v4i1.125  Abstract: 278 Viewers  PDF: 276 Viewers		
Assessment of factors causing landslides using the Analytical Hierarchy Process (AHP) method	51-64	
 Andriani Andriani, Bayu Martanto Adji, Elsa Eka Putri, Lafie Fathya Safira		
 DOI: 10.51662/jiae.v4i1.127  Abstract: 304 Viewers  PDF: 267 Viewers		
A study on the operational performance of the Trans Padang bus Corridor VI (City center - Andalas University)	65-76	
 Bayu Martanto Adji, Jonrinaldi Jonrinaldi, Masrilayanti Masrilayanti, Yenny Narny, Andriani Andriani, Putri Bian Handayani, Amalia Yunia Putri		
 DOI: 10.51662/jiae.v4i1.131  Abstract: 277 Viewers  PDF: 222 Viewers		
Identification of Alzheimer's disease using Convolutional Neural Network	77-86	
 Cedric Obundaa Nnah, Yu-Dong Zhang		
 DOI: 10.51662/jiae.v4i1.144  Abstract: 431 Viewers  PDF: 141 Viewers		

Journal of Integrated and Advanced Engineering (JIAE)
Akademisi dan Saintis Indonesia (ASASI)
p-ISSN: 2774-602X
e-ISSN: 2774-6038
Journal URL: <https://asasijournal.id/index.php/jiae/>
Journal DOI: [10.51662/jiae](https://doi.org/10.51662/jiae)

00017359

[View My Stats](#)

JIAE is indexed by the following abstracting and indexing services:



SUMMARY STATS

USER

Username

Password

☐ Remember me

Login

NOTIFICATIONS

[View](#)

[Subscribe](#)

VISITORS

JOURNAL CONTENT

Search

Search Scope

All 

Search

Browse

[By Issue](#)

[By Author](#)

[By Title](#)

<https://asasijournal.id/index.php/jiae/issue/view/8>

Page 1 of 2



E-ISSN: 2774-6038
P-ISSN: 2774-602X

Journal of Integrated and Advanced Engineering



www.asasijournal.id/index.php/jiae

[HOME](#) | [ABOUT](#) | [LOGIN](#) | [REGISTER](#) | [SEARCH](#) | [CURRENT](#) | [ARCHIVES](#) | [ANNOUNCEMENTS](#)

EDITORIAL TEAM

REVIEWERS

FOCUS AND SCOPE

AUTHOR GUIDELINES

ONLINE SUBMISSION

PUBLICATION ETHICS

PUBLICATION CHARGES

ABSTRACTING AND INDEXING

COPYRIGHT TRANSFER
AGREEMENT[Home](#) > [About the Journal](#) > [Editorial Team](#)

EDITORIAL TEAM

EDITOR IN CHIEF

Prof. Dr. Andi Adriansyah, Universitas Mercu Buana, Indonesia

ASSOCIATE EDITOR

Assoc. Prof. Dr. Ali Sophian, Kulliyah of Engineering, International Islamic University Malaysia, Malaysia
 Assoc. Prof. Dr. Herry Agung Prabowo, Universitas Mercu Buana, Indonesia
 Dr. Muhammad Salman Al Farisi, Hiroshima City University, Japan
 Dr. Muhammad Sjahrul Annas, Universitas Trisakti, Indonesia
 Dr. Sitti Rachmawati Yahya, Universitas Siber Asia, Indonesia
 Dr. Eng. Syahril Ardi, Politeknik Astra, Indonesia

EDITORIAL BOARD

Prof. Dr. Adi Susilo, Universitas Brawijaya, Indonesia
 Prof. Dr. Anton Satria Prabuwono, King Abdulaziz University, Saudi Arabia
 Prof. Dr. Brian Yulianto, Institut Teknologi Bandung, Indonesia
 Prof. Dr. -Ing. Kalamullah Ramli, Universitas Indonesia, Indonesia
 Prof. Dr. Salwani Mohd Daud, Universiti Teknologi Malaysia, Malaysia
 Prof. Dr. Syarif Junaidi, University of Sharjah, United Arab Emirates
 Prof. Dr. Teddy Surya Gunawan, International Islamic University Malaysia, Malaysia
 Assoc. Prof. Dr. Edy Herianto Majlan, Universiti Kebangsaan Malaysia, Malaysia
 Dr. Babul Salam KSM Kader Ibrahim, Coventry University, United Kingdom
 Dr. Bernardi Pranggono, Sheffield Hallam University, United Kingdom
 Dr. Chandra Sekhar Angani, Gandhi Institute of Technology and Management (GITAM) University, India
 Dr. Denni Kurniawan, Universitas Teknologi Brunei, Brunei Darussalam
 Dr. Oki Muraza, Pertamina, Indonesia
 Dr. Setiadi Yazid, Universitas Indonesia, Indonesia

EDITORIAL STAFF

Haris Wahyudi, Universitas Mercu Buana, Indonesia
 Rachmat Muwardi, Universitas Mercu Buana, Indonesia

Journal of Integrated and Advanced Engineering (JIAE)

Akademisi dan Saintis Indonesia (ASASI)
 p-ISSN: 2774-602X
 e-ISSN: 2774-6038
 Journal URL: <https://asasijournal.id/index.php/jiae/>
 Journal DOI: [10.51662/jiae](https://doi.org/10.51662/jiae)

00017357

[View My Stats](#)

JIAE is indexed by the following abstracting and indexing services:

This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](https://creativecommons.org/licenses/by-sa/4.0/).

SUMMARY STATS

USER

Username Password ☐ Remember me

NOTIFICATIONS

[View](#)
[Subscribe](#)

VISITORS

JOURNAL CONTENT

Search

Search Scope

Browse

[By Issue](#)[By Author](#)[By Title](#)

The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode

Dody Prayitno¹ & Joko Riyono²

¹Department of Postgraduate of Mechanical Engineering, Faculty of Industrial Engineering, Universitas Trisakti, Indonesia

²Department of Mechanical Engineering, Faculty of Industrial Engineering, Universitas Trisakti, Indonesia

Abstract

The objective of this paper is to investigate the effect of porosity on the corrosion rate of aluminum foams as sacrificial anodes. An aluminum bar (6061 series) was cut to 19x19x13 mm. Then the aluminum was drilled to become an aluminum foam. A Carbon steel plate was cut to 40x 40x1 mm. The aluminum foam and the steel were connected by a bolt to become a galvanic couple. The galvanic couples were immersed in fresh water for variation times (32 hours, 168 hours, 335 hours, 504 hours and 672 hours). The temperature was 27 °C. The corrosion test was the weight loss method. The results. The corrosion rate of initial steel is 0.15 millimeter per year (mmy). The corrosion rate of steel decrease from 0.15 mmy to 0.015 + 0.02 mmy when using the aluminum foam as sacrificial anode. The corrosion rate of initial aluminum foam is 0.01 mmy. The corrosion rate of aluminum foam increases from 0.01 to 0.015 – 0.02 mm when used as sacrificial anode. Increasing the porosity of the anode will reduce the corrosion rate of the anode itself.

Keywords:

*Aluminum Foam;
Corrosion;
Porosity;
Sacrificial Anode;*

Article History:

*Received: August, 18, 2023
Revised: October 5, 2023
Accepted: October 19, 2023
Published: February 14, 2024*

Corresponding Author:

*Dody Prayitno,
Department of Mechanical
Engineering, Faculty of Industrial
Engineering, Universitas Trisakti,
Indonesia
Email: dodyprayitno@trisakti.ac.id*

This is an open access article under the [CC BY-SA](https://creativecommons.org/licenses/by-sa/4.0/) license



INTRODUCTION

Many industries spend billions of dollars due to corrosion [1]. Corrosion is a reaction of the material especially the reaction of metals (metallic components) with the surroundings and causes many changes to the material (metallic components) [2]. Corrosion - induced component failure affect direct and indirect economic losses [3]. To protect the metal from corrosion, two main types of techniques are most popular which are coating methods (namely paint systems and metallic coating) and cathodic protection (CP) methods [4].

Non-alloy steel is usually coated with varnish or paint systems coatings. Paint systems are famous systems to steel structures. The paint acts as a physical barrier between the steel and any oxygen or water in the environment. Metallic coatings (e.g. based on zinc or zinc and aluminum). Metallic coatings are composed by non-ferrous metals, usually zinc (Zn), aluminum (Al) and their alloys. This protection system present corrosion protection by (i) barrier or physical protection of the metallic substrate against the environmental factors and (ii) galvanic actions (sacrificial protection of the steel at damaged areas) [5].

The CP technique is again two types: sacrificial anode cathodic protection (SACP) and impressed current cathodic protection (ICCP) methods. In cathodic protection methods, an external anode is used and the metal surface works (the protected metal) as the cathode. The external anode can be a galvanic anode or it can be impressed current. In the galvanic anode, the potential difference is the result of current flow and in the impressed current method, the current is supplied from an external dc power supply (rectified DC) [6].

A metal foam has high surface area per unit volume in open cell foams. The metallic foams have attracted considerable interest in recent years and have a variety of commercial applications such as electrodes, mechanical damping, vibration control, acoustic panels and cathode electrode [7, 8, 9]. Conventionally an aluminum sacrificial anode is solid [10] as shown in Figure 1. The corrosion rate of a solid sacrificial anode is 0.0349 - 0.04 mmy [11][12].

The corrosion rate of the anode is influenced by the surface area of cathode to surface area of anode. The anode corrosion rate will be higher if the anode area is smaller [13]. Since the surface area per unit volume compare of metal foam than solid foam. The objective of this paper is to investigate the effect of porosity on the corrosion rate of aluminum foams as sacrificial anodes.

METHOD

Material

The sacrificial anode was aluminum (6061 series) which Chemical composition (Wt %) are (Al: 95.8 - 98.6; Cr:0.04 - 0.35; Cu:0.15 - 0.4; Fe; Max 0.7; Mg: 0.8 - 1.2; Mn Max 0.15; Si:0.4 - 0.8. A cathode was medium carbon steel. Medium-carbon steel has approximately 0.3–0.6% carbon content. Media for corrosion was a fresh water.

Method

The research flow diagram is shown in Figure 2. The aluminum bar (6061 series) was cut into 19x19x13 mm and then the aluminum cutting was drilled to become aluminum foam. The carbon steel plate was cut to 40x40x1 mm. Aluminum foam and carbon steel were connected by bolts into a galvanic couple as presented in Figure 3. Steel was the cathode while aluminum foam was the sacrificial anode. The galvanic couples were immersed in fresh water for varying times of 36 hours (group 1), 168 hours (group 2), 335 hours (group 3), 504 hours (group 4), 672 hours (group 5). The temperature is 27 °C. The method of measuring the corrosion rate is the weight loss method.

$$CR = \frac{k \cdot W}{\rho \cdot A \cdot t} \quad (1)$$

Where CR is a Corrosion rate, k is Constant, A is Exposed Areas, and t is Time. Calculation of the porosity of aluminum foam is carried out using (2).

$$\text{Porosity (\%)} = (1 - (\rho_{\text{real}}/\rho_{\text{theory}})) \times (100\%) \quad (2)$$

Where ρ is a real specific gravity, ρ aluminum theory is 2.7 grams/cm³.

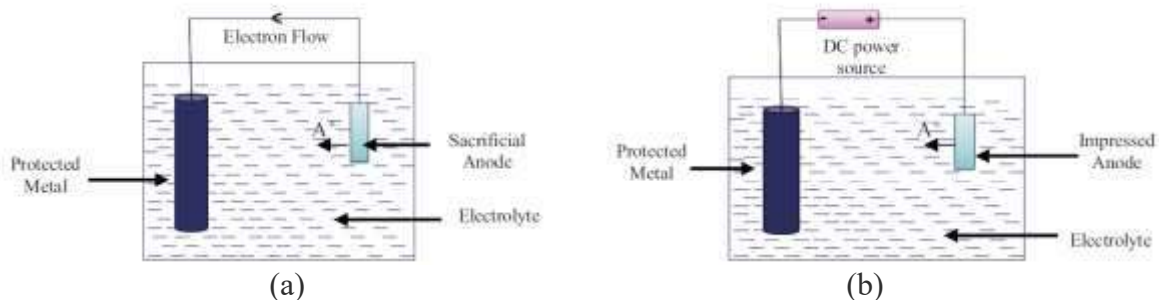


Figure 1. Sacrificial anode cathodic protection method:
(a). Impressed anode cathodic (b) protection method [5]

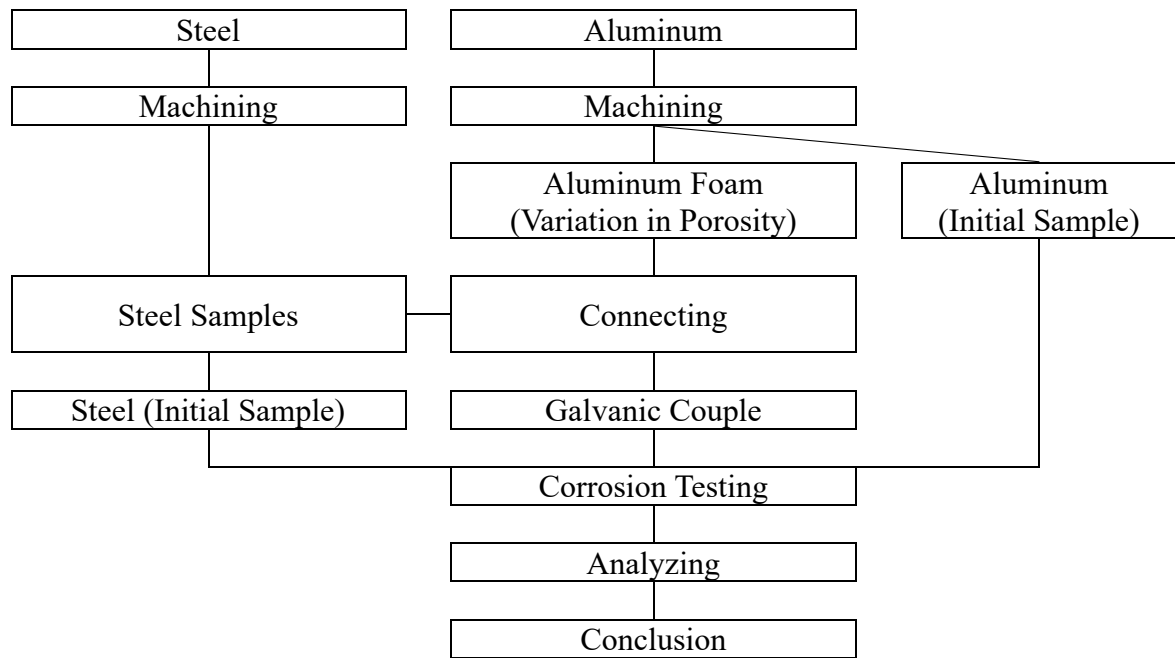


Figure 2. Research Flow Diagram

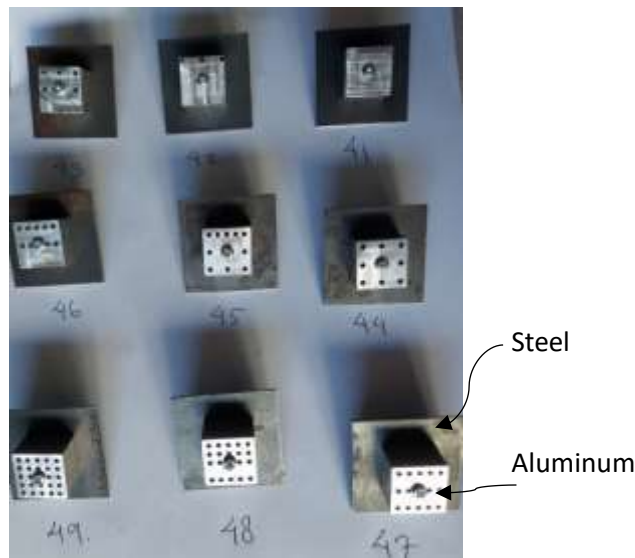


Figure 3. Galvanic Couple of cathode (steel)/anode (aluminum foam)

RESULTS AND DISCUSSION

The initial aluminum foam corrosion rate is 0.01 millimeter per year (mmy) as listed in [Table 1](#). Aluminum foam has a low corrosion rate because a layer of aluminum oxide forms on its surface [14]. The initial steel corrosion rate is 0.15 mmy. The electrochemical reaction in the initial steel is as follows:


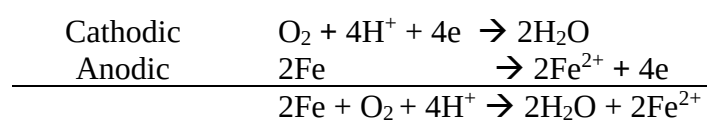



Table 1. Initial Sample Corrosion Rate

Material	Corrosion Rate (mmy)
Aluminum foam (initial)	0.01
Medium carbon steel (initial)	0.15


Figure 4 shows the corrosion rate values for steel and aluminum foam in the galvanic couple. Aluminum foam functions as a sacrificial anode used to protect steel from corrosion. The soaking time for galvanic couple varies from 35 hours, 168 hours, 335 hours, 504 hours and 672 hours. The corrosion rate of steel and the corrosion rate of aluminum foam as a galvanic pair of Fe-Al (foam) change with increasing percentage of porosity at each soaking time as shown in Figure 4. The corrosion rate of steel and the corrosion rate of aluminum foam are unsteady state when soaked 32 and 168 hours, due to the effect of the current density of the galvanic couple.

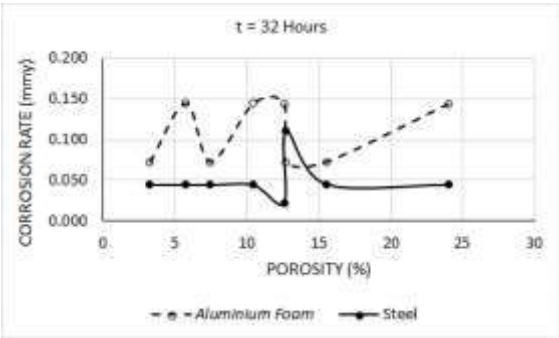


(a)

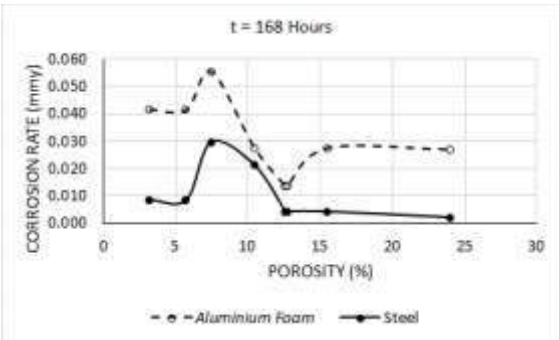


(b)

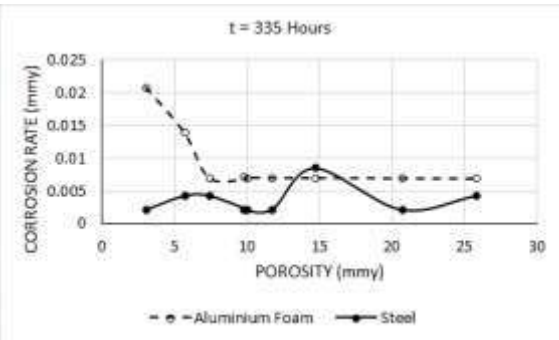

(c)

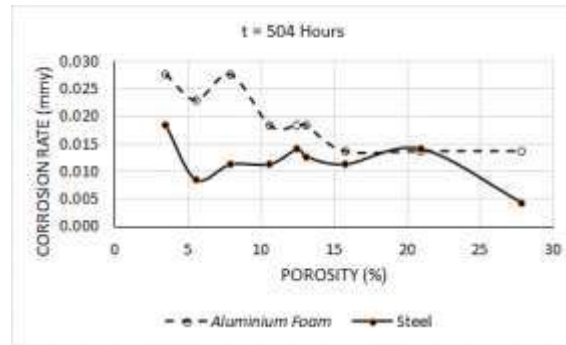

(d)

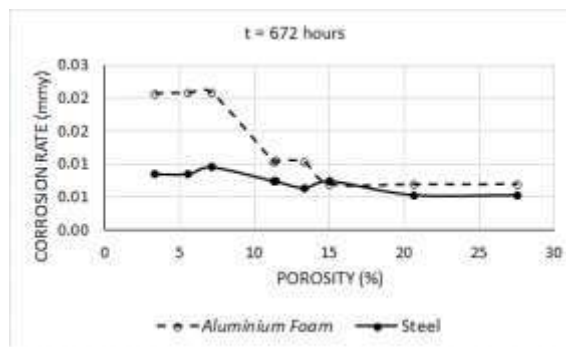


(e)

Figure 4. Corrosion rate of aluminum foam (sacrificial anode) and steel (cathode) with variations in immersion time:
(a) 32 hours, (b) 168 hours, (c) 335 hours, (d) 504 hours, (e) and 672 hours

Zhijian in his research show that the mean values of galvanic current densities generally attain their steady states after about 3 days immersion for all coupled pairs with different (Area of cathode/area of anode) [15]. At subsequent soaking times (335 hours, 504 hours and 672 hours) the steel corrosion rate steady states with increasing porosity percentage. Meanwhile, the corrosion rate of aluminum foam appears to decrease with increasing porosity.

The Effect of Porosities of Aluminum Foam on The Corrosion Rate of Steel.

The corrosion rate of steel appears to be constant with increasing porosity of aluminum foam. The average corrosion rate is $0.015 + 0.02$ mm/y. This corrosion rate value is smaller than the corrosion rate of the initial steel (0.15 mm/y). This research proves that the aluminum foam can be used as a sacrificial anode. The electrochemical reaction in galvanic couple (Fe-Al foam) is as follows:



The Effect of Porosity on The Corrosion Rate of Aluminum Foam.

The corrosion rate of initial aluminum foam is 0.01 mm/y. The corrosion rate of aluminum foam increases from 0.01 to 0.015 – 0.02 mm/y when used as sacrificial anode as shown in Figure 5. A relationship between the corrosion rate of anode (aluminum foam) with the porosity is shown in Figure 5 and porosity can be written in a mathematical using (3).

$$y = 0.03477 x^{(-0.519)} \quad (3)$$

Figure 6 shows clearly that the decrease in the corrosion rate of anode is due to an increase in porosity. The decrease in corrosion rate is related to decrease the amount of weight loss of aluminum per surface area of anode as shown in Figure 7 researched earlier. It can be found obviously in Figure 7 that changes of porosity can cause a decrease ratio of (weight loss of aluminum/surface area). When the porosity is more 20%, the ratio of (weight loss of aluminum/surface area) stability around to 0.0030 (grams/cm²). The results show that the ratio of (weight loss of aluminum/surface area) is no longer changes along with the increase of porosity, then it reaches limit. If the cathode surface area is constant, the ratio of cathode area to anode area will become smaller as porosity increases.

This experiment result is consistent with what Zhijian investigated earlier. Zhijian shows that the galvanic corrosion rate showed linear growth with ratio of (area cathode/area anode) due to the galvanic current along with the increase of (area cathode/area anode), and vice versa [15][16].

The relationship between the ratio (loss weight of aluminum/ surface area) and anode porosity can be written as follows:

$$y = 0.0131 x^{(-0.46)} \quad (4)$$

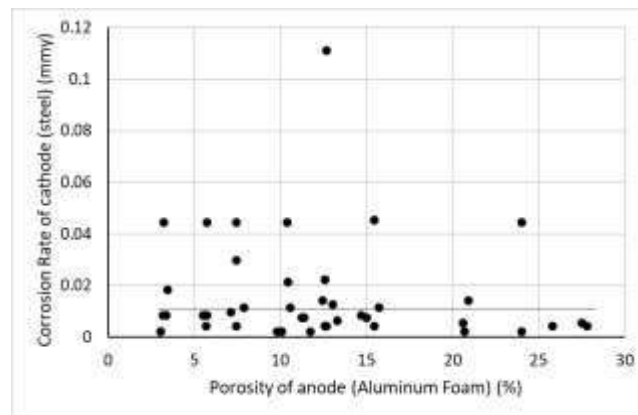


Figure 5. Corrosion rate of cathode (steel) vs porosity of anode (aluminum foam)

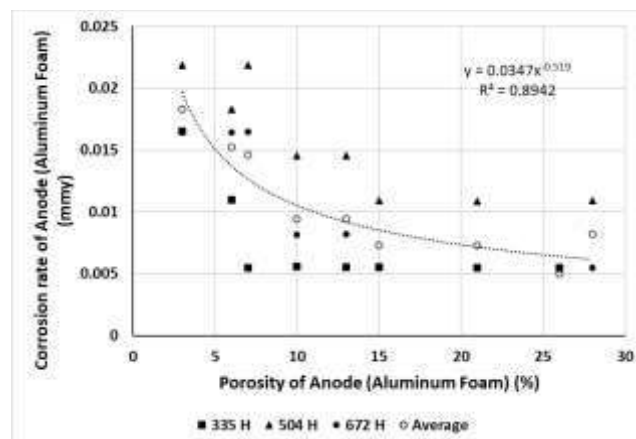


Figure 6. Corrosion rate anode versus porosity of anode (aluminum foam)

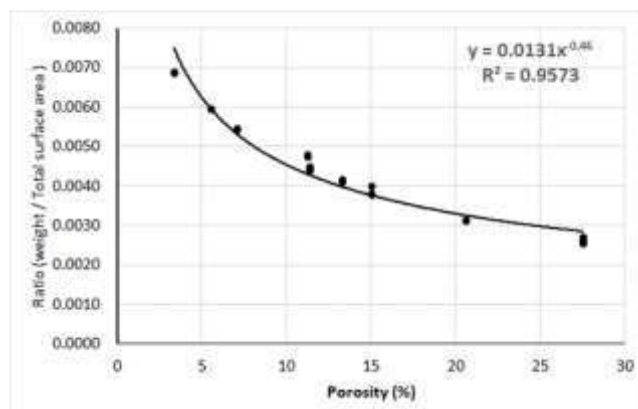


Figure 7. Ratio (weight loss/surface area) (grams/mm²) versus porosity of anode (aluminum foam)

CONCLUSION

Since the surface area per unit volume compare of metal foam than solid foam. The research investigated the effect of porosity on the corrosion rate of aluminum foams as sacrificial anodes. The research results show that aluminum foam can be applied as a sacrificial anode. The corrosion rate of aluminum foam increases from 0.01 to 0.015 – 0.02 mm when used as sacrificial anode. The results research also prove that increasing the porosity of the anode will reduce the corrosion rate of the anode itself.

ACKNOWLEDGMENT

This research was sponsored by Faculty of Industrial Engineering, Universitas Trisakti.

REFERENCES

- [1] A. A. L. Zaabi, S. Feroz, L. Nageswara Rao, "Investigation of High Corrosion Rate in Oil Production Carbon Steel Pipelines", *International Journal of Chemical Engineering and Processing*, vol. 2, no. 2, pp 42–51, 2016
- [2] W. Von Baeckmann, W. Schwenk, and W. Prinz, *Handbook of Cathodic Corrosion Protection*, 3rd Ed., Elsevier, 1997.
- [3] M. T. Saeed, M. Saleem, S. Usmani, I. A. Malik, F. A. Al-Shammari, K. M. Deen, "Corrosion inhibition of mild steel in 1 M HCl by sweet melon peel extract", *Journal of King Saud University – Science*, vol. 31, no. 4, pp. 1344 – 1351, 2019, doi: 10.1016/j.jksus.2019.01.013.
- [4] T. J. Langill, "Basic corrosion theory and protection methods," *University Tool Kit*, 2006.
- [5] H. Perneta, M. J. Correia and M. M. Salta, "Corrosion Protection of Steel Structures," *International Conference Durable Structures: from construction to rehabilitation (ICDS12)*, Lisbon, Portugal, 2012, pp. 1-2.
- [6] M. Hanif, B. Harun, M. A. Islam, N. Mohammad and K. T. Ahmmed, "Comparison of Sacrificial Anode and Impressed Current Cathodic Protection Methods using Electric Resistance of Mild Steel," *2019 International Conference on Computer, Communication, Chemical, Materials and Electronic Engineering (IC4ME2)*, Rajshahi, Bangladesh, 2019, pp. 1-4, doi: 10.1109/IC4ME247184.2019.9036510.
- [7] W. F. Gale, T. C. Totemeier, "Chapter 38 - Non-Conventional and Emerging Metallic Materials, Smithells Metals Reference Book (Eighth Edition)", *Butterworth-Heinemann*, 2004, pp 38-1-38-38, ISBN 9780750675093, doi: 10.1016/B978-075067509-3/50041-5.
- [8] M. Vainoris, H. Cesiulis, and N. Tsytysaru, "Metal Foam Electrode as a Cathode for Copper Electrowinning," *Coatings*, vol. 10, no. 9, pp. 882, 2020, doi: 10.3390/coatings10090822
- [9] M.F. Ashby, A.G. Evans, N.A. Fleck, L.J. Gibson, J.W. Hutchinson and H.N.G. Wadley, "Metal Foams: A Design Guide," *Butterworth-Heinemann*, 2000
- [10] NN, *EN380 Naval Materials Science and Engineering Course Notes*, U.S. Naval Academy. Online https://www.usna.edu/NAOE/_files/documents/Courses/EN380/Course_Notes/Ch06_Corrosion_Protection.pdf

- [11] D. Prayitno & A. A. Zulmi, “Studi Kasus: Apa Kaleng Minuman Dapat Mencegah Korosi Baja St 37?” *Metrik Serial Teknologi Dan Sains (E)*, vol. 4, no. 1, pp. 30-36, 2023, doi: 10.51616/teksi.v4i1.427
- [12] Y. P. Asmara, J. P. Siregar, C. Tezara, C. T. Ann,” Improving Efficiency of Aluminium Sacrificial Anode Using Cold Work”, *Process IOP Conf. Series: Materials Science and Engineering 114*, ID: 012045, 2016, doi: 10.1088/1757-899X/114/1/012045.
- [13] D. Prayitno & M. Irsyad, “Effect of Ratio of Surface Area on The Corrosion Rate”, *SINERGI*, vol. 22, no. 1, pp. 7-12, 2018, doi: 10.22441/sinergi.2018.1.002
- [14] A. Bouvy, “Material properties: Tips to avoid corrosion in marine environments”, 2020, <https://www.shapesbyhydro.com/en/material-properties/tips-to-avoid-corrosion-in-marine-environments/>
- [15] Z. Wang, Y. Wang and C. Wang, “Area Ratio of Cathode/Anode Effect on the Galvanic Corrosion of High Potential Difference Coupling in Seawater,” *IOP Conf. Series: Materials Science and Engineering 322*, ID: 022046 , 2018, doi: 10.1088/1757-899X/322/2/022046
- [16] Y. P. Asmara, “Simulation of CO₂ Corrosion of Carbon Steel in High Pressure and High Temperature Environment (HPHT),” *Journal of Integrated and Advanced Engineering (JIAE)*, vol. 2, no. 1, pp. 63-70, 2022, doi:

The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode

by Joko Riyono FTI

Submission date: 06-Nov-2025 03:17PM (UTC+0700)

Submission ID: 2805224258

File name: 15._JIAE_1_terbaru.pdf (738.32K)

Word count: 2675

Character count: 13381



The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode

Dody Prayitno¹ & Joko Riyono²

¹Department of Postgraduate of Mechanical Engineering, Faculty of Industrial Engineering, Universitas Trisakti, Indonesia

²Department of Mechanical Engineering, Faculty of Industrial Engineering, Universitas Trisakti, Indonesia

Abstract

The objective of this paper is to investigate the effect of porosity on the corrosion rate of aluminum foams as sacrificial anodes. An aluminum bar (6061 series) was cut to 19x19x13 mm. Then the aluminum was drilled to become an aluminum foam. A Carbon steel plate was cut to 40x 40x1 mm. The aluminum foam and the steel were connected by a bolt to become a galvanic couple. The galvanic couples were immersed in fresh water for variation times (32 hours, 168 hours, 335 hours, 504 hours and 672 hours). The temperature was 27 °C. The corrosion test was the weight loss method. The results. The corrosion rate of initial steel is 0.15 millimeter per year (mmy). The corrosion rate of steel decrease from 0.15 mmy to 0.015 + 0.02 mmy when using the aluminum foam as sacrificial anode. The corrosion rate of initial aluminum foam is 0.01 mmy. The corrosion rate of aluminum foam increases from 0.01 to 0.015 – 0.02 mm when used as sacrificial anode. Increasing the porosity of the anode will reduce the corrosion rate of the anode itself.

Keywords:

Aluminum Foam;
Corrosion;
Porosity;
Sacrificial Anode;

Article History:

Received: August, 18, 2023

Revised: October 5, 2023

Accepted: October 19, 2023

Published: February 14, 2024

Corresponding Author:

Dody Prayitno,
Department of Mechanical
Engineering, Faculty of Industrial
Engineering, Universitas Trisakti,
Indonesia
Email: dodyprayitno@trisakti.ac.id

This is an open access article under the CC BY-SA license



INTRODUCTION

Many industries spend billions of dollars due to corrosion [1]. Corrosion is a reaction of the material especially the reaction of metals (metallic components) with the surroundings and causes many changes to the material (metallic components) [2]. Corrosion - induced component failure affect direct and indirect economic losses [3]. To protect the metal from corrosion, two main types of techniques are most popular which are coating methods (namely paint systems and metallic coating) and cathodic protection (CP) methods [4].

Non-alloy steel is usually coated with varnish or paint systems coatings. Paint systems are famous systems to steel structures. The paint acts as a physical barrier between the steel and any oxygen or water in the environment. Metallic coatings (e.g. based on zinc or zinc and aluminum). Metallic coatings are composed by non-ferrous metals, usually zinc (Zn), aluminum (Al) and their alloys. This protection system present corrosion protection by (i) barrier or physical protection of the metallic substrate against the environmental factors and (ii) galvanic actions (sacrificial protection of the steel at damaged areas) [5].

The CP technique is again two types: sacrificial anode cathodic protection (SACP) and impressed current cathodic protection (ICCP) methods. In cathodic protection methods, an external anode is used and the metal surface works (the protected metal) as the cathode. The external anode can be a galvanic anode or it can be impressed current. In the galvanic anode, the potential difference is the result of current flow and in the impressed current method, the current is supplied from an external dc power supply (rectified DC) [6].

A metal foam has high surface area per unit volume in open cell foams. The metallic foams have attracted considerable interest in recent years and have a variety of commercial applications such as electrodes, mechanical damping, vibration control, acoustic panels and cathode electrode [7, 8, 9]. Conventionally an aluminum sacrificial anode is solid [10] as shown in Figure 1. The corrosion rate of a solid sacrificial anode is 0.0349 - 0.04 mmy [11][12].

The corrosion rate of the anode is influenced by the surface area of cathode to surface area of anode. The anode corrosion rate will be higher if the anode area is smaller [13]. Since the surface area per unit volume compare of metal foam than solid foam. The objective of this paper is to investigate the effect of porosity on the corrosion rate of aluminum foams as sacrificial anodes.

METHOD

Material

The sacrificial anode was aluminum (6061 series) which Chemical composition (Wt %) are (Al: 95.8 - 98.6; Cr:0.04 - 0.35; Cu:0.15 - 0.4; Fe: Max 0.7; Mg: 0.8 - 1.2; Mn Max 0.15; Si:0.4 - 0.8. A cathode was medium carbon steel. Medium-carbon steel has approximately 0.3-0.6% carbon content. Media for corrosion was a fresh water.

Method

The research flow diagram is shown in Figure 2. The aluminum bar (6061 series) was cut into 19x19x13 mm and then the aluminum cutting was drilled to become aluminum foam. The carbon steel plate was cut to 40x40x1 mm. Aluminum foam and carbon steel were connected by bolts into a galvanic couple as presented in Figure 3. Steel was the cathode while aluminum foam was the sacrificial anode. The galvanic couples were immersed in fresh water for varying times of 36 hours (group 1), 168 hours (group 2), 335 hours (group 3), 504 hours (group 4), 672 hours (group 5). The temperature is 27 °C. The method of measuring the corrosion rate is the weight loss method.

$$CR = \frac{k \cdot W}{\rho \cdot A \cdot t} \quad (1)$$

Where CR is a Corrosion rate, k is Constant, A is Exposed Areas, and t is Time. Calculation of the porosity of aluminum foam is carried out using (2).

$$\text{Porosity (\%)} = (1 - (\rho_{\text{real}}/\rho_{\text{theory}})) \times (100\%) \quad (2)$$

Where ρ is a real specific gravity, ρ aluminum theory is 2.7 grams/cm³.

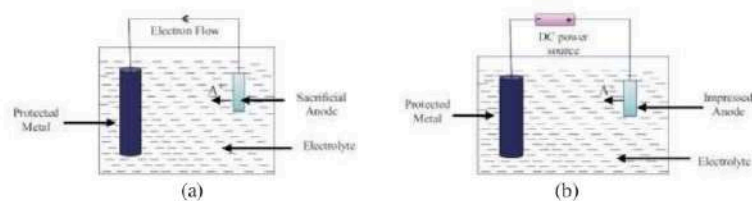


Figure 1. Sacrificial anode cathodic protection method: (a). Impressed anode cathodic (b) protection method [5]

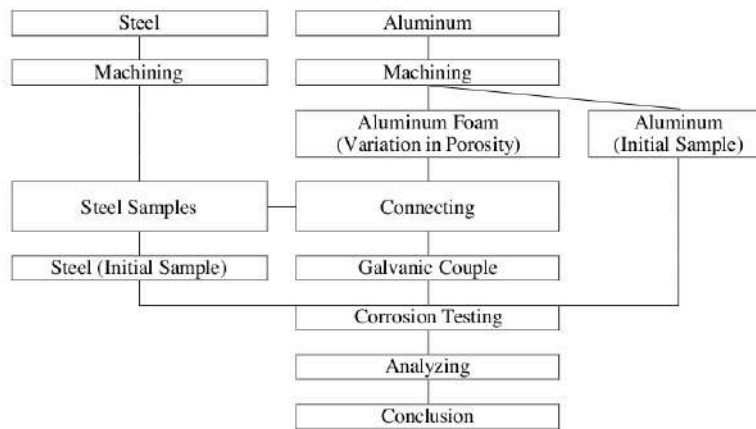


Figure 2. Research Flow Diagram

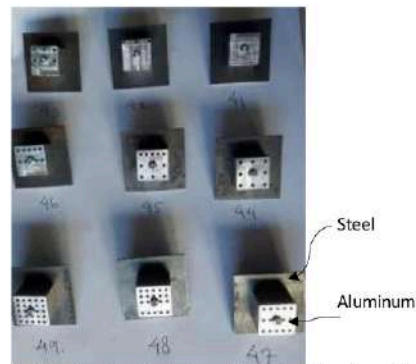


Figure 3. Galvanic Couple of cathode (steel)/anode (aluminum foam)

RESULTS AND DISCUSSION

The initial aluminum foam corrosion rate is 0.01 millimeter per year (mmy) as listed in Table 1. Aluminum foam has a low corrosion rate because a layer of aluminum oxide forms on its surface [14]. The initial steel corrosion rate is 0.15 mmy. The electrochemical reaction in the initial steel is as follows:






Table 1. Initial Sample Corrosion Rate

Material	Corrosion Rate (mm/y)
Aluminum foam (initial)	0.01
Medium carbon steel (initial)	0.15


Figure 4 shows the corrosion rate values for steel and aluminum foam in the galvanic couple. Aluminum foam functions as a sacrificial anode used to protect steel from corrosion. The soaking time for galvanic couple varies from 35 hours, 168 hours, 335 hours, 504 hours and 672 hours. The corrosion rate of steel and the corrosion rate of aluminum foam as a galvanic pair of Fe-Al (foam) change with increasing percentage of porosity at each soaking time as shown in Figure 4. The corrosion rate of steel and the corrosion rate of aluminum foam are unsteady state when soaked 32 and 168 hours, due to the effect of the current density of the galvanic couple.

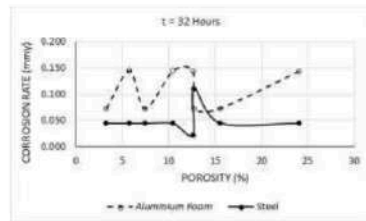


(a)

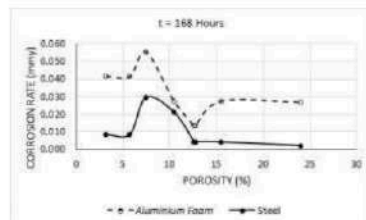


(b)

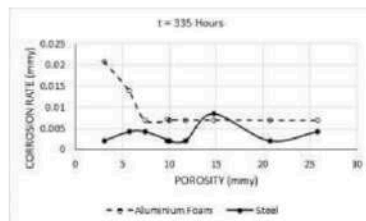

(c)

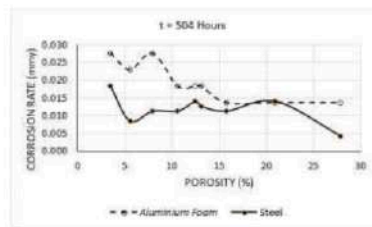

(d)

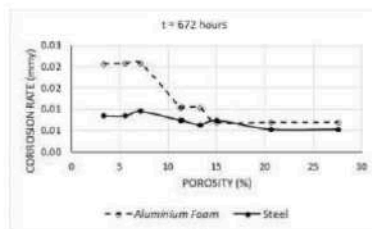

(e)


Figure 4. Corrosion rate of aluminum foam (sacrificial anode) and steel (cathode) with variations in immersion time:

(a) 32 hours, (b) 168 hours, (c) 335 hours, (d) 504 hours, (e) and 672 hours

Zhijian in his research show that the mean values of galvanic current densities generally attain their steady states after about 3 days immersion for all coupled pairs with different (Area of cathode/area of anode) [15]. At subsequent soaking times (335 hours, 504 hours and 672 hours) the steel corrosion rate steady states with increasing porosity percentage. Meanwhile, the corrosion rate of aluminum foam appears to decrease with increasing porosity.

The Effect of Porosities of Aluminum Foam on The Corrosion Rate of Steel.

The corrosion rate of steel appears to be constant with increasing porosity of aluminum foam. The average corrosion rate is 0.015 ± 0.02 mmy. This corrosion rate value is smaller than the corrosion rate of the initial steel (0.15 mmy). This research proves that the aluminum foam can be used as a sacrificial anode. The electrochemical reaction in galvanic couple (Fe-Al foam) is as follows:



The Effect of Porosity on The Corrosion Rate of Aluminum Foam.

The corrosion rate of initial aluminum foam is 0.01 mmy. The corrosion rate of aluminum foam increases from 0.01 to 0.015–0.02 mm when used as sacrificial anode as shown in Figure 5. A relationship between the corrosion rate of anode (aluminum foam) with the porosity is shown in Figure 5 and porosity can be written in a mathematical using (3).

$$y = 0.03477 x^{(-0.519)} \quad (3)$$

Figure 6 shows clearly that the decrease in the corrosion rate of anode is due to an increase in porosity. The decrease in corrosion rate is related to decrease the amount of weight loss of aluminum per surface area of anode as shown in Figure 7 researched earlier. It can be found obviously in Figure 7 that changes of porosity can cause a decrease ratio of (weight loss of aluminum/surface area). When the porosity is more 20%, the ratio of (weight loss of aluminum/surface area) stability around to 0.0030 (grams/cm²). The results show that the ratio of (weight loss of aluminum/surface area) is no longer changes along with the increase of porosity, then it reaches limit. If the cathode surface area is constant, the ratio of cathode area to anode area will become smaller as porosity increases.

This experiment result is consistent with what Zhijian investigated earlier. Zhijian shows that the galvanic corrosion rate showed linear growth with ratio of (area cathode/area anode) due to the galvanic current along with the increase of (area cathode/area anode), and vice versa [15][16].

The relationship between the ratio (loss weight of aluminum/ surface area) and anode porosity can be written as follows:

$$y = 0.0131 x^{(-0.46)} \quad (4)$$

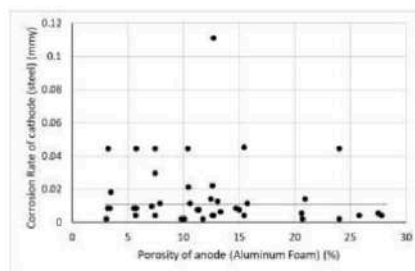


Figure 5. Corrosion rate of cathode (steel) vs porosity of anode (aluminum foam)

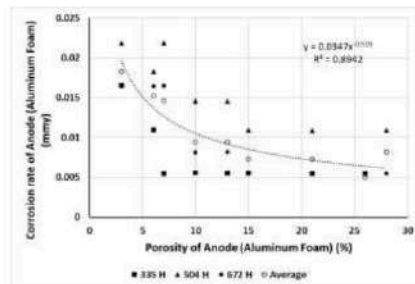


Figure 6. Corrosion rate anode versus porosity of anode (aluminum foam)

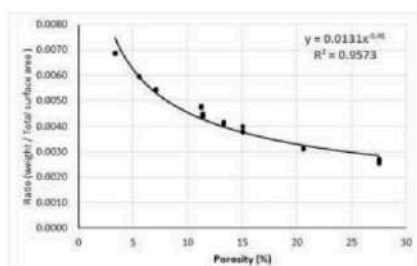


Figure 7. Ratio (weight loss/surface area) (grams/mm²) versus porosity of anode (aluminum foam)

CONCLUSION

Since the surface area per unit volume compare of metal foam than solid foam. The research investigated the effect of porosity on the corrosion rate of aluminum foams as sacrificial anodes. The research results show that aluminum foam can be applied as a sacrificial anode. The corrosion rate of aluminum foam increases from 0.01 to 0.015 – 0.02 mm when used as sacrificial anode. The results research also prove that increasing the porosity of the anode will reduce the corrosion rate of the anode itself.

ACKNOWLEDGMENT

This research was sponsored by Faculty of Industrial Engineering, Universitas Trisakti.

REFERENCES

- [1] A. A. L. Zaabi, S. Feroz, L. Nageswara Rao, "Investigation of High Corrosion Rate in Oil Production Carbon Steel Pipelines", *International Journal of Chemical Engineering and Processing*, vol. 2, no. 2, pp 42–51, 2016
- [2] W. Von Baekmann, W. Schwenk, and W. Prinz, *Handbook of Cathodic Corrosion Protection*, 3rd Ed., Elsevier, 1997.
- [3] M. T. Saeed, M. Saleem, S. Usmani, I. A. Malik, F. A. Al-Shammari, K. M. Deen, "Corrosion inhibition of mild steel in 1 M HCl by sweet melon peel extract", *Journal of King Saud University – Science*, vol. 31, no. 4, pp. 1344 – 1351, 2019, doi: 10.1016/j.jksus.2019.01.013.
- [4] T. J. Langill, "Basic corrosion theory and protection methods," *University Tool Kit*, 2006.
- [5] H. Perneta, M. J. Correia and M. M. Salta, "Corrosion Protection of Steel Structures," *International Conference Durable Structures: from construction to rehabilitation (ICDS12)*, Lisbon, Portugal, 2012, pp. 1-2.
- [6] M. Hanif, B. Harun, M. A. Islam, N. Mohammad and K. T. Ahmmed, "Comparison of Sacrificial Anode and Impressed Current Cathodic Protection Methods using Electric Resistance of Mild Steel," *2019 International Conference on Computer, Communication, Chemical, Materials and Electronic Engineering (IC4ME2)*, Rajshahi, Bangladesh, 2019, pp. 1-4, doi: 10.1109/IC4ME247184.2019.9036510.
- [7] W. F. Gale, T. C. Totemeier, "Chapter 38 - Non-Conventional and Emerging Metallic Materials, Smithells Metals Reference Book (Eighth Edition)", *Butterworth-Heinemann*, 2004, pp 38-1-38-38, ISBN 9780750675093, doi: 10.1016/B978-075067509-3/50041-5.
- [8] M. Vainoris, H. Cesiulis, and N. Tsytysaru, "Metal Foam Electrode as a Cathode for Copper Electrowinning," *Coatings*, vol. 10, no. 9, pp. 882, 2020, doi: 10.3390/coatings10090822
- [9] M.F. Ashby, A.G. Evans, N.A. Fleck, L.J. Gibson, J.W. Hutchinson and H.N.G. Wadley, "Metal Foams: A Design Guide," *Butterworth-Heinemann*, 2000
- [10] NN, *EN380 Naval Materials Science and Engineering Course Notes*, U.S. Naval Academy. Online https://www.usna.edu/NAOE/_files/documents/Courses/EN380/Course_Notes/Ch06_Corrosion_Protection.pdf

- [11] D. Prayitno & A. A. Zulmi, "Studi Kasus: Apa Kaleng Minuman Dapat Mencegah Korosi Baja St 37?" *Metrik Serial Teknologi Dan Sains (E)*, vol. 4, no. 1, pp. 30-36, 2023, doi: 10.51616/teksi.v4i1.427
- [12] Y. P. Asmara, J. P. Siregar, C. Tezara, C. T. Ann, "Improving Efficiency of Aluminium Sacrificial Anode Using Cold Work", *Process IOP Conf. Series: Materials Science and Engineering 114*, ID: 012045, 2016, doi: 10.1088/1757-899X/114/1/012045.
- [13] D. Prayitno & M. Irsyad, "Effect of Ratio of Surface Area on The Corrosion Rate", *SINERGI*, vol. 22, no. 1, pp. 7-12, 2018, doi: 10.22441/sinergi.2018.1.002
- [14] A. Bouvy, "Material properties: Tips to avoid corrosion in marine environments", 2020, <https://www.shapesbyhydro.com/en/material-properties/tips-to-avoid-corrosion-in-marine-environments/>
- [15] Z. Wang, Y. Wang and C. Wang, "Area Ratio of Cathode/Anode Effect on the Galvanic Corrosion of High Potential Difference Coupling in Seawater," *IOP Conf. Series: Materials Science and Engineering 322*, ID: 022046, 2018, doi: 10.1088/1757-899X/322/2/022046
- [16] Y. P. Asmara, "Simulation of CO₂ Corrosion of Carbon Steel in High Pressure and High Temperature Environment (HPHT)," *Journal of Integrated and Advanced Engineering (JIAE)*, vol. 2, no. 1, pp. 63-70, 2022, doi:

The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode

ORIGINALITY REPORT

12%

SIMILARITY INDEX

6%

INTERNET SOURCES

10%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

1

patents.justia.com

Internet Source

1%

2

epdf.tips

Internet Source

1%

3

Submitted to Mangosuthu University of Technology

Student Paper

1%

4

A.A. El-Moneim, A. Gebert. "Electrochemical characterization of galvanically coupled single phases and nanocrystalline NdFeB-based magnets in NaCl solutions", Journal of Applied Electrochemistry, 2003

Publication

1%

5

www.intechopen.com

Internet Source

1%

6

Lekan Taofeek Popoola, Alfred Ogbodo Agbo, Usman Taura, Adeyinka Sikiru Yusuff et al. "Weight loss and electrochemical measurements of aluminum corrosion in diesel fuel and biodiesel prepared via transesterification of waste cooking oil", Results in Engineering, 2024

Publication

1%

7

Nageswara Rao Lakkimsetty, Mai Ahmed Ali Al Qaidi, Varghese M Joy, Karunya S, Feroz Shaik. "Anti-corrosion behaviour of TiO₂-

1%

nanocomposites coated stainless steel",
Materials Today: Proceedings, 2022

Publication

-
- | | | |
|---|---|-----|
| <div style="background-color: #003366; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">8</div> | Snehal Kalambe, Trushna Deotale. "Design and Implementation of Weight-based Sorting Mechanism using IoT", 2023 7th International Conference on I-SMAC (IoT in Social, Mobile, Analytics and Cloud) (I-SMAC), 2023 | 1 % |
| <hr/> | | |
| <div style="background-color: #800080; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">9</div> | Wafa K. Essa, Layth Y. Qasim, Walaa H. Abdulqader. "Study the Corrosion of Iron Steel in Presence of Sacrificial Anode in Different pH Media", Egyptian Journal of Chemistry, 2021 | 1 % |
| <hr/> | | |
| <div style="background-color: #6B8E23; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">10</div> | Kuppan Thulukkanam. "Heat Exchangers Volume III - Operation, Performance, and Maintenance", CRC Press, 2024 | 1 % |
| <hr/> | | |
| <div style="background-color: #000080; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">11</div> | blog.sunnysteel.com | 1 % |
| <hr/> | | |
| <div style="background-color: #0070C0; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">12</div> | Submitted to University of Glasgow | 1 % |
| <hr/> | | |
| <div style="background-color: #FF0000; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">13</div> | Submitted to The Robert Gordon University | 1 % |
| <hr/> | | |
| <div style="background-color: #FF00FF; color: white; display: inline-block; width: 30px; height: 30px; text-align: center; line-height: 30px;">14</div> | ijict.iaescore.com | 1 % |
-

Exclude quotes On

Exclude matches

< 10 words

Exclude bibliography On

The effect of porosity on the corrosion rate of aluminum foam as a sacrificial anode

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/100

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8