

ISSN 1742-1007

IOP Conference Series

Earth and Environmental Science

1st Workshop on Metrology for Agriculture
and Forestry (METROAGRIFOR)

275

VOLUME 275 – 2019

3–5 October 2018
Asolo, Italy



EDITOR
Enrico Pitta Tomassini

The open access journal for conference proceedings

iopscience.org/jpcss

IOP Publishing











IOP Conference Series: Earth and Environmental Science

COUNTRY	SUBJECT AREA AND CATEGORY	PUBLISHER	H-INDEX
<p>United Kingdom</p> <p> Universities and research institutions in United Kingdom</p> <p> Media Ranking in United Kingdom</p>	<p>Earth and Planetary Sciences</p> <p>Earth and Planetary Sciences (miscellaneous)</p> <p>Environmental Science</p> <p>Environmental Science (miscellaneous)</p> <p>Physics and Astronomy</p> <p>Physics and Astronomy (miscellaneous)</p>	IOP Publishing Ltd.	48
PUBLICATION TYPE	ISSN	COVERAGE	INFORMATION
Conferences and Proceedings	17551307, 17551315	2010-2023	<p>Homepage</p> <p>How to publish in this journal</p> <p>ees@iopublishing.org</p>

SCOPE

The open access IOP Conference Series: Earth and Environmental Science (EES) provides a fast, versatile and cost-effective proceedings publication service.

 Join the conversation about this journal

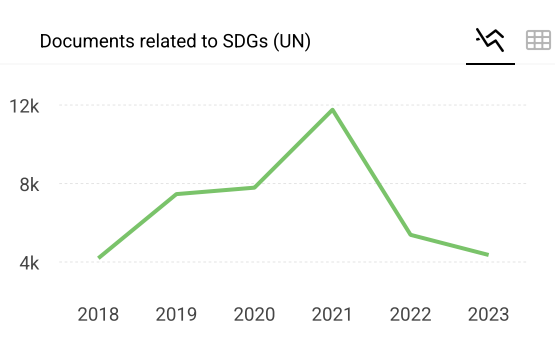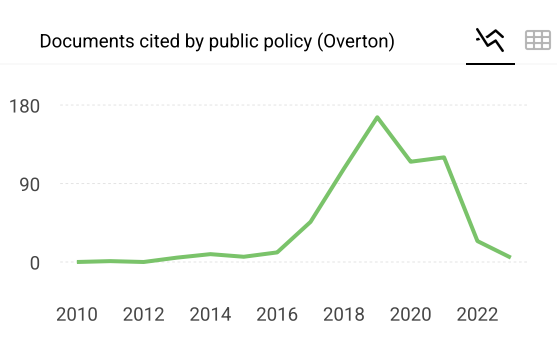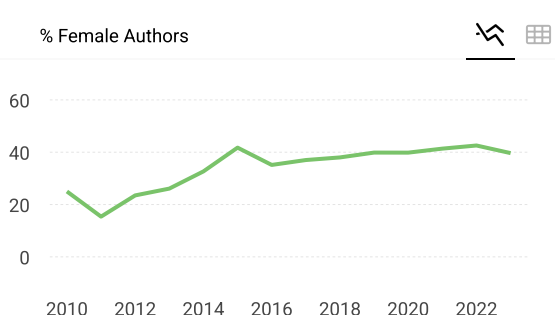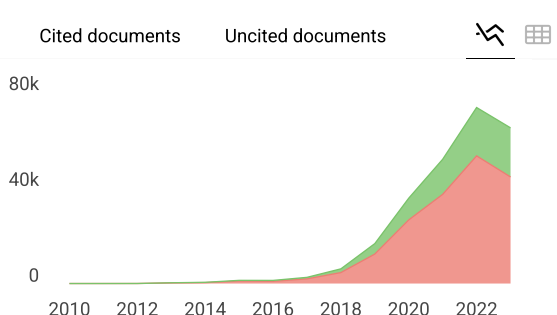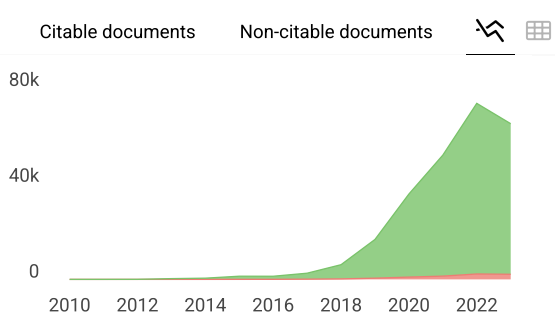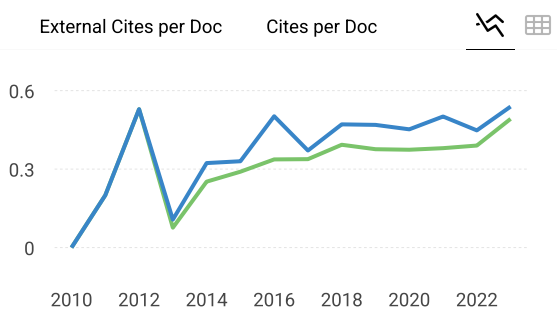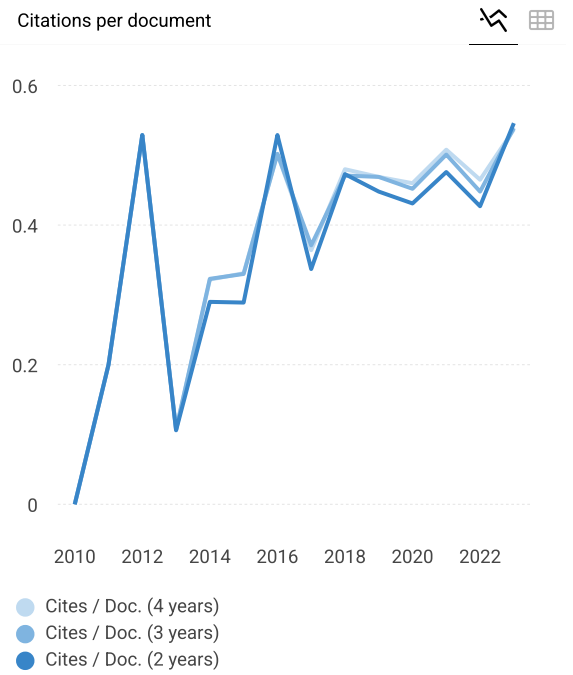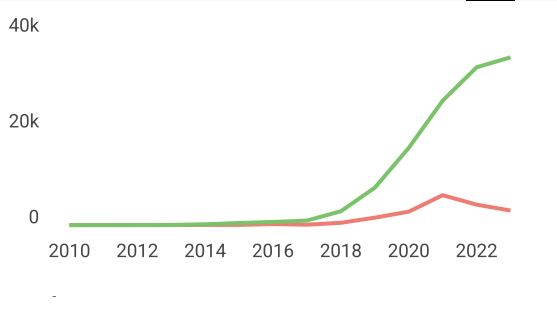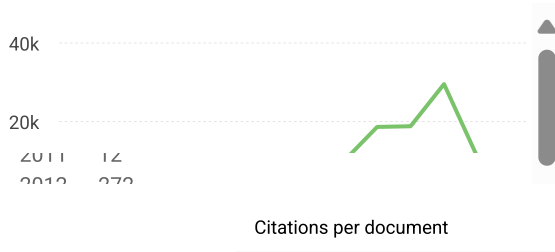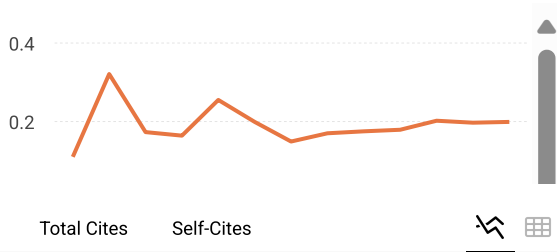



Just copy the code below
and paste within your html
code:

```
<a href="https://www.scimagojr.com" data-bbox="260 95 408 108">
```



SCImago Graphica

Explore, visually
communicate and make
sense of data with our
**new data visualization
tool.**



Metrics based on Scopus® data as of March 2024

R **RIBKA ROSARI NABABAN** 3 months ago

What is the quartal of this journal?

reply



Melanie Ortiz 3 months ago

SCImago Team

Dear Ribka,

Thank you for contacting us. Please see comments below.

Best regards, SCImago Team

D **Dilnozakhon Tursunova** 5 months ago

This is the only site for submitting articles. The information is not enough, the article was sent through the site, but there is no official reply. They demand payment before there are any changes on the site.

I think this site is not original <https://icem.uns.ac.id/>

reply



Melanie Ortiz 5 months ago

SCImago Team

Dear Dilnozakhon, thanks for your participation! Best Regards, SCImago Team

N **Nilufar Rajabova** 6 months ago

IOP Conference Series: Earth and Environmental Science

If you provide an official link to submit an article to the conference.

reply



Table of contents

Volume 1422

2024

← [Previous issue](#)

[Next issue](#) →

3rd International Conference on Mining and Environmental Technology 22/08/2024 - 24/08/2024 Mataram, Indonesia

Accepted papers received: 22 November 2024

Published online: 09 December 2024

Open all abstracts

Preface

OPEN ACCESS

011001

Preface

View article

PDF

OPEN ACCESS

011002

Peer Review Statement

View article

PDF

The 3rd International Conference on Mining and Environmental Technology

OPEN ACCESS

012001

Cost and fragmentation prediction of ammonium nitrate fuel oil versus bulk emulsion explosives

R Heryadi, J D H Utama and A V Prasgoro

View article

PDF

OPEN ACCESS

012002

Bedrock characterization and geochemical evolution of whole-rock weathering profile at GAG Ni laterite deposit, Southwest Papua, Indonesia

D V Sari, G S Wibowo and A Nurdiyansyah

View article



PDF

OPEN ACCESS

012003

Co-disposal as an alternative method for waste rock and tailings management—a review of geochemical aspects

M C N Deni, K Afandi, B Sinamo and A Satriawan

 [View article](#)  [PDF](#)

OPEN ACCESS 012004

Hydrological analysis using geoelectrics on nickel mine slopes



R Aryanto, E Calvin, M A Azizi and I Marwanza

 [View article](#)  [PDF](#)

OPEN ACCESS 012005

Clean water consumption of the coal mining operations in East Kalimantan province



R Amin, S G Rajagukguk and F T Wulandari

 [View article](#)  [PDF](#)

OPEN ACCESS 012006

Slope Stability analysis based on rock mass rating (RMR) method at an open pit mine, east Java, Indonesia


G P Koriawan, M Mawaleda and H Pachri

 [View article](#)  [PDF](#)

OPEN ACCESS 012007

Effects of particle sizes and roasting temperature on the Fe-Ni enrichment of limonite ore from the Wolo mine area, Southeast Sulawesi, using corncob char as reductant

Sufriadin, D Shinta, Purwanto, R Amalia, Akhiruddin, A Ito and S Onggang

 [View article](#)  [PDF](#)

OPEN ACCESS 012008

Upgrading of low-grade iron using alkaline roasting

A Faesal, L Naderajan and K E H K Ishak

 [View article](#)  [PDF](#)

OPEN ACCESS 012009

Geochemical signatures of the Taku schist, Peninsular Malaysia: implications for sedimentary protoliths and tectonic setting

A Faesal, M I K A Aminuddin, I Warmada, K Yonezu and N I Setiawan

 [View article](#)  [PDF](#)

OPEN ACCESS 012010

Leaching of rare earth elements from Malaysian monazite: effect of dephosphorization

M D Erintina, A I Md Yunus, A Z Mohamed, W Paulus and S Ismail

OPEN ACCESS

012011

Physicochemical analysis and sequential extraction of rare earth elements from Malaysian ion-adsorption clays

Rukayah, N F N Marzani, A Saud and N A Jabit

OPEN ACCESS

012012

Circular Economy Approach on Decarbonization by Repurposing Used Cooking Oil for Nickel Smelter – A Case Study of PT Megah Surya Pertiwi, Obi Island, North Maluku, Indonesia

TH Gultom, C Hasiholan, M Iqbal and D Mulyati

OPEN ACCESS

012013

Karst groundwater conservation based on hydrochemistry and isotope stable analysis in Obi Island, South Halmahera

A N Muchamad, Boy Yoseph CSS Syah Alam, Abdurrokhim and I Iskandar

OPEN ACCESS

012014

Influence of mining depth and panel length in longwall underground coal mining on the distribution of principal stresses along the barrier pillars

R S Zakri, R K Wattimena, S H Prassetyo and T Karian

OPEN ACCESS

012015

Long-term evaluation of FABA utilization to prevent AMD generation – a review of barrel kinetic test

Q Pirdiansy, W P Hartanto and M C N Deni

OPEN ACCESS

012016

Characterization of the Pit Lake Area for Sustainable Management at a Coal Mine in Central Kalimantan, Indonesia

E J Tuheteru, B Dwinagara, S R Haq, P N Hartami, V J Jati, Suhaila and A S Putri

OPEN ACCESS

012017

Mining tourism: A sustainable ex-mining management strategy in Sawahlunto city

H Fajri, B Saputra, A L Pegi, I Renaldi, H S Halawa and N Wahyuni

OPEN ACCESS

012018

Characterization of ion-adsorption clay rare earth elements (REEs) in weathered granite rock in North-Western area of Pahang state, Malaysia

A S Ubaidillah, H Ismail, Z Endut and M I K A Aminuddin

OPEN ACCESS

012019

Analysis of the Effect of Land Cover Changes on the Increase in Land Surface Temperature in PT Amman Mineral Mining Area

R Ridha, F Susanti, B H Widayanti, F P Hirsan, M A Sampandi and D A Putri

OPEN ACCESS

012020

Stabilization of clay soil of Lajut Village, Central Lombok District, with a mixture of rice husk ash and quicklime on California Bearing Ratio (CBR) value

A Fitrayudha, H Pujiastuti, U Putrajati, H Hamdani, N Hidayati, A R Hidayat, A Zarkasi, Sukuryadi and N Safitri

OPEN ACCESS

012021

The effectiveness of fly ash and fly ash-cement mixtures as stabilizing materials for high plasticity clay

H Pujiastuti, A Fitrayudha, J Adiansyah, A S Ubaidillah, D Winarti, T Wahyuningsih, A Efendy, A Fariyadin, Isfanari, M S Pascanawati *et al*

OPEN ACCESS

012022

Bioconversion of legume cover crop waste into organic fertilizer based on integrated composting-vermicomposting method

R A Ismadi, R Apriawan and J Sidabutar

OPEN ACCESS

012023


Integrated vertical mining and processing for Critical Mineral: A case study in Obi Island, North Maluku Province

T H Gultom

OPEN ACCESS

012024

The structure control on volcanic spring pattern distribution eastern slope of Salak Mountain and western slope of Pangrango Mountain on Cisadane upstream watershed, Bogor, West Java, Indonesia



 [View article](#)  [PDF](#)

OPEN ACCESS

012025

Utilization of Gamma & Weibull Distribution Functions in Validating Experimental-based Result of Ore Amenability for Coarse Gangue Rejection

I N Aslam, R Ayuni, B Albijanac and T McGrath


 [View article](#)  [PDF](#)

OPEN ACCESS

012026

Nickel mine planning application to support smelter demand fulfilment: a case study of gag nickel mine

G S Wibowo, D V Sari and A Milwadi

 [View article](#)  [PDF](#)

OPEN ACCESS

012027

Application of multiple linear regression (MLR) on copper ore separation based on grade and density

I N Aslam, N A Putri, A A Maulana, A Muslim and R Ayuni

 [View article](#)  [PDF](#)

OPEN ACCESS

012028

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

Suliestyah, E J Tuheteru, R Yulianti, C Palit, A D Astuti, I P Sari, S D Putri and A J Tanjung

 [View article](#)  [PDF](#)

OPEN ACCESS

012029

Sustainable supply chain in carbon emissions assessment with blockchain technology driven: a framework for mining industries

R Vikaliana, N F Rahmawati, Y R Hidayat, K Islah, S N Sari, T Santoso and R Kristanto

 [View article](#)  [PDF](#)

OPEN ACCESS

012030

Five years of monitoring the swampy forest system: a pilot project for acid mine drainage treatment to achieve threshold value



I Noor, Hairudin, Y F Arifin and A Mustafa

 [View article](#)  [PDF](#)

OPEN ACCESS

012031

Geochemical studies of potential acid-forming classification materials to reduce acid mine drainage formation



 [View article](#)  [PDF](#)

OPEN ACCESS

012032

NTB Province's commitment to achieve net zero emission by 2050 through energy transition

D Rahmawati, Hadiyanto and J S Adiansyah



 [View article](#)  [PDF](#)

OPEN ACCESS

012033

Mine design on mangrove block site of Indrabakti Mustika company in Lameruru, North Konawe regency, Southeast Sulawesi province

Ferry, Ariyanto, E R Fitriawan and H Rasikhun


 [View article](#)  [PDF](#)

OPEN ACCESS

012034

Achievement of overburden stripping production targets based on the calculation of cut-and-fill volume and truck count at Pit Middle West PT Cipta Bersama Sukses job site Tungal Jaya

M R Saputra, Alpiana, A Herdiansyah and A Wijaya

 [View article](#)  [PDF](#)

OPEN ACCESS

012035

Geometric analysis of blasting using C.J. Konya method to get the ideal target fragmentation in pit Main Ridge PT. J Resources Bolaang Mongondow site in Bakan, North Sulawesi

S Mufti, B F A Matrani and A Wijaya

 [View article](#)  [PDF](#)

OPEN ACCESS

012036

Analysis of work productivity and compatibility of excavation-loading equipment and transport equipment in soil salvaging activities at Katala Hill area of PT. Amman

Taufikurrachman and D Rahmawati

 [View article](#)  [PDF](#)

JOURNAL LINKS

[Journal home](#)

[Journal scope](#)

[Information for organizers](#)

[Information for authors](#)

[Contact us](#)

[Reprint services from Curran Associates](#)

IOPSCIENCE

Journals

Books

IOP Conference Series

About IOPscience

Contact Us

Developing countries access

IOP Publishing open access
policy

Accessibility

IOP PUBLISHING

Copyright 2024 IOP
Publishing

Terms and Conditions

Disclaimer

Privacy and Cookie Policy

Text and Data mining policy

PUBLISHING SUPPORT

Authors

Reviewers

Conference Organisers



This site uses cookies. By continuing to use this site you agree to our use of cookies.



IOP

OPEN ACCESS

Preface

To cite this article: 2024 *IOP Conf. Ser.: Earth Environ. Sci.* **1422** 011001

View the [article online](#) for updates and enhancements.

You may also like

- [The 3rd ISESCO International Workshop and Conference On Nanotechnology 2012 \(IWCN2012\)](#)
Akrajas Ali Umara, Muhammad Yahaya and Muhamad Mat Salleh
- [List of committees](#)
- [Technical Modernization as an Element of Technological Safety of a Peat Mining Enterprise \(for Example «Tverregiontorf»\)](#)
T B Yakonovskaya and A I Zhigul'skaya



UNITED THROUGH SCIENCE & TECHNOLOGY

 **The Electrochemical Society**
Advancing solid state & electrochemical science & technology

**248th
ECS Meeting**
Chicago, IL
October 12-16, 2025
Hilton Chicago

**Science +
Technology +
YOU!**

**SUBMIT
ABSTRACTS by
March 28, 2025**

SUBMIT NOW

PREFACE

Good morning,

Honorable Governor of West Nusa Tenggara

Distinguished guests, speakers, conference participants, and colleagues,

I am deeply honored and excited to welcoming all of you to The 3rd International Conference on Mining and Environmental Technology.

The theme of our conference this year, “Good Mining Practices and Energy Transition in the Mining Industry,” is highly relevant and significant in today’s global context. Amid the challenges of climate change and the need for sustainable energy sources, the mining industry plays a crucial role.

Good mining practices not only ensure environmental sustainability but also enhance operational efficiency and safety. By adopting the latest technologies and best practices, we can minimize the negative impacts on the environment and surrounding communities.

The energy transition in the mining industry is also a vital step towards a greener and more sustainable future. The use of renewable energy and innovations in energy technology can reduce our dependence on fossil fuels and lower carbon emissions. It is our collective responsibility to ensure that the mining industry can adapt and contribute positively to global efforts in combating climate change.

I am pleased to inform you that there will be 51 presented papers across plenary and parallel sessions. Paper presenters are from New Zealand, Australia, United State of America, Turkey, Malaysia, and Indonesia. In addition, I would like to convey my deepest gratitude to the keynote speakers: Professor Michael Walmsley, Associate Professor Wahidul Biswas, Professor Mahmud Yavuz, Associate Professor Datu Buyung Agusdinata, Associate Professor Hareyani binti Zabidi, and Mr. Tonny Gultom.

I hope this conference serves as an effective platform for sharing knowledge, experiences, and innovations in mining and environmental technology. Let us take this opportunity to discuss, collaborate, and find solutions that can be implemented in the field.

Thank you to everyone who has worked hard to organize this event, including the co-host (Universitas Trisakti, Mining Environmental Management Communication Forum, and Association of Indonesian Mining Professionals), the committee, sponsors, and speakers who have generously shared their insights. I also extend my gratitude to all participants for attending and contributing to this conference.

Lastly, I hope your stay in Lombok will be enjoyable and memorable one. Thank you.

With best wishes,

Associate Professor Joni Safaat Adiansyah
Organizing Committee Chairman

Conference Committees

Conference General Chair

Joni Safaat Adiansyah, Universitas Muhammadiyah Mataram, Indonesia

Conference Program Chairs

Arif Wijaya, Universitas Muhammadiyah Mataram, Indonesia

Edy Jamal Tuheteru, Universitas Trisakti, Indonesia

Steering Chair

Diah Rahmawati, Universitas Muhammadiyah Mataram, Indonesia

Scientific Committees

Buan Anshari, Universitas Mataram, Indonesia

Cut Aja Fauziah, Curtin University, Australia

Datu Buyung Agusdinata, Arizona State University, United States of America

Hareyani Binti Zabidi, Universiti Sains Malaysia

Jorina Waworuntu, Indonesian Environmental Mining Management Forum, Indonesia

Michael Walmsley, University of Waikato, New Zealand

Rusdi Husin, PT Adaro Energy, Indonesia

Shofa Rijalul Haq, Universitas Pembangunan Nasional Veteran Yogyakarta, Indonesia

Tedy Agung Cahyadi, Universitas Pembangunan Nasional Veteran Yogyakarta, Indonesia

Tonny Gultom, Harita Nickel, Indonesia

Wahidul Biswas, Curtin University, Australia

Yun Arifatul Fatimah, Universitas Muhammadiyah Magelang, Indonesia

PAPER • OPEN ACCESS

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

To cite this article: Suliestyah *et al* 2024 *IOP Conf. Ser.: Earth Environ. Sci.* **1422** 012028

View the [article online](#) for updates and enhancements.

You may also like

- [Stabilization of clay soil of Lajut Village, Central Lombok District, with a mixture of rice husk ash and quicklime on California Bearing Ratio \(CBR\) value](#)
A Fitriyudha, H Pujiastuti, U Putrajati *et al.*
- [Characterization of the Pit Lake Area for Sustainable Management at a Coal Mine in Central Kalimantan, Indonesia](#)
E J Tuheteru, B Dwinagara, S R Haq *et al.*
- [Sustainable supply chain in carbon emissions assessment with blockchain technology driven: a framework for mining industries](#)
R Vikaliana, N F Rahmawati, Y R Hidayat *et al.*



ECS The Electrochemical Society
Advancing solid state & electrochemical science & technology

247th ECS Meeting
Montréal, Canada
May 18-22, 2025
Palais des Congrès de Montréal

Showcase your science!

Abstract submission deadline extended: December 20

ECS UNITED

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

Sulistyah¹, E J Tuheteru^{1*}, R Yulianti¹, C Palit¹, A D Astuti², I P Sari³, S D Putri¹,
A J Tanjung¹

¹Mining Engineering Department, Universitas Trisakti

²Environmental Engineering, Universitas Trisakti

³Industrial Engineering, Universitas Trisakti

*Email: ejtuheteru@trisakti.ac.id

Abstract: Liquid waste containing heavy metals must be treated before being released into the environment. This study investigated the potential of coal-derived activated carbon as an adsorbent in AMD (Acid Mine Drainage) treatment. Coal was activated with H₃PO₄ with five weight ratios (10%, 20%, 30%, 40%, and 50%), carbonized for 120 min at 650 °C, and subjected to the proximate analysis of activated carbon. The results showed that the water content, ash content, volatile matter content, and fixed carbon were generally in accordance with Indonesian standards (SNI). The results of FT-IR and SEM on BET surface area and total pore volume of activated carbon were 296.4 m²/g and 0.1562 cc/g, respectively, indicative of sizeable pores, cracks, channels, and active groups. The iodine outnumbered the minimum limit in the SNI, and the activated carbon quantity consistently increased with H₃PO₄ ratios. The iodine produced with 10%, 20%, 30%, 40%, and 50% H₃PO₄ was 956.95 mg/g, 967.13 mg/g, 1,221.63 mg/g, 1,206.346 mg/g, and 865.32 mg/g., respectively.

1. Introduction

Activated carbon is extensively utilized in the purification of drinking water and treatment of wastewater and air pollution. It efficiently eliminates metals and chlorinated chemicals, which bring unpleasant taste and odor, exhibits the most powerful physical attraction, and possesses the most porous space for adsorption [1][2][3]. As a result, it boasts a huge surface area for capturing pollutants. Activated carbon is derived from various sources, including almonds, wood, coconut and walnut shells, and coal. Activated carbon is recognized for its affordability, well-established pore architectures, and high capacity for adsorption [4][5].

Previous studies have reported activated carbon from varied sources, such as bituminous coal with 1,198 mg/g iodine yield [6] [7], and a mixture of H₃PO₄-NH₄HCO₃ and bituminous coal raw material with 1,238 mg/g iodine yield [8]. The activation process using ZnCl₂, K₂CO₃, NaOH, and H₃PO₄ with sub-bituminous coal raw material was conducted by Hardianti et al., resulting in 1,238.5mg/g iodine [9] An activated carbon contains spaces occupied by free water molecules, enabling adsorbent properties for wastewater [10]. Studies show that chemically activated carbon produces a higher uptake of metal ions than activated carbon without activation [11]. A study has used medium-rank coal as the main active carbon material [12] and other research has reported chemical activation using low-rank coal, which has abundant reserves but low calorific value, thus less profitable as an energy source [6][8][13][14].

Adsorption is a process in which a component moves from one phase to another surface, resulting in a change in concentration on the surface. The absorbed substance is known as adsorbate, whereas the



absorbing substance is adsorbent. Activated carbon raw materials derived from plants, wood, animals, waste, and minerals containing carbon can be converted into activated carbon through a carbonization combustion process [15]. These materials include bones, softwood, husks, corncobs, coconut shells, and coal. Around 60% of a large coal reserve in Indonesia is of low quality and less valuable as a fuel source. The use of low-rank coal as raw material in producing activated carbon is reportedly promising due to its availability and economy; low-rank coal with phosphoric acid activation produced iodine numbers below 1.000 mg/g [16]. In this research, activated carbon is made using sub-bituminous coal with phosphoric acid activation using medium-ranked coal and only a single activator of phosphoric acid. It highlights the opportunity of utilizing medium-rank coal and phosphoric acid as the sole activator to produce an adsorbent with high adsorption capacity.

2. Method

2.1 Coal Preparation

The coal sample was weighed (3 kg), and the size was reduced using a jaw crusher. The sample was oven-dried at 30°C-35°C for 6h, and then the size was reduced again using a hammer mill to pass the 60-mesh sieve. The sample was divided using a mechanical divider, a splitter, or both, or the coning or quartering method. Exactly 2/8 parts of the sample were weighed for treatment, air dried at 30°C for 6h, and analyzed for coal quality based on parameters, including the total moisture, volatile matter, coal ash, fixed carbon, total sulfur, and calorific value.

2.2 Preparation of Carbon Activation Using Coal

The coal was weighed for treatments with five coal to H₃PO₄ ratios (based on weight, in percentage), namely 90:10 (AC1), 80:20 (AC2), 70:30% (AC3), 60:40 (AC4), and 50:50 (AC5). Then, coal and H₃PO₄ were incorporated into a container, mixed well until smooth, and let stand for one day (24 h). The dried residue for carbonizing activated carbon was placed inside a steel box, then into a muffle furnace with nitrogen gas flowing for 1.5 h at 650°C, let cool for 1h by allowing nitrogen gas flow in the muffle furnace. The activated carbon was washed in distilled water (80°C-90°C) with consistent stirring until the pH reached 5, then filtered using filter paper and funnel.

2.3 Characterization of Coal-activated Carbon with Phosphoric Acid Activation

Coal-activated carbon with phosphoric acid was characterized in several analyses. Iodine number testing determined the ability of activated carbon to adsorb substances with smaller molecular sizes, expressed in the amount of iodine yield. The surface composition and morphology (pore shape) of the sample were identified from various signals produced by the scanning electron beam method, Scanning Electron Microscope (SEM). These signals were provided by Fourier-Transform Infrared Spectroscopy (FTIR) analysis, as well as Brunauer-Emmett-Teller (BET) analysis for pore area, diameter, and volume.

3. Result and Discussion

3.1 Coal Quality Analysis

Data obtained in coal quality testing included moisture, coal ash, volatile matter, fixed carbon, total sulfur, and calorific value. As presented in **Table 1**, the coal rank was determined by changing the unit of calorific value analysis results to Btu/lb, demonstrating that the coal used in this study was categorized as the sub-bituminous coal class B with a calorific value of 9,500-10,500 Btu/Lb, classified as medium rank coal.

Table 1 Coal Quality Analysis

Parameter Analysis	Analysis Result	Unit	Base	Methods
Moisture	16,58	%	Adb	ASTM D.3173
Ash	2,9	%	Adb	ASTM D.3174
Volatile Matter	43,82	%	Adb	ASTM D.3175
Fixed Carbon	36,7	%	adb	ASTM D.3172
Total Sulfur	0,38	%	adb	ASTM D.3177
Calorific Value	6052,38	Cal/g	adb	ASTM D.5685

3.2 Proximate Analysis of Coal Activated Carbon

Based on the analysis (see Table 2), the moisture content and adsorption of iodine met the SNI standard, whereas volatile matter content, ash content, and fixed carbon were below the SNI. Low moisture content indicated little bonding with water vapor, and the pores of activated carbon were only slightly covered by the remaining moisture content, thus enlarging the surface area of the carbon. Ash content, an additional factor, can affect pore clogging and surface area; the higher the ash content, the more pores clogged, and the smaller the surface area [17][18][19].

Table 2 Proximate Analysis of Coal Activated Carbon

Requirement Type	Analysis Results					Quality Standards SNI 06-3730-1995
	AC1	AC2	AC3	AC4	AC5	
Water Content	3,8%	13,3%	6,8%	13,2%	13%	Max. 15 %
Ash Content	5,7%	9,9%	11,7%	1,8%	12,2%	Max. 10 %
Volatile Matter Content	20,6%	22,1%	24,6%	23,9%	25,4%	Max. 25 %
Fixed carbon Content	59,9%	54,7%	56,9%	61,6%	49,4%	Min. 65 %
Iodine number	956,9 mg/g	967,1 mg/g	1221,6 mg/g	1206,3 mg/g	1191,09 mg/g	Min. 750 mg/g

The high volatile content was due to the binding of carbon, water vapor, and non-carbon compounds such as nitrogen, hydrogen, and oxygen on the activated carbon surface, leading to a lower adsorption capacity. On the other hand, low fixed carbon content indicated that water vapor reacted with carbon atoms to produce carbon dioxide and carbon monoxide. Although the fixed carbon content was lower than the standard (65%), the other parameters were appropriate, so this activated carbon is arguably of good quality.

3.3 Iodine Number Analysis of Coal-activated Carbon

The adsorption capacity of activated carbon from this study was tested using the iodine number method to identify how many milligrams of iodine were adsorbed by 1 gram of activated carbon, expressed mg/g. The iodine numbers of activated carbons with 10%, 20%, 30%, 40%, and 50% H_3PO_4 were 956.95 mg/g, 967.13 mg/g, 1221.63 mg/g, 1206.346 mg/g, and 1,191.09 mg/g, respectively. These results were above the minimum standard of SNI, namely 750 mg/g (Table 2).

Figure 1 shows that the iodine number of activated carbon increases with the percentage of H_3PO_4 in the activation process. When activated, H_3PO_4 can catalyze the breaking of bonds in biopolymers found in coal. It can also link together the pieces of these biopolymers through cyclization and condensation, forming phosphate and polyphosphate bridges [20][21]. As a result, the acid fills crevices, prevents the material from shrinking, and produces a porous structure when washed away with water [22]. An adverse trend is observed in the adsorption capability following a particular H_3PO_4 composition. The decrease in adsorption capacity at high H_3PO_4 concentration is attributed to the formation of phosphate and polyphosphate linkages, which create a barrier that covers the pores. Excess acid expands the previously existing pores in activated carbon, resulting in more reactive sites created and carbon converted into a mesoporous structure instead of new pores formed [23].

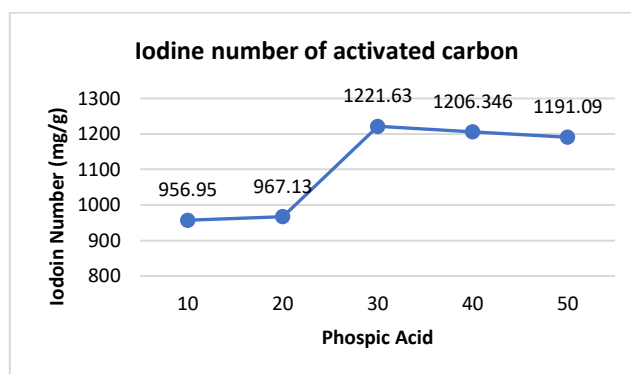


Figure 1. Graph of Phosphoric Acid Composition against Iodine Number

3.4 Scanning Electron Microscope (SEM) Analysis

In Figure 2, the coal surface in the SEM test shows considerable voids and clogged dirt. The surface texture appears quite rough, with larger voids, scattered on the activated carbon that has been activated with phosphoric acid. The surface texture of activated carbon (B) looks rough compared to that of coal (A) due to the reaction of functional groups on the surface with phosphoric acid [24].

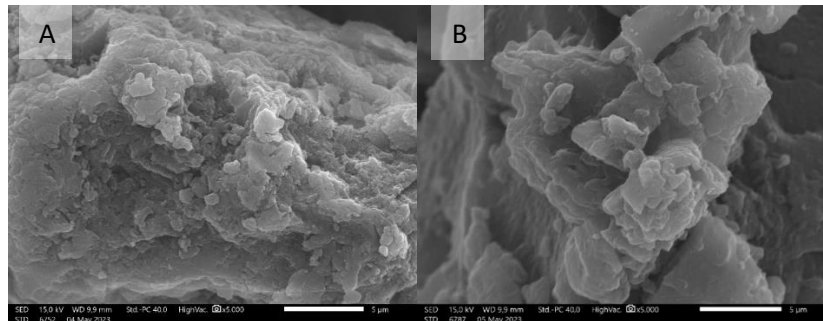


Figure 2. Scanning Electron Microscope Results (A) Coal, (B) Coal Activated Carbon With Phosphoric Acid Activation (AC3)

3.5 Brunauer-Emmett-Teller (BET) analysis

In the BET test results, the surface area of 60 mesh coal was 2.876 m²/g, but when activated, the carbon increased to 296.379 m²/g, indicative of an enlarged surface area (AC3). The pore volume of coal in the activated carbon using phosphoric acid increased from 0.0039 cc/g to 0.1562 cc/g. The pore diameter of 60 mesh coal was 27.3252 Å when measured but dropped to 10.5419 Å after activation and carbonization. A larger surface area will increase the pore volume, whereas a small pore diameter will increase the number of pores and enlarge the surface [25].

3.6 Fourier Transform Infrared Spectroscopy (FTIR) Analysis

Figure 3 the adsorption peaks of coal and activated carbon using phosphoric acid. At a wavelength of ± 2908.37 cm⁻¹, there was a hydroxy OH group that can bind metal ions and increase pH. Carboxylic groups were presented at a wavelength of ± 1635.92 cm⁻¹, ± 1594.51 cm⁻¹, and ± 1445.71 cm⁻¹, and ether groups were presented at a wavelength of ± 1286.17 cm⁻¹. The adsorption peak of activated carbon with coal may increase or decrease due to the phosphoric acid activation process [24].

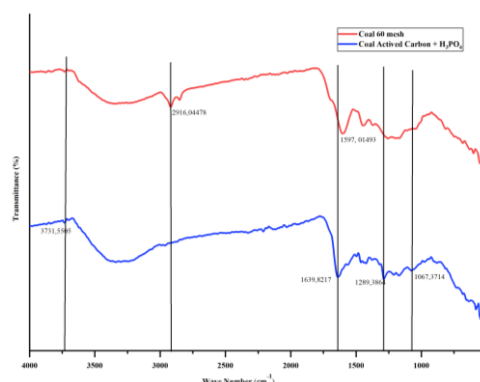


Figure 3. Fourier Transform Infrared Spectroscopy (FTIR) of coal activated carbon using phosphoric acid (AC3)

4. Conclusion

The coal for activated carbon was categorized as the sub-bituminous B coal class. In the proximate test of coal-activated carbon, the moisture content and adsorption capacity of iodine met the national standard (SNI), but substandard values were observed for ash content, volatile matter content, and fixed carbon content. Despite this partial standard accomplishment, the activated coal has demonstrated a good quality due to contributions of other parameters: the maximum capacity and large adsorption

power. The largest number yield was 76% in the ratio of 10% H₃PO₄, while the largest iodine number was 1,221.63 mg/g in the ratio of 30% H₃PO₄. Conclusively, the surface area increased when coal was utilized as the activated carbon, demonstrated by the 296.4 m²/g of BET surface area and 0.1562 cc/g of total pore volume of activated carbon. Further SEM analysis showed that the surface had a substantial number of pores, cracks, channels, and active groups. The adsorption peaks of coal and activated carbon using phosphoric acid, as a result of FTIR analysis, fluctuated due to the phosphoric acid activation process.

5. Acknowledgments

The authors are thankful to the Higher Education Service Institute Region III (LLDIKTI REGION III) with Trisakti University for the research grant under the contract number 832/LL3/AL.04/2024 and LPPM Contract with Researchers Number 179/A/LPPM-P/USAKTI/VI/2024.

References

- [1] Alves A T, Lasmar D J, de Andrade Miranda I P, da Silva Chaar J, and dos Santos Reis J 2021 The Potential of Activated Carbon in the Treatment of Water for Human Consumption, a Study of the State of the Art and Its Techniques Used for Its Development *Advances in Bioscience and Biotechnology* **12** 143–153 [doi: 10.4236/abb.2021.126010]
- [2] Manoilova L and Ruskova K 2022 Active carbons and their functional applications in water purification – an overview *MATEC Web of Conferences* **366** 04001 [doi: 10.1051/mateconf/202236604001]
- [3] Desprianto D, Supu I, Suliawati I, Juwita J, and Erfiana E 2021 Purification of dug well water using activated carbon made from sago fiber waste *Jambura Physics Journal* **3** 87–100 [doi: 10.34312/jpj.v3i2.11665]
- [4] Negara D N K P, Nindhia T G T, Widiyarta I M, Karohika I M G, Suarda M, and Dwijana I G K 2023 Characteristics and performance analysis of activated carbons derived from different precursors and activators for waste water adsorption *eureka, Physics and Engineering* **6** 160–172 [doi: 10.21303/2461-4262.2023.003116]
- [5] Oztan O and Uysal D 2023 Determination of adsorption capacities of N₂ and CO₂ on commercial activated carbon and adsorption isotherm models in *E3S Web of Conferences, EDP Sciences*, [doi: 10.1051/e3sconf/202343301004]
- [6] Monika I 2016 Potential study of indonesia coal for adsorbed natural gas studi potensi batubara Indonesia untuk adsorbed natural gas *INDONESIAN MINING JOURNAL* **19** 133–142
- [7] Suliestyah S, Tuheteru E J, and Hartami P N 2018 Pengaruh ukuran butir batubara dan komposisi batubara-ZnCl₂ pada daya serap karbon aktif terhadap logam Fe, Cu dan Zn dalam limbah cair *Jurnal Teknologi Mineral dan Batubara* **14** 201–212 [doi: 10.30556/jtmb.vol14.no3.2018.149]
- [8] Kusdarini E, Budianto A, and Ghafarunnisa D 2017 Produksi karbon aktif dari batubara bituminus dengan aktivasi tunggal H₃PO₄, kombinasi H₃PO₄-NH₄HCO₃, dan termal *Reaktor* **17** 74–80 [doi: 10.14710/reaktor.17.2.74-80]
- [9] Hardianti S, Rachman S A and Harminuke E H 2017 Characterization of Activated Carbon from Coal and Its Application as Adsorbent on Mine Acid Water Treatment *Indonesian Journal of Fundamental and Applied Chemistry* **2** 34–38 [doi: 10.24845/ijfac.v2.i2.34]
- [10] Paradise M, Nursanto E, Nurkhamim and Haq S R 2022 Use of claystone, zeolite, and activated carbon as a composite to remove heavy metals from acid mine drainage in coal mining *ASEAN Engineering Journal* **12** 75–81 [doi: 10.11113/aej.V12.16982]
- [11] P. J. Isaac P J, S. Amaravadi S, Kamil M S M, Cheralathan K K and Lakshmiopathy R 2019 Synthesis of zeolite/activated carbon composite material for the removal of lead (II) and cadmium (II) ions *Environ Prog Sustain Energy* **38** [doi: 10.1002/ep.13246]

- [12] Wongcharee S, Aravinthan V and Erdei L 2019 Mesoporous activated carbon-zeolite composite prepared from waste macadamia nut shell and synthetic faujasite *Chin J Chem Eng.* **27** 226–236 [doi: 10.1016/j.cjche.2018.06.024]
- [13] Sitorus S and Pijer D M 2015 Pemanfaatan Arang Aktif Dari Batubara Kotor (Dirty Coal) Sebagai Adsorben Ion Logam Mn(II) dan Ag(I) *Jurnal Pendidikan Kimia (JPKim)* **7** 40–48 [Online] Available: <http://jurnal.unimed.ac.id/2012/index.php/jpk>
- [14] Ramadhan R B, Solihin and L. Pulungan L 2016 Kajian Pembuatan Karbon Aktif Batubara Sub-Bituminus (Coalite) dari PT Bukit Asam (Persero) Tbk untuk Memenuhi Spesifikasi Ekstraksi Logam Emas *Prosiding Teknik Pertambangan* **2** 105–112
- [15] Genli N, Şahin Ö, Baytar O and Horoz S 2021 Synthesis of activated carbon in the presence of hydrochar from chickpea stalk and its characterization *Journal of Ovonic Research* **17** 117–124 [DOI:10.15251/JOR.2021.172.117]
- [16] Patmawati Y, Rahim M, and Nego R A 2020 Pengaruh konsentrasi aktivator H₃PO₄ terhadap karakteristik karbon aktif dari batubara lignit Kalimantan Timur *Seminar Nasional Terapan Riset Inovatif (SENTRINOV) Ke-6 ISAS Publishing Series: Engineering and Science* **6**
- [17] Takwanto A, Maryanty Y, Mustikarini A W, Darminawati L, and Nurhaliza S 2022 Utilization of Gondorukem Industrial Solid Waste Into Activated Carbon as Adsorbent to Improve the Quality of Gondorukem Color in *Proceedings of the 2022 Annual Technology, Applied Science and Engineering Conference (ATASEC 2022)*, Atlantis Press International BV, 2022, 3–16 [doi: 10.2991/978-94-6463-106-7_2]
- [18] Rabah F K J and Ashour F S 2024 Purification of Treated Wastewater Effluents from Residual Detergents using Activated Carbon Produced from Olive Seeds *Asian Journal of Chemistry*, **36** 411–417 [doi: 10.14233/ajchem.2024.30786]
- [19] Zulkania A, Hanum G F and Rezki A S 2018 The potential of activated carbon derived from bio-char waste of bio-oil pyrolysis as adsorbent in *MATEC Web of Conferences*, EDP Sciences [doi: 10.1051/mateconf/201815401029]
- [20] Thitame P V and Shukla S R 2016 Porosity Development of Activated Carbons Prepared from Wild Almond Shells and Coir Pith Using Phosphoric Acid *Chem Eng Commun* **203** 791–800, [doi: 10.1080/00986445.2015.1104503]
- [21] Hao W, Björkman E, Lilliestråle M, and Hedin N 2014 Activated carbons for water treatment prepared by phosphoric acid activation of hydrothermally treated beer waste *Ind Eng Chem Res.* **53** 15389–15397 [doi: 10.1021/ie5004569]
- [22] Zhang Z B *et al.* 2018 Effects of the ultrasound-assisted H₃PO₄ impregnation of sawdust on the properties of activated carbons produced from it *Xinxing Tan Cailiao/New Carbon Materials* **33** 409–416 [doi: 10.1016/S1872-5805(18)60349-X]
- [23] Reffas A *et al.* 2010 Carbons prepared from coffee grounds by H₃PO₄ activation: Characterization and adsorption of methylene blue and Nylosan Red N-2RBL *J Hazard Mater*, **175** 779–788 [doi: 10.1016/j.jhazmat.2009.10.076]
- [24] Mentari A V, Handika G and Maulina S 2018 The Comparison of Function Group and Surface Morphology of Activated Carbon from Oil Palm Frond Using Phosphoric Acid (H₃PO₄) *Jurnal Teknik Kimia USU* **7** 16–20
- [25] Kurniawan R *et al.* 2014 Karakterisasi luas permukaan bet (Braunear, Emmelt dan Teller) karbon aktif dari tempurung kelapa dan tandan kosong kelapa sawit dengan aktivasi asam fosfat (H₃PO₄) *Journal of Tropical Agricultural Engineering and Biosystem* **2** 15-20

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

by edy jamal tuheteru

Submission date: 29-Jan-2025 11:23AM (UTC+0700)

Submission ID: 2574219496

File name: iestyah_2024_IOP_Conf._Ser._Earth_Environ._Sci._1422_012028.pdf (1.02M)

Word count: 3559

Character count: 18647

PAPER · OPEN ACCESS

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

To cite this article: Suliestyah *et al* 2024 *IOP Conf. Ser.: Earth Environ. Sci.* **1422** 012028

4

View the [article online](#) for updates and enhancements.

You may also like

- [Co-disposal as an alternative method for waste rock and tailings management—a review of geochemical aspects](#)
M C N Deni, K Afandi, B Sinamo et al.

- [Stabilization of clay soil of Lajut Village, Central Lombok District, with a mixture of rice husk ash and quicklime on California Bearing Ratio \(CBR\) value](#)
A Fitrayudha, H Pujiastuti, U Putrajati et al.

- [Characterization of the Pit Lake Area for Sustainable Management at a Coal Mine in Central Kalimantan, Indonesia](#)
E J Tuheteru, B Dwinagara, S R Haq et al.



UNITED THROUGH SCIENCE & TECHNOLOGY

 **The Electrochemical Society**
Advancing solid state & electrochemical science & technology

**248th
ECS Meeting**
Chicago, IL
October 12-16, 2025
Hilton Chicago

**Science +
Technology +
YOU!**

**SUBMIT
ABSTRACTS by
March 28, 2025**

SUBMIT NOW

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

Sulistyah¹, E J Tuheteru^{1*}, R Yulianti¹, C Palit¹, A D Astuti², I P Sari³, S D Putri¹,
A J Tanjung¹

¹Mining Engineering Department, Universitas Trisakti

²Environmental Engineering, Universitas Trisakti

³Industrial Engineering, Universitas Trisakti

*Email: ejtuheteru@trisakti.ac.id

Abstract: Liquid waste containing heavy metals must be treated before being released into the environment. This study investigated the potential of coal-derived activated carbon as an adsorbent in AMD (Acid Mine Drainage) treatment. Coal was activated with H₃PO₄ with five weight ratios (10%, 20%, 30%, 40%, and 50%), carbonized for 120 min at 650 °C, and subjected to the proximate analysis of activated carbon. The results showed that the water content, ash content, volatile matter content, and fixed carbon were generally in accordance with Indonesian standards (SNI). The results of FT-IR and SEM on BET surface area and total pore volume of activated carbon were 296.4 m²/g and 0.1562 cc/g, respectively, indicative of sizeable pores, cracks, channels, and active groups. The iodine outnumbered the minimum limit in the SNI, and the activated carbon quantity consistently increased with H₃PO₄ ratios. The iodine produced with 10%, 20%, 30%, 40%, and 50% H₃PO₄ was 956.95 mg/g, 967.13 mg/g, 1,221.63 mg/g, 1,206.346 mg/g, and 865.32 mg/g, respectively.

1. Introduction

Activated carbon is extensively utilized in the purification of drinking water and treatment of wastewater and air pollution. It efficiently eliminates metals and chlorinated chemicals, which bring unpleasant taste and odor, exhibits the most powerful physical adsorption, and possesses the most porous space for adsorption [1][2][3]. As a result, it boasts a huge surface area for capturing pollutants. Activated carbon is derived from various sources, including almonds, wood, coconut and walnut shells, and coal. Activated carbon is recognized for its affordability, well-established pore architectures, and high capacity for adsorption [4][5].

Previous studies have reported activated carbon from varied sources, such as bituminous coal with 1,198 mg/g iodine yield [6] [7], and a mixture of H₃PO₄:NH₄HCO₃ and bituminous coal raw material with 1,238 mg/g iodine yield [8]. The activation process using ZnCl₂, K₂CO₃, NaOH, and H₃PO₄ with sub-bituminous coal raw material was conducted by Hardianti et al., resulting in 1,238.5mg/g iodine [9] An activated carbon contains spaces occupied by free water molecules, enabling adsorbent properties for wastewater [10]. Studies show that chemically activated carbon produces a higher uptake of metal ions than activated carbon without activation [11]. A study has used medium-rank coal as the main active carbon material [12] and other research has reported chemical activation using low-rank coal, which has abundant reserves but low calorific value, thus less profitable as an energy source [6][8][13][14].

Adsorption is a process in which a component moves from one phase to another surface, resulting in a change in concentration on the surface. The absorbed substance is known as adsorbate, whereas the



absorbing substance is adsorbent. Activated carbon raw materials derived from plants, wood, animals, waste, and minerals containing carbon can be converted into activated carbon through a carbonization combustion process [15]. These materials include bones, softwood, husks, corncobs, coconut shells, and coal. Around 60% of a large coal reserve in Indonesia is of low quality and less valuable as a fuel source. The use of low-rank coal as raw material in producing activated carbon is reportedly promising due to its availability and economy; low-rank coal with phosphoric acid activation produced iodine numbers below 1.000 mg/g [16]. In this research, activated carbon is made using sub-bituminous coal with phosphoric acid activation using medium-ranked coal and only a single activator of phosphoric acid. It highlights the opportunity of utilizing medium-rank coal and phosphoric acid as the sole activator to produce an adsorbent with high adsorption capacity.

2. Method

2.1 Coal Preparation

The coal sample was weighed (3 kg), and the size was reduced using a jaw crusher. The sample was oven-dried at 30°C-35°C for 6h, and then the size was reduced again using a hammer mill to pass the 60-mesh sieve. The sample was divided using a mechanical divider, a splitter, or both, or the coning or quartering method. Exactly 2/8 parts of the sample were weighed for treatment, air dried at 30°C for 6h, and analyzed for coal quality based on parameters, including the total moisture, volatile matter, coal ash, fixed carbon, total sulfur, and calorific value.

2.2 Preparation of Carbon Activation Using Coal

The coal was weighed for treatments with five coal to H₃PO₄ ratios (based on weight, in percentage), namely 90:10 (AC1), 80:20 (AC2), 70:30% (AC3), 60:40 (AC4), and 50:50 (AC5). Then, coal and H₃PO₄ were incorporated into a container, mixed well until smooth, and let stand for one day (24 h). The dried residue for carbonizing activated carbon was placed inside a steel box, then into a muffle furnace with nitrogen gas flowing for 1.5 h at 650°C, let cool for 1h by allowing nitrogen gas flow in the muffle furnace. The activated carbon was washed in distilled water (80°C-90°C) with consistent stirring until the pH reached 5, then filtered using filter paper and funnel.

2.3 Characterization of Coal-activated Carbon with Phosphoric Acid Activation

Coal-activated carbon with phosphoric acid was characterized in several analyses. Iodine number testing determined the ability of activated carbon to adsorb substances with smaller molecular sizes, expressed in the amount of iodine yield. The surface composition and morphology (pore shape) of the sample were identified from various signals produced by the scanning electron beam method, Scanning Electron Microscope (SEM). These signals were provided by Fourier-Transform Infrared Spectroscopy (FTIR) analysis, as well as Brunauer-Emmett-Teller (BET) analysis for pore area, diameter, and volume.

3. Result and Discussion

3.1 Coal Quality Analysis

Data obtained in coal quality testing included moisture, coal ash, volatile matter, fixed carbon, total sulfur, and calorific value. As presented in **Table 1**, the coal rank was determined by changing the unit of calorific value analysis results to Btu/lb, demonstrating that the coal used in this study was categorized as the sub-bituminous coal class B with a calorific value of 9,500-10,500 Btu/Lb, classified as medium rank coal.

Table 1 Coal Quality Analysis

Parameter Analysis	Analysis Result	Unit	Base	8 Methods
Moisture	16,58	%	Adb	ASTM D.3173
Ash	2,9	%	Adb	ASTM D.3174
Volatile Matter	43,82	%	Adb	ASTM D.3175
Fixed Carbon	36,7	%	adb	ASTM D.3172
Total Sulfur	0,38	%	adb	ASTM D.3177
Calorific Value	6052,38	Cal/g	adb	ASTM D.5685

3.2 Proximate Analysis of Coal Activated Carbon

Based on the analysis (see Table 2), the moisture content and adsorption of iodine met the SNI standard, whereas volatile matter content, ash content, and fixed carbon were below the SNI. Low moisture content indicated little bonding with water vapor, and the pores of activated carbon were only slightly covered by the remaining moisture content, thus enlarging the surface area of the carbon. Ash content, an additional factor, can affect pore clogging and surface area; the higher the ash content, the more pores clogged, and the smaller the surface area [17][18][19].

Table 2 Proximate Analysis of Coal Activated Carbon

Requirement Type	Analysis Results					Quality Standards SNI 06-3730-1995
	AC1	AC2	AC3	AC4	AC5	
Water Content	3,8%	13,3%	6,8%	13,2%	13%	Max. 15 %
Ash Content	5,7%	9,9%	11,7%	1,8%	12,2%	Max. 10 %
Volatile Matter Content	20,6%	22,1%	24,6%	23,9%	25,4%	Max. 25 %
Fixed carbon Content	59,9%	54,7%	56,9%	61,6%	49,4%	Min. 65 %
Iodine number	956,9 mg/g	967,1 mg/g	1221,6 mg/g	1206,3 mg/g	1191,09 mg/g	Min. 750 mg/g

The high volatile content was due to the binding of carbon, water vapor, and non-carbon compounds such as nitrogen, hydrogen, and oxygen on the activated carbon surface, leading to a lower adsorption capacity. On the other hand, low fixed carbon content indicated that water vapor reacted with carbon atoms to produce carbon dioxide and carbon monoxide. Although the fixed carbon content was lower than the standard (65%), the other parameters were appropriate, so this activated carbon is arguably of good quality.

3.3 Iodine Number Analysis of Coal-activated Carbon

The adsorption capacity of activated carbon from this study was tested using the iodine number method to identify how many milligrams of iodine were adsorbed by 1 gram of activated carbon, expressed mg/g. The iodine numbers of activated carbons with 10%, 20%, 30%, 40%, and 50% H₃PO₄ were 956.95 mg/g, 967.13 mg/g, 1221.63 mg/g, 1206.346 mg/g, and 1,191.09 mg/g, respectively. These results were above the minimum standard of SNI, namely 750 mg/g (Table 2).

Figure 1 shows that the iodine number of activated carbon increases with the percentage of H₃PO₄ in the activation process. When activated, H₃PO₄ can catalyze the breaking of bonds in biopolymers found in coal. It can also link together the pieces of these biopolymers through cyclization and condensation, forming phosphate and polyphosphate bridges [20][21]. As a result, the acid fills crevices, prevents the material from shrinking, and produces a porous structure when washed away with water [22]. An adverse trend is observed in the adsorption capability following a particular H₃PO₄ composition. The decrease in adsorption capacity at high H₃PO₄ concentration is attributed to the formation of phosphate and polyphosphate linkages, which create a barrier that covers the pores. Excess acid expands the previously existing pores in activated carbon, resulting in more reactive sites created and carbon converted into a mesoporous structure instead of new pores formed [23].

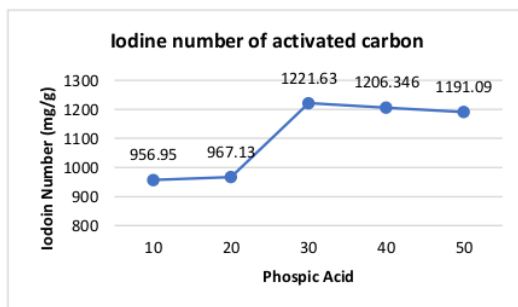


Figure 1. Graph of Phosphoric Acid Composition against Iodine Number

3.4 Scanning Electron Microscope (SEM) Analysis

In Figure 2, the coal surface in the SEM test shows considerable voids and clogged dirt. The surface texture appears quite rough, with larger voids, scattered on the activated carbon that has been activated with phosphoric acid. The surface texture of activated carbon (B) looks rough compared to that of coal (A) due to the reaction of functional groups on the surface with phosphoric acid [24].

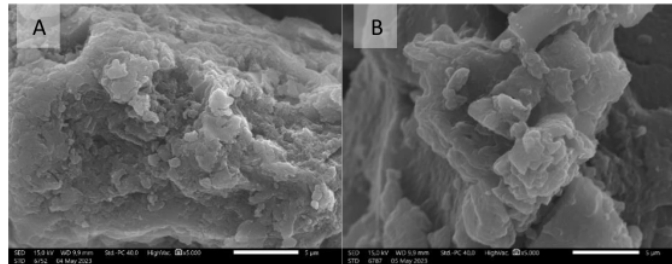


Figure 2. Scanning Electron Microscope Results (A) Coal, (B) Coal Activated Carbon With Phosphoric Acid Activation (AC3)

3.5 Brunauer-Emmett-Teller (BET) analysis

In the BET test results, the surface area of 60 mesh coal was 2.876 m²/g, but when activated, the carbon increased to 296.379 m²/g, indicative of an enlarged surface area (AC3). The pore volume of coal in the activated carbon using phosphoric acid increased from 0.0039 cc/g to 0.1562 cc/g. The pore diameter of 60 mesh coal was 27.3252 Å when measured but dropped to 10.5419 Å after activation and carbonization. A larger surface area will increase the pore volume, whereas a small pore diameter will increase the number of pores and enlarge the surface [25].

3.6 Fourier Transform Infrared Spectroscopy (FTIR) Analysis

Figure 3 the adsorption peaks of coal and activated carbon using phosphoric acid. At a wavelength of ±2908.37 cm⁻¹, there was a hydroxy OH group that can bind metal ions and increase pH. Carboxylic groups were presented at a wavelength of ±1635.92 cm⁻¹, ±1594.51 cm⁻¹, and ±1445.71 cm⁻¹, and other groups were presented at a wavelength of ±1286.17 cm⁻¹. The adsorption peak of activated carbon with coal may increase or decrease due to the phosphoric acid activation process [24].



Figure 3. Fourier Transform Infrared Spectroscopy (FTIR) of coal activated carbon using phosphoric acid (AC3)

4. Conclusion

The coal for activated carbon was categorized as the sub-bituminous B coal class. In the proximate test of coal-activated carbon, the moisture content and adsorption capacity of iodine met the national standard (SNI), but substandard values were observed for ash content, volatile matter content, and fixed carbon content. Despite this partial standard accomplishment, the activated coal has demonstrated a good quality due to contributions of other parameters: the maximum capacity and large adsorption

power. The largest number yield was 76% in the ratio of 10% H₃PO₄, while the largest iodine number was 1,221.63 mg/g in the ratio of 30% H₃PO₄. Conclusively, the surface area increased when coal was utilized as the activated carbon, demonstrated by the 296.4 m²/g of BET surface area and 0.1562 cc/g of total pore volume of activated carbon. Further SEM analysis showed that the surface had a substantial number of pores, cracks, channels, and active groups. The adsorption peaks of coal and activated carbon using phosphoric acid, as a result of FTIR analysis, fluctuated due to the phosphoric acid activation process.

5. Acknowledgments

The authors are thankful to the Higher Education Service Institute Region III (LLDIKTI REGION III) with Trisakti University for the research grant under the contract number 832/LL3/AL.04/2024 and LPPM Contract with Researchers Number 179/A/LPPM-P/USAKTI/VI/2024.

References

- [1] Alves A T, Lasmar D J, de Andrade Miranda I P, da Silva Chaar J, and dos Santos Reis J 2021 The Potential of Activated Carbon in the Treatment of Water for Human Consumption, a Study of the State of the Art and Its Techniques Used for Its Development *Advances in Bioscience and Biotechnology* **12** 143–153 [doi: 10.4236/abb.2021.126010]
- [2] Manoilova L and Ruskova K 2022 Active carbons and their functional applications in water purification – an overview *MATEC Web of Conferences* **366** 04001 [doi: 10.1051/mateconf/202236604001]
- [3] Desprianto D, Supu I, Suliawati I, Juwita J, and Erfiana E 2021 Purification of dug well water using activated carbon made from sago fiber waste *Jambura Physics Journal* **3** 87–100 [doi: 10.34312/jpj.v3i2.11665]
- [4] Negara D N K P, Nindhia T G T, Widiyarta I M, Karohika I M G, Suarda M, and Dwijana I G K 2023 Characteristics and performance analysis of activated carbons derived from different precursors and activators for waste water adsorption *eureka, Physics and Engineering* **6** 160–172 [doi: 10.21303/2461-4262.2023.003116]
- [5] Oztan O and Uysal D 2023 Determination of adsorption capacities of N₂ and CO₂ on commercial activated carbon and adsorption isotherm models in *E3S Web of Conferences, EDP Sciences*, [doi: 10.1051/e3sconf/202343301004]
- [6] Monika I 2016 Potential study of indonesia coal for adsorbed natural gas studi potensi batubara Indonesia untuk adsorbed natural gas *INDONESIAN MINING JOURNAL* **19** 133–142
- [7] Suliestyah S, Tuheteru E J, and Hartami P N 2018 Pengaruh ukuran butir batubara dan komposisi batubara-ZnCl₂ pada daya serap karbon aktif terhadap logam Fe, Cu dan Zn dalam limbah cair *Jurnal Teknologi Mineral dan Batubara* **14** 201–212 [doi: 10.30556/jtmb.vol14.no3.2018.149]
- [8] Kusdarini E, Budianto A, and Ghafarunnisa D 2017 Produksi karbon aktif dari batubara bituminus dengan aktivasi tunggal H₃PO₄, kombinasi H₃PO₄-NH₄HCO₃, dan termal *Reaktor* **17** 74–80 [doi: 10.14710/reaktor.17.2.74-80]
- [9] Hardianti S, Rachman S A and Harminuke E H 2017 Characterization of Activated Carbon from Coal and Its Application as Adsorbent on Mine Acid Water Treatment *Indonesian Journal of Fundamental and Applied Chemistry* **2** 34–38 [doi: 10.24845/ijfac.v2.i2.34]
- [10] Paradise M, Nursanto E, Nurkhamim and Haq S R 2022 Use of claystone, zeolite, and activated carbon as a composite to remove heavy metals from acid mine drainage in coal mining *ASEAN Engineering Journal* **12** 75–81 [doi: 10.11113/aej.V12.16982]
- [11] P. J. Isaac P J, S. Amaravadi S, Kamil M S M, Cheralathan K K and Lakshmiopathy R 2019 Synthesis of zeolite/activated carbon composite material for the removal of lead (II) and cadmium (II) ions *Environ Prog Sustain Energy* **38** [doi: 10.1002/ep.13246]

- [12] Wongcharee S, Aravinthan V and Erdei L 2019 Mesoporous activated carbon-zeolite composite prepared from waste macadamia nut shell and synthetic faujasite *Chin J Chem Eng.* **27** 226–236 [doi: 10.1016/j.cjche.2018.06.024]
- [13] Sitorus S and Pijer D M 2015 Pemanfaatan Arang Aktif Dari Batubara Kotor (Dirty Coal) Sebagai Adsorben Ion Logam Mn(II) dan Ag(I) *Jurnal Pendidikan Kimia (JPKim)* **7** 40–48 [Online] Available: <http://jurnal.unimed.ac.id/2012/index.php/jpk>
- [14] Ramadhan R B, Solihin and L. Pulungan L 2016 Kajian Pembuatan Karbon Aktif Batubara Sub-Bituminus (Coalite) dari PT Bukit Asam (Persero) Tbk untuk Memenuhi Spesifikasi Ekstraksi Logam Emas *Prosiding Teknik Pertambangan* **2** 105–112
- [15] Genli N, Şahin Ö, Baytar O and Horoz S 2021 Synthesis of activated carbon in the presence of hydrochar from chickpea stalk and its characterization *Journal of Ovonic Research* **17** 117–124 [DOI:10.15251/JOR.2021.172.117]
- [16] Patmawati Y, Rahim M, and Nego R A 2020 Pengaruh konsentrasi aktivator H₃PO₄ terhadap karakteristik karbon aktif dari batubara lignit Kalimantan Timur *Seminar Nasional Terapan Riset Inovatif (SENTRINOV) Ke-6 ISAS Publishing Series: Engineering and Science* **6**
- [17] Takwanto A, Maryanty Y, Mustikarini A W, Darminawati L, and Nurhaliza S 2022 Utilization of Gondorukem Industrial Solid Waste Into Activated Carbon as Adsorbent to Improve the Quality of Gondorukem Color in *Proceedings of the 2022 Annual Technology, Applied Science and Engineering Conference (ATASEC 2022)*, Atlantis Press International BV, 2022, 3–16 [doi: 10.2991/978-94-6463-106-7_2]
- [18] Rabah F K J and Ashour F S 2024 Purification of Treated Wastewater Effluents from Residual Detergents using Activated Carbon Produced from Olive Seeds *Asian Journal of Chemistry*, **36** 411–417 [doi: 10.14233/ajchem.2024.30786]
- [19] Zulkania A, Hanum G F and Rezki A S 2018 The potential of activated carbon derived from bio-char waste of bio-oil pyrolysis as adsorbent in *MATEC Web of Conferences*, EDP Sciences [doi: 10.1051/mateconf/201815401029]
- [20] Thitame P V and Shukla S R 2016 Porosity Development of Activated Carbons Prepared from Wild Almond Shells and Coir Pith Using Phosphoric Acid *Chem Eng Commun* **203** 791–800, [doi: 10.1080/00986445.2015.1104503]
- [21] Hao W, Björkman E, Lilliestråle M, and Hedin N 2014 Activated carbons for water treatment prepared by phosphoric acid activation of hydrothermally treated beer waste *Ind Eng Chem Res.* **53** 15389–15397 [doi: 10.1021/ie5004569]
- [22] Zhang Z B *et al.* 2018 Effects of the ultrasound-assisted H₃PO₄ impregnation of sawdust on the properties of activated carbons produced from it *Xinxing Tan Cailiao/New Carbon Materials* **33** 409–416 [doi: 10.1016/S1872-5805(18)60349-X]
- [23] Reffas A *et al.* 2010 Carbons prepared from coffee grounds by H₃PO₄ activation: Characterization and adsorption of methylene blue and Nylosan Red N-2RBL *J Hazard Mater.* **175** 779–788 [doi: 10.1016/j.jhazmat.2009.10.076]
- [24] Mentari A V, Handika G and Maulina S 2018 The Comparison of Function Group and Surface Morphology of Activated Carbon from Oil Palm Frond Using Phosphoric Acid (H₃PO₄) *Jurnal Teknik Kimia USU* **7** 16–20
- [25] Kumiawan R *et al.* 2014 Karakterisasi luas permukaan bet (Braunanear, Emmelt dan Teller) karbon aktif dari tempurung kelapa dan tandan kosong kelapa sawit dengan aktivasi asam fosfat (H₃PO₄) *Journal of Tropical Agricultural Engineering and Biosystem* **2** 15-20

Effect of phosphoric acid composition in the production and characterization of coal activated carbon

ORIGINALITY REPORT

12%

SIMILARITY INDEX

11%

INTERNET SOURCES

12%

PUBLICATIONS

6%

STUDENT PAPERS

PRIMARY SOURCES

1	www.eubios.info Internet Source	4%
2	www.apri.or.id Internet Source	2%
3	Suliestyah, Pancanita N. Hartami, Edy Jamal Tuheteru. "Effect of weight and contact time adsorption of activated carbon from coal as adsorbent of Cu(II) and Fe(II) in liquid solutions", AIP Publishing, 2020 Publication	1%
4	www.scribd.com Internet Source	1%
5	jurnal.tekmira.esdm.go.id Internet Source	1%
6	www.cjee.ac.cn Internet Source	1%
7	"Removal of Dyes from Effluents Using Biowaste-Derived Adsorbents", Green	1%

Chemistry for Dyes Removal from Wastewater, 2015.

Publication

8

dokumen.tips

Internet Source

1 %

9

www.tandfonline.com

Internet Source

1 %

Exclude quotes Off

Exclude matches < 15 words

Exclude bibliography On