

BUKTI REVIEW DAN CORRESPONDING AUTHOR
SYARAT KHUSUS UNTUK PENGUSULAN JABATAN AKADEMIK
UNIVERSITAS TRISAKTI



Judul Paper	:	Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor
Nama Penulis	:	Syah Alam ; Indra Surjati; Lydia Sari; R Deiny Mardian; Marouane Abicha; Zahriladha Zakaria; Teguh Firmansyah; Mudrik Alaydrus; Yusnita Rahayu
Nama Corresponding Author	:	Syah Alam
Volume / Nomor / Tahun	:	Vol.12 / No. 1 / pp. 94861 – 94869 / Juli 2024
Url Jurnal	:	
Doi	:	https://doi.org/10.1109/ACCESS.2024.3425159
Kategori	:	https://ieeexplore.ieee.org/xpl/RecentIssue.jsp?punumber=6287639
Quartile/ SJR/ Impact Factor / Publisher	:	Q1 / SJR = 0.96 / IF = 3.4 / IEEE
Jenis Dokumen / Jabamik	:	Syarat Khusus / Profesor

REKAM JEJAK PUBLIKASI DARI PROSES *SUBMISSION* → *PUBLISHED*

No	Tahapan	Keputusan	Tanggal
1.	1 st submission	Naskah diterima oleh editor dan dilanjutkan untuk proses peer review	22 Juni 2024
2.	1 st decision	Major Revision	21 Mei 2024
3.	2 nd submission (Revision 1)	Minor Revision	1 Juli 2024
4.	Accepted	Naskah diterima	5 Juli 2024
5.	Published (early access)	Naskah dipublikasikan pada versi early access	10 Juli 2024
6.	Published full version	Naskah dipublikasikan pada Vol.12 / No. 1 / pp. 94861 – 94869	10 Juli 2024

1st submission → Major Revision

IEEE Access
Regular Manuscript

Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor

Submission Status	Rejected	
Manuscript ID	Access-2024-17163	
Rejected On	21 May 2024 by Editorial Office	Learn about what to do if your manuscript was rejected.
Submitted On	4 May 2024 by Syah Alam	
Journal Contacts	Sharma, Dr. Dharmendra - Administrator dharmendra.sharma@ieee.org	Submission overview →

2nd submission → Accepted

IEEE Access
Regular Manuscript

Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor

Submission Status	Accepted	
Manuscript ID	Access-2024-24030	
Accepted On	5 July 2024 by Editorial Office	Learn about what happens once your article has been accepted.
Submitted On	5 July 2024 by Syah Alam	
Journal Contacts	Kaur, Dr. Manpreet - Administrator m.kaur@ieee.org	Submission overview →



Assoc. Prof. Syah Alam S Pd, MT, PhD <syah.alam@trisakti.ac.id>

IEEE Access - Manuscript ID Access-2024-24030

1 message

1st submission

IEEE Access <onbehalf@manuscriptcentral.com>

Sat, Jun 22, 2024 at 9:03 AM

Reply-To: ieeeaccess@ieee.org

To: syah.alam@trisakti.ac.id, indra@trisakti.ac.id, lydia_sari@trisakti.ac.id, deiny.wp@gmail.com, r.deiny@ui.ac.id, deiny_wp@trisakti.ac.id, marouane.abicha@outlook.com, zahriladha@utem.edu.my, teguhfirmansyah@untirta.ac.id, mudrikalaydrus@mercubuana.ac.id, yusnita.rahayu@lecturer.unri.ac.id

21-Jun-2024

Dear Authors:

Your manuscript entitled "Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor" has been successfully submitted online and is presently being given full consideration for publication in IEEE Access.

If you are receiving this email, that means you are listed as an author. If you do **not** approve of being listed as a co-author on this article, please reach out to ieeeaccess@ieee.org as soon as possible.

As a reminder, IEEE Access is a fully open access journal. Open Access provides unrestricted access to published articles via IEEE *Xplore*. In lieu of paid subscriptions, authors are required to pay an article processing charge of \$1,995 (plus applicable local taxes) after the article has been accepted for publication.

Your manuscript ID is Access-2024-24030. Please mention the manuscript ID in all future correspondence to the IEEE Access Editorial Office. The submitting author can view the manuscript status at any time by checking their author dashboard on the [IEEE Author Portal](#). If the submitting author needs to update their email address after submission, please reach out to ieeeaccess@ieee.org so we can assist you in doing so.

** Please note that any change to the author list after the article has been submitted is considered rare and exceptional, and the decision to allow such changes rests with the Editor. Once the list and order of authors has been established, the list and order of authors should not be altered without permission of all living authors of that article and will still be subject to editorial review.

Thank you again for submitting your manuscript to IEEE Access.

Sincerely,

IEEE Access Editorial Office

Decision 1st round

Decision letter (Initial Submission)

Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor

Subject IEEE Access - Decision on Manuscript ID Access-2024-17163
Date sent 21 May 2024 at 09:37 GMT+7
From jacobs.s@ieee.org
To syah.alam@trisakti.ac.id
CC > [Show 12 addresses](#)

21-May-2024

Dear Dr. Alam:

I am writing to you regarding manuscript # Access-2024-17163 entitled "Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor" which you submitted to IEEE Access.

Your article was peer reviewed with interest but has not been recommended for publication in its current form. We strongly encourage you to address the reviewers' concerns, which can be found at the bottom of this letter, and resubmit your article to IEEE Access once you have updated it

accordingly.

Please note that IEEE Access has a binary peer review process. Therefore, to uphold quality to IEEE standards, an article is rejected even if it requires minor edits.

When updating your manuscript, you should elaborate on your points and clarify with references, examples, data, etc. If you disagree with any technical points the reviewers have made, please include your counterarguments in your response to the reviewers (more information detailed below) and work this into the updated manuscript. Also, note that if a reviewer suggested references, you should only add those that are relevant to your work if you feel they strengthen your article. Recommending references to specific publications is not appropriate for reviewers and you should report excessive cases to ieeeaccessEIC@ieee.org.

If the updated manuscript is determined not to have addressed all of the previous reviewers' concerns, or if the Associate Editor still has substantial technical concerns, the article may be rejected and no further resubmissions will be allowed.

When you are ready to resubmit your updated article, you can do so in the [IEEE Author Portal](#). When you log into the IEEE Author Portal you will see the title of the rejected article and the option to "Start Resubmission".

Upon resubmission you will be asked to upload the following 3 files:

1) A document containing your response to reviewers from the previous peer review. The "response to reviewers" document (template attached) should have the following regarding each comment: a) Reviewer's concern, b) your response to the concern, c) your action to remedy the concern. **The document should be uploaded with your manuscript files under "Author's Response Files."**

2) Your updated manuscript with all your individual changes highlighted, including grammatical changes (e.g. preferably with the yellow highlight tool within the pdf file). This file should be uploaded with your manuscript files as "*Highlighted PDF*."

3) A clean copy of the final manuscript (without highlighted changes) submitted as a Word or LaTeX file, and as a PDF, both submitted as the "*Main Manuscript*."

****IMPORTANT:** Please see the attached Resubmission Checklist that details all the items listed above. Please utilize this checklist to ensure you have made the necessary edits to your manuscript, and to ensure you have all the necessary files prepared prior to resubmission.

***** AUTHOR LIST CHANGES:** If your revised manuscript has an updated author list, you will need to submit a formal request to the Editor by completing the attachment labelled 'Request for Byline Change,' and uploading it as '*Request for byline change form*.' This should include a DETAILED justification explaining each author's contribution(s) to the work. Change in the author list is considered rare and exceptional, and the decision to allow such changes rests with the Editor. Once the list and order of authors has been established, the list and order of authors should not be altered without permission of all living authors of that article.

We sincerely hope you will update your manuscript and resubmit soon. Please contact me if you have any questions.

Thank you for your interest in IEEE Access.

Sincerely,

Dr. LI YANG
Associate Editor, IEEE Access
yang96507@gmail.com

Reviewers' Comments to Author:

Reviewer: 1

Comments:

The manuscript deals with a dual functional microwave sensor for displacement and angular detection of liquid material based on electric coupled (ELC) resonator. The experimental work is well explained and illustrated with many measured results.

Additional Questions:

Please confirm that you have reviewed all relevant files, including supplementary files and any author response files, which can be found in the "View Author's Response" link above (author responses will only appear for resubmissions): Yes, all files have been reviewed

- 1) Does the paper contribute to the body of knowledge?: yes
- 2) Is the paper technically sound?: yes
- 3) Is the subject matter presented in a comprehensive manner?: yes
- 4) Are the references provided applicable and sufficient?: N/A
- 5) Are there references that are not appropriate for the topic being discussed?: No
- 5a) If yes, then please indicate which references should be removed.:

Reviewer: 2

Comments:

The sensor works by changing the dielectric loading on top of a microstrip-based ELC resonator, thereby altering the resonant frequency of the circuit. By measuring the transmission zero location, the sensor can be used for determining the displacement of the dielectric loading. The loading in this work is a tube of water on top of the resonator, and by changing the water fill level, it causes a change in the equivalent LC of the circuit. Since water has a large dielectric constant, the impact on the resonant frequency is significant.

Here are some specific comment and questions:

1. Though the application for angular displacement of liquid seems novel, can you cite the applications where this is useful?
2. Page 7 of 28: "The measurement process was carried out in the laboratory using a Vector Network Analyzer (VNA) with a frequency range of 2 - 3 GHz, a frequency span of 0.01 GHz and an ambient temperature of 25°C." It shouldn't be frequency span. It could be frequency step size, resolution/video bandwidth, but not span.
3. Page 7 of 28 Eq. (2) cites ref [18] for an equation to determine displacement from resonant frequency. Although the authors did not elaborate, Eq(2) is a curve-fitted equation using either simulation or measurement. Ref [18] instead uses an analytical method. Therefore, the citation is not valid.
4. Page 10 of 28. Table 10 compares different microwave sensors that measure linear and angular displacement. Ensure that the comparison is clear and the context of each sensor's application is adequately explained.
5. The authors claim that the sensor uses a microfluidic channel, which is characterized by small volumes (μL , nL, pL, fL) and has a small size; however, this design in the manuscript uses a drinking straw, which has a volume in the range of mL. This discrepancy needs to be addressed.
6. Given that the angular displacement sensing uses bending of the straw to achieve rotation, the repeatability of the measurement and the precision come into question. Please address this issue.
7. Most of the other displacement sensors cited use metal on top of a stable dielectric substrate. This work uses a dielectric instead. This is a novelty in itself, but the co-sensitivity to temperature needs to be discussed. The other sensors use stable substrates which might offer better temperature stability.

Additional Questions:

Please confirm that you have reviewed all relevant files, including supplementary files and any author response files, which can be found in the "View Author's Response" link above (author responses will only appear for resubmissions): Yes, all files have been reviewed

1) Does the paper contribute to the body of knowledge?: Yes, the paper contributes to the body of knowledge by introducing a dual-functional microwave sensor capable of detecting both linear and angular displacement of liquid samples using microfluidic channels. This is a novel approach as previous works have primarily focused on solid materials and have not combined both displacement and angular detection for liquid materials in a single sensor.

2) Is the paper technically sound?: The paper is technically sound, presenting an experimental setup and clear methodology for the proposed sensor. The use of an ELC resonator and microfluidic channels is adequately justified, and the results are supported by experimental data. However, there are some technical inaccuracies in the references and certain methodological explanations that need correction and clarification to enhance the paper's robustness.

3) Is the subject matter presented in a comprehensive manner?: Yes

4) Are the references provided applicable and sufficient?: The references provided are generally applicable and sufficient, covering a wide range of

relevant studies in the field of microwave sensors for displacement and angular detection. However, there are a few issues with specific citations, such as the incorrect reference for Equation (2) and the need for more precise and relevant sources in some sections. Addressing these issues would strengthen the overall quality and credibility of the paper.

5) Are there references that are not appropriate for the topic being discussed?: No

5a) If yes, then please indicate which references should be removed.:

If you have any questions, please contact article administrator: Dr. Dharmendra Sharma dharmendra.sharma@ieee.org

Powered by **Research Exchange Submission** © Research Exchange

[Privacy Policy](#) | [Cookie Preferences](#) | [Terms](#) | [Help](#)

[IEEE Privacy Policy](#) | [Contact us](#)

Original Manuscript ID: Access-2024-17163

Original Article Title: “Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor”

To:

Dr. Lie Yang

IEEE Access Editor

Re: Response to reviewers

Dear Editor,

Thank you for allowing a resubmission of our manuscript, with an opportunity to address the reviewers' comments.

We are uploading (a) our point-by-point response to the comments (below) (response to reviewers, under “Author’s Response Files”), (b) an updated manuscript with yellow highlighting indicating changes (as “Highlighted PDF”), and (c) a clean updated manuscript without highlights (“Main Manuscript”).

We sincerely appreciate the valuable time you dedicated to reviewing and evaluating our paper. Should you have any queries, please feel free to reach out to me. Thank you again for your time and consideration.

Best regards,

Syah Alam, et al.

Please address all correspondence to:

Syah Alam* / Zahriladha Zakaria**

*Department of Electrical Engineering, Universitas Trisakti, DKI Jakarta, 11440

** Faculty of Electronic and Computer Technology and Engineering, Universiti Teknikal Malaysia Melaka (UTeM), Malaysia

Corresponding author e-mail: *syah.alam@trisakti.ac.id / ** zahriladha@utem.edu.my

Reviewer#1, Concern # 1:

The manuscript deals with a dual functional microwave sensor for displacement and angular detection of liquid material based on electric coupled (ELC) resonator. The experimental work is well explained and illustrated with many measured results.

Author response: We thank the reviewer for constructive comment.

Reviewer#2, Concern # 1:

Though the application for angular displacement of liquid seems novel, can you cite the applications where this is useful?

Author response: We thank the reviewer for constructive comment. Therefore, we have added some previous research to show the applications of liquid displacement, including biomedical and robotics [30], health monitoring and mobile healthcare [31].

Author action: We updated the manuscript by added new reference [30] and [31] in the introduction section

Kindly refer to: Section I. Introduction, page 1 – 2

“Displacement sensors play an important role for several industries that require high precision such as the automotive, robotics and aerospace industries[1][2][3][4]. Generally, displacement sensors consist of two types, including linear and angular displacement. Linear displacement is determined based on distance while angular displacement is based on the angle between the sensor and the sample[5][6]. One of the strategies for detecting sample displacement is to utilize a microwave sensor[7][8][9][10]. Microwave sensors have advantages including compact design, low cost and high accuracy. Microwave sensors have been widely developed to detect the characteristics of solid materials [11]–[13], liquids[14]–[17] and displacement[18]–[20]. Several previous works proposed sensors for linear and angular displacement detection in solid materials using microwave sensors with a certain dynamic range based on frequency shift[21][22], notch depth [23][24] and phase variation[25][26].

Generally, rotation and displacement detection using microwave sensors is proposed for solid materials using stators and rotators where the sample is rotated in the sensing area with a certain dynamic range[27]–[29]. However, this creates friction between the sample and the sensor which has the potential to damage the surface of the sensor. In addition, the sample is placed on an open surface, so it is greatly influenced by changes in temperature and environment. Another constraint, the proposed sensor from previous work only has one single function so it cannot be used for displacement and rotation detection separately. In addition, sensors for displacement and rotation detection are only proposed for solid materials and are not supported for detection in liquid samples. Moreover, liquid displacement sensors are very useful for several applications, including biomedical and robotics [30], health monitoring and mobile healthcare[31]. Therefore, microwave sensors that have the capability to detect displacement and rotation of liquid samples are needed. This work provides an excellent solution by proposing a microwave sensor that has dual functional characteristics for displacement and angular detection for liquid samples. Furthermore, to maintain and control the influence of temperature and environment, the sample is contained in a microfluidic channel[32]–[34]. Moreover, microfluidic channels are proposed to reduce friction between the sensor and the sample so that the sensor surface is more durable and protected. Displacement and angular detection are determined based on the shift in the resonant frequency of the resonator.

The main contribution of this work is to produce a dual functional microwave sensor that has the capability for displacement and angular detection in liquid samples in microfluidic channels. The proposed sensor has been successfully simulated and validated through the measurement process. Based on the measurement results, the proposed sensor has the ability to detect displacement with a distance range of 1 - 4 cm and for angular detection with an angle range of 0 - 90° for microfluidic channel filled with water content.”

Reference:

- [30] G. Keulemans, F. Ceysens, and R. Puers, “An ionic liquid based strain sensor for large displacement measurement,” *Biomed. Microdevices*, vol. 19, no. 1, 2017, doi: 10.1007/s10544-016-0141-4.
 - [31] Y. Ren, S. Tan, L. Zhang, Z. Wang, Z. Wang, and J. Yang, “Liquid level sensing using commodity wifi in a smart home environment,” *Proc. ACM Interactive, Mobile, Wearable Ubiquitous Technol.*, vol. 4, no. 1, pp. 1–30, 2020, doi: 10.1145/3380996.
-

Reviewer#2, Concern # 2:

Page 7 of 28: "The measurement process was carried out in the laboratory using a Vector Network Analyzer (VNA) with a frequency range of 2 - 3 GHz, a frequency span of 0.01 GHz and an ambient temperature of 25°C." It shouldn't be frequency span. It could be frequency step size, resolution/video bandwidth, but not span.

Author response: We thank the reviewer for constructive comment. We have changed the term of frequency span to frequency step size according to comments from reviewers. We thank you for the corrections provided.

Author action: We updated the manuscript by changing the term of frequency span to frequency step size in section III. Measurement and Verification on page 4.

Kindly refer to: Section III. Measurement and Verification, page 4

III. MEASUREMENT RESULT AND VERIFICATION

In this chapter, the measurement process and scenarios for liquid displacement and angular detection are explained in detail. The measurement process was carried out in the laboratory using a Vector Network Analyzer (VNA) with a frequency range of 2 - 3 GHz, a frequency step size of 0.01 GHz and an ambient temperature of 25°C.

Reviewer#2, Concern # 3:

Page 7 of 28 Eq. (2) cites ref [18] for an equation to determine displacement from resonant frequency. Although the authors did not elaborate, Eq (2) is a curve-fitted equation using either simulation or measurement. Ref [18] instead uses an analytical method. Therefore, the citation is not valid.

Author response: We thank the reviewer for constructive comment. In this paper, liquid displacement detection is proposed using a polynomial curve by observing the frequency shift of the measurement process relative to the displacement of the sample. Therefore, Eq (2) is obtained from the frequency response to sample shift from the measurement process. Furthermore, we have changed reference [18] to [7] which is related to polynomial curves for detecting displacements in samples.

Author action: We updated the manuscript by giving a clear explanation about the polynomial curve for displacements detection and changed the reference [18] to [7] which is related to polynomial curves for detecting displacements in samples.

Kindly refer to: Section III. Measurement and Verification, Sub Section: A. Scenario for liquid displacement detection, page 4.

“Based on the measurement results, the resonant frequency of the resonator shifts from 2.72 GHz to 2.59 GHz with ΔF of 0.13 GHz in line with the sample displacement in the microfluidic channel which is clogged by a stopper with a distance range of $d = 1 - 4$ cm as shown in Fig.8 (a) and Fig.8 (b). This finding shows that the proposed sensor has interacted with the sample to detect the displacement of the sample. The resonant frequency of the resonator shifts to low frequencies slowly in line with the displacement of the sample. This occurs because there is a change in the permittivity of the sample, where the water sample has a higher permittivity than the bare air sample, so it greatly influences the resonance frequency of the resonator. Furthermore, displacement detection with the proposed resonator can be determined based on Eq. (2)[7]:

$$f_{r(c)} = 0.01273 d^3 - 0.988 d^2 + 0.1862 d - 2.6153 \quad (2)$$

where $f_{r(b)}$ is the resonant frequency of the resonator for displacement detection and d represents the distance of the displacement in the water-filled microfluidic channel. Moreover, the sensitivity (S) of the sensor is determined based on the following Eq. (3)[21]:

$$S = \frac{\Delta F \text{ (GHz)}}{\Delta d \text{ (cm)}} \quad (3)$$

where ΔF represents the shift in the resonant frequency of the resonator and Δd represents the displacement of the sample in the microfluidic channel. Based on Eq. (3), the sensitivity of the sensor for displacement detection is 32.5 MHz/cm with a range d of 1 - 4 cm.”

Reference:

- [7] A. V. Praveen Kumar and P. Regalla, “A Transmission Mode Dielectric Resonator as a Displacement Sensor,” *IEEE Sens. J.*, vol. 20, no. 13, pp. 6979–6984, 2020, doi: 10.1109/JSEN.2020.2977893.
-

Reviewer#2, Concern # 4

Page 10 of 28. Table 10 compares different microwave sensors that measure linear and angular displacement. Ensure that the comparison is clear, and the context of each sensor's application is adequately explained.

Author response: We thank the reviewer for constructive comment. We have comprehensively explained the comparison of type, sensing parameters and prospective applications between the proposed sensor and previous work shown in Table 3.

TABLE III
COMPARISON OF TYPE, SENSING PARAMETERS AND PROSPECTIVE APPLICATIONS OF DISPLACEMENT / ROTATION SENSORS

Ref	Type of resonator	Sensing parameter	Prospective applications
[1]	Single port resonator	Phase	Industrial
[3]	Band stop filter	S_{21}	Industrial
[7]	Band pass filter	S_{21}	Industrial
[19]	Band stop filter	S_{21}	Industrial
[21]	Band stop filter	S_{21}	Space vehicle (satellites)
[23]	Band pass filter	Phase	Industrial
[27]	Band pass filter	S_{21}	Industrial
[28]	Band stop filter	S_{21}	Industrial
[32]	Band pass filter	S_{21}	Biomedical and energy
This work	Band stop filter	S_{21}	Industrial and Biomedical

Furthermore, a comprehensive comparison of types, sensing parameters and proposed applications of displacement and rotation sensors is shown in Table III. Previous work [3][19][21][23] proposed a band stop filter for displacement and rotation detection which is recommended for industrial applications including flow detection in liquids, space vehicle and rotation detection in AC motors. In addition, other work [7][23][27][32] proposed a band stop filter for displacement/rotation detection which is recommended for industrial, biomedical and energy applications while previous work [1], proposed a single port resonator for motor rotation detection AC based on phase variations.

Author action: We updated the manuscript by providing clear information regarding the comparison of the proposed sensor with previous work which is presented in Table III.

Kindly refer to: Section IV. Validation with previous work, Table III. COMPARISON OF TYPE, SENSING PARAMETERS AND PROSPECTIVE APPLICATIONS OF DISPLACEMENT / ROTATION SENSORS, page 7.

Furthermore, a comprehensive comparison of types, sensing parameters and proposed applications of displacement and rotation sensors is shown in Table III. Previous work [3][19][21][23] proposed a band stop filter for displacement and rotation detection which is recommended for industrial applications including flow detection in liquids, space vehicle and rotation detection in AC motors. In addition, other work [7][23][27][32] proposed a band stop filter for displacement/rotation detection which is recommended for industrial, biomedical and energy applications while previous work [1], proposed a single port resonator for motor rotation detection AC based on phase variations.

TABLE III
COMPARISON OF TYPE, SENSING PARAMETERS AND PROSPECTIVE APPLICATIONS OF DISPLACEMENT / ROTATION SENSORS

<i>Ref</i>	<i>Type of resonator</i>	<i>Sensing parameter</i>	<i>Prospective applications</i>
[1]	Single port resonator	Phase	Industrial
[3]	Band stop filter	S_{21}	Industrial
[7]	Band pass filter	S_{21}	Industrial
[19]	Band stop filter	S_{21}	Industrial
[21]	Band stop filter	S_{21}	Space vehicle (satellites)
[23]	Band pass filter	Phase	Industrial
[27]	Band pass filter	S_{21}	Industrial
[28]	Band stop filter	S_{21}	Industrial
[32]	Band pass filter	S_{21}	Biomedical and energy
This work	Band stop filter	S_{21}	Industrial and Biomedical

Reference:

- [1] J. Muñoz-Enano, P. Vélez, L. Su, M. Gil-Barba, and F. Martín, "A Reflective-Mode Phase-Variation Displacement Sensor," *IEEE Access*, vol. 8, pp. 189565–189575, 2020, doi: 10.1109/ACCESS.2020.3031032.
- [3] P. W. Zhu *et al.*, "Design of H-shaped planar displacement microwave sensors with wide dynamic range," *Sensors Actuators A Phys.*, vol. 333, p. 113311, 2022, doi: 10.1016/j.sna.2021.113311.
- [7] A. V. Praveen Kumar and P. Regalla, "A Transmission Mode Dielectric Resonator as a Displacement Sensor," *IEEE Sens. J.*, vol. 20, no. 13, pp. 6979–6984, 2020, doi: 10.1109/JSEN.2020.2977893.
- [19] C. H. Chio, R. Gomez-Garcia, L. Yang, K. W. Tam, W. W. Choi, and S. K. Ho, "An Angular Displacement Sensor Based on Microwave Transversal Signal Interference Principle," *IEEE Sens. J.*, vol. 20, no. 19, pp. 11237–11246, 2020, doi: 10.1109/JSEN.2020.2998181.
- [21] A. K. Jha, N. Delmonte, A. Lamecki, M. Mrozowski, and M. Bozzi, "Design of Microwave-Based Angular Displacement Sensor," *IEEE Microw. Wirel. Components Lett.*, vol. 29, no. 4, pp. 306–308, 2019, doi: 10.1109/LMWC.2019.2899490.
- [23] J. Naqui and F. Martín, "Transmission lines loaded with bisymmetric resonators and their application to angular displacement and velocity sensors," *IEEE Trans. Microw. Theory Tech.*, vol. 61, no. 12, pp. 4700–4713, 2013, doi: 10.1109/TMTT.2013.2285356.
- [27] C. H. Chio, K. W. Tam, and R. Gomez-Garcia, "Filtering Angular Displacement Sensor Based on Transversal Section with Parallel-Coupled-Line Path and U-Shaped Coupled Slotline," *IEEE Sens. J.*, vol. 22, no. 2, pp. 1218–1226, 2022, doi: 10.1109/JSEN.2021.3133452.
- [28] A. Ebrahimi, W. Withayachumnankul, S. F. Al-Sarawi, and D. Abbott, "Metamaterial-inspired rotation sensor with wide dynamic range," *IEEE Sens. J.*, vol. 14, no. 8, pp. 2609–2614, 2014, doi: 10.1109/JSEN.2014.2313625.
- [32] M. H. Zarifi, H. Sadabadi, S. H. Hejazi, M. Daneshmand, and A. Sanati-Nezhad, "Noncontact and Nonintrusive Microwave-Microfluidic Flow Sensor for Energy and Biomedical Engineering," *Sci. Rep.*, vol. 8, no. 1, pp. 1–10, 2018, doi: 10.1038/s41598-017-18621-2.

Reviewer#2, Concern # 5:

The authors claim that the sensor uses a microfluidic channel, which is characterized by small volumes (μL , nL , pL , fL) and has a small size; however, this design in the manuscript uses a drinking straw, which has a volume in the range of mL . This discrepancy needs to be addressed.

Author response: We thank the reviewer for constructive comment. We agree with the reviewer's comments regarding the microfluidic approach we have proposed in this paper does not correspond to the recommended sample volumes for microfluidic channels (μL , nL , pL , fL). Therefore, we have replaced the term microfluidic with polystyrene-mm pipe channel referring to previous work [17].

Author action: We updated the manuscript by replacing the term microfluidic with polystyrene-mm pipe channel throughout the revised manuscript.

Kindly refer to: Section II. Working principle of proposed sensor, Sub-section D. Scenario of sample placement, page 3.

D. SCENARIO OF SAMPLE PLACEMENT

The sample placement scenario is determined based on the location of the resonator with the highest electric field as shown in **Fig.6 (a)**. In this paper, the sample is placed in the center of the ELC resonator using a polystyrene-mm pipe channel based on polystyrene-mm pipe channel [17] with a permittivity of 3.1 and a diameter represented by D_1 and D_2 of 5 mm and 4.5 mm and length of polystyrene-mm pipe channel represented by L_1 of 40 mm, respectively. The sample placement scenario consists of two conditions, including the bare condition where the polystyrene-mm pipe channel is filled with air samples and the other condition is when the polystyrene-mm pipe channel is filled with water samples. The polystyrene-mm pipe channel is placed in line with the sensing area of the ELC resonator which is located in the middle arm and the gap of the resonator.

Reference:

[17] S. Mosbah *et al.*, "Compact and Highly Sensitive Bended Microwave Liquid Sensor Based on a Metamaterial Complementary Split-Ring Resonator," *Appl. Sci.*, vol. 12, no. 4, 2022, doi: 10.3390/app12042144.

Reviewer#2, Concern # 6:

Given that the angular displacement sensing uses bending of the straw to achieve rotation, the repeatability of the measurement and the precision come into question. Please address this issue.

Author response: We thank the reviewer for constructive comment. We agree with the reviewer's comments to perform repeatable measurements of rotation detection using the proposed sensor. Therefore, we have added repeated measurement data to demonstrate the performance of the proposed sensor in Fig 16, page 7. In this experiment, we proposed repeatability measurements for 3 cycles within 5 minutes as shown in Fig. 2.

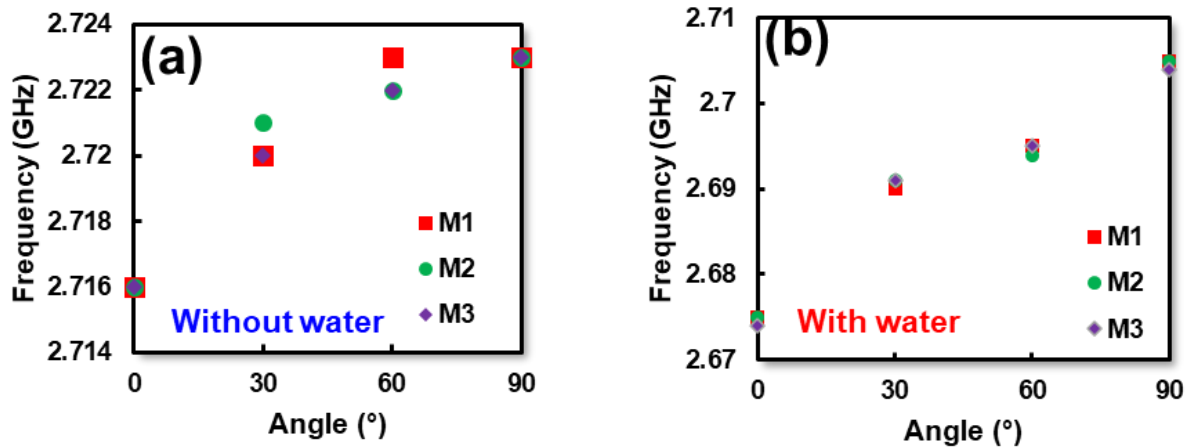


Fig.2 Repeatability measurement of bending detection; (a) without water, (b) with water

Fig. 2 shows that the repeatability measurements of 3 cycles of the proposed sensor are in line and consistent. Furthermore, based on repeatability from measurement 1, 2 and 3 (M1, M2 and M3), the correlation between average resonant frequency and deviation is shown in **Table III**, **Table IV** and **Fig.3**.

Table III. Repeatability measurement of bending detection for sample without water

Angle (°)	f _r (GHz)			Average of f _r (GHz)	Deviation
	M1	M2	M3		
0	2.716	2.716	2.716	2.716	0.00000
30	2.72	2.721	2.72	2.720	0.00058
60	2.723	2.722	2.722	2.722	0.00058
90	2.723	2.723	2.723	2.723	0.00000

Table IV. Repeatability measurement of bending detection for sample with water

Angle (°)	f _r (GHz)			Average of f _r (GHz)	Deviation
	M1	M2	M3		
0	2.675	2.675	2.674	2.675	0.00058
30	2.69	2.691	2.691	2.691	0.00058
60	2.695	2.694	2.695	2.695	0.00058
90	2.705	2.705	2.704	2.705	0.00058

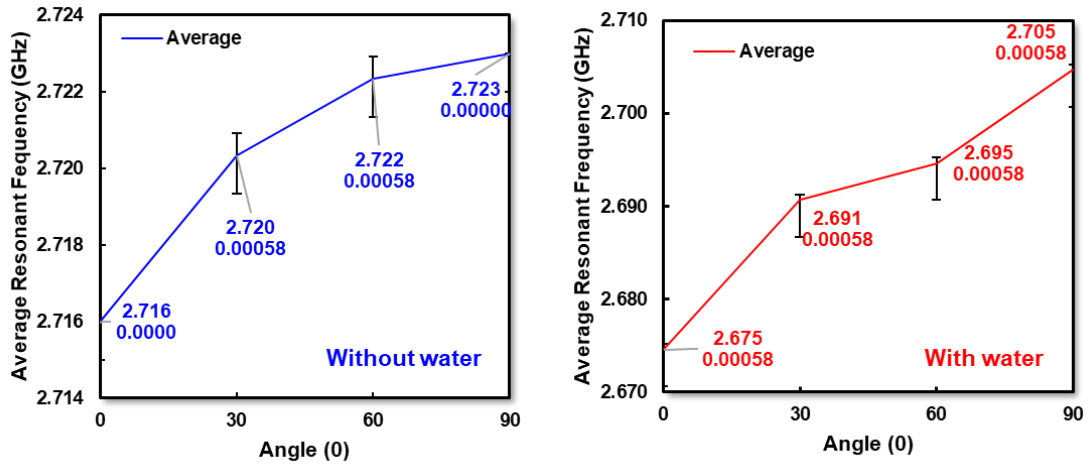


Fig.3 Average and deviation from repeatability measurement for bending detection; (a) without water, (b) with water.

Based on **Fig. 3**, the deviation from the repeatability measurement results is in the range 0 - 0.00058. These findings indicate that the proposed sensor has high accuracy for bending detection in samples with and without water. Therefore, we added these findings in a revised paper represented in Fig. 5 and 6.

Author action: We updated the manuscript by adding Fig. 16 (a) and Fig. 16 (b) to demonstrate repeatability of the measurement.

Kindly refer to: Section III. Measurement and Verification, Sub Section B: Liquid Angular Detection, Fig. 16, page 6.

Based on **Eq. (6)**, the sensitivity of the sensor for angular detection of microfluidic channel without and with water content are 0.07 MHz° and 0.33 MHz° with a dynamic range of $0 - 90^\circ$. Moreover, average and deviation of repeatability measurements with 3 cycles are proposed to show the error bars of angular detection for sample filled in microfluidic channel with and without water using the proposed sensor as shown in **Fig.16**.

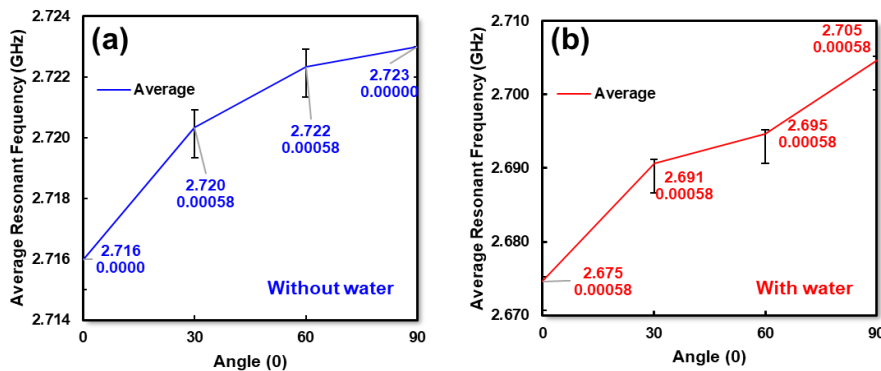


Fig.16. Average and deviation from repeatability measurement for angular detection; (a) without water, (b) with water.

Based on **Fig.16 (a)** and **Fig. 16 (b)**, the deviation from the repeatability measurement results is in the range 0 - 0.00058 for angular detection with and without water. These findings indicate that the proposed sensor has a low error bar for angular detection in samples with and without water.

Reviewer#2, Concern # 7:

Most of the other displacement sensors cited use metal on top of a stable dielectric substrate. This work uses a dielectric instead. This is a novelty in itself, but the co-sensitivity to temperature needs to be discussed. The other sensors use stable substrates which might offer better temperature stability.

Author response: We thank the reviewer for constructive comment. For your information, we have tried our best to minimize environmental effects, maintain the temperature of samples at 25^o C and ensure that there are no other objects close to the sensor during the measurement process in the laboratory.

We thank the reviewer for constructive comments. We agree with the reviewer's comments that the temperature of the sample affects the performance and sensitivity of the sensor. Therefore, we have carried out measurements for liquid displacement detection at three different temperatures of samples at 25^o C, 27^oC and 30^o C as shown in **Fig.1** and **Table 1**.

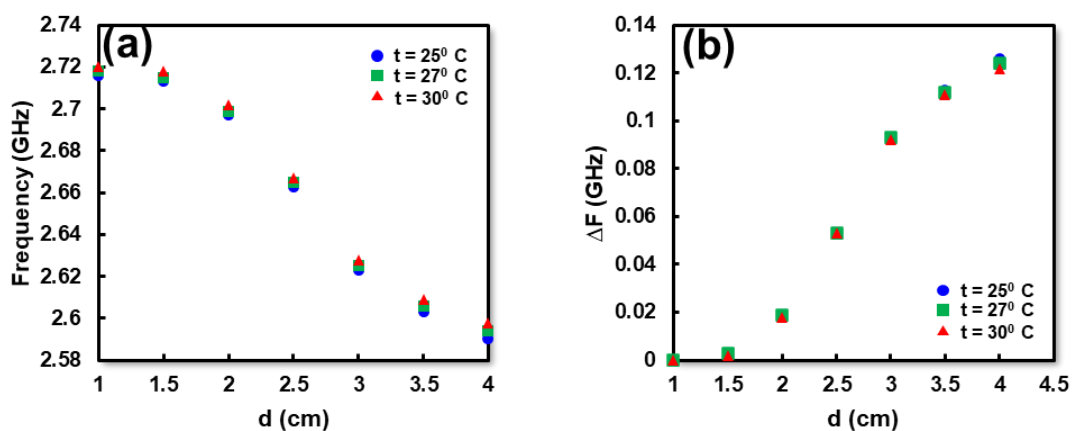


Fig.1 Displacement detection of liquid samples based on different temperatures; (a) response of the resonant frequency, (b) ΔF of proposed sensor.

Table 1. Measurement result of displacement detection based on different temperatures.

d	Frequency (GHz)			Delta F (GHz)		
	t = 25° C	t = 27° C	t = 30° C	t = 25° C	t = 27° C	t = 30° C
1	2.716	2.718	2.72	0	0	0
1.5	2.713	2.715	2.718	0.003	0.003	0.002
2	2.697	2.699	2.702	0.019	0.019	0.018
2.5	2.663	2.665	2.667	0.053	0.053	0.053
3	2.623	2.625	2.628	0.093	0.093	0.092
3.5	2.603	2.606	2.609	0.113	0.112	0.111
4	2.59	2.594	2.598	0.126	0.124	0.122

Based on Fig.1 (a), changes in temperature in the sample have an impact on shifting the resonant frequency of the resonator towards high frequencies correlated with previous work [34] [39]. For example, the resonant frequency of the sensor shifts from 2.716 GHz to 2.718 GHz and 2.72 GHz for temperature changes of 25^o C, 27^oC and 30^o C as shown in **Table I**. The maximum ΔF of the proposed sensor for three different temperatures are 0.126 GHz, 0.124 GHz and 0.122 GHz respectively as shown in **Fig. 1 (b)**. The sensitivity of the sensor based on temperature changes is 31.5 MHz/cm, 31 MHz/cm and 30.5 MHz/cm respectively. These findings indicate that changing the temperature of the sample has an impact on the shift in the resonance frequency and sensitivity of

the sensor but is not significant. Therefore, the effect of large variations in temperature changes can be further investigated thoroughly in the future in order to understand the behavior of the materials' properties.

Author action: We updated the manuscript by adding new data from the displacement detection measurement process on samples with different temperatures shown in Fig. 17 (a) and Fig. 17 (b), page 9. We have also added a new reference [39] to validate the measurement result.

Kindly refer to: Section III. Measurement and Verification, Sub Section B: Liquid Angular Detection, Fig. 17, page 6.

Referring to **Fig.17 (a)**, changes in temperature in the sample have an impact on shifting the resonant frequency of the resonator towards high frequencies correlated with previous work [34] [39]. The maximum ΔF of the proposed sensor for three different temperatures are 0.126 GHz, 0.124 GHz and 0.122 GHz respectively as shown in **Fig. 17 (b)**. The sensitivity of the sensor based on temperature changes is 31.5 MHz/cm, 31 MHz/cm and 30.5 MHz/cm respectively. These findings indicate that changing the temperature of the sample has an impact on the shift in the resonance frequency and sensitivity of the sensor but is not significant. Therefore, the temperature of the sample must be verified before the measurement process is carried out to obtain optimal performance.

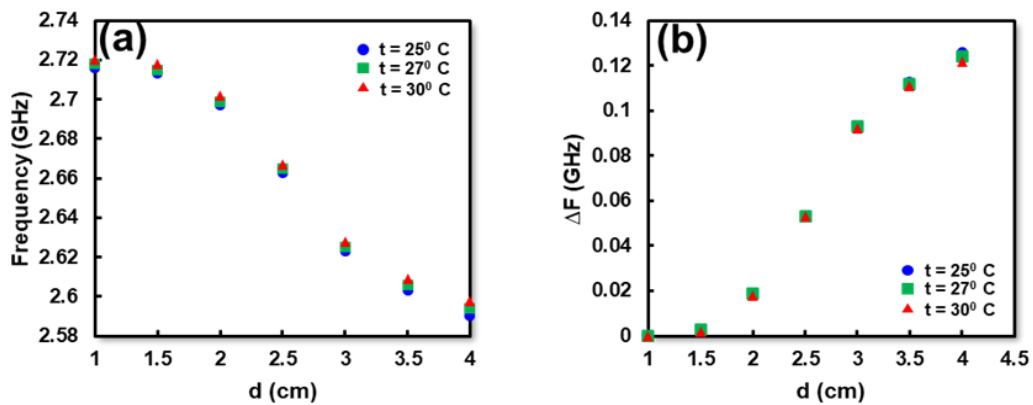


Fig. 17. Displacement detection of liquid samples based on different temperatures; (a) response of the resonant frequency, (b) ΔF of proposed sensor.

Reference:

- [34] A. A. Abduljabar, H. Hamzah, and A. Porch, "Double Microstrip Microfluidic Sensor for Temperature Correction of Liquid Characterization," *IEEE Microw. Wirel. Components Lett.*, vol. 28, no. 8, pp. 735–737, 2018, doi: 10.1109/LMWC.2018.2849218.
- [39] A. A. Abduljabar, N. Clark, J. Lees, and A. Porch, "Dual Mode Microwave Microfluidic Sensor for Temperature Variant Liquid Characterization," *IEEE Trans. Microw. Theory Tech.*, vol. 65, no. 7, pp. 2572–2582, 2017, doi: 10.1109/TMTT.2016.2647249.

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2022.Doi Number

Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor

Syah Alam¹, (Student Member IEEE), Indra Surjati¹, (Member IEEE), Lydia Sari¹, (Member IEEE), R. Deiny Mardian¹, (Member IEEE), Marouane Abicha², (Student Member IEEE), Zahriladha Zakaria³, (Senior Member IEEE), Teguh Firmansyah⁴, (Member IEEE), Mudrik Alaydrus⁵, (Senior Member IEEE), Yusnita Rahayu⁶, (Senior Member IEEE)

¹Department of Electrical Engineering, Universitas Trisakti, West Jakarta, Indonesia

²Department of Electrical Engineering, Polytechnic Nantes, Rue Christian Pauc, 44300 Nantes, France

³Faculty of Electronic and Computer Technology and Engineering, Universiti Teknikal Malaysia Melaka (UTeM), Malaysia

⁴Department of Electrical Engineering, Universitas Sultan Ageng Tirtayasa, Kota Serang, Banten 42124, Indonesia

⁵Department of Electrical Engineering, Universitas Mercu Buana, West Jakarta, Indonesia

⁶Department of Electrical Engineering, Universitas Riau, Pekanbaru, Indonesia

Corresponding author: Syah Alam (e-mail: syah.alam@trisakti.ac.id) / Zahriladha Zakaria (zahriladha@utem.edu.my)

“This work was funded by Universitas Trisakti and UTeM through overseas research collaborations for fiscal years of 2024”

ABSTRACT This paper proposes dual functional microwave sensor for displacement and angular detection of liquid material based on electric coupled (ELC) resonator. The liquid was placed in polystyrene-mm pipe channel filled with water content. The proposed resonator uses a two-port band stop filter operating at a resonant frequency of 2.72 GHz. **Polystyrene-mm pipe channels are used to accommodate water samples placed in the sensing area of the sensor in the center of the ELC resonator.** Displacement and angular detection were observed based on the shift in the resonant frequency of the resonator. Based on the measurement results, the proposed sensor has a sensitivity for displacement detection of 31.5 MHz/cm with a distance range of $d = 1 - 4$ cm while for angular detection it is 0.33 MHz/ $^{\circ}$ with a rotation angle of $0 - 90^{\circ}$ for polystyrene-mm pipe channel filled with water content. This paper makes a significant contribution by proposed a dual functional microwave sensor for displacement and angular detection that can be recommended for the automotive, robotics and aerospace industries.

INDEX TERMS dual functional, displacement, angular, polystyrene-mm pipe, microwave sensor

I. INTRODUCTION

Displacement sensors play an important role for several industries that require high precision such as the automotive, robotics and aerospace industries[1][2][3][4]. Generally, displacement sensors consist of two types, including linear and angular displacement. Linear displacement is determined based on distance while angular displacement is based on the angle between the sensor and the sample[5][6]. One of the strategies for detecting sample displacement is to utilize a microwave sensor[7][8][9][10]. Microwave sensors have advantages including compact design, low cost and high accuracy. Microwave sensors have been widely developed to detect the characteristics of

solid materials [11]–[13], liquids[14]–[17] and displacement[18]–[20]. Several previous works proposed sensors for linear and angular displacement detection in solid materials using microwave sensors with a certain dynamic range based on frequency shift[21][22], notch depth [23][24] and phase variation[25][26]. **Generally, rotation and displacement detection using microwave sensors is proposed for solid materials using stators and rotators where the sample is rotated in the sensing area with a certain dynamic range[27]–[29]. However, this creates friction between the sample and the sensor which has the potential to damage the surface of the sensor. In addition,**

the sample is placed on an open surface, so it is greatly influenced by changes in temperature and environment. Another constraint, the proposed sensor from previous work only has one single function so it cannot be used for displacement and rotation detection separately. In addition, sensors for displacement and rotation detection are only proposed for solid materials and are not supported for detection in liquid samples. Therefore, microwave sensors that have the capability to detect displacement and rotation of liquid samples are needed. Moreover, liquid displacement sensors are very useful for several applications, including biomedical and robotics [30], health monitoring and mobile healthcare[31]. This work provides an excellent solution by proposing a microwave sensor that has dual functional characteristics for displacement and angular detection for liquid samples. Furthermore, to maintain and control the influence of temperature and environment, the sample is contained in a polystyrene-mm pipe channel[32]–[34]. Moreover, polystyrene-mm pipe is proposed to reduce friction between the sensor and the sample so that the sensor surface is more durable and protected. Displacement and angular detection are determined based on the shift in the resonant frequency of the resonator. The main contribution of this work is to produce a dual functional microwave sensor that has the capability for displacement and angular detection in liquid samples in polystyrene-mm pipe channels. The proposed sensor has been successfully simulated and validated through the measurement process. Based on the measurement results, the proposed sensor has the ability to detect liquid displacement with a distance range of 1 - 4 cm and for angular detection with an angle range of 0 - 90°.

II. WORKING PRINCIPLE OF PROPOSED SENSOR

This section explains in detail the development model, structure of the ELC resonator and the sample placement scenario of the proposed sensor.

A. STRUCTURE OF ELC RESONATOR

The proposed microwave sensor based on ELC resonator uses RO4003C with permittivity of 3.55, $\tan \delta$ of 0.0027 and thickness of 0.587 mm. The proposed resonator operates at a resonant frequency of $f_r = 2.69$ GHz with two ports representing $P1$ and $P2$. The structure of the proposed sensor is shown in Fig. 1(a) while the concentration of the electric field and magnetic field is shown in Fig. 1(b) and Fig 1(c). The structure of the ELC resonator consists of the left and right inductive arms, while the capacitive area is in the gap between the strips in the middle of the resonator. The overall dimension of ELC resonator is shown in Table 1. Based on the simulation results using HFSS 15.0, the highest electric field concentration at $f_r = 2.69$ GHz is in the arms and gaps between the strips of the ELC resonator as shown in Fig.1 (b), while the magnetic field concentration vanishes as shown in Fig.1 (c).

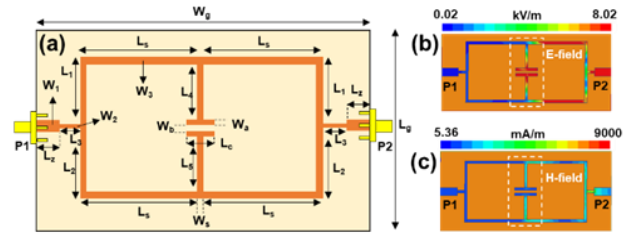


FIGURE 1. (a) Structure of Electric field coupled resonator, (b) E-field at $f_r = 2.69$ GHz, (c) H-field at $f_r = 2.69$ GHz

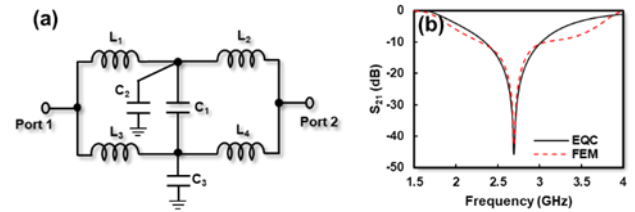


FIGURE 2. (a) Equivalent circuit of electric field coupled resonator, (b) comparison of EQC and FEM of electric field coupled resonator

Based on perturbation theory, the area of the resonator with a high electric field can be used to detect the characteristics of the sample[35].

Furthermore, the equivalent circuit of the ELC resonator can be derived based on L and C model as shown in Fig.2 (a). The arm of the resonator is represented as an inductor while the gap between strip is represented as a capacitor. The values of L and C are extracted using AWR 2009 where $L_1 = L_2 = L_3 = L_4 = 8.23$ nH, $C_1 = 0.17$ pF and $C_2 = 0.99$ pF and $C_3 = 1.25$ pF which are connected to port 1 and port 2 with an impedance of 50Ω . Therefore, the resonant frequency (f_r) of resonator can be determined using following Eq. (1)[36]:

$$f_r = \frac{1}{2\pi\sqrt{LC}} \quad (1)$$

A comparison of the simulation results from EQC and FEM is shown in Fig. 2 (b) where the results are both in line and operating at $f_r = 2.69$ GHz.

TABLE I
DIMENSION OF PROPOSED ELC RESONATOR

Parameter	Value (mm)	Parameter	Value (mm)
W_g	70	L_4	9
L_g	30	L_5	9
L_s	24.5	L_c	9
L_1	11	L_z	7
L_2	11	W_a	1
L_3	3	W_b	1
W_1	3	W_2, W_3	1

B. DEVELOPMENT MODEL OF ELC RESONATOR

The ELC resonator was developed in two steps where the proposed characteristic is a band stop response. The model

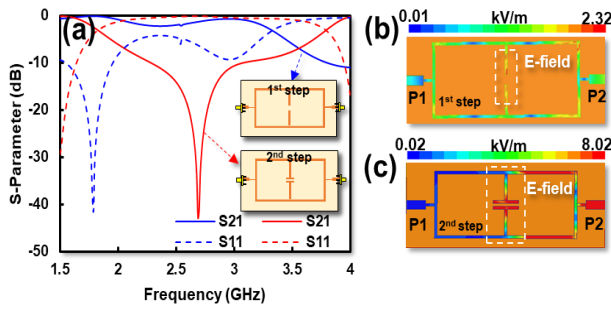


FIGURE 3. Development model of ELC resonator; (a) response of S-parameters, (b) E-field concentrations of ELC resonator at 1st and 2nd step

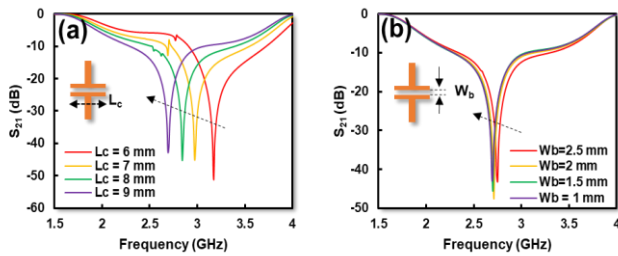


FIGURE 4. Iteration process; (a) iteration of L_c , (b) iteration of W_b

development of the ELC resonator is shown in Fig. 3 (a), Fig. 3 (b) and Fig. 3 (c).

The characteristics of the S-parameters at the 1st step show that the resonator has a band pass response where $S_{11} \leq -10$ dB while $S_{21} \geq -10$ dB in the frequency range of 1.5 - 3.2 GHz as shown by the red line in Fig. 3 (a). Furthermore, for the 2nd step, the characteristics of the S-parameters show the band stop response where $S_{11} \geq -10$ dB while $S_{21} \leq -10$ dB in the frequency range of 1.7 GHz - 3.82 GHz as shown by the blue line in Fig.3 (a). In addition, the characteristics of the electric field of the resonator for the 1st and 2nd steps are also observed as shown in Fig.3 (b) and Fig. 3(c). The electric field concentration is observed at $f_r = 2.69$ GHz where for the 1st step the electric field is concentrated in the center of the ELC resonator while for the 2nd step it is in the gap between the strips of the ELC resonator.

Next, several iterations are carried out to control the resonant frequency and S_{21} of the resonator as shown in Fig. 4 (a) and Fig. 4 (b). Fig. 4 (a) shows that the iteration of L_c causes the resonance frequency to shift lower in line with increasing length of L_c . In addition, the gap between the strips of the ELC resonator represented by W_b also has an impact on the resonant frequency and S_{21} of the resonator. Increasing the gap width W_b causes the resonant frequency of the resonator to shift towards high. This finding shows that the gap in the strip is an area that has high sensitivity so it can be recommended as a sensing area for placing samples.

C. FABRICATION OF PROPOSED RESONATOR

The fabrication results of the front and back side of the resonator are shown in Fig.5 (a) and Fig. 5 (b) where the ELC resonator is in the front layer and the ground plane is in the

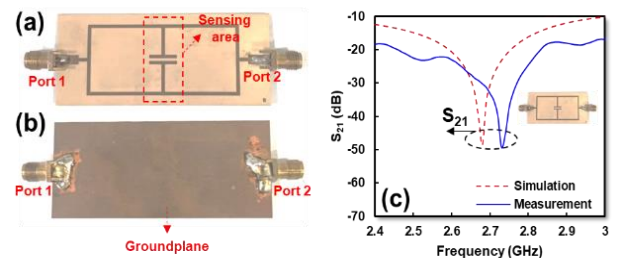


FIGURE 5. (a) Fabrication of ELC resonator at the front side, (b) fabrication of ELC resonator at the back side, (c) simulation and measurement of proposed resonator

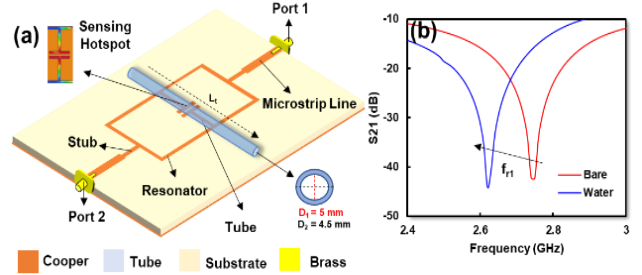


FIGURE 6. (a) Scenario placement of sample, (b) simulation of bare and with water condition.

back layer. The ELC resonator is connected to port 1 and port 2 and has the characteristics of a Band Stop Filter (BSF). Moreover, the comparison of simulation and measurement results from the resonator is shown in Fig. 5 (c).

Based on the measurement results, there is a slight difference between measurement and simulation result where the resonance frequency shifts from 2.69 GHz to 2.72 GHz. This is due to errors from the fabrication process and the permittivity of RO4003C which is in the range 3.38 - 3.55 [37][38].

D. SCENARIO OF SAMPLE PLACEMENT

The sample placement scenario is determined based on the location of the resonator with the highest electric field as shown in Fig.6 (a). In this paper, the sample is placed in the center of the ELC resonator using a polystyrene-mm pipe channel based on polystyrene-mm pipe channel [17] with a permittivity of 3.1 and a diameter represented by D_1 and D_2 of 5 mm and 4.5 mm and length of polystyrene-mm pipe channel represented by L_r of 40 mm, respectively. The sample placement scenario consists of two conditions, including the bare condition where the polystyrene-mm pipe channel is filled with air samples and the other condition is when the polystyrene-mm pipe channel is filled with water samples. The polystyrene-mm pipe channel is placed in line with the sensing area of the ELC resonator which is located in the middle arm and the gap of the resonator.

The simulation results from bare conditions and with water samples shown in Fig. 6 (b) show that the resonance frequency of the resonator moves to the lower frequency from 2.75 GHz to 2.62 GHz because the permittivity of water

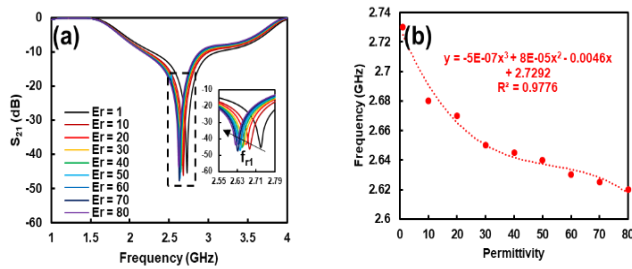


FIGURE 7. (a) Simulation with range ϵ_r of 1 – 80, (b) correlation between frequency and permittivity range ϵ_r of 1 – 80

is higher than bare where the permittivity of water is $\epsilon_r = 80$ and bare is $\epsilon_r = 1$. Furthermore, to demonstrate the performance of the proposed sensor, the permittivity of the sample inside the polystyrene-mm pipe channel is changed to a permittivity range of $\epsilon_r = 1 - 80$. Based on Fig.7 (a), the resonant frequency of the resonator shifts from 2.73 GHz to 2.62 GHz with a permittivity range of 1 – 80 with ΔF of 0.11 GHz.

It should be noted, based on the simulation results from Fig. 7 (a) and Fig.7 (b), it shows that changes in the permittivity of the sample in the polystyrene-mm pipe channel greatly affect the resonant frequency of the resonator where the resonant frequency moves to a lower frequency in line with an increase in the permittivity of the sample.

III. MEASUREMENT RESULT AND VERIFICATION

In this chapter, the measurement process and scenarios for liquid displacement and angular detection are explained in detail. The measurement process was carried out in the laboratory using a Vector Network Analyzer (VNA) with a frequency range of 2 - 3 GHz, a frequency step size of 0.01 GHz and an ambient temperature of 25°C.

A. SCENARIO FOR LIQUID DISPLACEMENT DETECTION

The proposed resonator consisting of port 1 and port 2 is connected to the vector analyzer using a coaxial cable with an impedance of 50Ω where the sensor and sample are placed using a holder as shown in Fig. 8 (a). Liquid displacement detection is proposed by placing a stopper in the center of the sample in a polystyrene-mm pipe channel filled with water content as shown in Fig.8 (b).

It should be noted, the sample in the plastic tube [17] placed carefully and is in direct contact with the sensing area in the middle of the ELC resonator. The stopper is placed in the middle of the polystyrene-mm pipe channel so that the water sample inside is clogged. Additionally, the area of the clogged polystyrene-mm pipe channel is filled with air samples represented by bare. The sample in the polystyrene-mm pipe channel will be moved vertically using a holder with a distance d of 1 - 4 cm as shown in Fig.8 (c). Furthermore, liquid displacement detection is determined by observing the shift in the resonance frequency when the sample moves through the sensing area of the resonator.

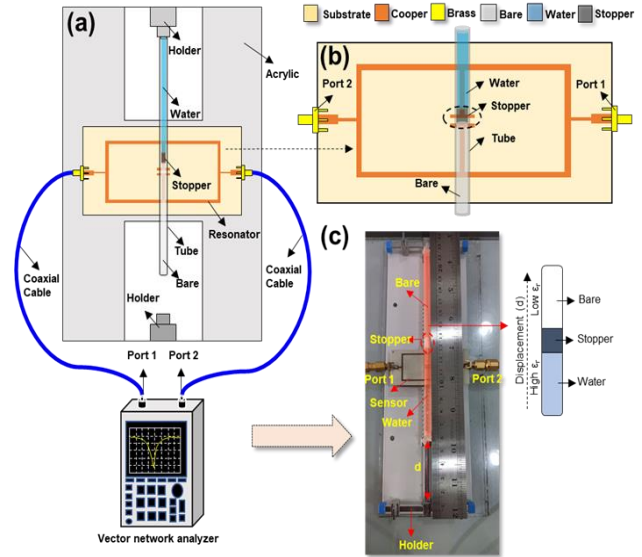


FIGURE 8. (a) Scenario for liquid displacement detection, (b) detail structure of liquid displacement detection, (c) measurement setup for liquid displacement detection using proposed sensor.

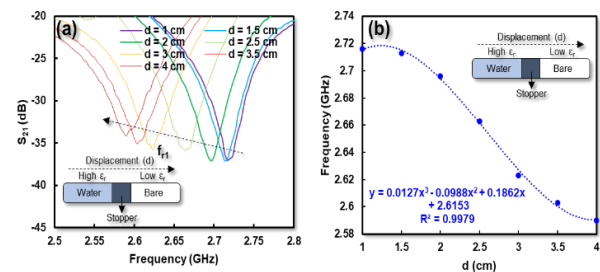


FIGURE 9. (a) Measurement result of liquid displacement detection with $d = 1 - 4$ cm, (b) correlation between resonant frequency and liquid displacement with $d = 1 - 4$ cm.

Based on the measurement results, the resonant frequency of the resonator shifts from 2.716 GHz to 2.59 GHz with ΔF of 0.126 GHz in line with the sample displacement in the polystyrene-mm pipe channel which is clogged by a stopper with a distance range of $d = 1 - 4$ cm as shown in Fig.8 (a) and Fig.8 (b). This finding shows that the proposed sensor has interacted with the sample to detect the displacement of the sample. The resonant frequency of the resonator shifts to low frequencies slowly in line with the displacement of the sample. This occurs because there is a change in the permittivity of the sample, where the water sample has a higher permittivity than the bare air sample, so it greatly influences the resonance frequency of the resonator. Furthermore, displacement detection with the proposed resonator can be determined based on Eq. (2)[7]:

$$f_{r(c)} = 0.01273 d^3 - 0.988 d^2 + 0.1862 d - 2.6153 \quad (2)$$

where $f_{r(b)}$ is the resonant frequency of the resonator for displacement detection and d represents the distance of the displacement in the water-filled polystyrene-mm pipe channel.

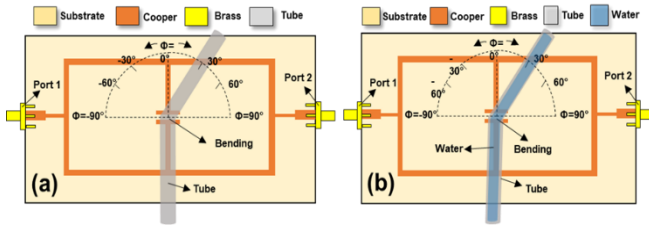


FIGURE 10. Scenario of angular detection from 0° - 90° ; (a) without water, (b) with water.

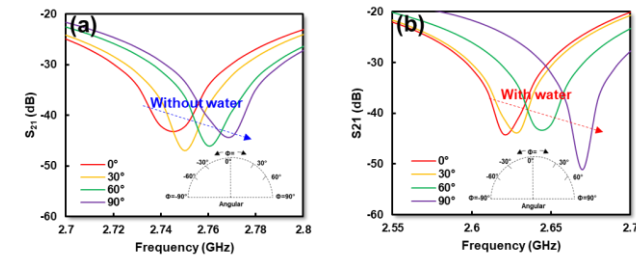


FIGURE 11. Simulation result of angular detection from 0° - 90° ; (a) without water, (b) with water

Moreover, the sensitivity (S) of the sensor is determined based on the following Eq. (3)[21]:

$$S = \frac{\Delta F \text{ (GHz)}}{\Delta d \text{ (cm)}} \quad (3)$$

where ΔF represents the shift in the resonant frequency of the resonator and Δd represents the displacement of the sample in the polystyrene-mm pipe channel. Based on Eq. (3), the sensitivity of the sensor for displacement detection is 31.5 MHz/cm with a range d of 1 - 4 cm.

B. SCENARIO FOR LIQUID ANGULAR DETECTION

Furthermore, liquid angular detection is proposed by rotating the sample inside the polystyrene-mm pipe channel with an angle range of 0° - 90° . In this paper, the rotation of the sample in the polystyrene-mm pipe channel is divided into two conditions, including with water and without water as shown in Fig. 10 (a) and Fig.10 (b). The sample in the polystyrene-mm pipe channel is rotated clockwise at angles of 0° , 30° , 60° and 90° .

The simulation results in Fig.11 (a) and Fig.11 (b) show that the resonant frequency of the resonator shifts to a higher frequency in line with increasing the rotation angle of the sample for conditions without water and with water content. The resonant frequency shifts from 2.74 GHz to 2.77 GHz in conditions without water, while for conditions with water it shifts from 2.62 GHz to 2.67 GHz with an angle range of 0° - 90° as shown in Fig. 12 (a) and Fig. 12 (b).

Furthermore, validation of angular detection is carried out by measuring the process using a VNA connected to port 1 and port 2 of the resonator placed in the holder using a coaxial cable with an impedance of 50Ω . The sample in the polystyrene-mm pipe channel is carefully placed in the sensing area

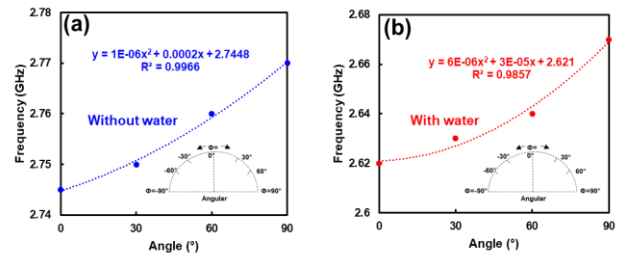


FIGURE 12. Simulation result of correlation between resonant frequency and angle from 0° - 90° ; (a) without water, (b) with water

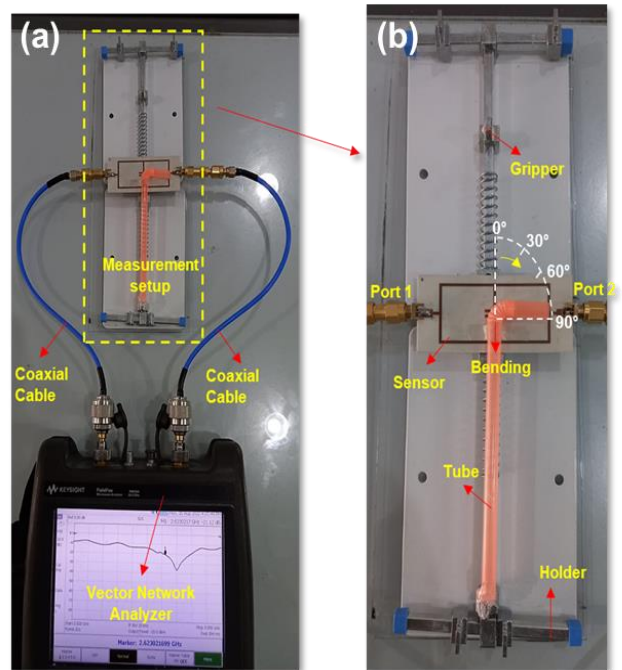


FIGURE 13. (a) Measurement setup with VNA, (b) Measurement scenario for angular detection from 0° - 90°

which is located in the middle of the ELC resonator as shown in Fig.13 (a) and Fig.13 (b).

Moreover, to ensure that the sample position is constant and stable, a gripper is proposed in the measurement setup to lock the position of the sample and sensor. The measurement results of angular detection when the polystyrene-mm pipe channel is filled with water and without water are shown in Fig.14 (a) and Fig.14 (b).

Based on the measurement results, the frequency of the resonator shifts from 2.716 GHz to 2.723 GHz when the polystyrene-mm pipe channel is without water, whereas when the polystyrene-mm pipe channel is filled with water, the frequency shifts from 2.675 GHz to 2.705 GHz with an angle range of 0° - 90° as shown in Fig.15 (a) and Fig.15 (b). These findings indicate that the proposed sensor interacts with the sample so that the resonant frequency of the resonator changes in line with an increase in the rotation angle of the sample in the polystyrene-mm pipe channel.

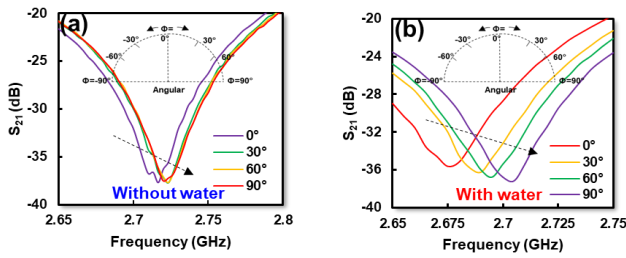


FIGURE 14. Measurement result of angular detection from 0° - 90°; (a) without water, (b) with water

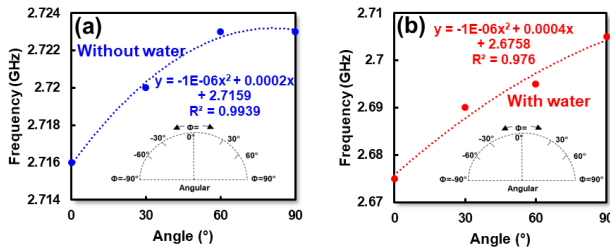


FIGURE 15. Measurement result of correlation between resonant frequency and angular from 0° - 90°; (a) without water, (b) with water

It should be noted, the resonance frequency shifts to a higher frequency due to the interaction of the sample and sensor which changes while the sample inside polystyrene-mm pipe channel shifts away from the surface of the sensing area with water content to bare condition (without sample). In other words, the permittivity of the sample changes from higher to lower. This condition changes the concentration of the electric field of the resonator and greatly influences the resonant frequency of the resonator.

Furthermore, angular detection of polystyrene-mm pipe channel without and with water can be determined based on the following Eq. (4) and Eq. (5):

$$f_r (ba) = -0.000001 x^2 - 0.0002 x + 2.7159 \quad (4)$$

$$f_r (bw) = -0.000001 x^2 - 0.0004 x + 2.6578 \quad (5)$$

where $f_r (ba)$ and $f_r (bw)$ is the resonant frequency of the resonator for angular detection with and without water and x represents the angle of the angular in the water-filled polystyrene-mm pipe channel.

Moreover, the sensitivity (S) of the sensor is determined based on the following Eq. (6)[18]:

$$S = \frac{\Delta F (GHz)}{\Delta \theta (^\circ)} \quad (6)$$

where ΔF represents the shift in the resonant frequency of the resonator and $\Delta \theta$ represents the rotation of the sample in the polystyrene-mm pipe channel.

Based on Eq. (6), the sensitivity of the sensor for angular detection of polystyrene-mm pipe channel without and with water content are 0.07 MHz/° and 0.33 MHz/° with a dynamic range of 0 - 90°. Moreover, average and deviation of repeatability measurements with 3 cycles are proposed to

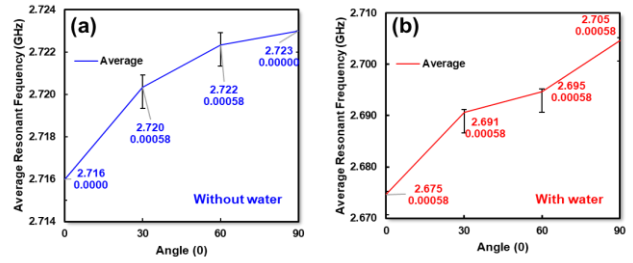


FIGURE 16. Average and deviation from repeatability measurement for angular detection; (a) without water, (b) with water.

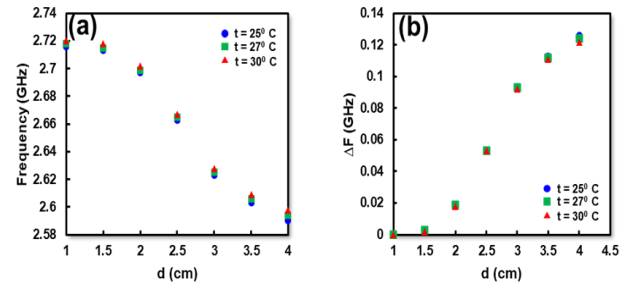


FIGURE 17. Displacement detection of liquid samples based on different temperatures; (a) response of the resonant frequency, (b) ΔF of proposed sensor.

show the error bars of angular detection for sample filled in polystyrene-mm pipe channel with and without water using the proposed sensor as shown in Fig.16.

Based on Fig.16 (a) and Fig. 16 (b), the deviation from the repeatability measurement results is in the range 0 - 0.00058 for angular detection with and without water. These findings indicate that the proposed sensor has a low error bar for angular detection in samples with and without water. To show the effect of changing the temperature of the liquid sample on displacement detection, validation with measurements at three different temperatures is proposed as shown in Fig. 17 (a) and Fig. 17 (b).

Referring to Fig.17 (a), changes in temperature in the sample have an impact on shifting the resonant frequency of the resonator towards high frequencies correlated with previous work [34] [39]. The maximum ΔF of the proposed sensor for three different temperatures are 0.126 GHz, 0.124 GHz and 0.122 GHz respectively as shown in Fig. 17 (b). The sensitivity of the sensor based on temperature changes is 31.5 MHz/cm, 31 MHz/cm and 30.5 MHz/cm respectively. These findings indicate that changing the temperature of the sample has an impact on the shift in the resonance frequency and sensitivity of the sensor but is not significant. Therefore, the temperature of the sample must be verified before the measurement process is carried out to obtain optimal performance.

IV. VALIDATION WITH PREVIOUS WORK

To validate the performance of the proposed sensor, a comprehensive evaluation with previous work is proposed as shown in Table 2. Based on previous work, the detection of linear and angular displacement of samples using microwave

TABLE II
COMPARISON OF PROPOSED SENSOR BASED ON DISPLACEMENT / ROTATION TECHNIQUE WITH EXISTING WORKS

Ref	Method	Freq (GHz)	Sensing mechanism	Sample	Dynamic Range		Sensitivity Average		Polystyrene mm-pipe	Sensor Type		Dual Functional
					Displacement	Angular	Displacement	Angular		Displacement	Angular	
[1]	Step impedance transmission lines	2.00	Phase variation	Solid	0 – 40 mm	-	312.7% / mm	-	-	Yes	-	-
[3]	H-shaped resonator	4.80	Freq shift	Solid	0 – 12 mm	-	147.8 MHz/mm	-	-	Yes	-	-
[7]	Dielectric resonator	2.59	Notch depth	Solid	1 – 10 mm	-	0.095 dB/mm	-	-	Yes	-	-
[19]	Transversal signal interference	3.70	Freq shift	Solid	-	0 – 180°	-	3.15 MHz/°	-	-	Yes	-
[21]	CSRR	0.92	Freq shift	Solid	-	0 – 90°	-	2.37 MHz/°	-	-	Yes	-
[23]	Transmission line	5.80	Notch depth	Solid	-	0 – 90°	-	0.095 dB/°	-	-	Yes	-
[27]	TFS - coupled slot line	2.17	Freq shift	Solid	-	0 – 90°	-	2.27 MHz/°	-	-	Yes	-
[28]	U-shaped resonator	1.20	Freq shift	Solid	-	0 – 180°	-	1.94 MHz/°	-	-	Yes	-
[32]	Stepped impedance Transmission lines	2.00	Phase variation	Solid	0 – 3 mm	-	528.7% / mm	-	-	Yes	-	-
This work	ELC Resonator	2.72	Freq shift	Liquid	1 – 4 cm	0 – 90°	31.5 MHz/cm	0.33 MHz/°	Yes	Yes	Yes	Yes

sensors are divided into three types of mechanisms based on frequency shift, phase variation and notch depth.

Previous work [1][32] proposed a microwave sensor based on transmission line for displacement detection of solid materials with a maximum dynamic range of 3 - 40 mm and maximum sensitivity of 312.7% / mm and 528.7% / mm where the displacement detection was determined based on phase variations. However, the sensor only has one function for displacement detection and cannot be used for angular displacement of materials. Other works [7] [23] proposed a microwave sensor for displacement and rotation detection of solid materials based on notch depth with a maximum dynamic range of 10 mm and 90°. Nevertheless, the proposed sensor only supports displacement detection in solid materials so it cannot be used for liquid materials. Furthermore, detection of linear displacement of solid materials based on resonant frequency shifts has been described in [3] where the maximum dynamic range is 12 mm with a sensitivity of 147.8 MHz/mm. Rotation detection of solid materials based on frequency shift has also been described in [19][21][23][28] where the solid material is moved using a rotator and the sensor is placed on the stator. However, high friction between the material and the sensor has the potential to damage the surface of the resonator and will reduce the performance of the sensor.

Furthermore, a comprehensive comparison of types, sensing parameters and proposed applications of displacement and rotation sensors is shown in **Table 3**. Previous work [3][19][21][23] proposed a band stop filter for displacement and rotation detection which is recommended for industrial applications including flow detection in liquids, space vehicle

and rotation detection in AC motors. In addition, other work [7][23][27][32] proposed a band stop filter for displacement/rotation detection which is recommended for industrial, biomedical and energy applications while previous work [1], proposed a single port resonator for motor rotation detection AC based on phase variations.

TABLE III
COMPARISON OF TYPE, SENSING PARAMETERS AND PROSPECTIVE APPLICATIONS OF DISPLACEMENT / ROTATION SENSORS

Ref	Type of resonator	Sensing parameter	Prospective applications
[1]	Single port resonator	Phase	Industrial
[3]	Band stop filter	S ₂₁	Industrial
[7]	Band pass filter	S ₂₁	Industrial
[19]	Band stop filter	S ₂₁	Industrial
[21]	Band stop filter	S ₂₁	Space vehicle (satellites)
[23]	Band pass filter	Phase	Industrial
[27]	Band pass filter	S ₂₁	Industrial
[28]	Band stop filter	S ₂₁	Industrial
[32]	Band pass filter	S ₂₁	Biomedical and energy
This work	Band stop filter	S ₂₁	Industrial and Biomedical

Therefore, this work makes a significant contribution by proposing a dual functional microwave sensor for translation and angular detection in liquid samples using polystyrene-mm pipe channels. The proposed sensor has the capability to detect displacement and angular detection separately based on the frequency shift of the resonator. Polystyrene-mm pipe channels are proposed to reduce the friction between the

sensor and the sample and maintain the temperature of the sample in order to obtain high-precision measurements. The proposed sensor has excellent performance with a maximum sensitivity of 31.5 MHz/cm for liquid displacement with a range of $d = 1 - 4$ cm and 0.33 MHz/° for angular detection with an angle range of 0 – 90°.

V. CONCLUSION

A microwave sensor with dual functional characteristics for liquid displacement and angular detection in polystyrene-mm pipe channel has been proposed and presented comprehensively in this paper. The proposed sensor is based on an ELC resonator operating at a resonant frequency of 2.72 GHz. The sample used is liquid material contained in a polystyrene-mm pipe channel. Displacement and angular detection are determined based on the shift in the resonant frequency of the resonator. Based on the measurement results, the proposed sensor has a sensitivity of 31.5 MHz/cm with a displacement range of 1 - 4 cm and 0.33 GHz/° with an angle range of 0 - 90°. This paper makes a significant contribution by proposed a dual functional microwave sensor for displacement and angular detection that can be recommended for the automotive, robotics and aerospace industries.

ACKNOWLEDGMENT

This work was supported by Ministry of Education and Culture, Republic of Indonesia, Institute for Research and Community Service Universitas Trisakti and collaborated with Universiti Teknikal Malaysia Melaka (UTeM).

REFERENCES

- [1] J. Muñoz-Enano, P. Vélez, L. Su, M. Gil-Barba, and F. Martín, "A Reflective-Mode Phase-Variation Displacement Sensor," *IEEE Access*, vol. 8, pp. 189565–189575, 2020, doi: 10.1109/ACCESS.2020.3031032.
- [2] K. Xu *et al.*, "Novel Microwave Sensors Based on Split Ring Resonators for Measuring Permittivity," *IEEE Access*, vol. 6, pp. 26111–26120, 2018, doi: 10.1109/ACCESS.2018.2834726.
- [3] P. W. Zhu *et al.*, "Design of H-shaped planar displacement microwave sensors with wide dynamic range," *Sensors Actuators A Phys.*, vol. 333, p. 113311, 2022, doi: 10.1016/j.sna.2021.113311.
- [4] Z. Shaterian and M. Mrozowski, "Multifunctional Bandpass Filter/Displacement Sensor Component," *IEEE Access*, vol. 11, no. March, pp. 27012–27019, 2023, doi: 10.1109/ACCESS.2023.3258545.
- [5] J. Naqui and F. Martín, "Angular displacement and velocity sensors based on electric-LC (ELC) loaded microstrip lines," *IEEE Sens. J.*, vol. 14, no. 4, pp. 939–940, 2014, doi: 10.1109/JSEN.2013.2295518.
- [6] J. Ma, Y. Chen, and J. Huang, "A Microwave Displacement Sensor Based on SIW Double Reentrant Cavity with Ring Gaps," *Prog. Electromagn. Res. M*, vol. 113, no. September, pp. 35–45, 2022, doi: 10.2528/PIERM22050102.
- [7] A. V. Praveen Kumar and P. Regalla, "A Transmission Mode Dielectric Resonator as a Displacement Sensor," *IEEE Sens. J.*, vol. 20, no. 13, pp. 6979–6984, 2020, doi: 10.1109/JSEN.2020.2977893.
- [8] M. Abdolrazzagh, N. Kazemi, V. Nayyeri, and F. Martín, "AI-Assisted Ultra-High-Sensitivity/Resolution Active-Coupled CSRR-Based Sensor with Embedded Selectivity," *Sensors*, vol. 23, no. 13, pp. 1–20, 2023, doi: 10.3390/s23136236.
- [9] M. Abdolrazzagh, N. Katchinskiy, A. Y. Elezzabi, P. E. Light, and M. Daneshmand, "Noninvasive Glucose Sensing in Aqueous

- Solutions Using an Active Split-Ring Resonator," *IEEE Sens. J.*, vol. 21, no. 17, pp. 18742–18755, 2021, doi: 10.1109/JSEN.2021.3090050.
- [10] N. Kazemi, M. Abdolrazzagh, P. E. Light, and P. Musilek, "In-human testing of a non-invasive continuous low-energy microwave glucose sensor with advanced machine learning capabilities," *Biosens. Bioelectron.*, vol. 241, p. 115668, Dec. 2023, doi: 10.1016/j.bios.2023.115668.
- [11] S. Alam, Z. Zakaria, I. Surjati, N. A. Shairi, M. Alaydrus, and T. Firmansyah, "Integrated Microwave Sensor and Antenna Sensor Based on Dual T-Shaped Resonator Structures for Contact and Noncontact Characterization of Solid Material," *IEEE Sens. J.*, vol. 23, no. 12, pp. 13010–13018, 2023, doi: 10.1109/JSEN.2023.3273008.
- [12] R. A. Alahnomi, Z. Zakaria, E. Ruslan, S. R. Ab Rashid, and A. A. Mohd Bahar, "High-Q sensor based on symmetrical split ring resonator with spurlines for solids material detection," *IEEE Sens. J.*, vol. 17, no. 9, pp. 2766–2775, 2017, doi: 10.1109/JSEN.2017.2682266.
- [13] S. Kiani, P. Rezaei, M. Navaei, and M. S. Abrishamian, "Microwave Sensor for Detection of Solid Material Permittivity in Single/Multilayer Samples With High Quality Factor," *IEEE Sens. J.*, vol. 18, no. 24, pp. 9971–9977, 2018, doi: 10.1109/JSEN.2018.2873544.
- [14] S. Kiani, P. Rezaei, and M. Navaei, "Dual-sensing and dual-frequency microwave SRR sensor for liquid samples permittivity detection," *Meas. J. Int. Meas. Confed.*, vol. 160, p. 107805, 2020, doi: 10.1016/j.measurement.2020.107805.
- [15] A. A. Abduljabar, H. Hamzah, and A. Porch, "Multi-resonators, microwave microfluidic sensor for liquid characterization," *Microw. Opt. Technol. Lett.*, vol. 63, no. 4, pp. 1042–1047, 2021, doi: 10.1002/mop.32675.
- [16] M. A. Karimi, M. Arsalan, and A. Shamim, "Multi-Channel, Microwave-Based, Compact Printed Sensor for Simultaneous and Independent Level Measurement of Eight Liquids," *IEEE Sens. J.*, vol. 19, no. 14, pp. 5611–5620, 2019, doi: 10.1109/JSEN.2019.2904648.
- [17] S. Mosbah *et al.*, "Compact and Highly Sensitive Bended Microwave Liquid Sensor Based on a Metamaterial Complementary Split-Ring Resonator," *Appl. Sci.*, vol. 12, no. 4, 2022, doi: 10.3390/app12042144.
- [18] C. H. Chio, R. Gomez-Garcia, L. Yang, K. W. Tam, W. W. Choi, and S. K. Ho, "An Angular-Displacement Microwave Sensor Using an Unequal-Length-Bi-Path Transversal Filtering Section," *IEEE Sens. J.*, vol. 20, no. 2, pp. 715–722, 2020, doi: 10.1109/JSEN.2019.2943640.
- [19] C. H. Chio, R. Gomez-Garcia, L. Yang, K. W. Tam, W. W. Choi, and S. K. Ho, "An Angular Displacement Sensor Based on Microwave Transversal Signal Interference Principle," *IEEE Sens. J.*, vol. 20, no. 19, pp. 11237–11246, 2020, doi: 10.1109/JSEN.2020.2998181.
- [20] M. H. Zarifi and M. Daneshmand, "Wide dynamic range microwave planar coupled ring resonator for sensing applications," *Appl. Phys. Lett.*, vol. 108, no. 23, 2016, doi: 10.1063/1.4953465.
- [21] A. K. Jha, N. Delmonte, A. Lamecki, M. Mrozowski, and M. Bozzi, "Design of Microwave-Based Angular Displacement Sensor," *IEEE Microw. Wirel. Components Lett.*, vol. 29, no. 4, pp. 306–308, 2019, doi: 10.1109/LMWC.2019.2899490.
- [22] A. M. Gargari *et al.*, "A Wireless Metamaterial-Inspired Passive Rotation Sensor with Submilliradian Resolution," *IEEE Sens. J.*, vol. 18, no. 11, pp. 4482–4490, 2018, doi: 10.1109/JSEN.2018.2822671.
- [23] J. Naqui and F. Martín, "Transmission lines loaded with bisymmetric resonators and their application to angular displacement and velocity sensors," *IEEE Trans. Microw. Theory Tech.*, vol. 61, no. 12, pp. 4700–4713, 2013, doi: 10.1109/TMTT.2013.2285356.
- [24] J. Naqui, J. Coromina, A. Karami-Horestani, C. Fumeaux, and F. Martín, "Angular displacement and velocity sensors based on coplanar waveguides (CPWs) loaded with S-shaped split ring resonators (S-SRR)," *Sensors (Switzerland)*, vol. 15, no. 5, pp. 9628–9650, 2015, doi: 10.3390/s150509628.
- [25] Z. Mehrjoo, A. Ebrahimi, G. Beziuk, F. Martín, and K. Ghorbani, "Microwave Rotation Sensor Based on Reflection Phase in Transmission Lines Terminated With Lumped Resonators," *IEEE*

- Sens. J.*, vol. 23, no. 7, pp. 6571–6580, 2023, doi: 10.1109/JSEN.2023.3236638.
- [26] J. Munoz-Enano, P. Velez, L. Su, M. Gil, P. Casacuberta, and F. Martin, “On the Sensitivity of Reflective-Mode Phase-Variation Sensors Based on Open-Ended Stepped-Impedance Transmission Lines: Theoretical Analysis and Experimental Validation,” *IEEE Trans. Microw. Theory Tech.*, vol. 69, no. 1, pp. 308–324, 2021, doi: 10.1109/TMTT.2020.3023728.
- [27] C. H. Chio, K. W. Tam, and R. Gomez-Garcia, “Filtering Angular Displacement Sensor Based on Transversal Section with Parallel-Coupled-Line Path and U-Shaped Coupled Slotline,” *IEEE Sens. J.*, vol. 22, no. 2, pp. 1218–1226, 2022, doi: 10.1109/JSEN.2021.3133452.
- [28] A. Ebrahimi, W. Withayachumnankul, S. F. Al-Sarawi, and D. Abbott, “Metamaterial-inspired rotation sensor with wide dynamic range,” *IEEE Sens. J.*, vol. 14, no. 8, pp. 2609–2614, 2014, doi: 10.1109/JSEN.2014.2313625.
- [29] J. Mata-Contreras, C. Herrojo, and F. Martin, “Detecting the Rotation Direction in Contactless Angular Velocity Sensors Implemented with Rotors Loaded with Multiple Chains of Resonators,” *IEEE Sens. J.*, vol. 18, no. 17, pp. 7055–7065, 2018, doi: 10.1109/JSEN.2018.2853643.
- [30] G. Keulemans, F. Ceysens, and R. Puers, “An ionic liquid based strain sensor for large displacement measurement,” *Biomed. Microdevices*, vol. 19, no. 1, 2017, doi: 10.1007/s10544-016-0141-4.
- [31] Y. Ren, S. Tan, L. Zhang, Z. Wang, Z. Wang, and J. Yang, “Liquid level sensing using commodity wifi in a smart home environment,” *Proc. ACM Interactive, Mobile, Wearable Ubiquitous Technol.*, vol. 4, no. 1, pp. 1–30, 2020, doi: 10.1145/3380996.
- [32] M. H. Zarifi, H. Sadabadi, S. H. Hejazi, M. Daneshmand, and A. Sanati-Nezhad, “Noncontact and Nonintrusive Microwave-Microfluidic Flow Sensor for Energy and Biomedical Engineering,” *Sci. Rep.*, vol. 8, no. 1, pp. 1–10, 2018, doi: 10.1038/s41598-017-18621-2.
- [33] A. Ebrahimi, J. Scott, and K. Ghorbani, “Ultrahigh-Sensitivity Microwave Sensor for Microfluidic Complex Permittivity Measurement,” *IEEE Trans. Microw. Theory Tech.*, vol. 67, no. 10, pp. 4269–4277, 2019, doi: 10.1109/TMTT.2019.2932737.
- [34] A. A. Abduljabar, H. Hamzah, and A. Porch, “Double Microstrip Microfluidic Sensor for Temperature Correction of Liquid Characterization,” *IEEE Microw. Wirel. Components Lett.*, vol. 28, no. 8, pp. 735–737, 2018, doi: 10.1109/LMWC.2018.2849218.
- [35] S. Alam, Z. Zakaria, I. Surjati, N. A. Shairi, M. Alaydrus, and T. Firmansyah, “Multifunctional of dual-band permittivity sensors with antenna using multicascoded T-shaped resonators for simultaneous measurement of solid materials and data transfer capabilities,” *Meas. J. Int. Meas. Confed.*, vol. 217, no. November 2022, p. 113078, 2023, doi: 10.1016/j.measurement.2023.113078.
- [36] S. Alam, Z. Zakaria, I. Surjati, N. A. Shairi, M. Alaydrus, and T. Firmansyah, “Dual-Band Independent Permittivity Sensor Using Single-Port with a Pair of U-Shaped Structures for Solid Material Detection,” *IEEE Sens. J.*, vol. 22, no. 16, pp. 16111–16119, 2022, doi: 10.1109/JSEN.2022.3191345.
- [37] S. Kiani, P. Rezaei, and M. Fakhr, “Real-Time Measurement of Liquid Permittivity Through Label-Free Meandered Microwave Sensor,” *IETE J. Res.*, 2023, doi: 10.1080/03772063.2023.2231875.
- [38] A. Zahedi, F. A. Boroumand, and H. Aliakbrian, “Analytical transmission line model for complex dielectric constant measurement of thin substrates using T-resonator method,” *IET Microwaves, Antennas Propag.*, vol. 14, no. 15, pp. 2045–2052, 2020, doi: 10.1049/iet-map.2019.1117.
- [39] A. A. Abduljabar, N. Clark, J. Lees, and A. Porch, “Dual Mode Microwave Microfluidic Sensor for Temperature Variant Liquid Characterization,” *IEEE Trans. Microw. Theory Tech.*, vol. 65, no. 7, pp. 2572–2582, 2017, doi: 10.1109/TMTT.2016.2647249.



Syah Alam was born in Jakarta, Indonesia. He received Bachelor Education of Engineering (S.Pd) degree in electrical engineering from Universitas Pendidikan Indonesia (UPI) and M.Eng (M.T) degree in telecommunication engineering from Graduate Programme of Electrical Engineering Universitas Trisakti in 2010 and 2012, respectively. In 2018, he joined the Department of Electrical Engineering Universitas Trisakti as a researcher and lecturer. In 2024, he is completed his PhD at Universiti Teknikal Melaka Malaysia (UTeM) in the field of Electronic Engineering (RF and Microwave). His research interests include microstrip antenna, and microwave sensor for various applications.



Indra Surjati was born in Bangkok, Thailand. She received Bachelor of Engineering (Ir.) degree in electrical engineering and M.Eng (M.T) degree in telecommunication engineering from Graduate Programme of Electrical Engineering Universitas Trisakti in 1996, respectively. In 2004 she completed his PhD in Electrical Engineering Department at the University of Indonesia and in 2011 she was confirmed as Professor in the Department of Electrical Engineering at Trisakti. Her research interests include microstrip antenna and microwave circuit for various applications.



Marouane Abicha, a passionate electronics engineering student, was born in Meknès, Morocco. His journey in the field of electronics began at the International Academy of Civil Aviation in Casablanca, Morocco, where he pursued his studies from 2018 to 2020, majoring in Electronics and Telecommunications. Eager to broaden his horizons, he embarked on a dual-degree program at Polytech Nantes in France from 2020 until the present, specializing in Electronics and Digital Technologies. During the summer of 2023, he seized the opportunity to further enrich his academic journey by undertaking an internship in Universitas Trisakti in Jakarta, Indonesia, where he actively contributed to groundbreaking research, specifically delving into the realm of microwave sensors. Currently in his final year of training, he has honed his expertise in Mobile Communication Systems, with a particular focus on the intricate world of radio frequency environments.



Zahrialdha Zakaria was born in Johor, Malaysia. He received the B. Eng. and M. Eng. In Electrical and Electronic Engineering from the Universiti Teknologi Malaysia in 1998 and 2004 respectively, and the PhD degree in Electrical & Electronic Engineering from the Institute of Microwaves and Photonics (IMP), University of Leeds, United Kingdom in 2010. From 1998 to 2002, he was with STMicroelectronics, Malaysia where he worked as Product Engineer. He is currently a Professor at Microwave Research Group (MRG), Faculty of Electronic & Computer Engineering, University Teknikal Malaysia Melaka (UTeM). His research interests include variety of microwave devices development such as planar and nonplanar microwave filters, resonators, amplifiers and antennas. He also investigates energy harvesting and sensors.



Teguh Firmansyah, was born in Subang, Indonesia. He received a B.Eng. and M. Eng degree in electrical engineering from the Department of Electrical Engineering, Universitas Indonesia, in 2010 and 2012, respectively. In 2022, He received his Dr. Eng degree from Shizuoka University Japan as the best graduate. In 2012, he joined the Department of Electrical Engineering, Universitas Sultan Ageng Tirtayasa, as a Researcher and a Lecturer.

He holds two patents for wideband antenna and multiband antenna. His research interests include microwave circuits for various applications and developing multifunctional sensors using acoustic, plasmonic, and microwave resonators.



Mudrik Alaydrus was born in Jakarta, Indonesia. He received the Dipl.-Ing. and Dr.-Ing. degrees in Electrical Engineering from Universitaet Hannover and Universitaet Wuppertal, in 1997 and 2001, respectively. Since 2003, he has worked at Universitas Mercu Buana, Jakarta. Dr. Alaydrus is Senior Member of IEEE and member of Verein der Deutschen Elektroingenieure (VDE). His current researchs include microwave and millimeter wave

components, wireless power transfers, wireless sensor networks, interaction between electromagnetics and materials, and mathematical modeling in signal processing.



Yusnita Rahayu, was born in Pekanbaru, Indonesia. She received B.Eng degree in Electrical Engineering from the Department of Electrical Engineering, National Institute of Science and Technology Jakarta, in 1999. She received her M.Eng and Ph.D degrees from Universiti Teknologi Malaysia in 2004 and 2009, respectively. She is currently a Senior Lecturer in the Department of Electrical Engineering, at Universitas Riau. She is a Senior Member of

IEEE. Her research interests include antenna and propagation, microwave and millimeter wave components, sensors, and wireless communication.

2nd round decision

Decision letter (Revision 1)

Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor

Subject IEEE Access - Decision on Manuscript ID Access-2024-24030
Date sent 1 July 2024 at 12:01 GMT+7
From ieeeaccess@ieee.org
To syah.alam@trisakti.ac.id
CC > [Show 12 addresses](#)

01-Jul-2024

Dear Dr. Alam:

Your manuscript entitled "Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor" has been accepted for publication in IEEE Access. The comments of the reviewers who evaluated your manuscript are included at the foot of this letter. We ask that you make minor changes to your manuscript based on those comments, before uploading final files.

Please be advised that you are **not permitted** to add or remove authors or references post-acceptance, regardless of the reviewers' request(s).

Any request to add an author post-acceptance will be denied. However, we encourage you to check the formatting of your references to ensure that they are accurate in terms of bibliographic details as well as consistent with [IEEE style](#). Additionally, please take this opportunity to improve the English grammar and check spelling, as the article is only lightly edited before publication.

You can submit your final files through the [IEEE Author Portal](#).

All files intended for publication need to be submitted during this step, even if some files are unchanged from the initial submission. If you do not submit all files during this step, it can delay the publication of your article, or result in certain files not being published. **Please be advised that once you submit final files the article will be considered published and cannot be withdrawn.**

To assist you with preparing your final files, attached please find a Final Files Checklist.

Once you have completed the submission of your final files, the **accepted version** of your article will be posted Early Access on IEEE *Xplore* within 2-3 business days. Within 7-10 business days you will receive your page proofs, at which point you can make **minor** edits as necessary. Once you approve the proofs, the final version will replace the Early Access version on IEEE *Xplore*.

For more information on what to expect after you submit final files, please visit our [Post Acceptance Guide](#).

After you submit final files you will automatically be directed to the Electronic Copyright Form. Once the copyright information is completed, within a few business days you will receive an email from Copyright Clearance Center (CCC) to settle your APC balance of \$1,995 USD plus applicable local taxes by check, credit card, or wire transfer. **Please note that once you submit final files your article is considered published, and you are responsible for covering the cost of the APC.** If you need assistance with the payment process, please contact CCC Customer Service at IEEESupport@copyright.com.

Thank you for your fine contribution. On behalf of the Editors of IEEE *Access*, we look forward to your continued contributions to IEEE *Access*.

Sincerely,

Dr. LI YANG
Associate Editor, IEEE *Access*
yang96507@gmail.com

Reviewer(s)' Comments to Author:

Reviewer: 1

Comments:

Thanks for applying comments

Additional Questions:

Please confirm that you have reviewed all relevant files, including supplementary files and any author response files, which can be found in the

"View Author's Response" link above (author responses will only appear for resubmissions): Yes, all files have been reviewed

- 1) Does the paper contribute to the body of knowledge?: yes
- 2) Is the paper technically sound?: yes
- 3) Is the subject matter presented in a comprehensive manner?: yes
- 4) Are the references provided applicable and sufficient?: yes
- 5) Are there references that are not appropriate for the topic being discussed?: No
- 5a) If yes, then please indicate which references should be removed.:

Reviewer: 2

Comments:

The authors have addressed the comments clearly. However, the grammar or narrative can be improved. For example, two sentences in the abstract have duplicated meanings:

- 1 " The liquid was placed in polystyrene-mm pipe channel filled with water content."
2. "Polystyrene-mm pipe channels are used to accommodate water samples placed in the sensing area of the sensor in the center of the ELC resonator."

Additional Questions:

Please confirm that you have reviewed all relevant files, including supplementary files and any author response files, which can be found in the "View Author's Response" link above (author responses will only appear for resubmissions): Yes, all files have been reviewed

- 1) Does the paper contribute to the body of knowledge?: Yes
- 2) Is the paper technically sound?: Yes
- 3) Is the subject matter presented in a comprehensive manner?: Yes
- 4) Are the references provided applicable and sufficient?: No
- 5) Are there references that are not appropriate for the topic being discussed?: No
- 5a) If yes, then please indicate which references should be removed.:

If you have any questions, please contact article administrator: Dr. Manpreet Kaur m.kaur@ieee.org

Powered by **Research Exchange Submission** © Research Exchange

[Privacy Policy](#) | [Cookie Preferences](#) | [Terms](#) | [Help](#)

[IEEE Privacy Policy](#) | [Contact us](#)

Response Letter

Dear Eric Charbonneau
Journals Production Manager

Please find the response letter for our manuscript.

Periodical Title: IEEE Access
Volume: Volume 0
Digital Object Identifier: 10.1109/ACCESS.2024.3425159
Manuscript Number: Access-2024-24030

Please do not hesitate to contact me if there are any questions.

Yours Sincerely,

Syah Alam *et al.*
Department of Electrical Engineering, Universitas Trisakti, West Jakarta 11440, Indonesia
Email: syah.alam@trisakti.ac.id

=====

Title:

“Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor”

AQ:1 = According to our records, SYAH ALAM is listed as a Graduate Student Member, IEEE. However, the files provided list them as a Student Member. Please verify.

Ans:

Thanks for the queries. We agree and confirm that SYAH ALAM is Graduate Student Member, IEEE.

AQ:2 = Please confirm the author’s name “ZHRILADHA ZAKARIA” in all instances.

Ans:

Thanks for the queries. We agree and confirm that the author’s name “ZHRILADHA ZAKARIA” in the final manuscript is correct.

AQ:3 = Please confirm whether the edits made in the current affiliation of all the authors are correct

Ans:

Thanks for the queries. We agree and confirm that the author’s affiliations in added to the final manuscript is correct.

AQ:4 = Please confirm or add details for any funding or financial support for the research of this articles

Ans:

Thanks for the queries. We update that this research is supported by Ministry of Education and Culture, Republic of Indonesia, Institute for Research and Community Service Universitas Trisakti. The author extends their appreciation to Universiti Teknikal Malaysia Melaka (UTeM) to support the study under grant Jurnal/2022/FTKEK/Q00086.

Correction:

This work was supported by Ministry of Education and Culture, Republic of Indonesia, Institute for Research and Community Service Universitas Trisakti. The author extends their appreciation to Universiti Teknikal Malaysia Melaka (UTeM) to support the study under grant Jurnal/2022/FTKEK/Q00086.

AQ:5 = If you haven't done so already, please make sure you have submitted a graphical abstract for your paper. The GA should be a current figure or image from your accepted article. The GA will be displayed on your articles abstract page on IEEE Xplore. Please choose a current figure from the paper and supply a caption at your earliest convenience for the graphical abstract. Note that captions cannot exceed 1800 characters (including spaces). If you submitted a video as your graphical abstract, please make sure there is an overlay image and caption. Overlay images are usually a screenshot of your video that best represents the video. This is for readers who may not have access to video-viewing software. Please see an example in the link below: <http://ieeaccess.ieee.org/submitting-an-article/>

Ans:

Thanks for the queries. We have uploaded the graphical abstract including captions along with the final manuscript.

AQ:6 = Please provide the issue no. and month for Ref. [6].

Ans:

Thanks for the correction. We update the following reference as follows:

[6] J. Ma, Y. Chen, and J. Huang, "A Microwave Displacement Sensor Based on SIW Double Reentrant Cavity with Ring Gaps," *Prog. Electromagn. Res. M*, vol. 113, no.1, September, pp. 35–45, 2022, doi: 10.2528/PIERM22050102.

Correction:

[6] J. Ma, Y. Chen, and J. Huang, "A Microwave Displacement Sensor Based on SIW Double Reentrant Cavity with Ring Gaps," *Prog. Electromagn. Res. M*, vol. 113, no.1, September, pp. 35–45, 2022, doi: 10.2528/PIERM22050102.

AQ:7 = Please provide the page range for Refs. [20] and [30].

Ans:

Thanks for the correction. We update the following reference as follows:

[20] M. H. Zarifi and M. Daneshmand, "Wide dynamic range microwave planar coupled ring resonator for sensing applications," *Appl. Phys. Lett.*, vol. 108, no. 23, 2016, pp. 1-4, doi: 10.1063/1.4953465.

[30] G. Keulemans, F. Ceyssens, and R. Puers, "An ionic liquid based strain sensor for large displacement measurement," *Biomed. Microdevices*, vol. 19, no. 1, 2017, pp. 1-9, doi: 10.1007/s10544-016-0141-4.

Correction:

[20] M. H. Zarifi and M. Daneshmand, "Wide dynamic range microwave planar coupled ring resonator

for sensing applications,” *Appl. Phys. Lett.*, vol. 108, no. 23, 2016, pp. 1-4, doi: 10.1063/1.4953465.

- [30] G. Keulemans, F. Ceysens, and R. Puers, “An ionic liquid based strain sensor for large displacement measurement,” *Biomed. Microdevices*, vol. 19, no. 1, 2017, pp. 1-9, doi: 10.1007/s10544-016-0141-4.

AQ:8 = Please provide the volume no. for Ref. [37].

Ans: Thanks for the correction. We update the following reference as follows:

- [37] S. Kiani, P. Rezaei, and M. Fakhr, “Real-Time Measurement of Liquid Permittivity Through Label-Free Meandered Microwave Sensor,” *IETE Journal of Research*, pp. 1–11, Jul. 2023, doi: 10.1080/03772063.2023.2231875.

Correction:

- [37] S. Kiani, P. Rezaei, and M. Fakhr, “Real-Time Measurement of Liquid Permittivity Through Label-Free Meandered Microwave Sensor,” *IETE Journal of Research*, pp. 1–11, Jul. 2023, doi: 10.1080/03772063.2023.2231875.

AQ:9 = Please provide a better/higher quality image for the authors, “SYAH ALAM, INDRA SURJATI, MAROUANE ABICHA, TEGUH FIRMANSYAH, and MUDRIK ALAYDRUS.”

Ans: Thanks for the correction. We update the following link as follows:

https://drive.google.com/drive/folders/1lo_CJHVi7sl_y129oerYBOloRck7h9qk?usp=sharing

AQ:10 = Please check and confirm whether the year 1996 provided for the author INDRA SURJATI is correct.

Ans:

Thanks for the queries. We agree and confirm that the year 1996 for author INDRA SURJATI in the final manuscript is correct.

RESEARCH ARTICLE

Dual Functional Liquid Displacement and Angular Detection Based on Band Stop Response Microwave Sensor

SYAH ALAM¹, (Graduate Student Member, IEEE), INDRA SURJATI¹, (Member, IEEE), LYDIA SARI¹, (Member, IEEE), R. DEINY MARDIAN¹, (Member, IEEE), MAROUANE ABICHA², (Student Member, IEEE), ZAHRIADHA ZAKARIA³, (Senior Member, IEEE), TEGUH FIRMANSYAH⁴, (Member, IEEE), MUDRIK ALAYDRUS⁵, (Senior Member, IEEE), AND YUSNITA RAHAYU⁶, (Senior Member, IEEE)

¹Department of Electrical Engineering, Universitas Trisakti, West Jakarta 11440, Indonesia

²Department of Electrical Engineering, Polytechnic Nantes, 44300 Nantes, France

³Faculty of Electronic and Computer Technology and Engineering, Universiti Teknikal Malaysia Melaka (UTeM), Durian Tunggal 76100, Malaysia

⁴Department of Electrical Engineering, Universitas Sultan Ageng Tirtayasa, Serang, Banten 42124, Indonesia

⁵Department of Electrical Engineering, Universitas Mercu Buana, West Jakarta 11650, Indonesia

⁶Department of Electrical Engineering, Universitas Riau, Pekanbaru 28292, Indonesia

Corresponding authors: Syah Alam (syah.alam@trisakti.ac.id) and Zahriladha Zakaria (zahriladha@utem.edu.my)

This work was supported by Ministry of Education and Culture, Republic of Indonesia, Institute for Research and Community Service Universitas Trisakti. The author extends their appreciation to Universiti Teknikal Malaysia Melaka (UTeM) to support the study under grant Jurnal/2022/FTKEK/Q00086.

ABSTRACT This paper proposes dual functional microwave sensor for displacement and angular detection of liquid material based on electric coupled (ELC) resonator. The proposed resonator uses a two-port band stop filter operating at a resonant frequency of 2.72 GHz. Polystyrene-mm pipe channels are used to accommodate water samples placed in the sensing area of the sensor in the center of the ELC resonator. Displacement and angular detection were observed based on the shift in the resonant frequency of the resonator. Based on the measurement results, the proposed sensor has a sensitivity for displacement detection of 31.5 MHz/cm with a distance range of $d = 1 - 4$ cm while for angular detection it is 0.33 MHz/ $^{\circ}$ with a rotation angle of $0 - 90^{\circ}$ for polystyrene-mm pipe channel filled with water content. This paper makes a significant contribution by proposed a dual functional microwave sensor for displacement and angular detection that can be recommended for the automotive, robotics and aerospace industries.

INDEX TERMS Dual functional, displacement, angular, polystyrene-mm pipe, microwave sensor.

I. INTRODUCTION

Displacement sensors play an important role for several industries that require high precision such as the automotive, robotics and aerospace industries [1], [2], [3], [4]. Generally, displacement sensors consist of two types, including linear and angular displacement. Linear displacement is determined based on distance while angular displacement is based on the angle between the sensor and the sample [5], [6]. One of the strategies for detecting sample displacement is to utilize

The associate editor coordinating the review of this manuscript and approving it for publication was Li Yang¹.

a microwave sensor [7], [8], [9], [10]. Microwave sensors have advantages including compact design, low cost and high accuracy. Microwave sensors have been widely developed to detect the characteristics of solid materials [11], [12], [13], liquids [14], [15], [16], [17] and displacement [18], [19], [20]. Several previous works proposed sensors for linear and angular displacement detection in solid materials using microwave sensors with a certain dynamic range based on frequency shift [21], [22], notch depth [23], [24] and phase variation [25], [26]. Generally, rotation and displacement detection using microwave sensors is proposed for solid materials using stators and rotators where the sample is rotated in the

sensing area with a certain dynamic range [27], [28], [29]. However, this creates friction between the sample and the sensor which has the potential to damage the surface of the sensor. In addition, the sample is placed on an open surface, so it is greatly influenced by changes in temperature and environment. Another constraint, the proposed sensor from previous work only has one single function so it cannot be used for displacement and rotation detection separately. In addition, sensors for displacement and rotation detection are only proposed for solid materials and are not supported for detection in liquid samples. Therefore, microwave sensors that have the capability to detect displacement and rotation of liquid samples are needed. Moreover, liquid displacement sensors are very useful for several applications, including biomedical and robotics [30], health monitoring and mobile healthcare [31]. This work provides an excellent solution by proposing a microwave sensor that has dual functional characteristics for displacement and angular detection for liquid samples. Furthermore, to maintain and control the influence of temperature and environment, the sample is contained in a polystyrene-mm pipe channel [32], [33], [34]. Moreover, polystyrene-mm pipe is proposed to reduce friction between the sensor and the sample so that the sensor surface is more durable and protected. Displacement and angular detection are determined based on the shift in the resonant frequency of the resonator. The main contribution of this work is to produce a dual functional microwave sensor that has the capability for displacement and angular detection in liquid samples in polystyrene-mm pipe channels. The proposed sensor has been successfully simulated and validated through the measurement process. Based on the measurement results, the proposed sensor has the ability to detect liquid displacement with a distance range of 1 - 4 cm and for angular detection with an angle range of 0 - 90°.

II. WORKING PRINCIPLE OF PROPOSED SENSOR

This section explains in detail the development model, structure of the ELC resonator and the sample placement scenario of the proposed sensor.

A. STRUCTURE OF ELC RESONATOR

The proposed microwave sensor based on ELC resonator uses RO4003C with permittivity of 3.55, tan δ of 0.0027 and thickness of 0.587 mm. The proposed resonator operates at a resonant frequency of $f_r = 2.69$ GHz with two ports representing P1 and P2. The structure of the proposed sensor is shown in Fig. 1(a) while the concentration of the electric field and magnetic field is shown in Fig. 1(b) and Fig 1(c). The structure of the ELC resonator consists of the left and right inductive arms, while the capacitive area is in the gap between the strips in the middle of the resonator. The overall dimension of ELC resonator is shown in Table 1. Based on the simulation results using HFSS 15.0, the highest electric field concentration at $f_r = 2.69$ GHz is in the arms and gaps between the strips of the ELC resonator as shown in Fig.1 (b),

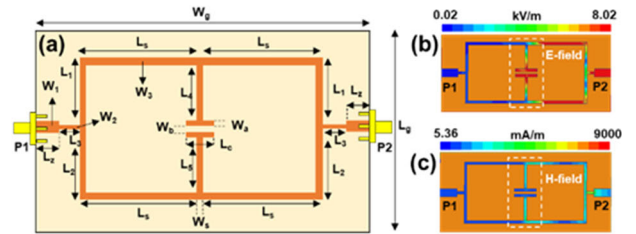


FIGURE 1. (a) Structure of electric field coupled resonator, (b) E-field at $f_r = 2.69$ GHz, (c) H-field at $f_r = 2.69$ GHz.

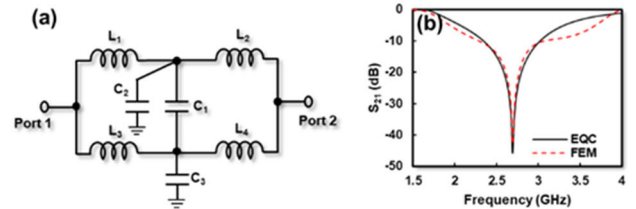


FIGURE 2. (a) Equivalent circuit of electric field coupled resonator, (b) comparison of EQC and FEM of electric field coupled resonator.

TABLE 1. Dimension of proposed ELC resonator.

Parameter	Value (mm)	Parameter	Value (mm)
W_g	70	L_4	9
L_g	30	L_5	9
L_s	24.5	L_c	9
L_1	11	L_z	7
L_2	11	W_a	1
L_3	3	W_b	1
W_1	3	W_2, W_3	1

while the magnetic field concentration vanishes as shown in Fig.1 (c).

Based on perturbation theory, the area of the resonator with a high electric field can be used to detect the characteristics of the sample [35].

Furthermore, the equivalent circuit of the ELC resonator can be derived based on L and C model as shown in Fig.2 (a). The arm of the resonator is represented as an inductor while the gap between strip is represented as a capacitor. The values of L and C are extracted using AWR 2009 where $L_1 = L_2 = L_3 = L_4 = 8.23$ nH, $C_1 = 0.17$ pF and $C_2 = 0.99$ pF and $C_3 = 1.25$ pF which are connected to port 1 and port 2 with an impedance of 50 Ω. Therefore, the resonant frequency (f_r) of resonator can be determined using following Eq. (1) [36]:

$$f_r = \frac{1}{2\pi\sqrt{LC}} \tag{1}$$

A comparison of the simulation results from EQC and FEM is shown in Fig. 2 (b) where the results are both in line and operating at $f_r = 2.69$ GHz.

B. DEVELOPMENT MODEL OF ELC RESONATOR

The ELC resonator was developed in two steps where the proposed characteristic is a band stop response. The model

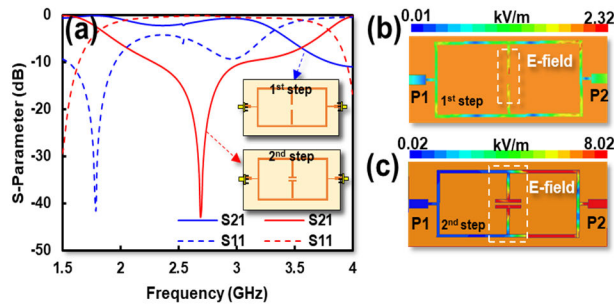


FIGURE 3. Development model of ELC resonator; (a) response of S-parameters, (b) E-field concentrations of ELC resonator at 1st and 2nd step.

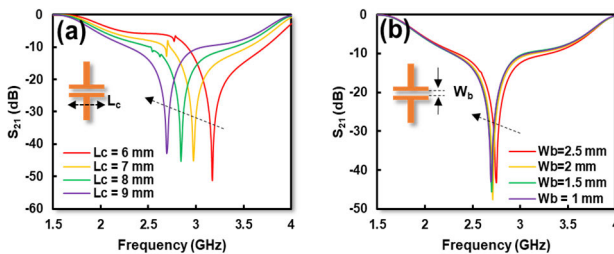


FIGURE 4. Iteration process; (a) iteration of L_c , (b) iteration of W_b .

development of the ELC resonator is shown in **Fig. 3 (a)**, **Fig. 3 (b)** and **Fig. 3 (c)**.

The characteristics of the S-parameters at the 1st step show that the resonator has a band pass response where $S_{11} \leq -10$ dB while $S_{21} \geq -10$ dB in the frequency range of 1.5 - 3.2 GHz as shown by the red line in **Fig. 3 (a)**. Furthermore, for the 2nd step, the characteristics of the S-parameters show the band stop response where $S_{11} \geq -10$ dB while $S_{21} \leq -10$ dB in the frequency range of 1.7 GHz - 3.82 GHz as shown by the blue line in **Fig. 3 (a)**. In addition, the characteristics of the electric field of the resonator for the 1st and 2nd steps are also observed as shown in **Fig. 3 (b)** and **Fig. 3 (c)**. The electric field concentration is observed at $f_r = 2.69$ GHz where for the 1st step the electric field is concentrated in the center of the ELC resonator while for the 2nd step it is in the gap between the strips of the ELC resonator.

Next, several iterations are carried out to control the resonant frequency and S_{21} of the resonator as shown in **Fig. 4 (a)** and **Fig. 4 (b)**. **Fig. 4 (a)** shows that the iteration of L_c causes the resonance frequency to shift lower in line with increasing length of L_c . In addition, the gap between the strips of the ELC resonator represented by W_b also has an impact on the resonant frequency and S_{21} of the resonator. Increasing the gap width W_b causes the resonant frequency of the resonator to shift towards high. This finding shows that the gap in the strip is an area that has high sensitivity so it can be recommended as a sensing area for placing samples.

C. FABRICATION OF PROPOSED RESONATOR

The fabrication results of the front and back side of the resonator are shown in **Fig. 5 (a)** and **Fig. 5 (b)** where the ELC resonator is in the front layer and the ground plane is in the back layer. The ELC resonator is connected to port 1 and

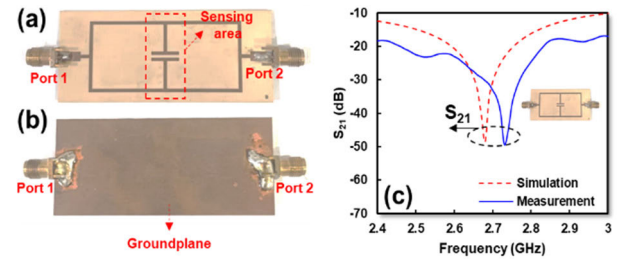


FIGURE 5. (a) Fabrication of ELC resonator at the front side, (b) fabrication of ELC resonator at the back side, (c) simulation and measurement of proposed resonator.

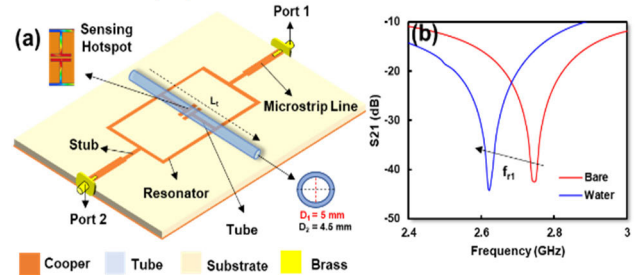


FIGURE 6. (a) Scenario placement of sample, (b) simulation of bare and with water condition.

port 2 and has the characteristics of a Band Stop Filter (BSF). Moreover, the comparison of simulation and measurement results from the resonator is shown in **Fig. 5 (c)**.

Based on the measurement results, there is a slight difference between measurement and simulation result where the resonance frequency shifts from 2.69 GHz to 2.72 GHz. This is due to errors from the fabrication process and the permittivity of RO4003C which is in the range 3.38 - 3.55 [37], [38].

D. SCENARIO OF SAMPLE PLACEMENT

The sample placement scenario is determined based on the location of the resonator with the highest electric field as shown in **Fig. 6 (a)**. In this paper, the sample is placed in the center of the ELC resonator using a polystyrene-mm pipe channel based on polystyrene-mm pipe channel [17] with a permittivity of 3.1 and a diameter represented by D_1 and D_2 of 5 mm and 4.5 mm and length of polystyrene-mm pipe channel represented by L_t of 40 mm, respectively. The sample placement scenario consists of two conditions, including the bare condition where the polystyrene-mm pipe channel is filled with air samples and the other condition is when the polystyrene-mm pipe channel is filled with water samples. The polystyrene-mm pipe channel is placed in line with the sensing area of the ELC resonator which is located in the middle arm and the gap of the resonator.

The simulation results from bare conditions and with water samples shown in **Fig. 6 (b)** show that the resonance frequency of the resonator moves to the lower frequency from 2.75 GHz to 2.62 GHz because the permittivity of water is higher than bare where the permittivity of water is $\epsilon_r = 80$ and bare is $\epsilon_r = 1$. Furthermore, to demonstrate the performance

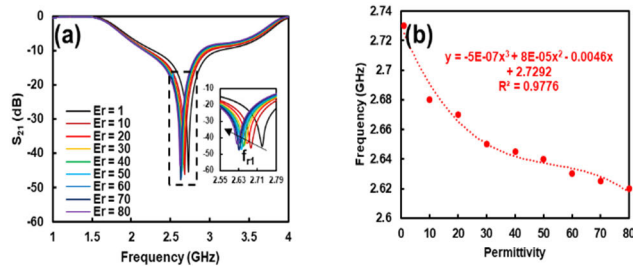


FIGURE 7. (a) Simulation with range ϵ_r of 1 – 80, (b) correlation between frequency and permittivity range ϵ_r of 1 – 80.

of the proposed sensor, the permittivity of the sample inside the polystyrene-mm pipe channel is changed to a permittivity range of $\epsilon_r = 1 - 80$. Based on Fig.7 (a), the resonant frequency of the resonator shifts from 2.73 GHz to 2.62 GHz with a permittivity range of 1 – 80 with ΔF of 0.11 GHz.

It should be noted, based on the simulation results from Fig. 7 (a) and Fig.7 (b), it shows that changes in the permittivity of the sample in the polystyrene-mm pipe channel greatly affect the resonant frequency of the resonator where the resonant frequency moves to a lower frequency in line with an increase in the permittivity of the sample.

III. MEASUREMENT RESULT AND VERIFICATION

In this chapter, the measurement process and scenarios for liquid displacement and angular detection are explained in detail. The measurement process was carried out in the laboratory using a Vector Network Analyzer (VNA) with a frequency range of 2 - 3 GHz, a frequency step size of 0.01 GHz and an ambient temperature of 25° C.

A. SCENARIO FOR LIQUID DISPLACEMENT DETECTION

The proposed resonator consisting of port 1 and port 2 is connected to the vector analyzer using a coaxial cable with an impedance of 50Ω where the sensor and sample are placed using a holder as shown in Fig 8(a) . Liquid displacement detection is proposed by placing a stopper in the center of the sample in a polystyrene-mm pipe channel filled with water content as shown in Fig. 8 (b).

It should be noted, the sample in the plastic tube [17] placed carefully and is in direct contact with the sensing area in the middle of the ELC resonator. The stopper is placed in the middle of the polystyrene-mm pipe channel so that the water sample inside is clogged. Additionally, the area of the clogged polystyrene-mm pipe channel is filled with air samples represented by bare. The sample in the polystyrene-mm pipe channel will be moved vertically using a holder with a distance d of 1 - 4 cm as shown in Fig.8 (c). Furthermore, liquid displacement detection is determined by observing the shift in the resonance frequency when the sample moves through the sensing area of the resonator.

Based on the measurement results, the resonant frequency of the resonator shifts from 2.716 GHz to 2.59 GHz with ΔF of 0.126 GHz in line with the sample displacement in the polystyrene-mm pipe channel which is clogged by a stopper

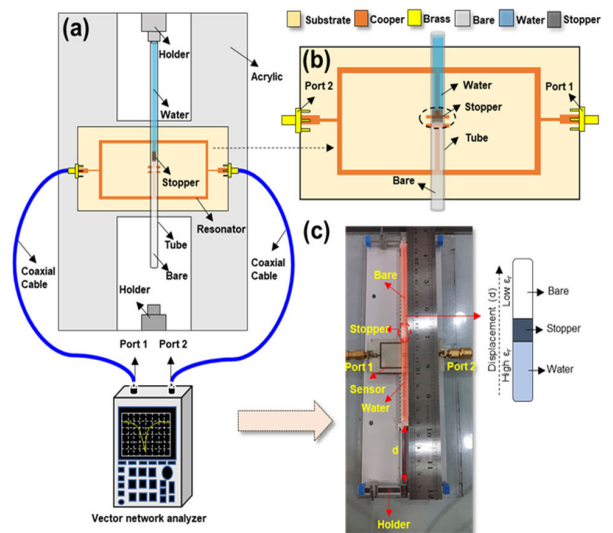


FIGURE 8. (a) Scenario for liquid displacement detection, (b) detail structure of liquid displacement detection, (c) measurement setup for liquid displacement detection using proposed sensor.

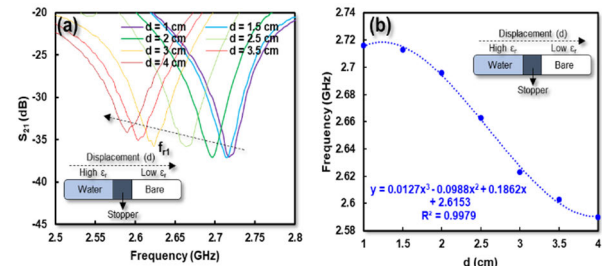


FIGURE 9. (a) Measurement result of liquid displacement detection with $d = 1 - 4$ cm, (b) correlation between resonant frequency and liquid displacement with $d = 1 - 4$ cm.

with a distance range of $d = 1 - 4$ cm as shown in Fig.8 (a) and Fig.8 (b). This finding shows that the proposed sensor has interacted with the sample to detect the displacement of the sample. The resonant frequency of the resonator shifts to low frequencies slowly in line with the displacement of the sample. This occurs because there is a change in the permittivity of the sample, where the water sample has a higher permittivity than the bare air sample, so it greatly influences the resonance frequency of the resonator. Furthermore, displacement detection with the proposed resonator can be determined based on Eq. (2) [7]:

$$f_{r(c)} = 0.01273 d^3 - 0.988 d^2 - 0.1862 d - 2.6153 \quad (2)$$

where $f_{r(b)}$ is the resonant frequency of the resonator for displacement detection and d represents the distance of the displacement in the water-filled polystyrene-mm pipe channel.

Moreover, the sensitivity (S) of the sensor is determined based on the following Eq. (3) [21]:

$$S = \frac{\Delta F \text{ (GHz)}}{\Delta d \text{ (cm)}} \quad (3)$$

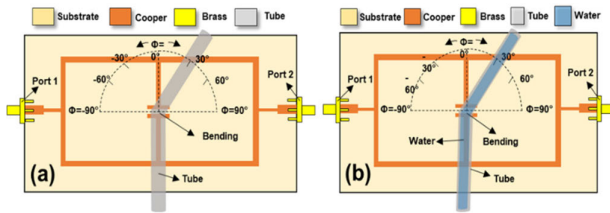


FIGURE 10. Scenario of angular detection from 0° - 90° ; (a) without water, (b) with water.

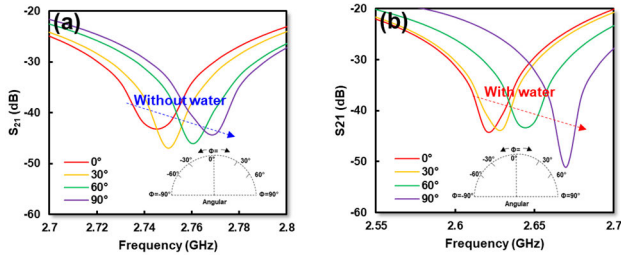


FIGURE 11. Simulation result of angular detection from 0° - 90° ; (a) without water, (b) with water.

where ΔF represents the shift in the resonant frequency of the resonator and Δd represents the displacement of the sample in the polystyrene-mm pipe channel. Based on Eq. (3), the sensitivity of the sensor for displacement detection is 31.5 MHz/cm with a range d of 1 - 4 cm.

B. SCENARIO FOR LIQUID ANGULAR DETECTION

Furthermore, liquid angular detection is proposed by rotating the sample inside the polystyrene-mm pipe channel with an angle range of 0° - 90° . In this paper, the rotation of the sample in the polystyrene-mm pipe channel is divided into two conditions, including with water and without water as shown in Fig. 10 (a) and Fig. 10 (b). The sample in the polystyrene-mm pipe channel is rotated clockwise at angles of 0° , 30° , 60° and 90° .

The simulation results in Fig. 11 (a) and Fig. 11 (b) show that the resonant frequency of the resonator shifts to a higher frequency in line with increasing the rotation angle of the sample for conditions without water and with water content. The resonant frequency shifts from 2.74 GHz to 2.77 GHz in conditions without water, while for conditions with water it shifts from 2.62 GHz to 2.67 GHz with an angle range of 0° - 90° as shown in Fig. 12 (a) and Fig. 12 (b).

Furthermore, validation of angular detection is carried out by measuring the process using a VNA connected to port 1 and port 2 of the resonator placed in the holder using a coaxial cable with an impedance of 50 Ω . The sample in the polystyrene-mm pipe channel is carefully placed in the sensing area which is located in the middle of the ELC resonator as shown in Fig. 13 (a) and Fig. 13 (b).

Moreover, to ensure that the sample position is constant and stable, a gripper is proposed in the measurement setup to lock the position of the sample and sensor. The measurement results of angular detection when the polystyrene-mm pipe channel is filled with water and without water are shown in Fig. 14 (a) and Fig. 14 (b).

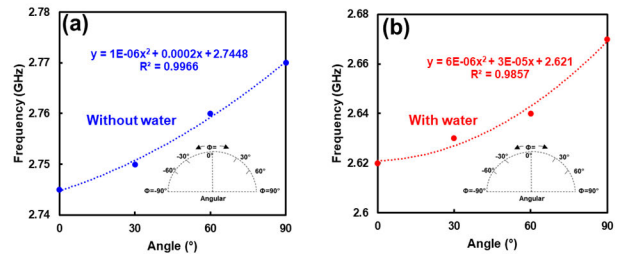


FIGURE 12. Simulation result of correlation between resonant frequency and angle from 0° - 90° ; (a) without water, (b) with water.

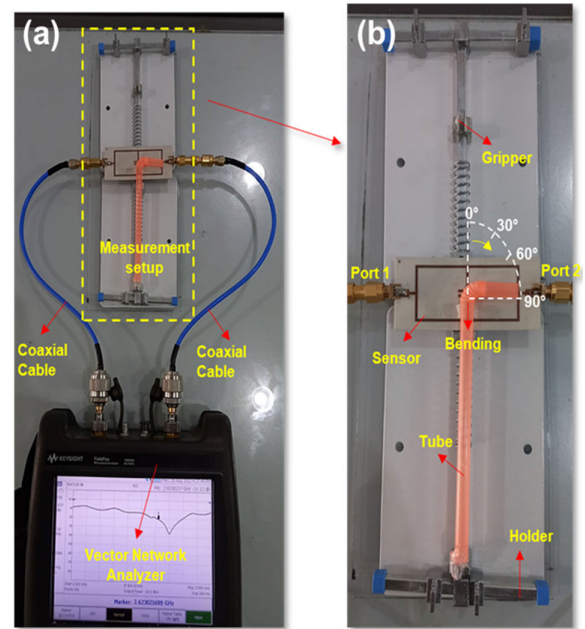


FIGURE 13. (a) Measurement setup with VNA, (b) Measurement scenario for angular detection from 0° - 90° .

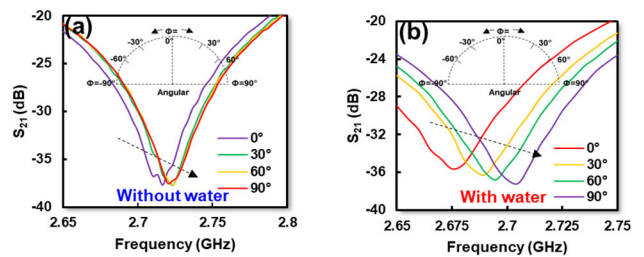


FIGURE 14. Measurement result of angular detection from 0° - 90° ; (a) without water, (b) with water.

Based on the measurement results, the frequency of the resonator shifts from 2.716 GHz to 2.723 GHz when the polystyrene-mm pipe channel is without water, whereas when the polystyrene-mm pipe channel is filled with water, the frequency shifts from 2.675 GHz to 2.705 GHz with an angle range of 0° - 90° as shown in Fig. 15 (a) and Fig. 15 (b). These findings indicate that the proposed sensor interacts with the sample so that the resonant frequency of the resonator changes in line with an increase in the rotation angle of the sample in the polystyrene-mm pipe channel.

It should be noted, the resonance frequency shifts to a higher frequency due to the interaction of the sample and

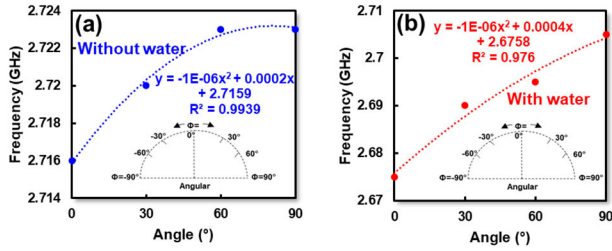


FIGURE 15. Measurement result of correlation between resonant frequency and angular from 0° - 90°; (a) without water, (b) with water.

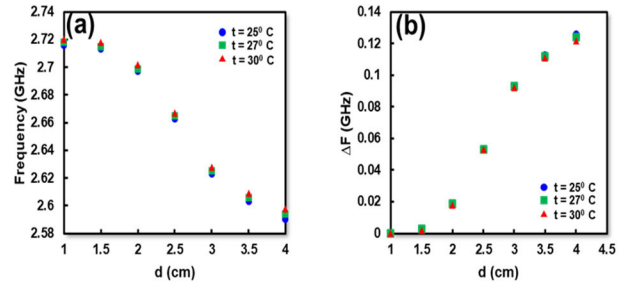


FIGURE 17. Displacement detection of liquid samples based on different temperatures; (a) response of the resonant frequency, (b) ΔF of proposed sensor.

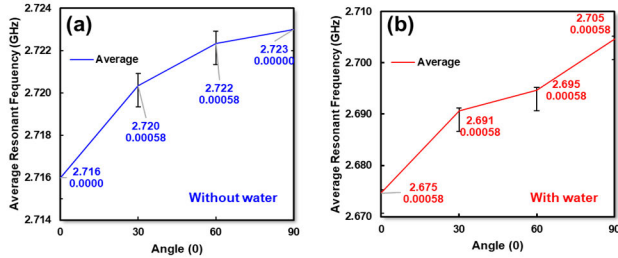


FIGURE 16. Average and deviation from repeatability measurement for angular detection; (a) without water, (b) with water.

sensor which changes while the sample inside polystyrene-mm pipe channel shifts away from the surface of the sensing area with water content to bare condition (without sample). In other words, the permittivity of the sample changes from higher to lower. This condition changes the concentration of the electric field of the resonator and greatly influences the resonant frequency of the resonator.

Furthermore, angular detection of polystyrene-mm pipe channel without and with water can be determined based on the following Eq. (4) and Eq. (5):

$$f_r (ba) = -0.000001 x^2 - 0.0002 x + 2.7159 \quad (4)$$

$$f_r (bw) = -0.000001 x^2 - 0.0004 x + 2.6578 \quad (5)$$

where $f_r (ba)$ and $f_r (bw)$ is the resonant frequency of the resonator for angular detection with and without water and x represents the angle of the angular in the water-filled polystyrene-mm pipe channel.

Moreover, the sensitivity (S) of the sensor is determined based on the following Eq. (6) [18]:

$$S = \frac{\Delta F \text{ (GHz)}}{\Delta \theta \text{ (°)}} \quad (6)$$

where ΔF represents the shift in the resonant frequency of the resonator and $\Delta \theta$ represents the rotation of the sample in the polystyrene-mm pipe channel.

Based on Eq. (6), the sensitivity of the sensor for angular detection of polystyrene-mm pipe channel without and with water content are 0.07 MHz/° and 0.33 MHz/° with a dynamic range of 0 - 90°. Moreover, average and deviation of repeatability measurements with 3 cycles are proposed to show the error bars of angular detection for sample filled in polystyrene-mm pipe channel with and without water using the proposed sensor as shown in Fig.16.

Based on Fig.16 (a) and Fig. 16 (b), the deviation from the repeatability measurement results is in the range 0 - 0.00058 for angular detection with and without water. These findings indicate that the proposed sensor has a low error bar for angular detection in samples with and without water. To show the effect of changing the temperature of the liquid sample on displacement detection, validation with measurements at three different temperatures is proposed as shown in Fig. 17 (a) and Fig. 17 (b).

Referring to Fig.17 (a), changes in temperature in the sample have an impact on shifting the resonant frequency of the resonator towards high frequencies correlated with previous work [34] [39]. The maximum ΔF of the proposed sensor for three different temperatures are 0.126 GHz, 0.124 GHz and 0.122 GHz respectively as shown in Fig. 17 (b). The sensitivity of the sensor based on temperature changes is 31.5 MHz/cm, 31 MHz/cm and 30.5 MHz/cm respectively. These findings indicate that changing the temperature of the sample has an impact on the shift in the resonance frequency and sensitivity of the sensor but is not significant. Therefore, the temperature of the sample must be verified before the measurement process is carried out to obtain optimal performance.

IV. VALIDATION WITH PREVIOUS WORK

To validate the performance of the proposed sensor, a comprehensive evaluation with previous work is proposed as shown in Table 2. Based on previous work, the detection of linear and angular displacement of samples using microwave sensors are divided into three types of mechanisms based on frequency shift, phase variation and notch depth.

Previous work [1], [32] proposed a microwave sensor based on transmission line for displacement detection of solid materials with a maximum dynamic range of 3 - 40 mm and maximum sensitivity of 312.7 ° / mm and 528.7 ° / mm where the displacement detection was determined based on phase variations. However, the sensor only has one function for displacement detection and cannot be used for angular displacement of materials. Other works [7], [23] proposed a microwave sensor for displacement and rotation detection of solid materials based on notch depth with a maximum dynamic range of 10 mm and 90 °. Nevertheless, the proposed sensor only supports displacement detection in solid

TABLE 2. Comparison of proposed sensor based on displacement / rotation technique with existing works.

Ref	Method	Freq (GHz)	Sensing mechanism	Sample	Dynamic Range		Sensitivity Average		Polystyrene mm-pipe	Sensor Type		Dual Functional
					Displacement	Angular	Displacement	Angular		Displacement	Angular	
[1]	Step impedance transmission lines	2.00	Phase variation	Solid	0 – 40 mm	-	312.77°/mm	-	-	Yes	-	-
[3]	H-shaped resonator	4.80	Freq shift	Solid	0 – 12 mm	-	147.8 MHz/mm	-	-	Yes	-	-
[7]	Dielectric resonator	3.70	Notch depth	Solid	1 – 10 mm	-	0.095 dB/mm	-	-	Yes	-	-
[19]	Transversal signal interference	0.92	Freq shift	Solid	-	0 – 180°	-	3.15 MHz/°	-	-	Yes	-
[21]	CSRR	5.80	Freq shift	Solid	-	0 – 90°	-	2.37 MHz/°	-	-	Yes	-
[23]	Transmission line	1.21	Notch depth	Solid	-	0 – 90°	-	0.095 dB/°	-	-	Yes	-
[27]	TFS - coupled slot line	2.17	Freq shift	Solid	-	0 – 90°	-	2.27 MHz/°	-	-	Yes	-
[28]	U-shaped resonator	1.20	Freq shift	Solid	-	0 – 180°	-	1.94 MHz/°	-	-	Yes	-
[32]	Stepped impedance Transmission lines	2.00	Phase variation	Solid	0 – 3 mm	-	528.7°/mm	-	-	Yes	-	-
This work	ELC Resonator	2.72	Freq shift	Liquid	1 – 4 cm	0 – 90°	31.5 MHz/cm	0.33 MHz/°	Yes	Yes	Yes	Yes

TABLE 3. Comparison of type, sensing parameters and prospective applications of displacement / rotation sensors.

Ref	Type of resonator	Sensing parameter	Prospective applications
[1]	Single port resonator	Phase	Industrial
[3]	Band stop filter	S ₂₁	Industrial
[7]	Band pass filter	S ₂₁	Industrial
[19]	Band stop filter	S ₂₁	Industrial
[21]	Band stop filter	S ₂₁	Space vehicle (satellites)
[23]	Band pass filter	Phase	Industrial
[27]	Band pass filter	S ₂₁	Industrial
[28]	Band stop filter	S ₂₁	Industrial
[32]	Band pass filter	S ₂₁	Biomedical and energy
This work	Band stop filter	S₂₁	Industrial and Biomedical

materials so it cannot be used for liquid materials. Furthermore, detection of linear displacement of solid materials based on resonant frequency shifts has been described in [3] where the maximum dynamic range is 12 mm with a sensitivity of 147.8 MHz/mm. Rotation detection of solid materials based on frequency shift has also been described in [19], [21], [23], and [28] where the solid material is moved using a rotator and the sensor is placed on the stator. However, high friction between the material and the sensor has the potential to damage the surface of the resonator and will reduce the performance of the sensor.

Furthermore, a comprehensive comparison of types, sensing parameters and proposed applications of displacement and rotation sensors is shown in Table 3. Previous work [3], [19], [21], [23] proposed a band stop filter for displacement and rotation detection which is recommended for industrial applications including flow detection in liquids, space vehicle and rotation detection in AC motors. In addition, other

work [7], [23], [27], [32] proposed a band stop filter for displacement/rotation detection which is recommended for industrial, biomedical and energy applications while previous work [1], proposed a single port resonator for motor rotation detection AC based on phase variations.

Therefore, this work makes a significant contribution by proposing a dual functional microwave sensor for translation and angular detection in liquid samples using polystyrene-mm pipe channels. The proposed sensor has the capability to detect displacement and angular detection separately based on the frequency shift of the resonator. Polystyrene-mm pipe channels are proposed to reduce the friction between the sensor and the sample and maintain the temperature of the sample in order to obtain high-precision measurements. The proposed sensor has excellent performance with a maximum sensitivity of 31.5 MHz/cm for liquid displacement with a range of $d = 1 - 4$ cm and 0.33 MHz/° for angular detection with an angle range of 0 – 90°.

V. CONCLUSION

A microwave sensor with dual functional characteristics for liquid displacement and angular detection in polystyrene-mm pipe channel has been proposed and presented comprehensively in this paper. The proposed sensor is based on an ELC resonator operating at a resonant frequency of 2.72 GHz. The sample used is liquid material contained in a polystyrene-mm pipe channel. Displacement and angular detection are determined based on the shift in the resonant frequency of the resonator. Based on the measurement results, the proposed sensor has a sensitivity of 31.5 MHz/cm with a displacement range of 1 - 4 cm and 0.33 GHz/° with an angle range of 0 - 90°. This paper makes a significant contribution by proposed a dual functional microwave sensor for displacement and angular detection that can be recommended for the automotive, robotics and aerospace industries.

REFERENCES

- [1] J. Muñoz-Enano, P. Vélez, L. Su, M. Gil-Barba, and F. Martín, "A reflective-mode phase-variation displacement sensor," *IEEE Access*, vol. 8, pp. 189565–189575, 2020, doi: [10.1109/ACCESS.2020.3031032](https://doi.org/10.1109/ACCESS.2020.3031032).
- [2] K. Xu, Y. Liu, S. Chen, P. Zhao, L. Peng, L. Dong, and G. Wang, "Novel microwave sensors based on split ring resonators for measuring permittivity," *IEEE Access*, vol. 6, pp. 26111–26120, 2018, doi: [10.1109/ACCESS.2018.2834726](https://doi.org/10.1109/ACCESS.2018.2834726).
- [3] P.-W. Zhu, X. Wang, W.-S. Zhao, J. Wang, D.-W. Wang, F. Hou, and G. Wang, "Design of H-shaped planar displacement microwave sensors with wide dynamic range," *Sens. Actuators A, Phys.*, vol. 333, Jan. 2022, Art. no. 113311, doi: [10.1016/j.sna.2021.113311](https://doi.org/10.1016/j.sna.2021.113311).
- [4] Z. Shaterian and M. Mrozowski, "Multifunctional bandpass filter/displacement sensor component," *IEEE Access*, vol. 11, pp. 27012–27019, 2023, doi: [10.1109/ACCESS.2023.3258545](https://doi.org/10.1109/ACCESS.2023.3258545).
- [5] J. Naqui and F. Martín, "Angular displacement and velocity sensors based on electric-LC (ELC) loaded microstrip lines," *IEEE Sensors J.*, vol. 14, no. 4, pp. 939–940, Apr. 2014, doi: [10.1109/JSEN.2013.2295518](https://doi.org/10.1109/JSEN.2013.2295518).
- [6] J. Ma, Y. Chen, and J. Huang, "A microwave displacement sensor based on SIW double reentrant cavity with ring gaps," *Prog. Electromagn. Res. M.*, vol. 113, no. 1, pp. 35–45, Sep. 2022, doi: [10.2528/PIERM22050102](https://doi.org/10.2528/PIERM22050102).
- [7] A. V. Praveen Kumar and P. Regalla, "A transmission mode dielectric resonator as a displacement sensor," *IEEE Sensors J.*, vol. 20, no. 13, pp. 6979–6984, Jul. 2020, doi: [10.1109/JSEN.2020.2977893](https://doi.org/10.1109/JSEN.2020.2977893).
- [8] M. Abdolrazzaghi, N. Kazemi, V. Nayyeri, and F. Martín, "AI-assisted ultra-high-sensitivity/resolution active-coupled CSRR-based sensor with embedded selectivity," *Sensors*, vol. 23, no. 13, p. 6236, Jul. 2023, doi: [10.3390/s23136236](https://doi.org/10.3390/s23136236).
- [9] M. Abdolrazzaghi, N. Katchinskiy, A. Y. Elezzabi, P. E. Light, and M. Daneshmand, "Noninvasive glucose sensing in aqueous solutions using an active split-ring resonator," *IEEE Sensors J.*, vol. 21, no. 17, pp. 18742–18755, Sep. 2021, doi: [10.1109/JSEN.2021.3090050](https://doi.org/10.1109/JSEN.2021.3090050).
- [10] N. Kazemi, M. Abdolrazzaghi, P. E. Light, and P. Musilek, "In-human testing of a non-invasive continuous low-energy microwave glucose sensor with advanced machine learning capabilities," *Biosensors Bioelectron.*, vol. 241, Dec. 2023, Art. no. 115668, doi: [10.1016/j.bios.2023.115668](https://doi.org/10.1016/j.bios.2023.115668).
- [11] S. Alam, Z. Zakaria, I. Surjati, N. A. Shairi, M. Alaydrus, and T. Firmansyah, "Integrated microwave sensor and antenna sensor based on dual T-shaped resonator structures for contact and noncontact characterization of solid material," *IEEE Sensors J.*, vol. 23, no. 12, pp. 13010–13018, Jun. 2023, doi: [10.1109/JSEN.2023.3273008](https://doi.org/10.1109/JSEN.2023.3273008).
- [12] R. A. Alahnomi, Z. Zakaria, E. Ruslan, S. R. Ab Rashid, and A. A. Mohd Bahar, "High-Q sensor based on symmetrical split ring resonator with spurlines for solids material detection," *IEEE Sensors J.*, vol. 17, no. 9, pp. 2766–2775, May 2017, doi: [10.1109/JSEN.2017.2682266](https://doi.org/10.1109/JSEN.2017.2682266).
- [13] S. Kiani, P. Rezaei, M. Navaei, and M. S. Abrishamian, "Microwave sensor for detection of solid material permittivity in Single/Multilayer samples with high quality factor," *IEEE Sensors J.*, vol. 18, no. 24, pp. 9971–9977, Dec. 2018, doi: [10.1109/JSEN.2018.2873544](https://doi.org/10.1109/JSEN.2018.2873544).
- [14] S. Kiani, P. Rezaei, and M. Navaei, "Dual-sensing and dual-frequency microwave SRR sensor for liquid samples permittivity detection," *Measurement*, vol. 160, Aug. 2020, Art. no. 107805, doi: [10.1016/j.measurement.2020.107805](https://doi.org/10.1016/j.measurement.2020.107805).
- [15] A. A. Abduljabar, H. Hamzah, and A. Porch, "Multi-resonators, microwave microfluidic sensor for liquid characterization," *Microw. Opt. Technol. Lett.*, vol. 63, no. 4, pp. 1042–1047, Apr. 2021, doi: [10.1002/mop.32675](https://doi.org/10.1002/mop.32675).
- [16] M. A. Karimi, M. Arsalan, and A. Shamim, "Multi-channel, microwave-based, compact printed sensor for simultaneous and independent level measurement of eight liquids," *IEEE Sensors J.*, vol. 19, no. 14, pp. 5611–5620, Jul. 2019, doi: [10.1109/JSEN.2019.2904648](https://doi.org/10.1109/JSEN.2019.2904648).
- [17] S. Mosbah, C. Zebiri, D. Sayad, I. Elfergani, M. L. Bouknia, S. Mekki, R. Zegadi, M. Palandoken, J. Rodriguez, and R. A. Abd-Alhameed, "Compact and highly sensitive bended microwave liquid sensor based on a metamaterial complementary split-ring resonator," *Appl. Sci.*, vol. 12, no. 4, p. 2144, Feb. 2022, doi: [10.3390/app12042144](https://doi.org/10.3390/app12042144).
- [18] C.-H. Chio, R. Gómez-García, L. Yang, K.-W. Tam, W.-W. Choi, and S.-K. Ho, "An angular-displacement microwave sensor using an unequal-length-bi-path transversal filtering section," *IEEE Sensors J.*, vol. 20, no. 2, pp. 715–722, Jan. 2020, doi: [10.1109/JSEN.2019.2943640](https://doi.org/10.1109/JSEN.2019.2943640).
- [19] C. H. Chio, R. Gomez-Garcia, L. Yang, K. W. Tam, W.-W. Choi, and S. K. Ho, "An angular displacement sensor based on microwave transversal signal interference principle," *IEEE Sensors J.*, vol. 20, no. 19, pp. 11237–11246, Oct. 2020, doi: [10.1109/JSEN.2020.2998181](https://doi.org/10.1109/JSEN.2020.2998181).
- [20] M. H. Zarifi and M. Daneshmand, "Wide dynamic range microwave planar coupled ring resonator for sensing applications," *Appl. Phys. Lett.*, vol. 108, no. 23, pp. 1–4, 2016, doi: [10.1063/1.4953465](https://doi.org/10.1063/1.4953465).
- [21] A. K. Jha, N. Delmonte, A. Lamecki, M. Mrozowski, and M. Bozzi, "Design of microwave-based angular displacement sensor," *IEEE Microw. Wireless Compon. Lett.*, vol. 29, no. 4, pp. 306–308, Apr. 2019, doi: [10.1109/LMWC.2019.2899490](https://doi.org/10.1109/LMWC.2019.2899490).
- [22] A. Maleki Gargari, B. Ozbey, H. V. Demir, A. Altintas, U. Albostan, and O. Kurc, "A wireless metamaterial-inspired passive rotation sensor with submilliradian resolution," *IEEE Sensors J.*, vol. 18, no. 11, pp. 4482–4490, Jun. 2018, doi: [10.1109/JSEN.2018.2822671](https://doi.org/10.1109/JSEN.2018.2822671).
- [23] J. Naqui and F. Martín, "Transmission lines loaded with bisymmetric resonators and their application to angular displacement and velocity sensors," *IEEE Trans. Microw. Theory Techn.*, vol. 61, no. 12, pp. 4700–4713, Dec. 2013, doi: [10.1109/TMTT.2013.2285356](https://doi.org/10.1109/TMTT.2013.2285356).
- [24] J. Naqui, J. Coromina, A. Karami-Horestani, C. Fumeaux, and F. Martín, "Angular displacement and velocity sensors based on coplanar waveguides (CPWs) loaded with S-shaped split ring resonators (S-SRR)," *Sensors*, vol. 15, no. 5, pp. 9628–9650, Apr. 2015, doi: [10.3390/s150509628](https://doi.org/10.3390/s150509628).
- [25] Z. Mehrjoo, A. Ebrahimi, G. Beziuk, F. Martín, and K. Ghorbani, "Microwave rotation sensor based on reflection phase in transmission lines terminated with lumped resonators," *IEEE Sensors J.*, vol. 23, no. 7, pp. 6571–6580, Apr. 2023, doi: [10.1109/JSEN.2023.3236638](https://doi.org/10.1109/JSEN.2023.3236638).
- [26] J. Muñoz-Enano, P. Vélez, L. Su, M. Gil, P. Casacuberta, and F. Martín, "On the sensitivity of reflective-mode phase-variation sensors based on open-ended stepped-impedance transmission lines: Theoretical analysis and experimental validation," *IEEE Trans. Microw. Theory Techn.*, vol. 69, no. 1, pp. 308–324, Jan. 2021, doi: [10.1109/TMTT.2020.3023728](https://doi.org/10.1109/TMTT.2020.3023728).
- [27] C.-H. Chio, K.-W. Tam, and R. Gómez-García, "Filtering angular displacement sensor based on transversal section with parallel-coupled-line path and U-shaped coupled slotline," *IEEE Sensors J.*, vol. 22, no. 2, pp. 1218–1226, Jan. 2022, doi: [10.1109/JSEN.2021.3133452](https://doi.org/10.1109/JSEN.2021.3133452).
- [28] A. Ebrahimi, W. Withayachumnankul, S. F. Al-Sarawi, and D. Abbott, "Metamaterial-inspired rotation sensor with wide dynamic range," *IEEE Sensors J.*, vol. 14, no. 8, pp. 2609–2614, Aug. 2014, doi: [10.1109/JSEN.2014.2313625](https://doi.org/10.1109/JSEN.2014.2313625).
- [29] J. Mata-Contreras, C. Herrojo, and F. Martín, "Detecting the rotation direction in contactless angular velocity sensors implemented with rotors loaded with multiple chains of resonators," *IEEE Sensors J.*, vol. 18, no. 17, pp. 7055–7065, Sep. 2018, doi: [10.1109/JSEN.2018.2853643](https://doi.org/10.1109/JSEN.2018.2853643).
- [30] G. Keulemans, F. Ceysens, and R. Puers, "An ionic liquid based strain sensor for large displacement measurement," *Biomed. Microdevices*, vol. 19, no. 1, pp. 1–9, 2017, doi: [10.1007/s10544-016-0141-4](https://doi.org/10.1007/s10544-016-0141-4).
- [31] Y. Ren, S. Tan, L. Zhang, Z. Wang, Z. Wang, and J. Yang, "Liquid level sensing using commodity WiFi in a smart home environment," *Proc. ACM Interact., Mobile, Wearable Ubiquitous Technol.*, vol. 4, no. 1, pp. 1–30, Mar. 2020, doi: [10.1145/3380996](https://doi.org/10.1145/3380996).
- [32] M. H. Zarifi, H. Sadabadi, S. H. Hejazi, M. Daneshmand, and A. Sanati-Nezhad, "Noncontact and nonintrusive microwave-microfluidic flow sensor for energy and biomedical engineering," *Sci. Rep.*, vol. 8, no. 1, pp. 1–10, Jan. 2018, doi: [10.1038/s41598-017-18621-2](https://doi.org/10.1038/s41598-017-18621-2).
- [33] A. Ebrahimi, J. Scott, and K. Ghorbani, "Ultrahigh-sensitivity microwave sensor for microfluidic complex permittivity measurement," *IEEE Trans. Microw. Theory Techn.*, vol. 67, no. 10, pp. 4269–4277, Oct. 2019, doi: [10.1109/TMTT.2019.2932737](https://doi.org/10.1109/TMTT.2019.2932737).
- [34] A. A. Abduljabar, H. Hamzah, and A. Porch, "Double microstrip microfluidic sensor for temperature correction of liquid characterization," *IEEE Microw. Wireless Compon. Lett.*, vol. 28, no. 8, pp. 735–737, Aug. 2018, doi: [10.1109/LMWC.2018.2849218](https://doi.org/10.1109/LMWC.2018.2849218).
- [35] S. Alam, Z. Zakaria, I. Surjati, N. A. Shairi, M. Alaydrus, and T. Firmansyah, "Multifunctional of dual-band permittivity sensors with antenna using multicascode T-shaped resonators for simultaneous measurement of solid materials and data transfer capabilities," *Measurement*, vol. 217, Aug. 2023, Art. no. 113078, doi: [10.1016/j.measurement.2023.113078](https://doi.org/10.1016/j.measurement.2023.113078).
- [36] S. Alam, Z. Zakaria, I. Surjati, N. A. Shairi, M. Alaydrus, and T. Firmansyah, "Dual-band independent permittivity sensor using single-port with a pair of U-shaped structures for solid material detection," *IEEE Sensors J.*, vol. 22, no. 16, pp. 16111–16119, Aug. 2022, doi: [10.1109/JSEN.2022.3191345](https://doi.org/10.1109/JSEN.2022.3191345).
- [37] S. Kiani, P. Rezaei, and M. Fakhr, "Real-time measurement of liquid permittivity through label-free meandered microwave sensor," *IETE J. Res.*, pp. 1–11, Jul. 2023, doi: [10.1080/03772063.2023.2231875](https://doi.org/10.1080/03772063.2023.2231875).
- [38] A. Zahedi, F. A. Boroumand, and H. Aliakbarian, "Analytical transmission line model for complex dielectric constant measurement of thin substrates using T-resonator method," *IET Microw., Antennas Propag.*, vol. 14, no. 15, pp. 2027–2034, Dec. 2020, doi: [10.1049/iet-map.2019.1117](https://doi.org/10.1049/iet-map.2019.1117).

- [39] A. A. Abduljabar, N. Clark, J. Lees, and A. Porch, "Dual mode microwave microfluidic sensor for temperature variant liquid characterization," *IEEE Trans. Microw. Theory Techn.*, vol. 65, no. 7, pp. 2572–2582, Jul. 2017, doi: 10.1109/TMTT.2016.2647249.



SYAH ALAM (Graduate Student Member, IEEE) was born in Jakarta, Indonesia. He received the S.Pd. degree in electrical engineering from Universitas Pendidikan Indonesia (UPI), Indonesia, in 2010, the M.Eng. (M.T.) degree in telecommunication engineering from the Graduate Program of Electrical Engineering, Universitas Trisakti, in 2012, and the Ph.D. degree in electronic engineering (RF and microwave) from Universiti Teknikal Melaka Malaysia (UTeM), in 2024.

In 2018, he joined the Department of Electrical Engineering, Universitas Trisakti, as a Researcher and a Lecturer. His research interests include microstrip antenna and microwave sensors for various applications.



INDRA SURJATI (Member, IEEE) was born in Bangkok, Thailand. She received the Bachelor of Engineering (Ir.) degree in electrical engineering and the M.Eng. (M.T.) degree in telecommunication engineering from the Graduate Program of Electrical Engineering, Universitas Trisakti, in 1996, and the Ph.D. degree from the Department of Electrical Engineering, University of Indonesia, in 2004. In 2011, she was a Professor with the Department of Electrical Engineering, Universitas Trisakti.

Her research interests include microstrip antenna and microwave circuits for various applications.



LYDIA SARI (Member, IEEE) received the B.S. degree in electrical engineering from Universitas Trisakti, Jakarta, Indonesia, in 1998, and the M.S. and Ph.D. degrees in electrical engineering from the University of Indonesia in 2002 and 2010, respectively. She is currently a Faculty Member with Electrical Engineering Department, Universitas Trisakti. Her research interests include wireless communications and information theory.



RADEN DEINY MARDIAN (Member, IEEE) received the bachelor's and master's degrees in electrical engineering from Universitas Trisakti, Jakarta, Indonesia, in 1998 and 2001, respectively, and the Ph.D. degree in electrical engineering from Universitas Indonesia, Depok, Indonesia, in 2023. He has published several journal papers and conference proceedings. He is currently a Lecturer at the Electrical Engineering Department, Faculty of Industrial Technology, Universitas Trisakti. His

research interests are mobile and wireless communication technology, digital broadcasting, quality of service, and quality of experience—all his research concerns technical and regulatory policy management.



MAROUANE ABICHA (Student Member, IEEE) was born in Meknes, Morocco. He is currently pursuing the degree in electronics engineering student. His journey in the field of electronics began at the International Academy of Civil Aviation, Casablanca, Morocco, where he pursued his studies, from 2018 to 2020, majoring in electronics and telecommunications. Eager to broaden his horizons, he embarked on a dual-degree program at Polytech Nantes, France, since 2020, specializing

in electronics and digital technologies. During the Summer of 2023, he seized the opportunity to further enrich his academic journey by undertaking an internship at Universitas Trisakti, Jakarta, Indonesia, where he actively contributed to groundbreaking research, specifically delving into the realm of microwave sensors. Currently, in his final year of training, he has honed his expertise in mobile communication systems, with a particular focus on the intricate world of radio frequency environments.



ZAHRIADHA ZAKARIA (Senior Member, IEEE) was born in Johor, Malaysia. He received the B.Eng. and M.Eng. degrees in electrical and electronic engineering from Universiti Teknologi Malaysia, Malaysia, in 1998 and 2004, respectively, and the Ph.D. degree in electrical and electronic engineering from the Institute of Microwaves and Photonics (IMP), University of Leeds, Leeds, U.K., in 2010. From 1998 to 2002, he was with STMicroelectronics, Malaysia, where

he was a Product Engineer. He is currently a Professor with the Microwave Research Group (MRG), Faculty of Electronic and Computer Engineering, Universiti Teknikal Malaysia Melaka (UTeM). He also investigates energy harvesting and sensors. His research interests include a variety of microwave device development, such as planar and nonplanar microwave filters, resonators, amplifiers, and antennas.



TEGUH FIRMANSYAH (Member, IEEE) was born in Subang, Indonesia. He received the B.Eng. and M.Eng. degree in electrical engineering from the Department of Electrical Engineering, Universitas Indonesia, in 2010 and 2012, respectively, and the Dr.Eng. degree (Hons.) from Shizuoka University, Japan, in 2022. In 2012, he joined the Department of Electrical Engineering, Universitas Sultan Ageng Tirtayasa, as a Researcher and a Lecturer. He holds two patents for wideband antenna

and multiband antenna. His research interests include microwave circuits for various applications and developing multifunctional sensors using acoustic, plasmonic, and microwave resonators.



MUDRIK ALAYDRUS (Senior Member, IEEE) was born in Jakarta, Indonesia. He received the Dipl.-Ing. degree in electrical engineering from Universität Hannover, in 1997, and the Dr.-Ing. degree in electrical engineering from the University of Wuppertal, in 2001. Since 2003, he has been with Universitas Mercu Buana, Jakarta. His current research interests include microwave and millimeter wave components, wireless power transfers, wireless sensor networks, an interaction

between electromagnetics and materials, and mathematical modeling in signal processing. He is a member of Verein der Deutschen Elektroingenieure (VDE).



YUSNITA RAHAYU (Senior Member, IEEE) was born in Pekanbaru, Indonesia. She received the B.Eng. degree in electrical engineering from the Department of Electrical Engineering, National Institute of Science and Technology, Jakarta, in 1999, and the M.Eng. and Ph.D. degrees from Universiti Teknologi Malaysia, in 2004 and 2009, respectively. She is currently a Senior Lecturer with the Department of Electrical Engineering, Universitas Riau. Her research interests include

antenna and propagation, microwave and millimeter wave components, sensors, and wireless communication.

...