

Journals

Sort by

Impact

Search journals

Search...

Filter

Page 1 of 1 | Total Records 1



JOURNAL OF APPLIED GEOSPATIAL INFORMATION (JAGI) ✓

[Google Scholar](#) [Website](#) [Editor URL](#)

[Politeknik Negeri Batam](#)

P-ISSN : 25793608 | E-ISSN : 25793608 Subject Area : Science, Social, Engineering

S3 Accredited

Garuda Indexed

0,97
Impact

10
H5-index

357
Citations 5yr

380
Citations

Previous 1 Next

Page 1 of 1 | Total Records 1



polibatam

JAGGI



JOURNAL OF APPLIED
GEOSPATIAL INFORMATION

Online ISSN : 2579-3608

Volume 6

[Register](#) [Login](#)

JOURNAL OF APPLIED

[HOME](#) [ARCHIVES](#) [CURRENT](#) [JAGI INDEXED](#) [ANNOUNCEMENTS](#)[ABOUT](#) ▾ [HOME](#) / [ARCHIVES](#) / Vol 6 No 2 (2022): Journal of Applied Geospatial Information (JAGI)

The journal publishes one volume and two (2) issues (January - Juni & July- December) per year. The accepted manuscript will be online soon upon revised version has received and approved by the [editor in chief](#).

[Journal of Applied Geospatial Information \(JAGI\)](#) is licensed under a [Creative Commons Attribution 4.0 International License](#)

DOI: <https://doi.org/10.30871/jagi.v6i2>

PUBLISHED: 2022-07-28

ARTICLES

Development And Field Test Of Gps-Gsm Drifting Buoy For Measurement Of Sea Surface Current Data

Agung Tri Nugroho; Indra Jaya, Yuli Naulita (Author Guidelines)

607-614

 **PDF**

Monitoring of Land Surface Change in Padang City Using Dinsar Sentinel-1a Method

Desi Syafriani, Saiyidinal Fikri, Quinoza Guvil

615-619

 **PDF**

Analysis of Land Cover Changes On Rainwater Runoff In Ciapus Sub-Watershed

Alimuddin Alimuddin, Feril Hariati, Fachruddin Fachruddin, Muhamad Lutfi, Muhamad Rizki

620-625

 **PDF**

TSS Analysis (Total Suspended Soil) Using GEE (Google Earth Engine) Cloud Technology in Belawan Waters

Mardame Pangihutan Sinaga, Jono Barita Sianipar, Ady Frenly Simanullang, Goldberd Harmuda Duva Sinaga, Ewin Handoco S, Welmar Olfan Basten Barat

626-631

 **PDF**

Design and Build a Pharmacy Location Mapping Information System in Batam City

Fendi Hidayat, Dwi Ratna Fitriyani, Fifin Oktaviani, Yoga Fitriana

632-637

 **PDF**

The Effect of Water Quality on Growth of Microalgae Chlorella pyrenoidosa

Srinatalia Silaen, Welmar Olfan Basten Barat

638-640



Geographic Information System (GIS) as an Information Media in the Field of Environmental Health: Literature Review

Maghfirah Dara Chaniago, Herika Muhamad Taki

641-646



Study of Flood Vulnerability in Pesanggrahan District, South Jakarta

Herika Muhamad Taki, Anita Sitawati Wartaman

647-651



ROFI Zone (Region of Freshwater Influence) and Its Impact on Total Dissolved Solids in the Coastal District of Sukadana Kayong Utara

Zan Zibar; I Wayan Nurjaya, Robin Saputra, Alimuddin Alimuddin (Author Guidelines); Ferdy Gustian, Mohammad Sumiran Papatungan

652-657



Fish Catch Results Related to Temperature and Chlorophyll in Western Waters of Sumatera

Ewin Handoco S, Ria Retno Manik, Jogi Arleston

658-663



Measurement and Analysis of Acoustic Surface Scattering for Oil Concentration

Ratna Juita Sari, Henry Munandar Manik, Susilohadi Susilohadi

664-668



Evaluation of Settlement Space Patterns in Solok City with Remote Sensing

Siti Naila Tassa Ghuba Afti, Fitriana Syahar

669-673

**Efforts to Reduce River Water Discharge through Land Use Control (Case Study: Upstream Ciliwung Watershed, Indonesia)**

Shamira Nathania, Endrawati Fatimah, Benny B Suharto

674-680

**The Impact Of The Operation Of Jati Asih Toll Gate On Land Use Changes In Jati Asih Sub-District**

Tsamara Qolbi Haridza, Anita Sitawati Wartaman, Wisely Yahya

681-687

**Analysis of Design Flood Discharge and Water Level Case Study of the Batang Singkut River Section Sarolangun Regency**

Fitria Melany, Harmes Harmes, Freddy Ilfan

688-692

**Analysis of Morphological Development Due to the Industrial Development in Majalaya District, Bandung Regency**

Hana Sugiastu Firdaus, Arwan Putra Wijaya, Nadhea Ramadhani

693-699

**Modeling Accessibility to Emergency Obstetric Care in Mountain Region on Adonara Island, Eastern Indonesia**

Kalista Ina Dai Nimun, Frederika Rambu Ngana, Ali Warsito, Jehunias Leonidas Tanesib

700-704

**SWOT Analysis of Galuga Final Disposal Site**

Azka fadilla setiawan, Alimuddin Alimuddin, Rulhendri Rulhendri, Fadhila Muhammad Libasut Taqwa

705-710



PDF

Developing Buildings Permits Systems Platforms (BPSP) for driving change to introduce GeoBIM potentials, challenges, and opportunities

Obaid Talal Aljobaly, Mohammed Maatouk, Emad Qurnfulah

711-721



PDF

Journal Metric & Achievement

MAKE A SUBMISSION

HOME

FOCUS AND SCOPE

OPEN ACCESS STATEMENT

PUBLICATION FREQUENCY

EDITORIAL TEAM

LIST OF REVIEWER

PEER REVIEW PROCESS

ARCHIVING

STATEMENT OF ETHIC

COPYRIGHT

DISCLAIMER

CONTACT JOURNAL

AUTHOR GUIDELINES

ARTICLE PROCESSING CHARGE

INDEXING

MANAGEMENT REFERENCE

SCREENING PLAGIARISM

JOURNAL TEMPLATE

OUR LOCATION



PLAGIARISM CHECK



RECOMMENDED TOOLS



MENDELEY

EndNote®



grammarly

e-ISSN (Online): 2579-3608



9 772579 360007

Visitors


[See more ▶](#)

ID 17,677	GB 154	SG 108
US 3,331	JP 150	TR 98
IN 531	SA 148	BR 98
CN 451	GH 140	AU 90
ET 207	CA 128	IR 81
MY 180	DE 119	
NG 165	KR 111	

FLAG counter


Journal of Applied Geospatial Information (JAGI)

S3 | Google Scholar
280 Citations



Powered by Author ID

Citations according to [Google Scholar](#): 290 (h-index: 8)

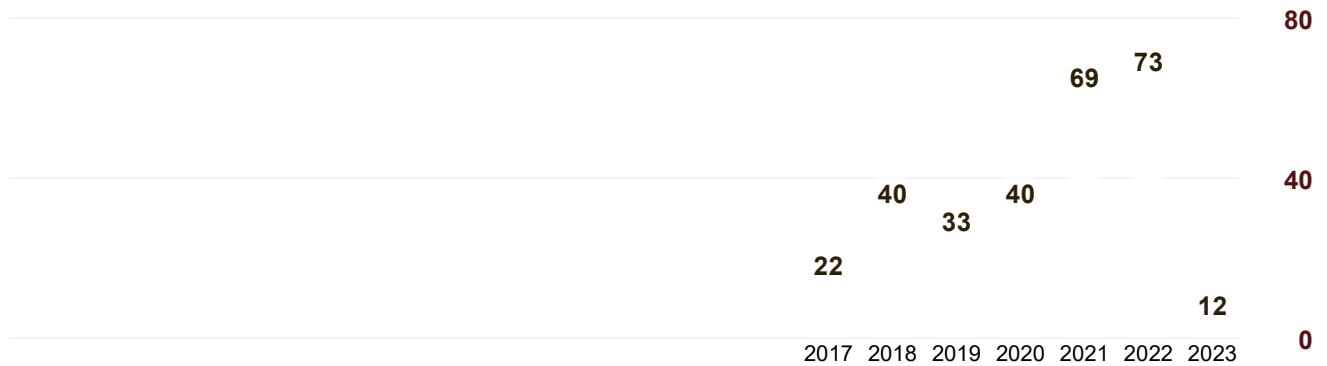

Citation Statistic by [Author My ID](#)

INFORMATION

[For Readers](#)

[For Authors](#)

[For Librarians](#)

[Open Journal Systems](#)

CURRENT ISSUE

ATOM 1.0

RSS 2.0

RSS 1.0

Visitor Number :

00055726 [View My Stats](#)

ISSN (online) : [2579-3608](#) | **DOI :** [10.30871/jagi](#)

This work is licensed under a [Creative Commons Attribution 4.0 International License](#).

Responsive Theme Design by [OpenJournalSystems.com](#)

Jl. Ahmad Yani, Batam Center, Batam 29461

Phone: +62 778 469856 Ext 2015

[Politeknik Negeri Batam](#)

Support by: Study Program of [Geomatics Engineering](#)



- [Home](#)
- [Archives](#)
- [Current](#)
- [JAGI Indexed](#)
- [Announcements](#)
- [About](#)

[Search](#)

- [Register](#)
- [Login](#)

1. [Home](#) /

2. Editorial Team

Editor in Chief:

[Muhammad Zainuddin Lubis S.I.K., M.Si, \[SCOPUS ID: 57200087802, h-index: 6\], \[Orcid ID: 0000-0003-3660-4837, ResearcherID: E-7997-2017, \[Semantic Scholar\], Google h-index=11\]](#), Department of Informatics Engineering, Geomatics Engineering Batam Polytechnic, Batam Kepulauan Riau, Indonesia.

Editor Assistant :

[Wenang Anurogo, S.Si., M.Sc, \[SCOPUS ID: 57200089165, h-index:5\], \[Orcid ID: 0000-0002-5695-6269, Google h-index=10\]](#)Department of Informatics Engineering, Geomatics Engineering Batam Polytechnic, Batam Kepulauan Riau, Indonesia, Indonesia.

Managing Editor:

Muhammad Ghazali, A.Md.T Department of Informatics Engineering, Geomatics Engineering Batam Polytechnic, Batam Kepulauan Riau, Indonesia, Indonesia.


National Editorial Advisor

1. [Prof.Dr.Ir. Vincentius P Siregar, DEA, \[SCOPUS ID: 56102074300, h-index:2\]](#), Department of Marine Science and Technology, Faculty of Fisheries and Marine Science, IPB University, Indonesia.
2. [Prof. Henry Munandar Manik, MT., Ph.D. \[SCOPUS ID: 13807256100, h-index:4\]](#), Department of Marine Science and Technology, Faculty of Fisheries and Marine Science, IPB University, Indonesia.
3. [Prof.Dr. Sismanto, M.Si, \[SCOPUS ID: 57199052755, h-index:2\]](#), Faculty of Mathematics and Natural Science, Universitas Gadjah Mada (UGM), Yogyakarta, Indonesia.
4. [Prof. Agung Dhamar Syakti, S.Pi, M.Sc, DEA, Ph.D. \[SCOPUS ID: 6507346312, h-index:14\]](#), Department of Marine Science, Faculty of Marine Science and Fisheries, Maritim Raja Ali Haji University (UMRAH), Indonesia.
5. [Prof. Dr. Ir. Jonson Lumban Gaol, M.Si, \[SCOPUS ID: 56497944600 h-index:5\]](#), Department of Marine Science and Technology, Faculty of Fisheries and Marine Science, IPB University, Indonesia.
6. [Ir. Agus Saleh Atmadipoera., DESS, Ph.D. \[SCOPUS ID: 25822241200, h-index:6\]](#), Department of Marine Science and Technology, Faculty of Fisheries and Marine Science, IPB University, Indonesia.
7. [Dr. Eng. Husnul Kausarian, BSc \(Hons\)., MSc, \[Scopus ID: 57191994504, h-index:7\]](#), Department of Geological Engineering, Faculty of Engineering, Universitas Islam Riau (UIR), Indonesia.
8. [Dr. Ir. Sri Pujiyati., M.Si, \[SCOPUS ID: 57202905079 h-index:2\]](#), Department of Marine Science and Technology, Faculty of Fisheries and Marine Science, IPB University, Indonesia.
9. [Dr. Pramaditya Wicaksono, S.Si., M.Sc, \[SCOPUS ID: 54279699900, h-index:10\]](#), Department of Geographic Information Science, Faculty of Geography Universitas Gadjah Mada, Sekip Utara, 55281 Yogyakarta, Indonesia.
10. [Herika, S.Si, M.Si, Ph.D, \[SCOPUS ID: 57200090300, h-index:4\]](#), Department of Urban and Regional Planning, Universitas Trisakti, Indonesia

International Editorial Advisor

1. [Prof. Josaphat Tetuko Sri Sumantyo, Ph.D. \[SCOPUS ID: 7801490558, h-index:19\]](#) Centre for Environmental Remote Sensing, Chiba University, Chiba, (Japan).
2. [Prof. Paul Doukhan, Ph.D, \[SCOPUS ID 6602566873: , h-index:15\]](#), University Cergy-Pontoise, laboratory of Mathematics, AGM (Analysis, Geometry, and Modeling) UMR 8088 CNRS, France.
3. [Prof. Andrzej Stepnowski, Ph.D., DSc. \[SCOPUS ID: 56405670500, h-index:8\]](#), Department of Geoinformatics, Gdansk University of Technology, Faculty of Electronics, Telecommunications and Informatics, 80-233 Gdansk, Poland.
4. [Prof.Fernando Castro Herrera, Ph.D. \[SCOPUS ID: 43160919700 h-index:12\]](#), University of North Texas, 1988 (USA).
5. [Dr. Zulkiflee Abd Latif, \[SCOPUS ID: 55991796500, h-index:12\]](#), Centre of Studies Surveying Science & Geomatics Faculty of Architecture, Planning & Surveying Universiti Teknologi Mara (UiTM) 40450 Shah Alam, Selangor (Malaysia).
6. [Rozaimi Che Hasan, Ph.D., \[SCOPUS ID: 54419613200, h-index:4\]](#), UTM Razak School of Engineering and Advanced Technology, Universiti Teknologi Malaysia, Kuala Lumpur, (Malaysia).

7. [Shaik Asif Hossain., \[SCOPUS ID: 57189032985, h-index:5\]](#), Department of Electronics and Telecommunication Engineering, Rajshahi University of Engineering and Technology, Rajshahi-6204, Bangladesh.

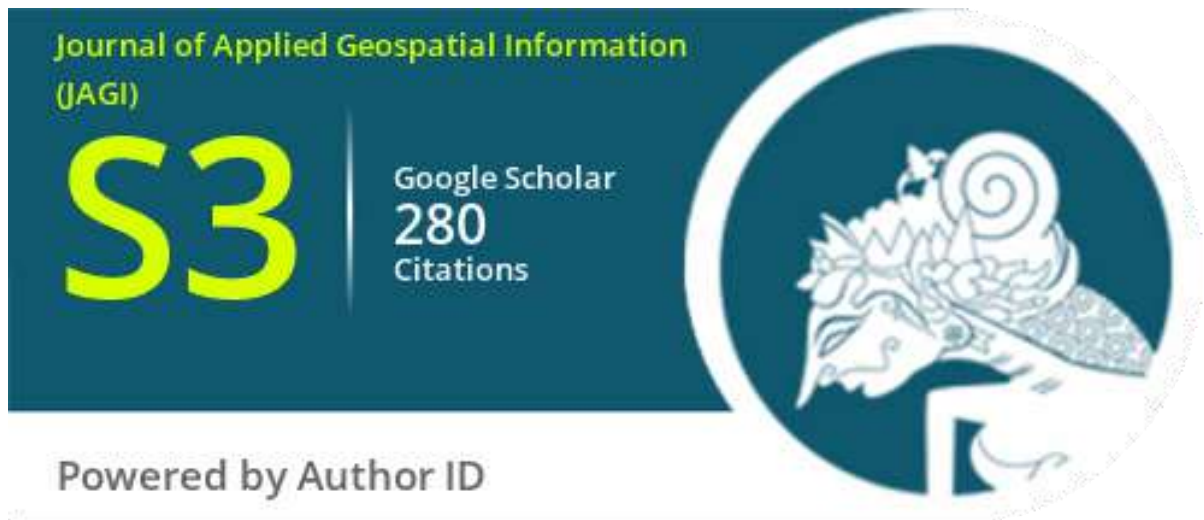

00055721 [View My Stats](#)

ISSN (online) : [2579-3608](#) | DOI : [10.30871/jagi](#)

This work is licensed under a [Creative Commons Attribution 4.0 International License](#).

Responsive Theme Design by [OpenJournalSystems.com](#)

Jl. Ahmad Yani, Batam Center, Batam
29461

Phone: +62 778 469856 Ext 2015
[Politeknik Negeri Batam](#)

Support by: Study Program of [Geomatics Engineering](#)

Efforts to Reduce River Water Discharge through Land Use Control (Case Study: Upstream Ciliwung Watershed, Indonesia)

Shamira Nathania¹, Endrawati Fatimah^{2*}, Benny B. Suharto³

^{1,2,3} *Urban and Regional Planning Department, Faculty of Landscape Architecture and Environmental Technology, Trisakti University, 11440, Indonesia*

Corresponding Author e-mail*: endrawati@trisakti.ac.id


Received: October 11, 2022

Accepted: November 11, 2022

Published: November 11, 2022

Copyright © 2022 by author(s) and
Scientific Research Publishing Inc.

Open Access



Abstract

Land-use change is the main cause of high runoff compared to other factors. The type of land use also plays a role in determining the amount of runoff that occurs. The Upstream Ciliwung watershed is blamed as the main causes of the flood disaster in Jakarta, the capital city. The land use in the upper stream has changed and causes increasing of run off to be higher than the capacity of river to drain it. This study aims to explore the land use changes of the Upstream Ciliwung Watershed from 1996 to 2016 and their consequences on the stream run off. Furthermore, the study also recommends the efforts needed to reduce river water discharge. The land use changes are identified by using spatial analysis method. The calculation of run off uses the rational method. Average rainfall data for every ten years is calculated by use of Gumbell distribution formula. The study shows that in the period 1996 – 2016, there was a change in land use in the upstream Ciliwung watershed. The area that continues to decline includes primary forest, open land, paddy fields, shrubs, and mixed gardens, all of which are categorized as undeveloped areas. The runoff discharge from 1996 – 2016 has increased from 278.77 to 465.57 mm/second that indicate runoff discharge is already in the Standby I position. Efforts that need to be made to reduce runoff water flow in the Ciliwung watershed are: 1) consistently develop and control land use change in the area based on the Jabodetabekpunjur Spatial Planning 2) consistently apply the building coverage ratio (BCR) regulation; 3) construct engineering and technology approach such as build infiltration wells in settlement, 4) forest rehabilitation and 5) conducting law enforcement.

Keywords: Ciliwung Watersheh; Land Use; Water Discharge

1. Introduction

Land use is a form of activity utilizing the land to meet certain needs. Land-use change is an increase in land use from one side of use to another at a certain time. Land-use change is defined as a change from one type of land use to another. Land conversion can be permanent or temporary. If technically irrigated agricultural land is turned into housing or industry, the conversion of this land function is permanent [Asdak, 2004]. Land use has a close relationship with the hydrological cycle. Land use change is one of the main contributing factors affecting discharge in watershed (Konkul *et al.*, 2014; Waiyasuri *et al.*, 2016; Chotpantararat *et al.*, 2018). Each type of land use has specific capacity of infiltration. Then, land use change might increase or decrease in infiltration and, in turn, a decrease or an increase in the rate and volume of

surface runoff (Chotpantararat, *et al.*, 2018; Klongvessa, *et al.*, 2017).

Ciliwung watershed is one of watershed in Java Island, Indonesia. This watershed is popular because Jakarta, the capital city, is in the downstream. During rainy season, Jakarta almost always experiences floods which are mostly suspected come from the Ciliwung river. In the last ten years, floods in Jakarta tend to get worse. The uncontrolled land use change in the upstream watershed is blamed as the main cause of the flood. The upstream Ciliwung watershed is covered around 15,225.13 hectares. Based on the Spatial Plan Regulation, the upstream area is mostly for conservation area (2654,90 hectares) and rural settlements which characterize as very low (class B5) – low density (class B4) settlement (Presidential

Regulation Number 60 of 2020 on Spatial Planning for Jakarta. Bogor. Depok. Tangerang. Bekasi. Puncak and Cianjur (Jabodetabek-Punjur))

This study aims to identify the land use changes in the upstream Ciliwung watershed and to calculate the water discharges from 1996 to 2016. Water discharge is the volume of water flowing through a river cross section per unit time. Extreme water discharge indicates that the river will be prone to overflow. So water discharge may become of flood's indicators (Hasanah *et al.*, 2013). Based on the water discharge calculation, some recommendations are given to reduce the discharge or runoff through land use control.

2. Methodology

This research method used is descriptive quantitative research, which is one type of research that aims to describe systematically, factually, and accurately the facts and characteristics of a particular population or try to describe the phenomenon in detail (Sugiyono, 2009). The analysis methods in this research use spatial analysis with super imposed technique and mathematical analysis using rational method. The data needed in this research is time-series data to find out changes in phenomena that occur during 1996 – 2016 and mostly is secondary data collecting from government institutions (Zuma *et al.*, 2017). The overlay technique will later translate the resulting map into a table to see the influence of the variables determined by changes in runoff water discharge in this study area.

To find out the maximum runoff water discharge, first needs to estimate maximum rainfall intensity that represent rainfall data for one period (10 years). The formula used in this analysis is Gumbel distribution by using monthly rain fall for one period. The rainfall results from the calculation, then are used to calculate the runoff water discharge using the Rational Method. The formulas use in this study are follow:

1. Gumbel distribution is used to calculate the possibility of maximum rainfall in 10 years period (Suripin, 2004.; Bhagat, 2017). The equation of Gumbel distribution method as follows:

$$R_{24} = \bar{X} + \frac{S_x}{S_y} (Y_f - Y_n)$$

Where:

R24 = The maximum daily rainfall 24 hours (mm/24 hours)

X = Average rainfall (mm)

Sx = Deviation Standard

Yn = Reduced mean

2. Mononobe equation is used to calculate the intensity of rainfall in mm per hour based on the maximum daily rainfall 24 hours calculated with Gumbel distribution equation. The Mononobe equation as follows (Suripin, 2004 .; Bhagat, 2017).

$$I = \frac{R24}{24} \left(\frac{24}{t} \right)^{2/3}$$

Where:

I = Rainfall Intensity (mm/hours)

R24 = The maximum daily rainfall (24 hours) (mm)

t = Rain Duration (24 hours)

3. Rational Method is used to calculate the runoff water discharge (Dunne. 2018)

$$Q=C.I A$$

Q = Maximum surface runoff rate (m3/s)

C = Surface runoff Coefficient

I = rainfall intensity (mm/hours)

A = Total Area (ha)

The value of C depends on the land cover, as shown in Table 1

Table 1. Surface runoff Coefficient (C) based on Land Cover

No	Use/Cover Land	Score C
1	Primary Forest	0.01
2	Secondary Forest	0.05
3	Mixed agriculture	0.5
4	Field	0.5
5	Plantation	0.5
6	Bush	0.3
7	Ricefield	0.2
8	Pavement	0.7
9	Open Space	0.95
10	Settlement	0.9

Source: Dunne&Leopold, 1978 (Dunne, 2018)

3. Result and Discussion

The analysis of land use changes in the Upper Ciliwung uses data for the year of 1996, 2006, and 2016, as shown in Tabel 1. The data show that generally unbuild land use areas, that are primary forest, open field, rice field, bush, and mixed agriculture, tend to be continuously decrease. On the other side, built-up area in the form of settlement seems to be increasing significantly.

Table 2. Land Use of the Upstream Ciliwung Watershed in the 1996, 2006 and 2016

No	Land use	1996		2006		2016		Land Use Change 1996-2016 (ha)
		Hectare	%	Hectare	%	Hectare	%	
1	Primary Forest	547,95	3.60	547,95	3.60	518,46	3.41	(29,49)
2	Secondary Forest	2,408,98	15.82	1,560,91	10.25	2,811,54	18.47	402,56
3	Open Field	20,36	0.13	20,36	0.13	0,59	0.00	(19,77)
4	Ricefield	7,671,23	50.39	6,849,02	44.98	520,22	3.42	(7,151.01)
5	Bush	100,32	0.66	100,32	0.66	29,85	0.20	(70,47)
6	Mixed agriculture	2873,91	18.88	3,706,72	24.35	2,097,89	13.78	(776.02)
7	Plantation	545,77	3.58	545,77	3.58	1,035,07	6.80	489,30
8	Field/Dryland farming	694,79	4.56	694,79	4.56	5,952,72	39.10	5,257,93
9	Settlement	361,82	2.38	1,199,29	7.88	2,258,19	14.83	1,896,37
Total Land Use		15,225.13	100.00	15,225.13	100.00	15,225.13	100.00	

Table 2 also shows that the most change in area is the land for rice field. It decreases more than 7000 ha and almost extinct. The rice field area is very possible to turn into settlement area or use for dry land farming. Primary forest that should be conserved also decreased. During 1996 – 2006, the

area of primary forest had been maintained, but since 2006 the area tends to decrease. It can be seen from Figure 1, that the primary forest seems to change into secondary forest and bush. That means the forest has decrease in quality as a water catchment area because it is cultivated.

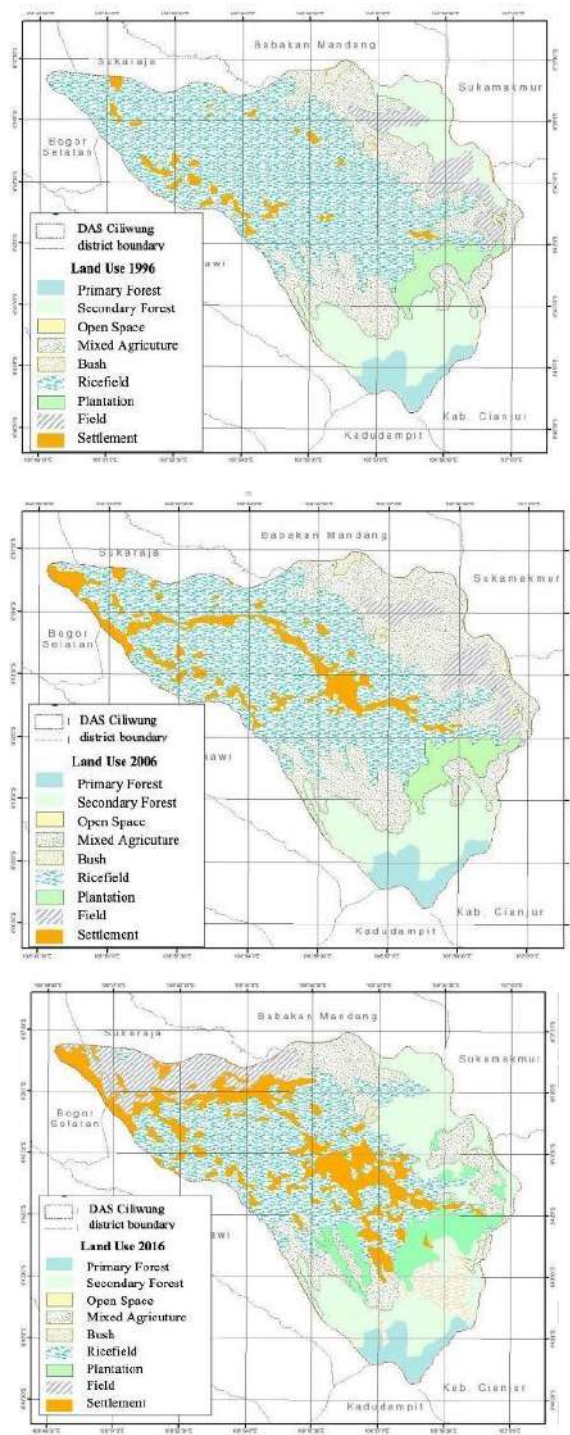


Figure 1. Land Use of The Upperstream Ciliung Watershed in 1996, 2006 and 2016

Figure 1 also shows that very intensive land use change from undeveloped land to settlements occurs in the middle of the catchment area parallel to the river and located along and around the main road. During 2006 -2016, in the northern part, close

to the middle stream watershed, there is also a massive change in paddy fields. Most of the rice fields turned into dry land. It is estimated that this change is a temporary change before it become the settlements and/or other use of built-up land.

As mentioned before, the land use changes have a close relationship with the proportion of volume of water absorbed by the soil and the volume of water that flows into surface water. By using the rational method, Table 4 shows the result of calculations of runoff water discharge based the land use data in 1996, 2006 and 2016 shown in Table 3. The value of maximum rainfall intensity uses in this study is calculated using Gumbel distribution methods and monthly rainfall data from 1996 – 2016. The calculation result shows that the maximum rainfall intensity is 24.52 mm/hour which is then used as the value of “I” in the rational method formula. The value of “C” in the rational formula, that is the surface runoff coefficient, is based on the C value for each land use as shown in table 1. The result of Runoff Water Discharge calculations for 1996, 2006 and 2016 is demonstrated in Table 3

Table 3. Runoff Water Discharge Values in m³/sec in the years of 1996, 2006 and 2016

Land Use	C	1996	2006	2016
Primary Forest	0.01	0.37	0.37	0.35
Secondary Forest	0.05	8.20	5.32	9.58
Open Space	0.95	1.32	1.32	0.04
Rice field	0.2	104.51	93.31	7.09
Bush	0.3	2.05	2.05	0.51
Mixed agriculture	0.5	97.88	126.24	71.45
Plantation	0.5	18.59	18.59	35.27
Field	0.5	23.66	23.66	202.74
Settlement	0.9	22.18	73.52	138.44
Total Runoff water Discharge		278.77	344.38	465.57

The total runoff calculated in this study is the maximum possible runoff because the rainfall intensity value used is maximum based on rainfall time series data from 1996 – 2016. The total runoff value of the upstream Ciliung watershed is an indicator that can be used to predict whether Jakarta, the downstream part of the watershed, will be flooded or not. BPBD (Regional Disaster Management Agency) Jakarta Province uses the Katulampa Weir Warning Level Criteria to estimate the occurrence of flood disasters. The Katulampa Weir is part of the flood early warning system of Ciliung River (Farika *et al.*, 2018). The weir is located in the boundary upstream and middle stream Ciliung Watershed. The total runoff water discharge from the upstream can be estimated by observing the water level in the weir. For example, if the water level measurement in the weir shows that the water level is 80 cm, it means that water discharge from upstream is around 90.05 m³/sec. Ciliung discharge in Katulampa Weir be known with water level reading which will be converted using rating curve. Table 5 shows the Katulampa Weir Warning Level Criteria.

Tabel 4. Katulampa Weir Warning Level Criteria

Warning Level (Alert)	Water Level Limit (cm)	Discharge Limit (m3/sec)
I	200	441.98
II	150	276.25
III	80	90.05
IV	0	0

Source: Farika, N, D. Sutjiningsih and E. Anggraheni, 2018 (Farika N. et.al 2018).

Warning Level (alert) I, with a water level of 200 cm and a discharge of 441.98 m3/sec, means that about 9 to 12 hours later, it is almost certain that there will be flooding in the Jakarta city. The maximum water discharges based on the condition of land uses in 1996, 2006 and 2016, then, can be classified using the Katulampa Weir Warning Level Criteria.

Table 5. Classification of Warning Level

Years	Calculated runoff water discharge (m3/Second)	Warning Level/Alert
1996	278.77	Alert II (276 s.d 441 m3/dt)
2006	344.38	Alert II (276 s.d 441 m3/dt)
2016	465.7	Alert I (>441 m3/dt)

Table 5 shows that with the condition of land uses in upstream Ciliwung watershed as in 2016, Jakarta would be flooding if it rains with intensity 24.52 mm per hour and it lasts for 24 hours. There for, this study tries to find recommendations to reduce the water discharge from more than 441 m3/sec to be in the Warning Level II. The recommendation is formulated based on the Jabodetabekpunjur Spatial Plan and at the same time, the study can show whether the land use plan, if implemented consistently, has considered the water discharge limit or not.

Based on the Jabodetabekpunjur Spatial Plan, the upstream Ciliwung watershed is comprised 2 (two) main categories of land uses, that are protected area (L) and settlement area (B). The settlements in the study area are classified into 5 (five) types of settlement zone. The land use plan of the upstream Ciliwung watershed can be seen in Table 6 and Figure 2.

Table 6 Land Use Plan of The Upstream Ciliwung Watershed based on President Regulation Number 60 of 2020

Land Use	Zone Code	Area (ha)	Percentage of total area (%)	Spatial Development Guidelines
Protected Area	L3	2654.90	17.44	Conservation area that can be in the forms of nature reservation areas or national parks
Settlement Area	B1	1432.96	9.41	High density settlement area, and high intensity urban centre
	B2	1035.31	6.80	Medium density settlement area and medium intensity urban centre
	B3	5814.84	38.20	Low – Medium density settlement area, agro-industrial area, tourism area, military zone area
	B4	4280.52	28.11	Low density settlement area, plantation area, agro-industrial area, agriculture area, tourism area dan production forest
	B5	6.58	0.04	Agricultural area
Total		15225.12	100	

Source: President Regulation Number 60 of 2020 on the Jabodetabekpunjur Spatial Planning (Presidential Regulation Number 60 of 2020 on Spatial Planning for Jakarta, Bogor, Depok, Tangerang, Bekasi, Puncak and Cianjur (Jabodetabek-Punjur)).

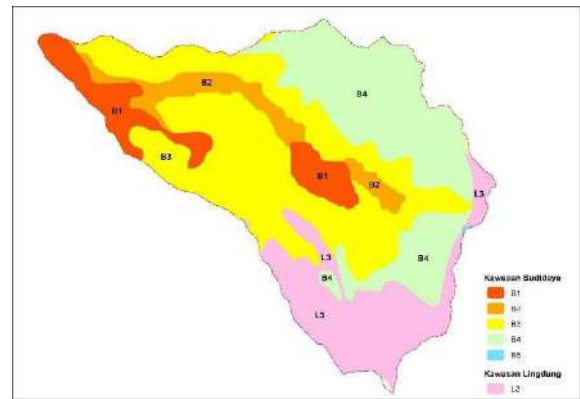


Figure 2. Land Use Plan of The Upstream Ciliwung Watershed

(Source: remapped based on President Regulation No 60 of 2020 on the Jabodetabekpunjur Spatial Planning)

It can be seen from the table and the figure, most dominant land use in the upstream Ciliwung watershed is settlement area classified as low to medium (B3 and B4). Those two zones of settlement cover around 66.31%. The protected area that covers 17.44% also is relatively dominant among other land uses. This land use planning shows that the upstream Ciliwung as a part of the whole watershed area tends to have a specific function as water catchment area that should infiltrated rain waters as much as possible. It means that the planning has considered the importance of the area in the context of hydrological cycle.

It also can be proven by calculating the runoff water discharge use by using the land use plan as shown in Tabel 7. The result shows that the value of Q, runoff water discharge, is estimated as 377.97 m3/second. Based on the warning level criteria (refer to Table 5), the planned runoff water discharge is below the limit of Warning Level I. That means that the flood disaster in Jakarta, the downstream area, would not occur or at least if there is a flood, it is not caused by overflowing water from the upper area.

Table 7. Runoff Water Discharge of the Upstream Ciliwung Watershed use the Land Use Plan

No.	Zone	Area (Ha)	C (mm/hours)	I (mm/hours)	Q(m3/second)
1	B1	1432.96	0.9	24.52	87.85
2	B2	1035.31	0.6	24.52	42.31
3	B3	5814.84	0.4	24.52	158.43
4	B4	4280.52	0.3	24.52	87.47
5	B5	6.58	0.2	24.52	0.09
6	L3	2654.90	0.01	24.52	1.81
Total					377.97

Considering that the results of calculating runoff water discharge using the land use plan indicate a relatively safe level for flooding in Jakarta, the recommendations proposed in this study will assume that the regulation of the Jabodetabekpunjur Spatial Plan is implemented consistently. Tabel 8 shows the comparison between the 2016 land uses and the land use plan including their runoff water discharges. Zone B1 that covers 1432,92 hectare is in a good condition since Q existing stands lower than Q as it is plan. Zone

B1, as mentioned before, is permitted to develop as high-density settlements. However, the development must pay to attention that upper zone of watershed has function as a water catchment area and has an important role as flood control for the lower zone (Handayani IGAKR. *et al.*, 2017.;Sudia *et al.*, 2021). With that consideration, the recommendations for Zone B1 are the area can still be developed, but it should be restrictedly. Some specifics guidelines for settlement development are applying Low Building Coefficient (BCR) standard and equipped with infiltration wells. Constructing infiltration wells in every individual or communal plot is recommended because infiltration wells have functions to reducing surface stream to minimize and prevent flood and inundation as well as to maintaining and increasing groundwater-surface height (Hirijanto *et al.*, 2021).

The Q existing in Zone B2 has exceed what it should be even though not too much. The recommendations for settlement area in Zone B2 are similar with these recommended in Zone B1 but as far as possible no expansion. The field or yard area seems to contribute the high volume of surface runoff. Therefore, the recommended farming method in this area is to apply agroforestry techniques or practices. As the FAO affirms that the definition of “agroforestry that is a collective name for land use systems and technologies where woody perennials (trees, shrubs, palms, bamboos, etc.) are deliberately used on the same land-management units as agricultural crops and/or animals, in some form of spatial arrangement or temporal sequence” (Santoro, et.al 2020) . The agroforestry practices have many benefits to the farmers in following ways (Hirijanto *et al.*, 2021 .; Alao, 2013):

- a. Consistent restoration of the fertility status of the soil
- b. A variety of products
- c. Prevention of wind and water erosion by trees acting as wind break and intercepting the raindrop impact on the soil respectively.
- d. Improving the micro-climate effect
- e. Restoration of water table to an absorbable level for crops use.
- f. Increased income opportunities and economic stability
- g. Reduce cost for establishing plantation
- h. Increased ability to manage for sustained yield.
- i. Hence, the advantages of agroforestry cover the social, economic, and environmental benefits to the farmers.

Table 8. Comparison between the existing land uses and the Jabodetabekpunjur land use plan and its implication to the Q value

BASED ON THE SPATIAL PLAN				BASED ON THE EXISTING CONDITION				Comparison and its Implication
Zone	Area (Ha)	C	Q plan (m ² /sec)	Land	Area (Ha)	C	Q existing (m ² /sec)	
B1	1432.96	0.90	87.85	Field	291.82	0.50	9.94	Q existing < Q plan Settlement can be further developed but should be restrictedly such as with low Building Coefficient Ratio (BCR) and
				Settlement	766.19	0.90	46.97	
				Ricefield	374.95	0.20	5.11	
B2	1035.31	0.60	42.31	Field	310.56	0.50	10.58	Q existing > Q plan The value of C should decrease. Settlement development must apply low BCR and equipped with infiltration wells. Field or yard is cultivated by using agroforestry concept.
				Settlement	581.98	0.90	35.68	
				Ricefield	142.77	0.20	1.95	
B3	5814.84	0.40	158.43	Secondary Forest	200.81	0.05	0.68	Q existing > Q plan The value of C should decrease. Settlement development must apply low Building Coefficient Ratio and equipped with infiltration wells. Applying agroforestry concept.
				Mixed agriculture	277.82	0.50	9.46	
				Field	4108.07	0.50	139.91	
				Plantation	369.92	0.50	12.80	
				Settlement	858.22	0.90	52.61	
B4	4280.52	0.30	87.47	Secondary Forest	1475.05	0.05	5.02	Q existing > Q plan Applying agroforestry concept.
				Mixed agriculture	1282.91	0.50	43.69	
				Field	900.27	0.50	30.66	
				Plantation	540.64	0.50	18.41	
				Settlement	51.80	0.90	3.18	
				Bush	29.78	0.30	0.61	
B5	6.58	0.30	0.22	Mixed agriculture	1.07	0.50	0.04	Q existing > Q plan The condition should be maintained
				Plantation	3.01	0.50	0.10	
				Rice field	2.50	0.20	0.03	
				Primary Forest	518.48	0.01	0.35	
				Secondary Forest	1135.68	0.05	3.87	
L3	2654.90	0.01	1.81	Mixed agriculture	536.07	0.50	18.26	Q existing > Q plan The L3 must be rehabilitated to its planned use and function such as by conducting reforestation
				Plantation	122.10	0.50	4.16	
				Field	342.00	0.50	11.65	
				Open land	0.59	0.95	0.04	
16226.11				378.10	TOTAL	16226.11	486.67	

As shown in Table 8, Zone B3 seems to tend to develop very intensively and uncontrollably as well as deviations from the Spatial Planning Regulation. Zone B3 is planned to be low – Medium density settlement area. agro-industrial area. tourism area. military zone area (refer to Table 7). Same as the Zone B3, the value of Q Zone B4 existing also exceeds the Q plan. The recommendations for the settlement areas are that the settlement should be maintain as low density settlement and completed with infiltration wells. The agricultural uses are dominantly in Zone B3 and B4 either in the form of field or yard, mixed agricultural and plantation. Again, the cultivations in these areas must be planted with perennial crop or by applying the agroforestry concept. The tree planting must be close to the secondary forest characteristics in terms of its density and variety of crop. So, the value of C can be decrease, which means the capacity of infiltration can be increase significantly.

The Q value of Zone L3 is also higher that it should be. Different with other zones, Zone L3 as the protected area is forced to be rehabilitated. From table 8, it can be seen some areas of L3 are occupied for agricultural purposes which have lower infiltration capacity than forests have. Hence, the recommendation for Zone L3 is conducting the forestation programmes to increase the quality of its function as protected area.

4. Conclusion

In the period 1996 – 2016, there was a change in land use in the upstream Ciliwung watershed. The area of land use that continues to decline includes primary forest, open land, rice fields, and mixed agriculture, all of which are categorized as undeveloped areas. Consequently, the runoff discharge from 1996 – 2016 has increased from 278.77 mm/sec to 465.57 mm/second. Most of the undeveloped land has been converted into residential use, and fields. By using the maximum assumption of rain intensity (I) equal to 24.52 mm/hour, the runoff discharge in 2016 is already in the warning level I. This means that the runoff discharge from the upstream Ciliwung watershed will cause flooding in the downstream (Jakarta). This study also proposes some recommendations for reducing runoff water flow in the upstream Ciliwung watershed that are the Jabodetabekpunjur Spatial Planning as regulated in The President Regulation Number 60 of 2020 must consistently implemented and became the legal basis for any determination letters. Settlement development may still have the permission to be developed in the upper stream, though it is recommended to implement low BCR zoning regulation, infiltration wells, and to locate the development in zone where the Q existing is lower than Q plan. Finally, the upstream Ciliwung watershed only develop it is necessary to apply the basic building coefficient ratio (BCR) that have been regulated in the Jabodetabekpunjur RTR and it is necessary to apply engineering technology such as infiltration wells. Finally, it is highly recommended to maintain the function of the upstream Ciliwung watershed as a water catchment area. Therefore, it is very necessary to increase infiltration capacity as well as controlling runoff volume through restoring protected functions in conservation areas, applying the concept of agroforestry on agricultural land and conducting law enforcement. This study concludes that law enforcement related to land use is very important and must be properly implemented to prevent or mitigate flood disasters in downstream areas.

References

- Alao, J.S. and Shuaibu, R.B. "Agroforestry practices and concepts in sustainable land use systems in Nigeria". *Journal of Horticulture and Forestry*. Vol. 5(10), pp 156-159, November 2013. <https://doi.org/10.5897/JHF11.055>. ISSN 2006-9782 © 2013 Academic Journal. <http://www.academicjournal.org/JHF>, 2013
- Asdak. C. *Hidrologi dan Pengolahan Daerah Aliran Sungai*. Gajah Mada University Press. Jogjakarta, Indonesia. 2004
- Bhagat. N. Flood Frequency Analysis Using Gumbel's Distribution Method: A case Study of Lower Mahi Basin, India. *Journal of Water Resources and Ocean Science*. Vol. 6 Issue 4. p 51-54. DOI: <https://doi.org/10.11648/j.wros.20170604.11..2017>
- Chotpantarat. S. and S. Boonkaewwan. "Impact of land-use changes on watershed discharge and water quality in large intensive agricultural area in Thailand". *Hydrological Sciences Journal*. vol. 63. Issue 9. <https://doi.org/10.1080/02626667.2018.1506128>. 2018
- Dunne & Leopold *Water in Environmental Planning*. Freeman, New York. 1978
- Farika N., D. Sutjningsih and E. Anggraheni. "Influence of impervious cover determination method of upper Ciliwung watershed on flood warning system level change in Katulampa weir". MATEC Web of Conferences. 4th International Conference on Engineering, Applied Sciences and Technology. ICEAST 2018. Phuket, Thailand 4 – 7 July 2018. DOI: <https://doi.org/10.1051/mateconf/201819202053>. 2018
- Handayani IGAKR. H. Glazer. M.R. Palil. F.U. Najicha and S. Akmadian. "Flood Management in Jakarta: Reconstruction of Jabodetabek Eight Priority Watershed Regulations". *South-East Asia Journal of Contemporary Business, economics and Law*. Vol. 14. Issue 4 (desember). ISSN 2289 – 1560.
- Hasanah, Y., M. Herlina, H. Zaikarina. "Flood prediction using transfer function model of rainfall and water discharge approach in Katulampa Dam". *Procedia Environmental Sciences*, DOI: <https://doi.org/10.1016/j.proenv.2013.02.044>, 2013
- Hirijanto, I.W. Mundra and B. Wedyantadji. "Infiltration wells alternatives to reduce water puddle in Lowokwaru Distrik, Malang City". *Journal of Sustainable Technology and Applied Science (JSTAS)*. Vol. 2. No. 1 May 2021. pp 1-8. ISSN: 2722-2403 (online). 2021.
- Klongvessa. P. Lu. M. and Chotpantarat. S. "Variations of characteristics of consecutive rainfall days over northern Thailand". *Theoretical and Applied Climatology*. <https://doi.org/10.1007/s00704-017-2208-4>. 2017
- Konkul. J. Rojborwornwittaya. W. and Chotpantarat. S. "Hydrologic characteristics and groundwater potentiality mapping using potential surface analysis in the Huay Sai area, Phetchaburi province, Thailand." *Geosciences Journal*. vol.18 no.1. pp 89–103. <https://doi.org/10.1007/s12303-013-0047-6>. 2014
- Presidential Regulation Number 60 of 2020 on Spatial Planning for Jakarta. Bogor. Depok. Tangerang. Bekasi. Puncak and Cianjur (Jabodetabek-Punjur).
- Santoro, A., M. Venturi, R. Bertani and M. Agnoletti. "A review of the role of forest and agroforestry systems in the FAO Globally Important Agricultural Heritage System (GIAHS) Programme". *Forests*, Vol 11(8),

- 860; <https://doi.org/10.3390/f11080860>.
2020
- Sudia. L.B. Gandri L. Hendryanto H.S. Bana S. Fitriani V. "Conservation Strategy Analysis in Upstream Watershed: Case Study in Cimandiri Watershed". *Jurnal Ecosolum*. Vol 10. No. 1. p. 33-47. ISSN ONLINE: 2654-430X. ISSN: 2252-7923. DOI: <https://doi.org/10.20956/ecosolum.v10i1.13100>. 2021
- Sugiyono. 2009. *Metode Penelitian Kuantitatif. Kualitatif dan R&D*. Bandung: Alfabeta. 2009.
- Suripin *Sistem Drainase Perkotaan yang Berkelanjutan*. Yogyakarta: Andi Offset. 2004
- Waiyasusri. K. Yumuang. S. and Chotpantarat. S. "Monitoring and predicting land use changes in the Huai Thap Salao Watershed area. Uthaitani province. Thailand. using the CLUE-s model". *Environmental Earth Science*. vol. 75. p 533. <https://doi.org/10.1007/s12665-016-5322-1>. 2016
- Zuma. DS. K. Murtalaksono. and Y. Suharnoto. "Analisis curah hujan dan debit model SWAT dengan metode moving average di DAS Ciliwung hulu." *Journal of Natural Resources and Environmental Management*. Vol. 7. DOI: <https://doi.org/10.29244/jpsl.7.2.98-106>. 2017

Reduce River water Discharge

by Anindita Ramadhani FALTL

Submission date: 17-Mar-2024 01:19AM (UTC+0700)

Submission ID: 2321994097

File name: e_Control_Case_Study_Upstream_Ciliwung_Watershed,_Indonesia.pdf (462.19K)

Word count: 4076

Character count: 20974

Efforts to Reduce River Water Discharge through Land Use Control (Case Study: Upstream Ciliwung Watershed, Indonesia)

Shamira Nathania¹, Endrawati Fatimah^{2*}, Benny B. Suharto³

^{1,2,3} ¹⁶ ²⁸ ²⁹ ³⁵ ³⁶ ³⁷ ³⁸ ³⁹ ⁴⁰ ⁴¹ ⁴² ⁴³ ⁴⁴ ⁴⁵ ⁴⁶ ⁴⁷ ⁴⁸ ⁴⁹ ⁵⁰ ⁵¹ ⁵² ⁵³ ⁵⁴ ⁵⁵ ⁵⁶ ⁵⁷ ⁵⁸ ⁵⁹ ⁶⁰ ⁶¹ ⁶² ⁶³ ⁶⁴ ⁶⁵ ⁶⁶ ⁶⁷ ⁶⁸ ⁶⁹ ⁷⁰ ⁷¹ ⁷² ⁷³ ⁷⁴ ⁷⁵ ⁷⁶ ⁷⁷ ⁷⁸ ⁷⁹ ⁸⁰ ⁸¹ ⁸² ⁸³ ⁸⁴ ⁸⁵ ⁸⁶ ⁸⁷ ⁸⁸ ⁸⁹ ⁹⁰ ⁹¹ ⁹² ⁹³ ⁹⁴ ⁹⁵ ⁹⁶ ⁹⁷ ⁹⁸ ⁹⁹ ¹⁰⁰ ¹⁰¹ ¹⁰² ¹⁰³ ¹⁰⁴ ¹⁰⁵ ¹⁰⁶ ¹⁰⁷ ¹⁰⁸ ¹⁰⁹ ¹¹⁰ ¹¹¹ ¹¹² ¹¹³ ¹¹⁴ ¹¹⁵ ¹¹⁶ ¹¹⁷ ¹¹⁸ ¹¹⁹ ¹²⁰ ¹²¹ ¹²² ¹²³ ¹²⁴ ¹²⁵ ¹²⁶ ¹²⁷ ¹²⁸ ¹²⁹ ¹³⁰ ¹³¹ ¹³² ¹³³ ¹³⁴ ¹³⁵ ¹³⁶ ¹³⁷ ¹³⁸ ¹³⁹ ¹⁴⁰ ¹⁴¹ ¹⁴² ¹⁴³ ¹⁴⁴ ¹⁴⁵ ¹⁴⁶ ¹⁴⁷ ¹⁴⁸ ¹⁴⁹ ¹⁵⁰ ¹⁵¹ ¹⁵² ¹⁵³ ¹⁵⁴ ¹⁵⁵ ¹⁵⁶ ¹⁵⁷ ¹⁵⁸ ¹⁵⁹ ¹⁶⁰ ¹⁶¹ ¹⁶² ¹⁶³ ¹⁶⁴ ¹⁶⁵ ¹⁶⁶ ¹⁶⁷ ¹⁶⁸ ¹⁶⁹ ¹⁷⁰ ¹⁷¹ ¹⁷² ¹⁷³ ¹⁷⁴ ¹⁷⁵ ¹⁷⁶ ¹⁷⁷ ¹⁷⁸ ¹⁷⁹ ¹⁸⁰ ¹⁸¹ ¹⁸² ¹⁸³ ¹⁸⁴ ¹⁸⁵ ¹⁸⁶ ¹⁸⁷ ¹⁸⁸ ¹⁸⁹ ¹⁹⁰ ¹⁹¹ ¹⁹² ¹⁹³ ¹⁹⁴ ¹⁹⁵ ¹⁹⁶ ¹⁹⁷ ¹⁹⁸ ¹⁹⁹ ²⁰⁰ ²⁰¹ ²⁰² ²⁰³ ²⁰⁴ ²⁰⁵ ²⁰⁶ ²⁰⁷ ²⁰⁸ ²⁰⁹ ²¹⁰ ²¹¹ ²¹² ²¹³ ²¹⁴ ²¹⁵ ²¹⁶ ²¹⁷ ²¹⁸ ²¹⁹ ²²⁰ ²²¹ ²²² ²²³ ²²⁴ ²²⁵ ²²⁶ ²²⁷ ²²⁸ ²²⁹ ²³⁰ ²³¹ ²³² ²³³ ²³⁴ ²³⁵ ²³⁶ ²³⁷ ²³⁸ ²³⁹ ²⁴⁰ ²⁴¹ ²⁴² ²⁴³ ²⁴⁴ ²⁴⁵ ²⁴⁶ ²⁴⁷ ²⁴⁸ ²⁴⁹ ²⁵⁰ ²⁵¹ ²⁵² ²⁵³ ²⁵⁴ ²⁵⁵ ²⁵⁶ ²⁵⁷ ²⁵⁸ ²⁵⁹ ²⁶⁰ ²⁶¹ ²⁶² ²⁶³ ²⁶⁴ ²⁶⁵ ²⁶⁶ ²⁶⁷ ²⁶⁸ ²⁶⁹ ²⁷⁰ ²⁷¹ ²⁷² ²⁷³ ²⁷⁴ ²⁷⁵ ²⁷⁶ ²⁷⁷ ²⁷⁸ ²⁷⁹ ²⁸⁰ ²⁸¹ ²⁸² ²⁸³ ²⁸⁴ ²⁸⁵ ²⁸⁶ ²⁸⁷ ²⁸⁸ ²⁸⁹ ²⁹⁰ ²⁹¹ ²⁹² ²⁹³ ²⁹⁴ ²⁹⁵ ²⁹⁶ ²⁹⁷ ²⁹⁸ ²⁹⁹ ³⁰⁰ ³⁰¹ ³⁰² ³⁰³ ³⁰⁴ ³⁰⁵ ³⁰⁶ ³⁰⁷ ³⁰⁸ ³⁰⁹ ³¹⁰ ³¹¹ ³¹² ³¹³ ³¹⁴ ³¹⁵ ³¹⁶ ³¹⁷ ³¹⁸ ³¹⁹ ³²⁰ ³²¹ ³²² ³²³ ³²⁴ ³²⁵ ³²⁶ ³²⁷ ³²⁸ ³²⁹ ³³⁰ ³³¹ ³³² ³³³ ³³⁴ ³³⁵ ³³⁶ ³³⁷ ³³⁸ ³³⁹ ³⁴⁰ ³⁴¹ ³⁴² ³⁴³ ³⁴⁴ ³⁴⁵ ³⁴⁶ ³⁴⁷ ³⁴⁸ ³⁴⁹ ³⁵⁰ ³⁵¹ ³⁵² ³⁵³ ³⁵⁴ ³⁵⁵ ³⁵⁶ ³⁵⁷ ³⁵⁸ ³⁵⁹ ³⁶⁰ ³⁶¹ ³⁶² ³⁶³ ³⁶⁴ ³⁶⁵ ³⁶⁶ ³⁶⁷ ³⁶⁸ ³⁶⁹ ³⁷⁰ ³⁷¹ ³⁷² ³⁷³ ³⁷⁴ ³⁷⁵ ³⁷⁶ ³⁷⁷ ³⁷⁸ ³⁷⁹ ³⁸⁰ ³⁸¹ ³⁸² ³⁸³ ³⁸⁴ ³⁸⁵ ³⁸⁶ ³⁸⁷ ³⁸⁸ ³⁸⁹ ³⁹⁰ ³⁹¹ ³⁹² ³⁹³ ³⁹⁴ ³⁹⁵ ³⁹⁶ ³⁹⁷ ³⁹⁸ ³⁹⁹ ⁴⁰⁰ ⁴⁰¹ ⁴⁰² ⁴⁰³ ⁴⁰⁴ ⁴⁰⁵ ⁴⁰⁶ ⁴⁰⁷ ⁴⁰⁸ ⁴⁰⁹ ⁴¹⁰ ⁴¹¹ ⁴¹² ⁴¹³ ⁴¹⁴ ⁴¹⁵ ⁴¹⁶ ⁴¹⁷ ⁴¹⁸ ⁴¹⁹ ⁴²⁰ ⁴²¹ ⁴²² ⁴²³ ⁴²⁴ ⁴²⁵ ⁴²⁶ ⁴²⁷ ⁴²⁸ ⁴²⁹ ⁴³⁰ ⁴³¹ ⁴³² ⁴³³ ⁴³⁴ ⁴³⁵ ⁴³⁶ ⁴³⁷ ⁴³⁸ ⁴³⁹ ⁴⁴⁰ ⁴⁴¹ ⁴⁴² ⁴⁴³ ⁴⁴⁴ ⁴⁴⁵ ⁴⁴⁶ ⁴⁴⁷ ⁴⁴⁸ ⁴⁴⁹ ⁴⁵⁰ ⁴⁵¹ ⁴⁵² ⁴⁵³ ⁴⁵⁴ ⁴⁵⁵ ⁴⁵⁶ ⁴⁵⁷ ⁴⁵⁸ ⁴⁵⁹ ⁴⁶⁰ ⁴⁶¹ ⁴⁶² ⁴⁶³ ⁴⁶⁴ ⁴⁶⁵ ⁴⁶⁶ ⁴⁶⁷ ⁴⁶⁸ ⁴⁶⁹ ⁴⁷⁰ ⁴⁷¹ ⁴⁷² ⁴⁷³ ⁴⁷⁴ ⁴⁷⁵ ⁴⁷⁶ ⁴⁷⁷ ⁴⁷⁸ ⁴⁷⁹ ⁴⁸⁰ ⁴⁸¹ ⁴⁸² ⁴⁸³ ⁴⁸⁴ ⁴⁸⁵ ⁴⁸⁶ ⁴⁸⁷ ⁴⁸⁸ ⁴⁸⁹ ⁴⁹⁰ ⁴⁹¹ ⁴⁹² ⁴⁹³ ⁴⁹⁴ ⁴⁹⁵ ⁴⁹⁶ ⁴⁹⁷ ⁴⁹⁸ ⁴⁹⁹ ⁵⁰⁰ ⁵⁰¹ ⁵⁰² ⁵⁰³ ⁵⁰⁴ ⁵⁰⁵ ⁵⁰⁶ ⁵⁰⁷ ⁵⁰⁸ ⁵⁰⁹ ⁵¹⁰ ⁵¹¹ ⁵¹² ⁵¹³ ⁵¹⁴ ⁵¹⁵ ⁵¹⁶ ⁵¹⁷ ⁵¹⁸ ⁵¹⁹ ⁵²⁰ ⁵²¹ ⁵²² ⁵²³ ⁵²⁴ ⁵²⁵ ⁵²⁶ ⁵²⁷ ⁵²⁸ ⁵²⁹ ⁵³⁰ ⁵³¹ ⁵³² ⁵³³ ⁵³⁴ ⁵³⁵ ⁵³⁶ ⁵³⁷ ⁵³⁸ ⁵³⁹ ⁵⁴⁰ ⁵⁴¹ ⁵⁴² ⁵⁴³ ⁵⁴⁴ ⁵⁴⁵ ⁵⁴⁶ ⁵⁴⁷ ⁵⁴⁸ ⁵⁴⁹ ⁵⁵⁰ ⁵⁵¹ ⁵⁵² ⁵⁵³ ⁵⁵⁴ ⁵⁵⁵ ⁵⁵⁶ ⁵⁵⁷ ⁵⁵⁸ ⁵⁵⁹ ⁵⁶⁰ ⁵⁶¹ ⁵⁶² ⁵⁶³ ⁵⁶⁴ ⁵⁶⁵ ⁵⁶⁶ ⁵⁶⁷ ⁵⁶⁸ ⁵⁶⁹ ⁵⁷⁰ ⁵⁷¹ ⁵⁷² ⁵⁷³ ⁵⁷⁴ ⁵⁷⁵ ⁵⁷⁶ ⁵⁷⁷ ⁵⁷⁸ ⁵⁷⁹ ⁵⁸⁰ ⁵⁸¹ ⁵⁸² ⁵⁸³ ⁵⁸⁴ ⁵⁸⁵ ⁵⁸⁶ ⁵⁸⁷ ⁵⁸⁸ ⁵⁸⁹ ⁵⁹⁰ ⁵⁹¹ ⁵⁹² ⁵⁹³ ⁵⁹⁴ ⁵⁹⁵ ⁵⁹⁶ ⁵⁹⁷ ⁵⁹⁸ ⁵⁹⁹ ⁶⁰⁰ ⁶⁰¹ ⁶⁰² ⁶⁰³ ⁶⁰⁴ ⁶⁰⁵ ⁶⁰⁶ ⁶⁰⁷ ⁶⁰⁸ ⁶⁰⁹ ⁶¹⁰ ⁶¹¹ ⁶¹² ⁶¹³ ⁶¹⁴ ⁶¹⁵ ⁶¹⁶ ⁶¹⁷ ⁶¹⁸ ⁶¹⁹ ⁶²⁰ ⁶²¹ ⁶²² ⁶²³ ⁶²⁴ ⁶²⁵ ⁶²⁶ ⁶²⁷ ⁶²⁸ ⁶²⁹ ⁶³⁰ ⁶³¹ ⁶³² ⁶³³ ⁶³⁴ ⁶³⁵ ⁶³⁶ ⁶³⁷ ⁶³⁸ ⁶³⁹ ⁶⁴⁰ ⁶⁴¹ ⁶⁴² ⁶⁴³ ⁶⁴⁴ ⁶⁴⁵ ⁶⁴⁶ ⁶⁴⁷ ⁶⁴⁸ ⁶⁴⁹ ⁶⁵⁰ ⁶⁵¹ ⁶⁵² ⁶⁵³ ⁶⁵⁴ ⁶⁵⁵ ⁶⁵⁶ ⁶⁵⁷ ⁶⁵⁸ ⁶⁵⁹ ⁶⁶⁰ ⁶⁶¹ ⁶⁶² ⁶⁶³ ⁶⁶⁴ ⁶⁶⁵ ⁶⁶⁶ ⁶⁶⁷ ⁶⁶⁸ ⁶⁶⁹ ⁶⁷⁰ ⁶⁷¹ ⁶⁷² ⁶⁷³ ⁶⁷⁴ ⁶⁷⁵ ⁶⁷⁶ ⁶⁷⁷ ⁶⁷⁸ ⁶⁷⁹ ⁶⁸⁰ ⁶⁸¹ ⁶⁸² ⁶⁸³ ⁶⁸⁴ ⁶⁸⁵ ⁶⁸⁶ ⁶⁸⁷ ⁶⁸⁸ ⁶⁸⁹ ⁶⁹⁰ ⁶⁹¹ ⁶⁹² ⁶⁹³ ⁶⁹⁴ ⁶⁹⁵ ⁶⁹⁶ ⁶⁹⁷ ⁶⁹⁸ ⁶⁹⁹ ⁷⁰⁰ ⁷⁰¹ ⁷⁰² ⁷⁰³ ⁷⁰⁴ ⁷⁰⁵ ⁷⁰⁶ ⁷⁰⁷ ⁷⁰⁸ ⁷⁰⁹ ⁷¹⁰ ⁷¹¹ ⁷¹² ⁷¹³ ⁷¹⁴ ⁷¹⁵ ⁷¹⁶ ⁷¹⁷ ⁷¹⁸ ⁷¹⁹ ⁷²⁰ ⁷²¹ ⁷²² ⁷²³ ⁷²⁴ ⁷²⁵ ⁷²⁶ ⁷²⁷ ⁷²⁸ ⁷²⁹ ⁷³⁰ ⁷³¹ ⁷³² ⁷³³ ⁷³⁴ ⁷³⁵ ⁷³⁶ ⁷³⁷ ⁷³⁸ ⁷³⁹ ⁷⁴⁰ ⁷⁴¹ ⁷⁴² ⁷⁴³ ⁷⁴⁴ ⁷⁴⁵ ⁷⁴⁶ ⁷⁴⁷ ⁷⁴⁸ ⁷⁴⁹ ⁷⁵⁰ ⁷⁵¹ ⁷⁵² ⁷⁵³ ⁷⁵⁴ ⁷⁵⁵ ⁷⁵⁶ ⁷⁵⁷ ⁷⁵⁸ ⁷⁵⁹ ⁷⁶⁰ ⁷⁶¹ ⁷⁶² ⁷⁶³ ⁷⁶⁴ ⁷⁶⁵ ⁷⁶⁶ ⁷⁶⁷ ⁷⁶⁸ ⁷⁶⁹ ⁷⁷⁰ ⁷⁷¹ ⁷⁷² ⁷⁷³ ⁷⁷⁴ ⁷⁷⁵ ⁷⁷⁶ ⁷⁷⁷ ⁷⁷⁸ ⁷⁷⁹ ⁷⁸⁰ ⁷⁸¹ ⁷⁸² ⁷⁸³ ⁷⁸⁴ ⁷⁸⁵ ⁷⁸⁶ ⁷⁸⁷ ⁷⁸⁸ ⁷⁸⁹ ⁷⁹⁰ ⁷⁹¹ ⁷⁹² ⁷⁹³ ⁷⁹⁴ ⁷⁹⁵ ⁷⁹⁶ ⁷⁹⁷ ⁷⁹⁸ ⁷⁹⁹ ⁸⁰⁰ ⁸⁰¹ ⁸⁰² ⁸⁰³ ⁸⁰⁴ ⁸⁰⁵ ⁸⁰⁶ ⁸⁰⁷ ⁸⁰⁸ ⁸⁰⁹ ⁸¹⁰ ⁸¹¹ ⁸¹² ⁸¹³ ⁸¹⁴ ⁸¹⁵ ⁸¹⁶ ⁸¹⁷ ⁸¹⁸ ⁸¹⁹ ⁸²⁰ ⁸²¹ ⁸²² ⁸²³ ⁸²⁴ ⁸²⁵ ⁸²⁶ ⁸²⁷ ⁸²⁸ ⁸²⁹ ⁸³⁰ ⁸³¹ ⁸³² ⁸³³ ⁸³⁴ ⁸³⁵ ⁸³⁶ ⁸³⁷ ⁸³⁸ ⁸³⁹ ⁸⁴⁰ ⁸⁴¹ ⁸⁴² ⁸⁴³ ⁸⁴⁴ ⁸⁴⁵ ⁸⁴⁶ ⁸⁴⁷ ⁸⁴⁸ ⁸⁴⁹ ⁸⁵⁰ ⁸⁵¹ ⁸⁵² ⁸⁵³ ⁸⁵⁴ ⁸⁵⁵ ⁸⁵⁶ ⁸⁵⁷ ⁸⁵⁸ ⁸⁵⁹ ⁸⁶⁰ ⁸⁶¹ ⁸⁶² ⁸⁶³ ⁸⁶⁴ ⁸⁶⁵ ⁸⁶⁶ ⁸⁶⁷ ⁸⁶⁸ ⁸⁶⁹ ⁸⁷⁰ ⁸⁷¹ ⁸⁷² ⁸⁷³ ⁸⁷⁴ ⁸⁷⁵ ⁸⁷⁶ ⁸⁷⁷ ⁸⁷⁸ ⁸⁷⁹ ⁸⁸⁰ ⁸⁸¹ ⁸⁸² ⁸⁸³ ⁸⁸⁴ ⁸⁸⁵ ⁸⁸⁶ ⁸⁸⁷ ⁸⁸⁸ ⁸⁸⁹ ⁸⁹⁰ ⁸⁹¹ ⁸⁹² ⁸⁹³ ⁸⁹⁴ ⁸⁹⁵ ⁸⁹⁶ ⁸⁹⁷ ⁸⁹⁸ ⁸⁹⁹ ⁹⁰⁰ ⁹⁰¹ ⁹⁰² ⁹⁰³ ⁹⁰⁴ ⁹⁰⁵ ⁹⁰⁶ ⁹⁰⁷ ⁹⁰⁸ ⁹⁰⁹ ⁹¹⁰ ⁹¹¹ ⁹¹² ⁹¹³ ⁹¹⁴ ⁹¹⁵ ⁹¹⁶ ⁹¹⁷ ⁹¹⁸ ⁹¹⁹ ⁹²⁰ ⁹²¹ ⁹²² ⁹²³ ⁹²⁴ ⁹²⁵ ⁹²⁶ ⁹²⁷ ⁹²⁸ ⁹²⁹ ⁹³⁰ ⁹³¹ ⁹³² ⁹³³ ⁹³⁴ ⁹³⁵ ⁹³⁶ ⁹³⁷ ⁹³⁸ ⁹³⁹ ⁹⁴⁰ ⁹⁴¹ ⁹⁴² ⁹⁴³ ⁹⁴⁴ ⁹⁴⁵ ⁹⁴⁶ ⁹⁴⁷ ⁹⁴⁸ ⁹⁴⁹ ⁹⁵⁰ ⁹⁵¹ ⁹⁵² ⁹⁵³ ⁹⁵⁴ ⁹⁵⁵ ⁹⁵⁶ ⁹⁵⁷ ⁹⁵⁸ ⁹⁵⁹ ⁹⁶⁰ ⁹⁶¹ ⁹⁶² ⁹⁶³ ⁹⁶⁴ ⁹⁶⁵ ⁹⁶⁶ ⁹⁶⁷ ⁹⁶⁸ ⁹⁶⁹ ⁹⁷⁰ ⁹⁷¹ ⁹⁷² ⁹⁷³ ⁹⁷⁴ ⁹⁷⁵ ⁹⁷⁶ ⁹⁷⁷ ⁹⁷⁸ ⁹⁷⁹ ⁹⁸⁰ ⁹⁸¹ ⁹⁸² ⁹⁸³ ⁹⁸⁴ ⁹⁸⁵ ⁹⁸⁶ ⁹⁸⁷ ⁹⁸⁸ ⁹⁸⁹ ⁹⁹⁰ ⁹⁹¹ ⁹⁹² ⁹⁹³ ⁹⁹⁴ ⁹⁹⁵ ⁹⁹⁶ ⁹⁹⁷ ⁹⁹⁸ ⁹⁹⁹ ¹⁰⁰⁰ ¹⁰⁰¹ ¹⁰⁰² ¹⁰⁰³ ¹⁰⁰⁴ ¹⁰⁰⁵ ¹⁰⁰⁶ ¹⁰⁰⁷ ¹⁰⁰⁸ ¹⁰⁰⁹ ¹⁰¹⁰ ¹⁰¹¹ ¹⁰¹² ¹⁰¹³ ¹⁰¹⁴ ¹⁰¹⁵ ¹⁰¹⁶ ¹⁰¹⁷ ¹⁰¹⁸ ¹⁰¹⁹ ¹⁰²⁰ ¹⁰²¹ ¹⁰²² ¹⁰²³ ¹⁰²⁴ ¹⁰²⁵ ¹⁰²⁶ ¹⁰²⁷ ¹⁰²⁸ ¹⁰²⁹ ¹⁰³⁰ ¹⁰³¹ ¹⁰³² ¹⁰³³ ¹⁰³⁴ ¹⁰³⁵ ¹⁰³⁶ ¹⁰³⁷ ¹⁰³⁸ ¹⁰³⁹ ¹⁰⁴⁰ ¹⁰⁴¹ ¹⁰⁴² ¹⁰⁴³ ¹⁰⁴⁴ ¹⁰⁴⁵ ¹⁰⁴⁶ ¹⁰⁴⁷ ¹⁰⁴⁸ ¹⁰⁴⁹ ¹⁰⁵⁰ ¹⁰⁵¹ ¹⁰⁵² ¹⁰⁵³ ¹⁰⁵⁴ ¹⁰⁵⁵ ¹⁰⁵⁶ ¹⁰⁵⁷ ¹⁰⁵⁸ ¹⁰⁵⁹ ¹⁰⁶⁰ ¹⁰⁶¹ ¹⁰⁶² ¹⁰⁶³ ¹⁰⁶⁴ ¹⁰⁶⁵ ¹⁰⁶⁶ ¹⁰⁶⁷ ¹⁰⁶⁸ ¹⁰⁶⁹ ¹⁰⁷⁰ ¹⁰⁷¹ ¹⁰⁷² ¹⁰⁷³ ¹⁰⁷⁴ ¹⁰⁷⁵ ¹⁰⁷⁶ ¹⁰⁷⁷ ¹⁰⁷⁸ ¹⁰⁷⁹ ¹⁰⁸⁰ ¹⁰⁸¹ ¹⁰⁸² ¹⁰⁸³ ¹⁰⁸⁴ ¹⁰⁸⁵ ¹⁰⁸⁶ ¹⁰⁸⁷ ¹⁰⁸⁸ ¹⁰⁸⁹ ¹⁰⁹⁰ ¹⁰⁹¹ ¹⁰⁹² ¹⁰⁹³ ¹⁰⁹⁴ ¹⁰⁹⁵ ¹⁰⁹⁶ ¹⁰⁹⁷ ¹⁰⁹⁸ ¹⁰⁹⁹ ¹¹⁰⁰ ¹¹⁰¹ ¹¹⁰² ¹¹⁰³ ¹¹⁰⁴ ¹¹⁰⁵ ¹¹⁰⁶ ¹¹⁰⁷ ¹¹⁰⁸ ¹¹⁰⁹ ¹¹¹⁰ ¹¹¹¹ ¹¹¹² ¹¹¹³ ¹¹¹⁴ ¹¹¹⁵ ¹¹¹⁶ ¹¹¹⁷ ¹¹¹⁸ ¹¹¹⁹ ¹¹²⁰ ¹¹²¹ ¹¹²² ¹¹²³ ¹¹²⁴ ¹¹²⁵ ¹¹²⁶ ¹¹²⁷ ¹¹²⁸ ¹¹²⁹ ¹¹³⁰ ¹¹³¹ ¹¹³² ¹¹³³ ¹¹³⁴ ¹¹³⁵ ¹¹³⁶ ¹¹³⁷ ¹¹³⁸ ¹¹³⁹ ¹¹⁴⁰ ¹¹⁴¹ ¹¹⁴² ¹¹⁴³ ¹¹⁴⁴ ¹¹⁴⁵ ¹¹⁴⁶ ¹¹⁴⁷ ¹¹⁴⁸ ¹¹⁴⁹ ¹¹⁵⁰ ¹¹⁵¹ ¹¹⁵² ¹¹⁵³ ¹¹⁵⁴ ¹¹⁵⁵ ¹¹⁵⁶ ¹¹⁵⁷ ¹¹⁵⁸ ¹¹⁵⁹ ¹¹⁶⁰ ¹¹⁶¹ ¹¹⁶² ¹¹⁶³ ¹¹⁶⁴ ¹¹⁶⁵ ¹¹⁶⁶ ¹¹⁶⁷ ¹¹⁶⁸ ¹¹⁶⁹ ¹¹⁷⁰ ¹¹⁷¹ ¹¹⁷² ¹¹⁷³ ¹¹⁷⁴ ¹¹⁷⁵ ¹¹⁷⁶ ¹¹⁷⁷ ¹¹⁷⁸ ¹¹⁷⁹ ¹¹⁸⁰ ¹¹⁸¹ ¹¹⁸² ¹¹⁸³ ¹¹⁸⁴ ¹¹⁸⁵ ¹¹⁸⁶ ¹¹⁸⁷ ¹¹⁸⁸ ¹¹⁸⁹ ¹¹⁹⁰ ¹¹⁹¹ ¹¹⁹² ¹¹⁹³ ¹¹⁹⁴ ¹¹⁹⁵ ¹¹⁹⁶ ¹¹⁹⁷ ¹¹⁹⁸ ¹¹⁹⁹ ¹²⁰⁰ ¹²⁰¹ ¹²⁰² ¹²⁰³ ¹²⁰⁴ ¹²⁰⁵ ¹²⁰⁶ ¹²⁰⁷ ¹²⁰⁸ ¹²⁰⁹ ¹²¹⁰ ¹²¹¹ ¹²¹² ¹²¹³ ¹²¹⁴ ¹²¹⁵ ¹²¹⁶ ¹²¹⁷ ¹²¹⁸ ¹²¹⁹ ¹²²⁰ ¹²²¹ ¹²²² ¹²²³ ¹²²⁴ ¹²²⁵ ¹²²⁶ ¹²²⁷ ¹²²⁸ ¹²²⁹ ¹²³⁰ ¹²³¹ ¹²³² ¹²³³ ¹²³⁴ ¹²³⁵ ¹²³⁶ ¹²³⁷ ¹²³⁸ ¹²³⁹ ¹²⁴⁰ ¹²⁴¹ ¹²⁴² ¹²⁴³ ¹²⁴⁴ ¹²⁴⁵ ¹²⁴⁶ ¹²⁴⁷ ¹²⁴⁸ ¹²⁴⁹ ¹²⁵⁰ ¹²⁵¹ ¹²⁵² ¹²⁵³ ¹²⁵⁴ ¹²⁵⁵ ¹²⁵⁶ ¹²⁵⁷ ¹²⁵⁸ ¹²⁵⁹ ¹²⁶⁰ ¹²⁶¹ ¹²⁶² ¹²⁶³ ¹²⁶⁴ ¹²⁶⁵ ¹²⁶⁶ ¹²⁶⁷ ¹²⁶⁸ ¹²⁶⁹ ¹²⁷⁰ ¹²⁷¹ ¹²⁷² ¹²⁷³ ¹²⁷⁴ ¹²⁷⁵ ¹²⁷⁶ ¹²⁷⁷ ¹²⁷⁸ ¹²⁷⁹ ¹²⁸⁰ ¹²⁸¹ ¹²⁸² ¹²⁸³ ¹²⁸⁴ ¹²⁸⁵ ¹²⁸⁶ ¹²⁸⁷ ¹²⁸⁸ ¹²⁸⁹ ¹²⁹⁰ ¹²⁹¹ ¹²⁹² ¹²⁹³ ¹²⁹⁴ ¹²⁹⁵ ¹²⁹⁶ ¹²⁹⁷ ¹²⁹⁸ ¹²⁹⁹ ¹³⁰⁰ ¹³⁰¹ ¹³⁰² ¹³⁰³ ¹³⁰⁴ ¹³⁰⁵ ¹³⁰⁶ ¹³⁰⁷ ¹³⁰⁸ ¹³⁰⁹ ¹³¹⁰ ¹³¹¹ ¹³¹² ¹³¹³ ¹³¹⁴ ¹³¹⁵ ¹³¹⁶ ¹³¹⁷ ¹³¹⁸ ¹³¹⁹ ¹³²⁰ ¹³²¹ ¹³²² ¹³²³ ¹³²⁴ ¹³²⁵ ¹³²⁶ ¹³²⁷ ¹³²⁸ ¹³²⁹ ¹³³⁰ ¹³³¹

Regulation Number 60 of 2020 on Spatial Planning for Jakarta, Bogor, Depok, Tangerang, Bekasi, Puncak and Cianjur (Jabodetabek-Punjur)

This study aims to identify the land use changes in the upstream Ciliwung watershed and to calculate the water discharge from 1996 to 2016. Water discharge is the volume of water flowing through a river cross section per unit time. Extreme water discharge indicates that the river will be prone to overflow. So water discharge may become of flood's indicators (Hasanah *et al.*, 2013). Based on the water discharge calculation, some recommendations are given to reduce the discharge or runoff through land use control.

2. Methodology

This research method used is descriptive quantitative research, which is one type of research that aims to describe systematically, factually, and accurately the facts and characteristics of a particular population or try to describe the phenomenon in detail (Sugiyono, 2009). The analysis methods in this research use spatial analysis with super imposed technique and mathematical analysis using rational method. The data needed in this research is time-series data to find out changes in phenomena that occur during 1996 – 2016 and mostly is secondary data collecting from government institutions (Zuma *et al.*, 2017). The overlay technique will later translate the resulting map into a table to see the influence of the variables determined by changes in runoff water discharge in this study area.

To find out the maximum runoff water discharge, first needs to estimate maximum rainfall intensity that represent rainfall data for one period (10 years). The formula used in this analysis is Gumbel distribution by using monthly rain fall for one period. The rainfall results from the calculation, then are used to calculate the runoff water discharge using the Rational Method. The formulas use in this study are follow:

1. Gumbel distribution is used to calculate the possibility of maximum rainfall in 10 years period (Suripin, 2004.; Bhagat, 2017). The equation of Gumbel distribution method as follows:

$$R_{24} = \bar{X} + \frac{S_x}{S_n} (Y_t - Y_n)$$

Where:

R24 = The maximum daily rainfall 24 hours (mm/24 hours)

X = Average rainfall (mm)

Sx = Deviation Standard

Yn = Reduced mean

2. Mononobe equation is used to calculate the intensity of rainfall in mm per hour based on the maximum daily rainfall 24 hours calculated with Gumbel distribution equation. The Mononobe equation as follows (Suripin, 2004. ; Bhagat, 2017).

$$I = \frac{R_{24}}{24} \left(\frac{24}{t} \right)^{2.73}$$

Where:

I = Rainfall Intensity (mm/hours)

R24 = The maximum daily rainfall (24 hours) (mm)

t = Rain Duration (24 hours)

3. Rational Method is used to calculate the runoff water discharge (Dunne, 2018)

$$Q = C \cdot I \cdot A$$

Q = Maximum surface runoff rate (m³/s)

C = Surface runoff Coefficient

I = rainfall intensity (mm/hours)

A = Total Area (ha)

The value of C depends on the land cover, as shown in Table 1

Table 1. Surface runoff Coefficient (C) based on Land Cover

No	Use/Cover Land	Score C
1	Primary Forest	0.01
2	Secondary Forest	0.05
3	Mixed agriculture	0.5
4	Field	0.5
5	Plantation	0.5
6	Bush	0.3
7	Ricefield	0.2
8	Pavement	0.7
9	Open Space	0.95
10	Settlement	0.9

Source: Dunne&Leopold, 1978 (Dunne, 2018)

3. Result and Discussion

The analysis of land use changes in the Upper Ciliwung uses data for the year of 1996, 2006, and 2016, as shown in Tabel 1. The data show that generally unbuild land use areas, that are primary forest, open field, rice field, bush, and mixed agriculture, tend to be continuously decrease. On the other side, built-up area in the form of settlement seems to be increasing significantly.

Table 2. Land Use of the Upstream Ciliwung Watershed in the 1996, 2006 and 2016

No	Land use	1996		2006		2016		Land Use Change 1996-2016 (ha)
		Hectare	%	Hectare	%	Hectare	%	
1	Primary Forest	547.95	3.60	547.95	3.40	518.46	3.41	(29.49)
2	Secondary Forest	2,408.98	15.82	1,569.91	10.25	2,811.54	18.47	402.56
3	Open Field	28.36	0.13	20.36	0.13	0.59	0.00	(19.77)
4	Ricefield	7,671.23	50.39	6,849.02	44.38	520.22	3.42	(7,151.01)
5	Bush	109.32	0.66	109.32	0.66	29.85	0.20	(79.47)
5	Mixed agriculture	2873.91	18.88	3,706.73	24.16	1,097.89	12.78	(778.02)
7	Plantation	545.77	3.58	545.77	3.58	1,035.67	6.80	489.90
8	Field/Dryland farming	694.79	4.56	694.79	4.56	5,952.72	39.10	5,257.93
9	Settlement	361.82	2.38	1,199.29	7.88	1,258.19	14.83	1,896.37
Total Land Use		15,225.13	100.00	15,225.13	100.00	15,225.13	100.00	

Table 2 also shows that the most change in area is the land for rice field. It decreases more than 7000 ha and almost extinct. The rice field area is very possible to turn into settlement area or use for dry land farming. Primary forest that should be conserved also decreased. During 1996 – 2006, the

area of primary forest had been maintained, but since 2006 the area tends to decrease. It can be seen from Figure 1, that the primary forest seems to change into secondary forest and bush. That means the forest has decrease in quality as a water catchment area because it is cultivated.

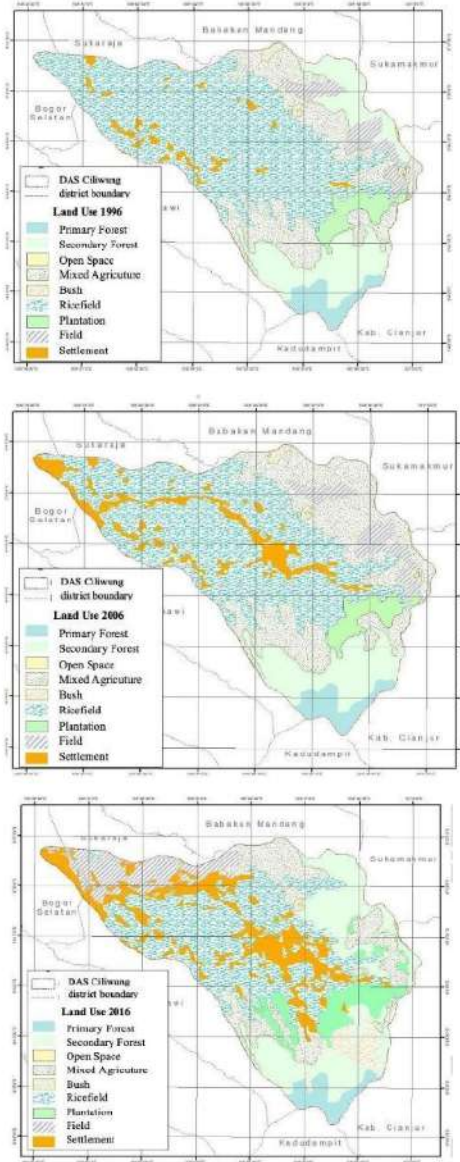


Figure 1. Land Use of The Upperstream Ciliwung Watershed in 1996, 2006 and 2016

Figure 1 also shows that very intensive land use change from undeveloped land to settlements occurs in the middle of the catchment area parallel to the river and located along and around the main road. During 2006 -2016, in the northern part, close

to the middle stream watershed, there is also a massive change in paddy fields. Most of the rice fields turned into dry land. It is estimated that this change is a temporary change before it become the settlements and/or other use of built-up land.

As mentioned before, the land use changes have a close relationship with the proportion of volume of water absorbed by the soil and the volume of water that flows into surface water. By using the rational method, Table 4 shows the result of calculations of runoff water discharge based the land use data in 1996, 2006 and 2016 shown in Table 3. The value of maximum rainfall intensity uses in this study is calculated using Gumbel distribution methods and monthly rainfall data from 1996 – 2016. The calculation result shows that the maximum rainfall intensity is 24.52 mm/hour which is then used as the value of “i” in the rational method formula. The value of “C” in the rational formula, that is the surface runoff coefficient, is based on the C value for each land use as shown in table 1. The result of Runoff Water Discharge calculations for 1996, 2006 and 2016 is demonstrated in Table 3

Table 3. Runoff Water Discharge Values in m³/sec in the years of 1996, 2006 and 2016

Land Use	C	1996	2006	2016
Primary Forest	0.01	0.37	0.37	0.35
Secondary Forest	0.05	8.20	5.32	9.58
Open Space	0.95	1.32	1.32	0.04
Rice field	0.2	104.51	93.31	7.09
Bush	0.3	2.05	2.05	0.61
Mixed agriculture	0.5	97.88	126.24	71.45
Plantation	0.5	18.59	18.59	35.27
Field	0.5	23.06	23.06	202.74
Settlement	0.9	22.18	73.52	138.44
Total Runoff water Discharge		278.77	344.38	465.57

The total runoff calculated in this study is the maximum possible runoff because the rainfall intensity value used is maximum based on rainfall time series data from 1996 – 2016. The total runoff value of the upstream Ciliwung watershed is an indicator that can be used to predict whether Jakarta, the downstream part of the watershed, will be flooded or not. BPBD (Regional Disaster Management Agency) Jakarta Province uses the Katulampa Weir Warning Level Criteria to estimate the occurrence of flood disasters. The Katulampa Weir is part of the flood early warning system of Ciliwung River (Farika *et al.*, 2018). The weir is located in the boundary upstream and middle stream Ciliwung Watershed. The total runoff water discharge from the upstream can be estimated by observing the water level in the weir. For example, if the water level measurement in the weir shows that the water level is 80 cm, it means that water discharge from upstream is around 90.05 m³/sec. Ciliwung discharge in Katulampa Weir be known with water level reading which will be converted using rating curve. Table 5 shows the Katulampa Weir Warning Level Criteria.

Table 4. Katulampa Weir Warning Level Criteria

Warning Level (Alert)	Water Level Limit (cm)	Discharge Limit (m ³ /sec)
I	200	441.98
II	150	276.25
III	80	90.05
IV	0	0

Source: Farika, N, D. Sutjningsih and E. Anggraheni, 2018 (Farika N. et.al 2018).

Warning Level (alert) I, with a water level of 200 cm and a discharge of 441.98 m³/sec, means that about 9 to 12 hours later, it is almost certain that there will be flooding in the Jakarta city. The maximum water discharges based on the condition of land uses in 1996, 2006 and 2016, then, can be classified using the Katulampa Weir Warning Level Criteria.

Table 5. Classification of Warning Level

Years	Calculated runoff water discharge (m ³ /Second)	Warning Level/Alert
1996	278.77	Alert II (276 ≤d 441 m ³ /dt)
2006	344.38	Alert II (276 ≤d 441 m ³ /dt)
2016	465.7	Alert I (>441 m ³ /dt)

Table 5 shows that with the condition of land uses in upstream Ciliwung watershed as in 2016, Jakarta would be flooding if it rains with intensity 24.52 mm per hour and it lasts for 24 hours. There for, this study tries to find recommendations to reduce the water discharge from more than 441 m³/sec to be in the Warning Level II. The recommendation is formulated based on the Jabodetabekpunjur Spatial Plan and at the same time, the study can show whether the land use plan, if implemented consistently, has considered the water discharge limit or not.

Based on the Jabodetabekpunjur Spatial Plan, the upstream Ciliwung watershed is comprised 2 (two) main categories of land uses, that are protected area (L) and settlement area (B). The settlements in the study area are classified into 5 (five) types of settlement zone. The land use plan of the upstream Ciliwung watershed can be seen in Table 6 and Figure 2.

Table 6 Land Use Plan of The Upstream Ciliwung Watershed based on President Regulation Number 60 of 2020

Land Use	Zone Code	Area (ha)	Percentage of total area (%)	Spatial Development Guidelines
Protected Area	L3	2654.90	17.44	Conservation area that can be in the forms of nature reservation areas or national parks
Settlement Area	B1	1432.96	9.41	High density settlement area, and high intensity urban centre
	B2	1035.31	6.90	Medium density settlement area and medium intensity urban centre
	B3	5814.84	38.20	Low – Medium density settlement area, agro-industrial area, tourism area, military zone area
	B4	4280.52	28.11	Low density settlement area, plantation area, agro-industrial area, agriculture area, tourism area dan production forest
	B5	6.58	0.04	Agricultural area
Total		15225.12	100	

Source: President Regulation Number 60 of 2020 on the Jabodetabekpunjur Spatial Planning (Presidential Regulation Number 60 of 2020 on Spatial Planning for Jakarta, Bogor, Depok, Tangerang, Bekasi, Puncak, and Cisur (Jabodetabekpunjur))

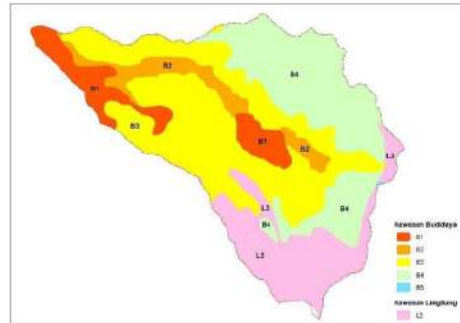


Figure 2. Land Use Plan of The Upstream Ciliwung Watershed

(Source: remapped based on President Regulation No 60 of 2020 on the Jabodetabekpunjur Spatial Planning)

It can be seen from the table and the figure, most dominant land use in the upstream Ciliwung watershed is settlement area classified as low to medium (B3 and B4). Those two zones of settlement cover around 66.31%. The protected area that covers 17.44% also is relatively dominant among other land uses. This land use planning shows that the upstream Ciliwung as a part of the whole watershed area tends to have a specific function as water catchment area that should infiltrated rain waters as much as possible. It means that the planning has considered the importance of the area in the context of hydrological cycle.

It also can be proven by calculating the runoff water discharge use by using the land use plan as shown in Tabel 7. The result shows that the value of Q, runoff water discharge, is estimated as 377.97 m³/second. Based on the warning level criteria (refer to Table 5), the planned runoff water discharge is below the limit of Warning Level I. That means that the flood disaster in Jakarta, the downstream area, would not occur or at least if there is a flood, it is not caused by overflowing water from the upper area.

Table 7. Runoff Water Discharge of the Upstream Ciliwung Watershed use the Land Use Plan

No.	Zone	Area (Ha)	C	I (mm/hours)	Q(m ³ /second)
1	B1	1432.96	0.9	24.52	87.85
2	B2	1035.31	0.6	24.52	42.31
3	B3	5814.84	0.4	24.52	158.43
4	B4	4280.52	0.3	24.52	87.47
5	B5	6.58	0.2	24.52	0.05
6	L3	2654.90	0.01	24.52	1.81
Total					377.97

Considering that the results of calculating runoff water discharge using the land use plan indicate a relatively safe level for flooding in Jakarta, the recommendations proposed in this study will assume that the regulation of the Jabodetabekpunjur Spatial Plan is implemented consistently. Tabel 8 shows the comparison between the 2016 land uses and the land use plan including their runoff water discharges. Zone B1 that covers 1432.92 hectare is in a good condition since Q existing stands lower than Q as it is plan. Zone

B1, as mentioned before, is permitted to develop as high-density settlements. However, the development must pay to attention that upper zone of watershed has function as a water catchment area and has an important role as flood control for the lower zone (Handayani IGAKR. *et al.*, 2017.;Sudia *et al.*, 2021). With that consideration, the recommendations for Zone B1 are the area can still be developed, but it should be restrictedly. Some specifics guidelines for settlement development are applying Low Building Coefficient (BCR) standard and equipped with infiltration wells. Constructing infiltration wells in every individual or communal plot is recommended because infiltration wells have functions to reducing surface stream to minimize and prevent flood and inundation as well as to maintaining and increasing groundwater-surface height (Hirijanto *et al.*, 2021).

The Q existing in Zone B2 has exceed what it should be even though not too much. The recommendations for settlement area in Zone B2 are similar with these recommended in Zone B1 but as far as possible no expansion. The field or yard area seems to contribute the high volume of surface runoff. Therefore, the recommended farming method in this area is to apply agroforestry techniques or practices. As the IAO affirms that the definition of "agroforestry that is a collective name for land use systems and technologies where woody perennials (trees, shrubs, palms, bamboos, etc.) are deliberately used on the same land-management units as agricultural crops and/or animals, in some form of spatial arrangement or temporal sequence" (Santoro, et.al 2020) . The agroforestry practices have many benefits to the farmers in following ways (Hirijanto *et al.*, 2021 .; Alao, 2013):

- 2 a. Consistent restoration of the fertility status of the soil
- 2 b. A variety of products
- c. Prevention of wind and water erosion by trees acting as wind break and intercepting the raindrop impact on the soil respectively.
- d. Improving the micro-climate effect
- e. Restoration of water table to an absorbable level for crops use.
- f. Increased income opportunities and economic stability
- g. Reduce cost for establishing plantation
- h. Increased ability to manage for sustained yield.
- i. Hence, the advantages of agroforestry cover the social, economic, and environmental benefits to the farmers.

Table 8. Comparison between the existing land uses and the Jabodetabekpunjur land use plan and its implication to the Q value

BASED ON THE SPATIAL PLAN				BASED ON THE EXISTING CONDITION				Comparison and its implication
Zone	Area (ha)	C	Q exist (m ² /year)	Land Use	Area (ha)	C	Q existing (m ² /year)	
B1	1432.56	0.90	17.85	Forest	217.82	0.50	6.04	Q existing + C plan Settlement can be further developed but must be equipped with infiltration wells as well as the Building Coefficient Ratio (BCR) and
				Settlement	788.19	0.90	48.57	
B2	1035.01	0.60	42.31	Forest	174.90	0.20	5.11	Q existing + C plan The value of C should decrease. Settlement development must apply the BCR and equipped with infiltration wells. Field or yard is authorized by using agroforestry concept.
				Settlement	811.48	0.60	30.48	
B3	5814.04	0.40	56.43	Secondary Forest	388.81	0.05	0.48	Q existing + C plan The value of C should decrease. Settlement development must apply the Building Coefficient Ratio and equipped with infiltration wells. Applying agroforestry concept.
				Forest	177.83	0.50	6.46	
B4	4880.02	0.30	37.47	Forest	4108.07	0.50	139.91	Q existing + C plan Applying agroforestry concept.
				Plantation	389.43	0.50	12.40	
L3	8.58	0.30	0.22	Secondary Forest	14.75	0.05	0.02	Q existing + C plan The condition should be maintained.
				Forest	1282.81	0.50	41.69	
L3	3654.90	0.01	1.81	Forest	889.07	0.50	30.46	Q existing + C plan The L3 must be rehabilitated to its natural use and function such as by conducting reforestation
				Plantation	543.84	0.50	18.41	
				Plantation	122.10	0.50	4.16	
				Field	342.80	0.50	11.42	
				Open land	0.59	0.05	0.04	
				TOTAL	15264.11		484.87	

As shown in Table 8, Zone B3 seems to tend to develop very intensively and uncontrollably as well as deviations from the Spatial Planning Regulation. Zone B3 is planned to be low – Medium density settlement area. agro-industrial area. tourism area. military zone area (refer to Table 7). Same as the Zone B3, the value of Q Zone B4 existing also exceeds the Q plan. The recommendations for the settlement areas are that the settlement should be maintain as low density settlement and completed with infiltration wells. The agricultural uses are dominantly in Zone B3 and B4 either in the form of field or yard, mixed agricultural and plantation. Again, the cultivations in these areas must be planted with perennial crop or by applying the agroforestry concept. The tree planting must be close to the secondary forest characteristics in terms of its density and variety of crop. So, the value of C can be decrease, which means the capacity of infiltration can be increase significantly.

The Q value of Zone L3 is also higher that it should be. Different with other zones, Zone L3 as the protected area is forced to be rehabilitated. From table 8, it can be seen some areas of L3 are occupied for agricultural purposes which have lower infiltration capacity than forests have. Hence, the recommendation for Zone L3 is conducting the forestation programmes to increase the quality of its function as protected area.



4. Conclusion

32 the period 1996 – 2016. there was a change in land use in the upstream Ciliwung watershed. The area of land use that continues to decline includes primary forest, open land, rice fields, and mixed agriculture, all of which are categorized as undeveloped areas. Consequently, the runoff discharge from 1996 – 2016 has increased from 278.77 mm/sec to 465.57 mm/second. Most of the undeveloped land has been converted into residential use, and fields. By using the maximum assumption of rain intensity (I) equal to 24.52 mm/hour, the runoff discharge in 2016 is already in the warning level I. This means that the runoff discharge from the upstream Ciliwung watershed will cause flooding in the downstream (Jakarta). This study also proposes some recommendations for reducing runoff water flow in the upstream Ciliwung watershed that are the Jabodetabekpunjur Spatial Planning as regulated in The President Regulation Number 60 of 2020 must consistently implemented and became the legal basis for any determination letters. Settlement development may still have the permission to be developed in the upper stream, though it is recommended to implement low BCR zoning regulation, infiltration wells, and to locate the development in zone where the Q existing is lower than Q plan. Finally, the upstream Ciliwung watershed only develop it is necessary to apply the basic building coefficient ratio (BCR) that have been regulated in the Jabodetabekpunjur RTR and it is necessary to apply engineering technology such as infiltration wells. Finally, it is highly recommended to maintain the function of the upstream Ciliwung watershed as a water catchment area. Therefore, it is very necessary to increase infiltration capacity as well as controlling runoff volume through restoring protected functions in conservation areas, applying the concept of agroforestry on agricultural land and conducting law enforcement. This study concludes that law enforcement related to land use is very important and must be properly implemented to prevent or mitigate flood disasters in downstream areas.

References

- 7 Alao, J.S. and Shuaibu, R.B. "Agroforestry practices and concepts in sustainable land use systems in Nigeria". *Journal of Horticulture and Forestry*. Vol. 5(10), pp 156-159, 20 November 2013. <https://doi.org/10.5897/JHF11.055>. ISSN 2006-9782 © 2013 Academic Journal. <http://www.academicjournal.org/JHF>, 2013
- Asdak, C. *Hidrologi dan Pengolahan Daerah Aliran Sungai*. Gadjah Mada University Press, Jogjakarta, Indonesia. 2004
- Bhagat, N. Flood Frequency Analysis Using Gumbel's Distribution Method: A case Study of Lower Mahi Basin. India. *Journal of Water Resources and Ocean Science*. Vol. 6 Issue 4. p 51-54. DOI:

<https://doi.org/10.11648/j.wros.20170604.11>
.. 2017

- Chotpantarat, S. and S. Boonkaewwan. "Impact of land-use changes on watershed discharge and water quality in large intensive agricultural area in Thailand". *Hydrological Sciences Journal*. vol. 63. Issue 9. <https://doi.org/10.1080/02626667.2018.1506128>. 2018
- Dunne & Leopold *Water in Environmental Planning*. Freeman. New York. 1978
- Farika N., D. Sutjningsih and E. Anggraheni. "Influence of impervious cover determination method of upper Ciliwung watershed on flood warning system level change in Katulampa weir". MATEC Web of Conferences. 4th International Conference on Engineering, Applied Sciences and Technology. ICEAST 2018. Ph 38. t. Thailand 4 – 7 July 2018. DOI: <https://doi.org/10.1051/mateconf/201819202053>. 2018
- Handayani IGAKR, H. Glazer, M.R. Paili, U. Najcha and S. Akmadian. "Flood Management in Jakarta: Reconstruction of Jabodetabek Eight Priority Watershed Regulations". *South-East Asia Journal of Contemporary Business, Economics and Law*. Vol. 14. Issue 4 (desember). ISSN 2289 – 1560.
- Hasanah, Y., M. Herlina, H. Zaikarina. "Flood prediction using transfer function model of rainfall and water discharge approach in Katulampa Dam". *Procedia Environmental Sciences*, DOI: <https://doi.org/10.1016/j.proenv.2013.02.044> ., 2013
- Hirijanto, I.W. Mundra and B. Wedyantadji. "Infiltration wells alternatives to reduce water table in Lowokwaru Distrik, Malang City". *Journal of Sustainable Technology and Applied Science (JSTAS)*. Vol. 2. No. 1 May 2021. pp 1-8. ISSN: 2722-2403 (online). 2021.
- 1 Klongvessa, P. Lu, M. and Chotpantarat, S. "Variations of characteristics of consecutive rainfall days over northern Thailand". *Theoretical and Applied Climatology*. <https://doi.org/10.1007/s00704-017-2208-4>. 2017
- Konkul, J. Rojborwornwittaya, W. and Chotpantarat, S. "Hydrologic characteristics and groundwater potential mapping using potential surface analysis in the Huay Sai area, Phetchaburi province, Thailand". *Geosciences Journal*. vol.18 no.1. pp 89–103. <https://doi.org/10.1007/s12303-013-0047-6>. 2014 21
- Presidential Regulation Number 60 of 2020 on Spatial Planning for Jakarta. Bogor. Depok, Tangerang, Bekasi, Puncak and Cianjur (Jabodetabek-Punjur).
- Santoro, A., M. Venturi, R. Bertani and M. Bolletti. "A review of the role of forest and agroforestry systems in the FAO Globally Important Agricultural Heritage System (GIAHS) Programme". *Forests*, Vol 11(8),

- 860; <https://doi.org/10.3390/f11080860>.
2020
- 10 Sudia, L.B. Gandri L. Hendryanto H.S. Bana S. Fitriani V. "Conservation Strategy Analysis in Upstream Watershed: Case Study in Cimandiri Watershed". *Jurnal Ecosolum*. Vol 10. No. 1. p. 33-47. ISSN ONLINE: 2311-430X. ISSN: 2252-7923. DOI: <http://doi.org/10.20956/ecosolum.v10i1.13100>. 2021
- Sugiyono. 2009. *Metode Penelitian Kuantitatif, Kualitatif dan R&D*. Bandung: Alfabeta.
- 27 Suripin *Sistem Drainase Perkotaan yang Berkelanjutan*. Yogyakarta: Andi Offset. 2004
- 5 Waiyasusri. K. Yumuang. S. and Chotpantarat. S. "Monitoring and predicting land use changes in the Huai Thap Salao Watershed area. Uthaitani province. Thailand. using the CLUE-s model". *Environmental Earth Science*. vol. 75. p 533. <https://doi.org/10.1007/s12665-016-5322-1>. 2016
- 12 Zuma. DS. K. Murtiaksono. and Y. Suharnoto. "Analisis curah hujan dan debit model SWAT dengan metode moving average di DAS Ciliwung hulu." *Journal of Natural Resources and Environmental Management*. Vol. 7. DOI: <https://doi.org/10.29244/jipsl.7.2.98-106>. 2017

Reduce River water Discharge

ORIGINALITY REPORT

19%

SIMILARITY INDEX

16%

INTERNET SOURCES

14%

PUBLICATIONS

5%

STUDENT PAPERS

PRIMARY SOURCES

1	Satika Boonkaewwan, Srilert Chotpantararat. "Impacts of land-use changes on watershed discharge and water quality in a large intensive agricultural area in Thailand", Hydrological Sciences Journal, 2018 Publication	2%
2	www.cfa-international.org Internet Source	2%
3	www.mdpi.com Internet Source	2%
4	www.ijesrt.com Internet Source	1%
5	ejournal.undip.ac.id Internet Source	1%
6	ejournal.itn.ac.id Internet Source	1%
7	erepository.uonbi.ac.ke Internet Source	1%

8

Aldi Alfaro, SB Soeryamassoeka, Danang Gunarto, Umar Umar, Eko Yulianto. "FLOOD MANAGEMENT STRATEGY IN THE LANDAK SUB-RIVER BASIN USING SWOT ANALYSIS", Jurnal Teknik Sipil, 2023

Publication

1 %

9

Dyah Ayu Puspitaningrum, Chumi Zahroul Fitriyah, Yuni Fitriyah Ningsih, Rizki Putri Wardani. "The effect of pop up book learning media on student's understanding about multicultural education in growing tolerance value", AIP Publishing, 2023

Publication

1 %

10

Ali Nasiri Khiavi, Mehdi Vafakhah, Seyed Hamidreza Sadeghi. "Comparative applicability of MCDM-SWOT based techniques for developing integrated watershed management framework", Natural Resource Modeling, 2023

Publication

1 %

11

repository.unand.ac.id

Internet Source

1 %

12

jai.ipb.ac.id

Internet Source

<1 %

13

osuva.uwasa.fi

Internet Source

<1 %

14	Submitted to School of Business and Management ITB Student Paper	<1 %
15	conference.unsri.ac.id Internet Source	<1 %
16	iopscience.iop.org Internet Source	<1 %
17	H Islam, T E B Soesilo, H S Hasibuan. "Noise regulation of KRL commuterline in Indonesia: A critical review", IOP Conference Series: Earth and Environmental Science, 2019 Publication	<1 %
18	Submitted to Riga Technical University Student Paper	<1 %
19	iieta.org Internet Source	<1 %
20	academicjournals.org Internet Source	<1 %
21	journal.unj.ac.id Internet Source	<1 %
22	Submitted to University of British Columbia Student Paper	<1 %
23	Submitted to University of Leicester Student Paper	<1 %

etd.repository.ugm.ac.id

24

Internet Source

<1 %

25

eprints.utm.my

Internet Source

<1 %

26

M Sriwati, S Pallu, M Selintung, R Lopa. " Bioengineering Technology to Control River Soil Erosion using Vetiver ", IOP Conference Series: Earth and Environmental Science, 2018

Publication

<1 %

27

ijesty.org

Internet Source

<1 %

28

Kusmardi Kusmardi, Bagas Ariffandi, Nadar Sukri Lubis, Tri Wahyuni Lestari, Putri Reno Intan, Alfred Pakpahan. "Effects of Sambiloto (Andrographis paniculata) Extract and Spirulina (Spirulina platensis) Administration on Ki-67 Protein Expression in the Colon Epithelial Cells of Plasmodium berghei-infected Mice", The Indonesian Biomedical Journal, 2022

Publication

<1 %

29

Vidhya Lakshmi Sivakumar, Anand Raju. "Comparison of Geographical Information System approaches for programming with Projected Coordinate System code numbers", 2023 International Conference on Emerging

<1 %

Research in Computational Science (ICERCS), 2023

Publication

30

Wahyuni, F Salimin. "The Effect of Land Cover Changes on Surface Runoff Using the Soil and Water Assessment Tool in the Bila Watershed", IOP Conference Series: Earth and Environmental Science, 2023

Publication

<1 %

31

journal.unhas.ac.id

Internet Source

<1 %

32

link.springer.com

Internet Source

<1 %

33

www.technicalgeography.org

Internet Source

<1 %

34

Chay Asdak, Sudradjat Supian, Subiyanto. "Watershed management strategies for flood mitigation: A case study of Jakarta's flooding", Weather and Climate Extremes, 2018

Publication

<1 %

35

Erfu Dai, Shaohong Wu, Wenzhong Shi, Chui-kwan Cheung, Ahmed Shaker. "Modeling Change-Pattern-Value Dynamics on Land Use: An Integrated GIS and Artificial Neural Networks Approach", Environmental Management, 2005

Publication

<1 %

36

Faradiba. "Analysis of Intensity, Duration, and Frequency Rain Daily of Java Island Using Mononobe Method", Journal of Physics: Conference Series, 2021

Publication

<1 %

37

Mafaldo José Faria, Marçal Ximenes, Oktoviano Viegas Tilman de Jesus. "Assessing Future Flooding Risk in a Coastal Lagoon Using Hydrogeological Approaches and Analysis of the 2021 Flood Event: A Case Study of Tasi-Tolu Lagoon, Dili, Timor-Leste", Journal of Water Resource and Protection, 2023

Publication

<1 %

38

Ton Duc Thang University

Publication

<1 %

Exclude quotes Off

Exclude matches < 5 words

Exclude bibliography On

Reduce River water Discharge

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/100

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7
