

e-ISSN: 2581-8341

An Open
Access

IJCSRR

M
U
L
T
I
D
I
S
C
I
P
L
I
N
A
R
Y

J
O
U
R
N
A
L

International Journal of Current Science Research and Review

Volume 07

2024

editor@ijcsrr.org



EDITORIAL BOARD



Dr. Arun

Lecturer, Asia
Pacific
University of
Technology &
Innovation, Malays



**Dr. Amit
Soni**

Prof and
head EE
Manipal
University



**Prof.
Rudra
pd
Ghimire**

DAV B
school

**Impact
Factor :**
7.943

Author Desk

[Call For Paper](#)[Author Guideline](#)[Publication Ethics](#)[Publication](#)[Process](#)[Plagiarism Policy](#)[Scope](#)[Mode of Payment](#)

Downloads

[Manuscript
Template](#)[Copyright form](#)[Journal Cover
Page](#)

Information

[Journal Indexing](#)[Author
Instructions](#)



**Prof. Dr.
N K
Joshi**

PhD. MBA
MCA
Director
Modi
institute of
management
and
technology
Kota
Rajasthan
India



**Hemant
amhiya**

Ass. Prof.
Department
of electrical
engineering



**Prof. Dr.
C.B.
SENTHILKUMAR**

Ph.D.
Professor &
Head –
Commerce
Department



**Dr.
Priyanka
Agarwal**

Ph.D.
Assistant
Professor
Department
Of



**ANSHIKA
BANSAL**

NET, U-SET
Department
Of
Commerce
Govt.P.G



**Dr.Eng.Ahmed
Hussein
Kadhim**

P.h.d.
Assistant
Professor
Department
of
Mechanical
Engineering

[Publication Fee](#)

Archives

[Vol 7 Year 2024](#)

[Vol 6 Year 2023](#)

[Vol 5 Year 2023](#)

[Vol 5 Year 2022](#)

[Vol 4 Year 2021](#)

[Vol 3 Year 2020](#)

[Vol 2 Year 2019](#)

[Volume 2 Issue
09 November 2019](#)

[Volume 2 Issue
08 October 2019](#)

[Volume 2 Issue
07 September 2019](#)

[Volume 2 Issue
06 August 2019](#)

[Volume 02 Issue
05 July 2019](#)

[Volume 02 Issue
04 June 2019](#)

[Volume 02
ISSUE 03 May 2019](#)

[Volume 02
ISSUE 02 April 2019](#)

[Volume 02 Issue
01 March 2019](#)

[Vol 1 Year 2018](#)

Search

Author Name, DOI, T

Select Month

Select Year

Commerce
Government
P.G. College
Kotdwara

College
Kotdwara

College of
Engineering
University of
Babylon
Republic of
Iraq

Search



**MOHD.
MUNTJIR**

Assistant
Professor
Departments
of Computer
Science and
Information
Technology



**Dr. Abd
El-
Aleem
Saad
Soliman
Desok**

Professor
Assistant of
Agricultural
Zoology



**Rudrarup
Gupta**

Academic
Researcher,
Rupayan
Housing
Society,
A/102,
Central
Road, H.B.
Town,
Sodepur,
P.O.
Bijoypur,
Kolkata
,India



**Dr. S.
PRIYAN**

Assistant



**Professor
Jacinta
A.Opara,FCI,**



**JAGPREET
SINGH**

Assistant
Professor,
Department

Assistant
Professor,
Department
of
Mathematics

Professor
and Director
Centre for
Health and
Environmental
Studies

Department
of
Nanotechnology,
Sri Guru
Granth
Sahib World
University,



**Prof. Dr.
ALI
HENNACHE**
Professor of
Electrical
Engineering
and Applied
Physics



**Dr.
Rohit
Bansal**
Ph.D.,
Assistant
Professor,
Department
of
Management
Studies,
Vaish
College of
Engineering,
Rohtak



**Dr.
Abun
Dameanus**
Ph.D.,
Faculty of
the College
of Business
of Divine
Word
College of
Vigan and
Divine Word
College of
Laoag



Dr



Dr K



**Dr.
Chong
SHEN**

**Dr.
GUENDOZ
Mohamed**

(Doctorate)
Lecturer,
Civil
engineering,
University of
Medea,
Algérie

**Dr. R.
Rama
Rao**

(Ph.D., PDF,
D.Litt) Asst.
Professor of
Zoology,
Govt.
Degree & PG
College

**Dr. R.
Rama
Rao**
(Ph.D.)
Senior
Scientist,
Gut
Immunology
Lab, Enzyme
innovation
and
development,
R&D,
DuPont
Nutrition &
Biosciences,
Brabrand,
Denmark



**Dr.
Pauline
Ukamaka
Umeanaeto**

(Ph.D.)
Department
of
Parasitology
and
Entomology,
Faculty of
Biosciences,
Nnamdi
Azikiwe



**Dr.
Abun
Dameanus**

Faculty of
the College
of Business
of Divine
Word
College of
Vigan and
Divine Word
College of
Laoag



**Dr. Dinh
Tran
Ngoc
Huy**

GSIM,
International
University of
Japan,
Niigata,
Japan



**Manish
Soni**

Assistant
Professor
Department
of computer
science,
Govt P.G
college
Mandsaur,
India



**Dr. A.
Vamshi
Krishna
Reddy**

Assistant
Professor
Centre for
Environment,
Institute of
Science &
Technology,
Opp. to
State Bank,
Jawaharlal
Nehru
Technological
University
Hyderabad,
Kukatpally,
Hyderabad,
Telangana-
500 085.



**Dr.
Kavita
Chahal**

Assistant
Professor
(Botany)
Government
College,
Bichhua,
Chhindwara, M.P



**Dr.
Arghya
Mani**

Assistant
Professor,
School of
Agriculture,
Lovely
Professional
University,
Phagwara



**MRS.
ELIZEBETH
RANI. V**

Associate
professor,
Obstetrics &
Gynaecology
nursing,
M.A.
Chidambaram
College of
Nursing,
Chennai.



**Dr.
Muktpal
Bhalerao**

Assistant
Professor
Department
of
Physiology
Rural



Ramalingam

**M.
Pharm.,
Ph.D.,
SEFM,
Nehruji**
Professor &
Head,
Department
of
Pharmaceutics,
Devaki



**Dr. P.
Senthilvalavan**

Assistant
Professor
Department
of Soil
Science &
Agricultural
Chemistry
Faculty of
Agriculture

Medical
College PIMS
(DU) India

Dr. M. C.
Amma
Memorial
College of
Pharmacy,
Pulliparamba
Post,
Chelembra,
Malappuram
Dt, Kerala -
673634

Agriculture
Annamalai
University
Annamalainagar, Chidambaram
Tamil Nadu,
India



**Dr. M. C.
Manjunatha**

Assistant
Professor,
Department
of Civil
Engineering,
Maharaja
Institute of
Technology,
Thandavapura,
Mysuru -571
302



**Dr.
Berdimbetov
Timur
Tleubergenc**

Head of
Department
of
International
Relations
and Teacher
Nukus
Branch of
Tashkent
University of
Information
Technologies
Named After
Muhammad
Al-
Khwarizmi



**Dr. I
Gusti
Bagus
Rai
Utama**

Associate
Professor of
Tourism in
the Faculty
of
Economics,
Business,
and
Humanity,
Dhyana Pura
University,
Bali,
Indonesia



**Dr. M
Naveen
Kumar**

System
Administrator
in Telangana
University,
Nizamabad



**Mrs.
Mohsina
F.P**

Associate
Professor,
Luqman
college of
Pharmacy,
Gulbarga,
Karnataka



**Johan
Severinus
Tati**

English
Lecturer,
Politeknik
Kota
Kinabalu,
Kota
Kinabalu,
Sabah
Malaysia



**Dr. Uko,
Ibeabuchi**

Sub-Dean,
Fac. of
Agriculture,
Nnamdi
Azikiwe
University,
Awka.



**Dr.
Nisha
Rana**

Assistant
Professor,
Department
Of Zoology,
Keral Verma
Subharti
College of
Science,
Swami
Vivekanand
Subharti
University,
Meerut



**Dr.
David
Pangaribuar
SE, M.Si**

Lecturer at
Bhayangkara
University



**Shivanand
Kolageri**

Assistant
Professor at



Pursuing Ph.
D. in
Anurag
Hazarika
Faculty of
Management
Studies and
Commerce,
KK
Handique
State Open

University,
Greater
Jakarta

Professor at
Ikon
Pharmacy
College,
Bengaluru-
562109

University,
Tezpur
College
Study
Centre,
Assam, India



**Dr. P.
Rajini**

Associate
Professor
and HoD –
Research –
School of
Commerce,



**Prof.
(Dr.)
Nareesh**



**Dr.
Gurmeet**



**Dr. M.
HEMA**

**NARESH
Sachdev**
PhD
(Management)
Dean
(Corporate
Relations)
PCTE Group
of Institutes,
Ludhiana
142021.

**Gurmeet
Singh
Bhatia**
Associate
Professor,
Department
of
Mathematics
Khalsa
College
Patiala



**Abu
Muna
Almaududi
Ausat, S.
Sos.,
M.AB.**
Magister of
Business
Administration,
Lecturer
University of
Subang



**Mannonov
Abdurakhim
Mutalovich**
Professor of
the
Department
of Iranian-
Afghan
Philology of
the
Tashkent
State
University of
Oriental
Studies



**Dr. J.
Suresh
Kumar**
Associate
Professor,
Department
of
Economics
St. Joseph
University
Virgin Town,
Ikishe Model
Village,
Dimapur,
Nagaland,

ikishe
Model
Village,
Dimapur,
Nagaland
93701
211

93701
211
93701
211

India - 797
115



**Jithin
Mathew**

Assistant
Professor,
Department
of
Pharmacology,
Caritas
College of
Pharmacy,
Thellakom,
Kottayam,
Kerala



**Dr.
Meena
Ganapathy**

"Ph.D. Guide
(Nursing) Maharshi
Karve Stree
Shikshan
Samstha's,
Smt. Bakul
Tambat
Institute of
Nursing
Education."

Dr. Jithin Mathew



**Radha
Kishan
Saran**
Ph.D.
(Environmental
Science)
Department
of
Environmental
Science
Maharaja



**Alcher
Juagpao
Arpilleda**
Ph.D.
Assistant
Principal,,
Basic
Education
Department,
St. Paul



**NIKKO
TESIORNA
EDERIO,
LPT, h.c.**
Ph.D."Director,
Quality
Management,
St. Paul
University
Cebu

Manaraja
Ganga Singh
University,
Bikaner,
334001

noit63U

St. Paul
University
Surigao
Philippines

noit63U

Surigao -
College of
Education,
Culture and
Arts,
Philippines "



**Dr.
Daleen
AL
IBRAHIM**

Ph.D.,
Damascus
University,
Faculty of
Media,
Radio &
Television
Department



**Dr. R.D.
Sivakumar**

Assistant
Professor,
Department
of Computer
Science, Bell
Institute
(Affiliated to
Alagappa
University),



**Dr. C.
Vijai**

Department
of
Commerce
and
Business
Administration,
Vel Tech
Rangarajan
Dr.
Sagunthala
R&D
Institute of
Science and
Technology,
Chennai-62,
Tamil Nadu,
India.



**Dr.
Geeta**

Assistant
Professor,
Department
of English
School of
Languages,
Linguistics &
Indology

Maulāna
Azad
National
Urdu
University
(Central
University)
Gachibowli,
Hyderabad,
Telangana-
500032,
India

Use of this website constitutes acceptance of our Terms of Use and Privacy Policy
Email : editor@ijcsrr.org | Published by ijcsrr.org



Addressing the Environmental Concerns: Statistical Approach for Mg^{2+} and Mn^{2+} Mitigation in Water System Sustainability in Indonesia

Mustamina Maulani^{1*}, Asri Nugrahanti², Bayu Satiyawira³, Cahaya Rosyidan⁴, Lisa Samura⁵, Andry Prima⁶,
David Michael⁷, Muhammad Dzaki Arkaan⁸

¹⁻⁸Petroleum Engineering, FTKE, Universitas Trisakti, DKI Jakarta 11440, Indonesia

ABSTRACT: This research aimed to determine the most effective adsorbent for reducing Mg^{2+} and Mn^{2+} levels in residential water near the oil and gas industry in the Tambun area, Bekasi, Indonesia. Bentonite was tested with varying temperature conditions. The study further compared activated charcoal and bentonite as potential adsorbents, examining their efficacy under different contact times (10, 20, and 30 minutes). Thus, sampling followed the SNI 6989.57:2008 method for surface water sampling, with bentonite conditioning and activation as initial steps. Next, the adsorption experiments utilized a separating funnel, varying the contact time between adsorbent and sample. Hence, the filtrates were analyzed quantitatively for Mn^{2+} using atomic absorption spectroscopy and for Mg^{2+} through complexometric titration.

KEYWORDS: Adsorbent, Adsorption, Adsorption Process, Bentonite, Regression Analysis.

INTRODUCTION

Effective mitigation strategies are essential to ensure the safety and quality of residential water supplies. Thus, identifying the optimal adsorbent is paramount for successful water treatment initiatives in areas proximal to industrial operations. The Tambun region, located in Bekasi, Indonesia, serves as a pertinent case study due to its significant industrial presence and potential water contamination risks. (Elkhalek, 2022; Salikhanova and Usmonova, 2022) (Durán et al., 2019; Hamid et al., 2017a; Pawar et al., 2016)

Bentonite, a naturally occurring clay mineral known for its adsorption capabilities, was selected as a primary adsorbent in this study (Hamid et al., 2017b). The research aimed to evaluate its performance under different temperature conditions, considering the potential influence of temperature on adsorption efficiency. Additionally, activated charcoal, another commonly used adsorbent, was included for comparative analysis to assess its efficacy alongside bentonite in removing Mg^{2+} and Mn^{2+} from water samples. (Durán et al., 2019)

The study's experimental design involved introducing activated charcoal and bentonite into water samples collected from residential areas around the oil and gas industry in Tambun (Maulani et al., 2021; Prima et al., 2022, 2021, 2020; Samura et al., 2021; Wijayanti et al., 2021). Different contact times were tested to determine the optimal duration for adsorption processes. The research methodology adhered to standardized protocols for water sampling and analysis, ensuring reliability and comparability of results.

Through systematic experimentation and analysis, this research aims to contribute valuable insights into effective water treatment strategies for mitigating Mg^{2+} and Mn^{2+} contamination in residential areas near industrial sites. The findings hold significant implications for environmental management and public health, offering potential solutions to address water quality challenges in similar contexts worldwide. (Yu and Lin, 2016)

The compounds Mg^{2+} and Mn^{2+} are metal ion compounds commonly found in their salt forms ($MgSO_4$ and $MnSO_4$), in the form of their metal oxides (MgO and MnO), or as part of naturally occurring mineral compounds. Magnesium (Mg^{2+}) is a silvery-white metal that is insoluble in cold water (Kheibarian et al., 2022), while manganese (Mn^{2+}) is a white-grayish metal classified as a heavy metal (atomic mass = 54.94 g/mol)

Each of these metals undoubtedly has benefits for living organisms. For example, magnesium metal ions in the human body play a role in converting food nutrients into energy, and in the field of medicine, magnesium is used as an antacid for treating stomach acidity. On the other hand, manganese metal ions are useful as raw materials in textiles or printing due to their coloring properties. However, excessive utilization of these metals can lead to environmental damage and pose a threat to surrounding living organisms. An excess of Mg^{2+} ions (in its oxide form) can cause irritation to the eyes and nose and may result in flu-like symptoms (Hazardous

Substance Fact Sheet, 2007). In contrast to Mg^{2+} ions, manganese compounds in low concentrations are highly toxic (Gomaa et al., 2017) and belong to the most dangerous environmental pollutants that can cause pneumonia.

An absorber is needed to reduce the levels of Mg^{2+} and Mn^{2+} , and three common types of absorbers found in the market are activated charcoal, bentonite, and zeolite. For this research, one type of absorber, namely bentonite, was chosen. Bentonite (clay) is a mineral that has the ability to exchange ions and is commonly used to bind sand in metal casting. The alkali metal ions (Na^+) on activated bentonite undergo ion exchange with Mg^{2+} . Similarly, this research aims to test the ability of bentonite to absorb excess Mn^{2+} ions, considering that both ions have similar chemical and physical properties.

The samples used are water sources utilized by residents for daily purposes, collected in the Tambun area, Bekasi, as it is close to the oil and gas industry. The water samples undergo several filtration and absorption processes, followed by the analysis of Mg^{2+} and Mn^{2+} levels using complexometric titration and atomic absorption spectroscopy, respectively. The results from both methods are compared to determine which method has higher accuracy and precision, thereby ensuring representative and valid results.

OBJECTIVES OF THE STUDY

This research aimed to determine the most effective adsorbent for reducing Mg^{2+} and Mn^{2+} levels in residential water near the oil and gas industry in the Tambun area, Bekasi, Indonesia. The selection of adsorbents is crucial due to the potential health hazards posed by elevated concentrations of these metal ions in drinking water. Mg^{2+} and Mn^{2+} contamination in water sources can result from various industrial activities, including oil and gas exploration and production, which often release metal ions into nearby water bodies.

METHODOLOGY

The methodology for the study on reducing Mg^{2+} and Mn^{2+} levels in residential water near the oil and gas industry in the Tambun, Bekasi, Indonesia involves several key steps: (Ajenifuja et al., 2016)

Sampling: Water samples are collected from residential areas surrounding the oil and gas industry in the Tambun region of Bekasi, Indonesia. Sampling follows the SNI 6989.57: 2008 method for surface water sampling to ensure consistency and reliability. The following figure.1 explain the adsorption process. (Alexandre Poirier, Patrick Le Griel, Javier Perez, Daniel Hermida-Merino, Petra Pernot, 2022; Priprem and Wankao, 2015)

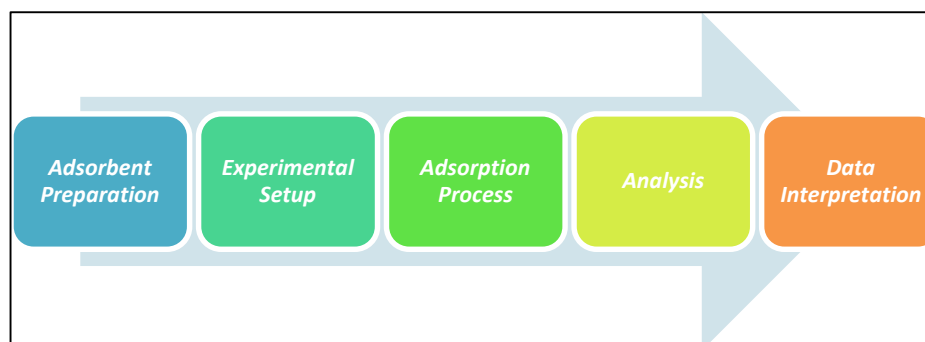


Figure 1. The Adsorption Process

1. **Adsorbent Preparation:** Bentonite, chosen as the primary adsorbent, undergoes conditioning and activation processes to enhance its adsorption capacity. Activated charcoal, another adsorbent, is also prepared for comparative analysis.
2. **Experimental Setup:** Different temperature variations are applied to the bentonite to assess the impact of temperature on its adsorption efficiency. The activated charcoal and bentonite are introduced into separate water samples with varying contact times (e.g., 10, 20, and 30 minutes). (Poirier et al., 2022)
3. **Adsorption Process:** Adsorption experiments are conducted using a separating funnel to facilitate the interaction between the adsorbents and water samples. The contact time between the adsorbents and water is controlled to investigate the optimal duration for effective adsorption. (Gitari et al., 2019)

4. **Analysis:** After the adsorption process, the filtrate is collected and subjected to quantitative analysis. Mn^{2+} metal analysis is performed using atomic absorption spectroscopy, while Mg^{2+} metal analysis is conducted through complexometric titration. (Adibmehr and H Faghihian, 2018; Y. S. Guang et al., 2018; Nkele et al., 2022)
5. **Data Interpretation:** The data collected from the analysis are interpreted to evaluate the efficacy of the adsorbents in reducing Mg^{2+} and Mn^{2+} levels in the water samples. Statistical analysis may be employed to compare the performance of bentonite and activated charcoal under different conditions. (Nie et al., 2021)

RESULTS AND DISCUSSIONS

The results of the study underscore the importance of considering the specific adsorption capacities of different materials when designing water treatment strategies for metal ion removal. While activated bentonite demonstrates effectiveness in reducing Mg^{2+} concentrations, its limited adsorption capacity for Mn^{2+} highlights the need for tailored approaches to address specific metal ion contaminants. (Y. Guang et al., 2018; Mohammad Hadi Dehghani, Sahar Afsari Sardari, Mojtaba Afsharnia, 2023; M. Shenashen et al., 2017; Shizong Wang, 2022)

The ion exchange mechanism of activated bentonite offers a promising avenue for Mg^{2+} removal, particularly in environments where high Mg^{2+} concentrations pose health and environmental risks. By replacing Na^{+} ions in the bentonite matrix with Mg^{2+} ions from the water solution, activated bentonite effectively reduces Mg^{2+} levels in water solutions. (Alexander et al., 2019a; Innwacje. and 2023, 2023; Mohammad Hadi Dehghani, Sahar Afsari Sardari, Mojtaba Afsharnia, 2023; M. A. Shenashen et al., 2017)

However, the ineffectiveness of activated bentonite in reducing Mn^{2+} concentrations underscore the complexity of metal ion removal processes. Mn^{2+} ions may exhibit different chemical properties and interactions with adsorbents compared to Mg^{2+} ions, necessitating alternative approaches for effective removal. (Alexander et al., 2019b; Durán et al., 2019; Kuncoro et al., 2018; Mohammad, S and Suzylawati, 2020; F. Nwosu et al., 2018; F. O. Nwosu et al., 2018)

Bentonite activation is carried out through a physical activation method. Bentonite is heated in a furnace at a temperature of $350^{\circ}C$ for three hours, then cooled and weighed until a constant weight is achieved. The required weight of activated bentonite is approximately 100 grams, which will be used as an adsorbent.

Activated bentonite is stored in a desiccator to prevent moisture or other contaminants. For the analysis, 20 grams of physically activated bentonite is used for 100 ml of the water sample (the ratio of bentonite to water sample is 1:5). The setup for the adsorption process involves using an extraction flask containing a sterile cotton arrangement and 20 grams of activated bentonite, as shown in Figure 2.



Figure 2. Arrangement of the Adsorption Process

Adsorption is carried out with varying contact times, namely 10, 20, and 30 minutes. For each research sample, a new adsorbent is used, replaced for each different sample. After adsorption, the resulting filtrate will be analyzed for Mn and Mg metals using complexometric titration and Atomic Absorption Spectrophotometry (AAS). Titrations and adsorption, along with their preparations, are conducted in the Fluid Reservoir Analysis Laboratory (AFR), while AAS is performed in the Environmental Engineering Laboratory of Trisakti University. Titration is conducted using Na₂EDTA 0.1N. However, due to limitations in materials and time, titration is only performed to determine the Mg content. For the AAS method, due to equipment conditions, the analysis is conducted only for Mn content. The titration is carried out in a basic environment using a pH 10 buffer with the assistance of EBT indicator under warm conditions. The initial colour of the titration is wine red, and the titration is stopped when it turns blue, as shown in Figure 3.

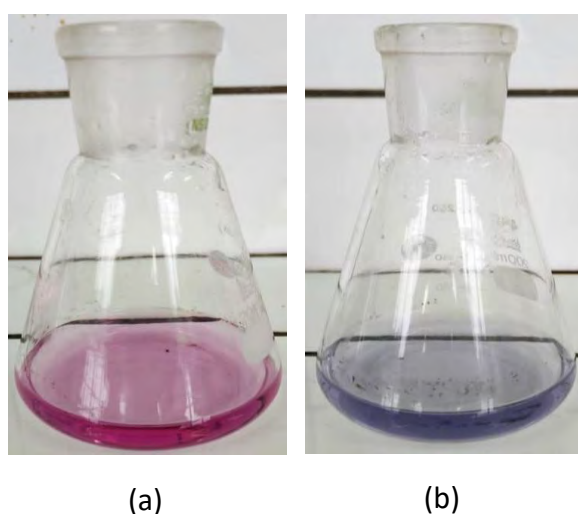


Figure 3. (a) Before Titration; (b) After Titration

Theoretically, the Mg content is expected to decrease with the increasing duration of contact with adsorption. This is substantiated by calculations obtained from the titration results presented in Table 1 below. The titration results indicate that with a longer contact time, there is a greater reduction in the Mg metal content. This is consistent with the explanation provided in the background of this experiment.

Table 1. The Results of Mg Metal Titration

Sample	Time	Content Mg (%)
Ground water	0	19,44
	10	17,04
	20	14,64
	30	12,24
Irrigation	0	18,84
	10	16,44
	20	15,00
	30	12,00

Surface water/x	0	21,24
	10	16,44
	20	12,00
	30	11,64

* The Standardization Results of Na₂EDTA Using Secondary Data

For the Mn metal content analyzed in the Environmental Engineering Laboratory of Universitas Trisakti, the results show the opposite trend. The Mn metal content obtained (mg/L) does not indicate a decrease in Mn metal. The data reveals an increase in Mn metal from the original sample. A plausible explanation for this occurrence could be the leakage of bentonite during filtration. The leaked bentonite is likely to have been drawn into the AAS, leading to its detection as an additional Mn metal by the detector, causing the Mn metal content to appear higher than it should or not significantly different from the original sample. Below are the Mn Metal levels obtained from the AAS readings in the Environmental Engineering Laboratory of Universitas Trisakti.

Table 2. The Results of Mn Metal Reading using AAS

Metal Mn		
Sample	Time	Content Mn (mg/L)
Ground water	0	0,3316
	10	5,564
	20	2,745
	30	6,628
Irrigation	0	2,277
	10	2,804
	20	3,501
	30	5,135
Surface water/x	0	0,708
	10	2,446
	20	3,079
	30	1,847

The experimental results clearly demonstrate that activated bentonite effectively lowers the concentration of Mg⁺ ions in the solution. This reduction is directly linked to the ion exchange process, where Mg²⁺ ions are swapped with Na⁺ ions present in the bentonite matrix.

Our findings reveal that activated bentonite exhibits remarkable efficacy in reducing the concentration of Mg⁺ ions. This phenomenon arises from the exchange of ions, specifically Mg²⁺, facilitated by the Na⁺ ions naturally occurring in the bentonite material.

The data obtained from our study unequivocally supports the role of activated bentonite in mitigating the concentration of Mg⁺ ions. This reduction is attributed to the ion exchange mechanism, wherein Mg²⁺ ions interact with Na⁺ ions within the bentonite lattice.

From the obtained data, activated bentonite is effective in reducing the concentration of Mg^{+} in the solution, reflecting the ability of bentonite to exchange ions with Mg^{2+} due to the presence of Na^{+} ions in bentonite. In the adsorption activity of Mg^{2+} ions, there is a significant decrease in concentration, as illustrated in Figure 4.

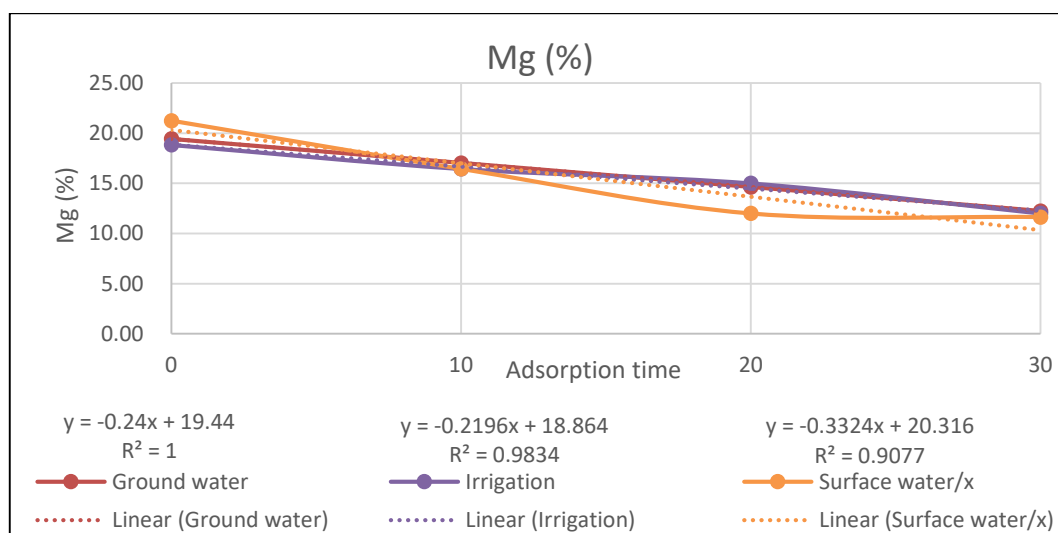


Figure 4. The Graph of Decrease in Mg Content

From the graph showing the reduction in the concentration of Mg^{2+} metal ions in well water, rice field water, and lake/river water samples, the regression approaches almost 1.00. This indicates that activated bentonite is successful in reducing the concentration of Mg^{2+} metal ions by cation exchange (Na^{+} in bentonite) with Mg^{2+} ions in the water samples. However, for the lake/river water sample, the regression does not quite meet the criteria ($1 > r > 0.98$), which could be caused by the leakage of bentonite during the adsorption process at the 30-minute mark, resulting in a reduced amount of active bentonite in contact with the sample. Nevertheless, considering the amount of Mg^{2+} ions obtained before adsorption, a decrease still occurs, indicating that activated bentonite is capable of reducing the concentration of Mg^{2+} metal ions in water samples. As for Mn metal, bentonite does not show signs of the ability to adsorb Mn metal, as shown in Figure 5.

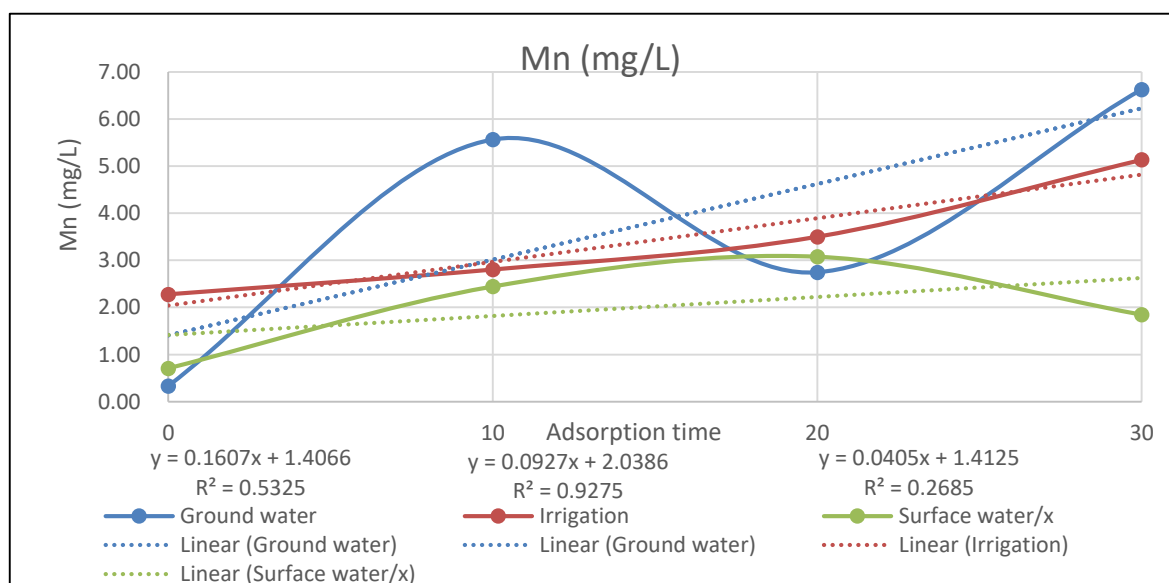


Figure 5. The Graph of Changes in Mn Metal Content



The regression analysis conducted for each sample concerning Mn^{2+} metal ions reveal a correlation coefficient (r) of less than 0.98. A suboptimal regression outcome suggests that the concentration of Mn^{2+} metal ions either remains constant or increases. This phenomenon may arise due to the activated bentonite's limited capacity to adsorb Mn^{2+} metal ions, resulting in no discernible reduction in their concentration post-adsorption, unlike the behavior observed with Mg^{2+} metal ions. Our data further indicates an increase in the concentration of Mn^{2+} metal ions, which could potentially be attributed to bentonite leakage during the adsorption process. Such leakage might introduce errors in instrument readings, impacting the accuracy of our measurements.

CONCLUSION

In conclusion, the research findings demonstrate that activated bentonite effectively reduces the concentration of Mg^{2+} metal ions in water solutions. This efficacy can be attributed to activated bentonite's ion exchange capability, whereby Na^+ ions in the bentonite are replaced by Mg^{2+} ions from the water solution. However, it is evident that activated bentonite is less effective in reducing the concentration of Mn^{2+} metal ions in water solutions. This inefficacy stems from the limited capacity of activated bentonite to adsorb Mn^{2+} metal ions. These conclusions highlight the importance of considering the specific adsorption capacities of different materials when designing water treatment strategies aimed at reducing metal ion concentrations. Further research may explore alternative adsorbents or modification techniques to enhance the effectiveness of activated bentonite for Mn^{2+} removal in water solutions.

REFERENCES

1. Adibmehar, Z., H Faghihian, 2018. Novel ion-imprinted adsorbent for lead removal from aqueous solutions, selectivity and adsorption capacity improvement, and evaluation of adsorption isotherms and. *Sep Sci Technol*.
2. Ajenifuja, E., Ajao, J., Alayande, S., 2016. Synthesis and Characterization of Pure and Ag-TiO₂-Modified Diatomaceous Aluminosilicate Ceramic Membranes for Water Remediation. *Journal of Water*.
3. Alexander, J.A., Ahmad Zaini, M.A., Surajudeen, A., Aliyu, E.N.U., Omeiza, A.U., 2019a. Surface modification of low-cost bentonite adsorbents—A review. *Particulate Science and Technology* 37, 534–545. <https://doi.org/10.1080/02726351.2018.1438548>
4. Alexandre Poirier, Patrick Le Griel, Javier Perez, Daniel Hermida-Merino, Petra Pernot, and N.B., 2022. Metallogels from a Glycolipid Biosurfactant. *ACS Sustainable Chem. Eng.* 10, 16503–16515. <https://doi.org/10.1021/acssuschemeng.2c01860i>
5. Durán, E., Bueno, S., Hermosín, M., L.C.-S. of the T., 2019, U., 2019. Optimizing a low added value bentonite as adsorbent material to remove pesticides from water. *Elsevier*.
6. Elkhalek, A.A., 2022. Environmental Sustainability and the Anthropocene, A Dynamic Behavioral Approach. *ijcsrr.org*. <https://doi.org/10.47191/ijcsrr/V5-i3-37>
7. Gitari, W.M., Izuagie, A.A., Mudzielwana, R., Pindihama, G.K., Ngulube, T., Msagati, T., 2019. Groundwater Defluoridation Using Novel Metal Modified Clay And Diatomaceous Earth Adsorbents. *Water Research Commission*.
8. Gomaa, H., Khalifa, H. et al., 2017. Selective, Photoenhanced Trapping/Detrapping of Arsenate Anions Using Mesoporous Blobfish Head TiO₂ Monoliths. *ACS Publications* 5, 10826–10839. <https://doi.org/10.1021/acssuschemeng.7b02766>
9. Guang, Y.S., Ren, X., Zhao, S., Yan, Q.Z., Zhao, G., Xu, Y.H., 2018. A novel 4-phenyl amino thiourea derivative designed for real-time ratiometric–colorimetric detection of toxic Pb²⁺. *J Environ Sci Health A Tox Hazard Subst Environ Eng* 53, 555–560. <https://doi.org/10.1080/10934529.2018.1425022>
10. Hamid, S.A., Shahadat, M., 2017, U., 2017a. Development of cost effective bentonite adsorbent coating for the removal of organic pollutant. *Elsevier*.
11. Innowacje., R.Y. et al. 2023. Agrobiological Properties Of Bentonite In Agriculture. *gospodarkainnowacje.pl* 40–2023.
12. Kheibarian, Z., Soleimani, E., Mardani, H.R., 2022. Green synthesis of Cu@Ag core–shell nanoparticles as efficient colorimetric sensing for Hg(II) ion. *Applied Physics A: Materials Science and Processing* 128. <https://doi.org/10.1007/S00339-022-05515-Y>
13. Kuncoro, E.P., Isnadina, D.R.M., Darmokoesoemo, H., Fauziah, O.R., Kusuma, H.S., 2018. Characterization, kinetic, and isotherm data for adsorption of Pb²⁺ from aqueous solution by adsorbent from mixture of bagasse-bentonite. *Data Brief* 16, 622–629. <https://doi.org/10.1016/j.dib.2017.11.098>



14. Maulani, M., Prima, A., Samura, L., Rinanti, A., Satiyawira, B., Ridaliani, O., Rosyidan, C., Pramadika, H., 2021. The intricate and indirect linkage between covid-19 global pandemic and the oil and gas trade balance of Indonesia. AIP Conf Proc 2363. <https://doi.org/10.1063/5.0061963/962722>
15. Mohammad Hadi Dehghani, Sahar Afsari Sardari, Mojtaba Afsharnia, M.Q. and M.S., 2023. Removal of toxic lead from aqueous solution using a low-cost adsorbent. Sci Rep.
16. Mohammad, S. A., Suzylawati, I., 2020. Study of the adsorption/desorption of MB dye solution using bentonite adsorbent coating. Engineering Journal of Water Process.
17. Nie, R., Yang, C., Zhang, K.D., 2021. Removal of multiple metal ions from wastewater by a multifunctional metal-organic-framework based trap. Water Science and Technology.
18. Nkele, K. et al. 2022. Fabrication of highly reactive MgO-NPs-CaO-hydrous nanocomposite and its application for the removal of manganese from aqueous solution. aet.irost.ir 4, 293–309. <https://doi.org/10.22104/AET.2022.5833.1609>
19. Nwosu, F., Ajala, O., Owoyemi, R., Raheem, B., 2018. Preparation and characterization of adsorbents derived from bentonite and kaolin clays. Appl Water Sci.
20. Pawar, R., Bajaj et al. 2016. Activated bentonite as a low-cost adsorbent for the removal of Cu (II) and Pb (II) from aqueous solutions: Batch and column studies. Elsevier.
21. Poirier, A., Le Griel, P., Perez, J., Hermida-Merino, D., Pernot, P., Baccile, N., 2022. Metallogels from a Glycolipid Biosurfactant. ACS Sustain Chem Eng 10, 16503–16515. <https://doi.org/10.1021/ACSSUSCHEMENG.2C01860>
22. Prima, A., Pramadika, H., Maulani, M., Ristawati, A., Dahani, W., Gio, P.U., 2022. The Undercurrent Indonesia's City Gas Sector with the Moderating Work Forces. PETRO:Jurnal Ilmiah Teknik Perminyakan 11, 34–39. <https://doi.org/10.25105/petro.v11i2.14060>
23. Prima, A., Ridaliani, O., Hamid, A., Pramadika, H., Sanusi, H.P., Rinanti, A., 2021. Deceleration of the development of city gas connections amidst the covid-19 pandemic in the metropolitan area. IOP Conf Ser Earth Environ Sci 802. <https://doi.org/10.1088/1755-1315/802/1/012014>
24. Prima, A., Satiyawira, B., Ridaliani, O., Pramadika, H., 2020. The past performance is the key to the present unplanned turnarounds. International Journal of Scientific and Technology Research 9.
25. Priprem, A., Wankao, L., 2015. Effect of formulations on in vitro skin permeation of some metals from mineral clays. J Pharm Sci 41, 39–46.
26. Salikhanova, D., Usmonova, Z., 2022. Investigations of the Ultimate and Proximate Analysis of Coal Samples from the Singrauli Coalfield, India. ijcsrr.org. <https://doi.org/10.47191/ijcsrr/V6-i12-62>
27. Samura, L., Prima, A., Maulani, M., Rinanti, A., Satiyawira, B., Ridaliani, O., Rosyidan, C., Pramadika, H., 2021. The unforeseen global pandemic as a key factor to the city gas growth in Indonesia. AIP Conf Proc 2363. <https://doi.org/10.1063/5.0062068/962653>
28. Shenashen, M., Akhtar, et al., 2017. Effective, low-cost recovery of toxic arsenate anions from water by using hollow-sphere geode traps. Chemistry—An Asian Journal.
29. Shizong Wang, and J.W., 2022. Enhanced Uranium Removal from Groundwater and the Regeneration of Fe₀@ Fe₃O₄ by Gamma Irradiation. SSRN.
30. Wijayanti, P., Prima, A., Ristawati, A., 2021. Management tool to avoid predictor having adverse effect on the production, in: AIP Conference Proceedings. <https://doi.org/10.1063/5.0061737>
31. Yu, C.T., Lin, H.M., 2016. Enhancement of Mercury Sorbent Using Metal Aluminate Carbonates with Chloride under Hydrothermal Conditions. Journal of the Chinese Chemical Society 63, 864–872. <https://doi.org/10.1002/JCCS.201600210>

Cite this Article: Mustamina Maulani, Asri Nugrahanti, Bayu Satiyawira, Cahaya Rosyidan, Lisa Samura, Andry Prima, David Michael, Muhammad Dzaki Arkaan (2024). Addressing the Environmental Concerns: Statistical Approach for Mg²⁺ and Mn²⁺ Mitigation in Water System Sustainability in Indonesia. International Journal of Current Science Research and Review, 7(2), 1355-1362

Addressing the Environmental Concerns: Statistical Approach for Mg^{2+} and Mn^{2+} Mitigation in Water System Sustainability in Indonesia

by Mustamina Maulani FTKE

Submission date: 01-Aug-2025 01:13PM (UTC+0700)

Submission ID: 2193212226

File name: ijcsrr_artikel_lani.pdf (585.39K)

Word count: 4374

Character count: 23581



Addressing the Environmental Concerns: Statistical Approach for Mg^{2+} and Mn^{2+} Mitigation in Water System Sustainability in Indonesia

Mustamina Maulani^{1*}, Asri Nugrahanti², Bayu Satiyawira³, Cahaya Rosyidan⁴, Lisa Samura⁵, Andry Prima⁶,
David Michael⁷, Muhammad Dzaki Arkaan⁸

¹⁻⁸Petroleum Engineering, FTKE, Universitas Trisakti, DKI Jakarta 11440, Indonesia

ABSTRACT: This research aimed to determine the most effective adsorbent for reducing Mg^{2+} and Mn^{2+} levels in residential water near the oil and gas industry in the Tambun area, Bekasi, Indonesia. Bentonite was tested with varying temperature conditions. The study further compared activated charcoal and bentonite as potential adsorbents, examining their efficacy under different contact times (10, 20, and 30 minutes). Thus, sampling followed the SNI 6989.57:2008 method for surface water sampling, with bentonite conditioning and activation as initial steps. Next, the adsorption experiments utilized a separating funnel, varying the contact time between adsorbent and sample. Hence, the filtrates were analyzed quantitatively for Mn^{2+} using atomic absorption spectroscopy and for Mg^{2+} through complexometric titration.

KEYWORDS: Adsorbent, Adsorption, Adsorption Process, Bentonite, Regression Analysis.

INTRODUCTION

Effective mitigation strategies are essential to ensure the safety and quality of residential water supplies. Thus, identifying the optimal adsorbent is paramount for successful water treatment initiatives in areas proximal to industrial operations. The Tambun region, located in Bekasi, Indonesia, serves as a pertinent case study due to its significant industrial presence and potential water contamination risks. (Elkhalek, 2022; Salikhanova and Usmonova, 2022) (Durán et al., 2019; Hamid et al., 2017a; Pawar et al., 2016)

Bentonite, a naturally occurring clay mineral known for its adsorption capabilities, was selected as a primary adsorbent in this study (Hamid et al., 2017b). The research aimed to evaluate its performance under different temperature conditions, considering the potential influence of temperature on adsorption efficiency. Additionally, activated charcoal, another commonly used adsorbent, was included for comparative analysis to assess its efficacy alongside bentonite in removing Mg^{2+} and Mn^{2+} from water samples. (Durán et al., 2019)

The study's experimental design involved introducing activated charcoal and bentonite into water samples collected from residential areas around the oil and gas industry in Tambun (Maulani et al., 2021; Prima et al., 2022, 2021, 2020; Samura et al., 2021; Wijayanti et al., 2021). Different contact times were tested to determine the optimal duration for adsorption processes. The research methodology adhered to standardized protocols for water sampling and analysis, ensuring reliability and comparability of results.

Through systematic experimentation and analysis, this research aims to contribute valuable insights into effective water treatment strategies for mitigating Mg^{2+} and Mn^{2+} contamination in residential areas near industrial sites. The findings hold significant implications for environmental management and public health, offering potential solutions to address water quality challenges in similar contexts worldwide. (Yu and Lin, 2016)

The compounds Mg^{2+} and Mn^{2+} are metal ion compounds commonly found in their salt forms ($MgSO_4$ and $MnSO_4$), in the form of their metal oxides (MgO and MnO), or as part of naturally occurring mineral compounds. Magnesium (Mg^{2+}) is a silvery-white metal that is insoluble in cold water (Kheibarian et al., 2022), while manganese (Mn^{2+}) is a white-grayish metal classified as a heavy metal (atomic mass = 54.94 g/mol)

Each of these metals undoubtedly has benefits for living organisms. For example, magnesium metal ions in the human body play a role in converting food nutrients into energy, and in the field of medicine, magnesium is used as an antacid for treating stomach acidity. On the other hand, manganese metal ions are useful as raw materials in textiles or printing due to their coloring properties. However, excessive utilization of these metals can lead to environmental damage and pose a threat to surrounding living organisms. An excess of Mg^{2+} ions (in its oxide form) can cause irritation to the eyes and nose and may result in flu-like symptoms (Hazardous



Substance Fact Sheet, 2007). In contrast to Mg^{2+} ions, manganese compounds in low concentrations are highly toxic (Gomaa et al., 2017) and belong to the most dangerous environmental pollutants that can cause pneumonia.

An adsorbent is needed to reduce the levels of Mg^{2+} and Mn^{2+} , and three common types of adsorbents found in the market are activated charcoal, bentonite, and zeolite. For this research, one type of adsorbent, namely bentonite, was chosen. Bentonite (clay) is a mineral that has the ability to exchange ions and is commonly used to bind sand in metal casting. The alkali metal ions (Na^+) on activated bentonite undergo ion exchange with Mg^{2+} . Similarly, this research aims to test the ability of bentonite to absorb excess Mn^{2+} ions, considering that both ions have similar chemical and physical properties.

The samples used are water sources utilized by residents for daily purposes, collected in the Tambun area, Bekasi, as it is close to the oil and gas industry. The water samples undergo several filtration and absorption processes, followed by the analysis of Mg^{2+} and Mn^{2+} levels using complexometric titration and atomic absorption spectroscopy, respectively. The results from both methods are compared to determine which method has higher accuracy and precision, thereby ensuring representative and valid results.

OBJECTIVES OF THE STUDY

This research aimed to determine the most effective adsorbent for reducing Mg^{2+} and Mn^{2+} levels in residential water near the oil and gas industry in the Tambun area, Bekasi, Indonesia. The selection of adsorbents is crucial due to the potential health hazards posed by elevated concentrations of these metal ions in drinking water. Mg^{2+} and Mn^{2+} contamination in water sources can result from various industrial activities, including oil and gas exploration and production, which often release metal ions into nearby water bodies.

METHODOLOGY

The methodology for the study on reducing Mg^{2+} and Mn^{2+} levels in residential water near the oil and gas industry in the Tambun, Bekasi, Indonesia involves several key steps: (Ajenifuja et al., 2016)

Sampling: Water samples are collected from residential areas surrounding the oil and gas industry in the Tambun region of Bekasi, Indonesia. Sampling follows the SNI 6989.57: 2008 method for surface water sampling to ensure consistency and reliability. The following figure.1 explain the adsorption process. (Alexandre Poirier, Patrick Le Griel, Javier Perez, Daniel Hermida-Merino, Petra Pernot, 2022; Priprem and Wankao, 2015)

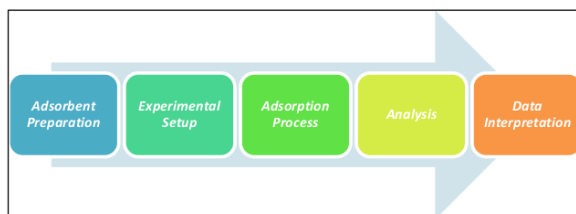


Figure 1. The Adsorption Process

1. **Adsorbent Preparation:** Bentonite, chosen as the primary adsorbent, undergoes conditioning and activation processes to enhance its adsorption capacity. Activated charcoal, another adsorbent, is also prepared for comparative analysis.
2. **Experimental Setup:** Different temperature variations are applied to the bentonite to assess the impact of temperature on its adsorption efficiency. The activated charcoal and bentonite are introduced into separate water samples with varying contact times (e.g., 10, 20, and 30 minutes). (Poirier et al., 2022)
3. **Adsorption Process:** Adsorption experiments are conducted using a separating funnel to facilitate the interaction between the adsorbents and water samples. The contact time between the adsorbents and water is controlled to investigate the optimal duration for effective adsorption. (Gitari et al., 2019)



4. **Analysis:** After the adsorption process, the filtrate is collected and subjected to quantitative analysis. Mn^{2+} metal analysis is performed using atomic absorption spectroscopy, while Mg^{2+} metal analysis is conducted through complexometric titration. (Adibmehr and H Faghihian, 2018; Y. S. Guang et al., 2018; Nkele et al., 2022)
5. **Data Interpretation:** The data collected from the analysis is interpreted to evaluate the efficacy of the adsorbents in reducing Mg^{2+} and Mn^{2+} levels in the water samples. Statistical analysis may be employed to compare the performance of bentonite and activated charcoal under different conditions. (Nie et al., 2021)

RESULTS AND DISCUSSIONS

The results of the study underscore the importance of considering the specific adsorption capacities of different materials when designing water treatment strategies for metal ion removal. While activated bentonite demonstrates effectiveness in reducing Mg^{2+} concentrations, its limited adsorption capacity for Mn^{2+} highlights the need for tailored approaches to address specific metal ion contaminants. (Y. Guang et al., 2018; Mohammad Hadi Dehghani, Sahar Afsari Sardari, Mojtaba Afsharnia, 2023; M. Shenashen et al., 2017; Shizong Wang, 2022)

The ion exchange mechanism of activated bentonite offers a promising avenue for Mg^{2+} removal, particularly in environments where high Mg^{2+} concentrations pose health and environmental risks. By replacing Na^+ ions in the bentonite matrix with Mg^{2+} ions from the water solution, activated bentonite effectively reduces Mg^{2+} levels in water solutions. (Alexander et al., 2019a; Innowacje. and 2023, 2023; Mohammad Hadi Dehghani, Sahar Afsari Sardari, Mojtaba Afsharnia, 2023; M. A. Shenashen et al., 2017)

However, the ineffectiveness of activated bentonite in reducing Mn^{2+} concentrations underscore the complexity of metal ion removal processes. Mn^{2+} ions may exhibit different chemical properties and interactions with adsorbents compared to Mg^{2+} ions, necessitating alternative approaches for effective removal. (Alexander et al., 2019b; Durán et al., 2019; Kuncoro et al., 2018; Mohammad, S and Suzylawati, 2020; F. Nwosu et al., 2018; F. O. Nwosu et al., 2018)

Bentonite activation is carried out through a physical activation method. Bentonite is heated in a furnace at a temperature of $350^{\circ}C$ for three hours, then cooled and weighed until a constant weight is achieved. The required weight of activated bentonite is approximately 100 grams, which will be used as an adsorbent.

Activated bentonite is stored in a desiccator to prevent moisture or other contaminants. For the analysis, 20 grams of physically activated bentonite is used for 100 ml of the water sample (the ratio of bentonite to water sample is 1:5). The setup for the adsorption process involves using an extraction flask containing a sterile cotton arrangement and 20 grams of activated bentonite, as shown in Figure 2.

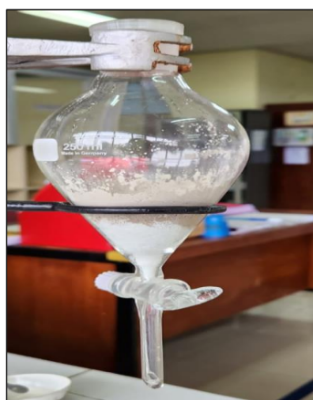


Figure 2. Arrangement of the Adsorption Process

Adsorption is carried out with varying contact times, namely 10, 20, and 30 minutes. For each research sample, a new adsorbent is used, replaced for each different sample. After adsorption, the resulting filtrate will be analyzed for Mn and Mg metals using complexometric titration and Atomic Absorption Spectrophotometry (AAS). Titrations and adsorption, along with their preparations, are conducted in the Fluid Reservoir Analysis Laboratory (AFR), while AAS is performed in the Environmental Engineering Laboratory of Trisakti University. Titration is conducted using Na₂EDTA 0.1N. However, due to limitations in materials and time, titration is only performed to determine the Mg content. For the AAS method, due to equipment conditions, the analysis is conducted only for Mn content. The titration is carried out in a basic environment using a pH 10 buffer with the assistance of EBT indicator under warm conditions. The initial colour of the titration is wine red, and the titration is stopped when it turns blue, as shown in Figure 3.

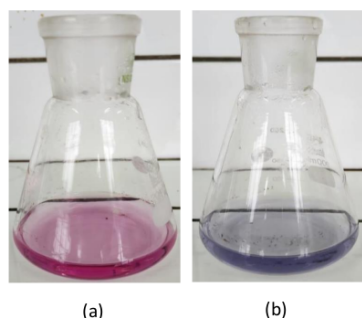


Figure 3. (a) Before Titration; (b) After Titration

Theoretically, the Mg content is expected to decrease with the increasing duration of contact with adsorption. This is substantiated by calculations obtained from the titration results presented in Table 1 below. The titration results indicate that with a longer contact time, there is a greater reduction in the Mg metal content. This is consistent with the explanation provided in the background of this experiment.

Table 1. The Results of Mg Metal Titration

Sample	Time	Content Mg (%)
Ground water	0	19,44
	10	17,04
	20	14,64
	30	12,24
Irrigation	0	18,84
	10	16,44
	20	15,00
	30	12,00



Surface water/x	0	21,24
	10	16,44
	20	12,00
	30	11,64

* The Standardization Results of Na2EDTA Using Secondary Data

For the Mn metal content analyzed in the Environmental Engineering Laboratory of Universitas Trisakti, the results show the opposite trend. The Mn metal content obtained (mg/L) does not indicate a decrease in Mn metal. The data reveals an increase in Mn metal from the original sample. A plausible explanation for this occurrence could be the leakage of bentonite during filtration. The leaked bentonite is likely to have been drawn into the AAS, leading to its detection as an additional Mn metal by the detector, causing the Mn metal content to appear higher than it should or not significantly different from the original sample. Below are the Mn Metal levels obtained from the AAS readings in the Environmental Engineering Laboratory of Universitas Trisakti.

Table 2. The Results of Mn Metal Reading using AAS

Metal Mn		
Sample	Time	Content Mn (mg/L)
Ground water	0	0,3316
	10	5,564
	20	2,745
	30	6,628
Irrigation	0	2,277
	10	2,804
	20	3,501
	30	5,135
Surface water/x	0	0,708
	10	2,446
	20	3,079
	30	1,847

The experimental results clearly demonstrate that activated bentonite effectively lowers the concentration of Mg⁺ ions in the solution. This reduction is directly linked to the ion exchange process, where Mg²⁺ ions are swapped with Na⁺ ions present in the bentonite matrix.

Our findings reveal that activated bentonite exhibits remarkable efficacy in reducing the concentration of Mg⁺ ions. This phenomenon arises from the exchange of ions, specifically Mg²⁺, facilitated by the Na⁺ ions naturally occurring in the bentonite material.

The data obtained from our study unequivocally supports the role of activated bentonite in mitigating the concentration of Mg⁺ ions. This reduction is attributed to the ion exchange mechanism, wherein Mg²⁺ ions interact with Na⁺ ions within the bentonite lattice.



From the obtained data, activated bentonite is effective in reducing the concentration of Mg^{2+} in the solution, reflecting the ability of bentonite to exchange ions with Mg^{2+} due to the presence of Na^{+} ions in bentonite. In the adsorption activity of Mg^{2+} ions, there is a significant decrease in concentration, as illustrated in Figure 4.

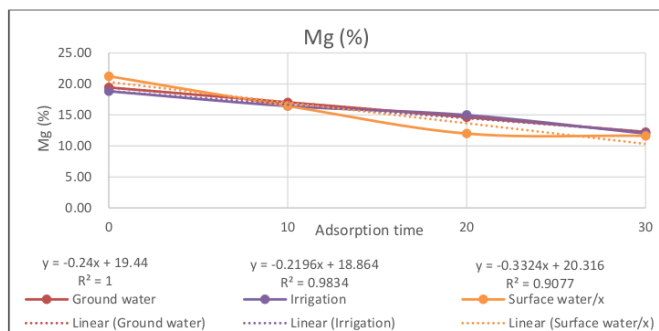


Figure 4. The Graph of Decrease in Mg Content

From the graph showing the reduction in the concentration of Mg^{2+} metal ions in well water, rice field water, and lake/river water samples, the regression approaches almost 1.00. This indicates that activated bentonite is successful in reducing the concentration of Mg^{2+} metal ions by cation exchange (Na^{+} in bentonite) with Mg^{2+} ions in the water samples. However, for the lake/river water sample, the regression does not quite meet the criteria ($1 > 0.98$), which could be caused by the leakage of bentonite during the adsorption process at the 30-minute mark, resulting in a reduced amount of active bentonite in contact with the sample. Nevertheless, considering the amount of Mg^{2+} ions obtained before adsorption, a decrease still occurs, indicating that activated bentonite is capable of reducing the concentration of Mg^{2+} metal ions in water samples. As for Mn metal, bentonite does not show signs of the ability to adsorb Mn metal, as shown in Figure 5.

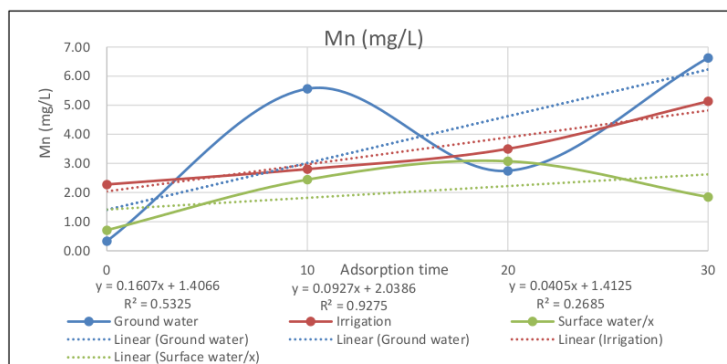


Figure 5. The Graph of Changes in Mn Metal Content



The regression analysis conducted for each sample concerning Mn^{2+} metal ions reveal a correlation coefficient (r) of less than 0.98. A suboptimal regression outcome suggests that the concentration of Mn^{2+} metal ions either remains constant or increases. This phenomenon may arise due to the activated bentonite's limited capacity to adsorb Mn^{2+} metal ions, resulting in no discernible reduction in their concentration post-adsorption, unlike the behavior observed with Mg^{2+} metal ions. Our data further indicates an increase in the concentration of Mn^{2+} metal ions, which could potentially be attributed to bentonite leakage during the adsorption process. Such leakage might introduce errors in instrument readings, impacting the accuracy of our measurements.

CONCLUSION

In conclusion, the research findings demonstrate that activated bentonite effectively reduces the concentration of Mg^{2+} metal ions in water solutions. This efficacy can be attributed to activated bentonite's ion exchange capability, whereby Na^+ ions in the bentonite are replaced by Mg^{2+} ions from the water solution. However, it is evident that activated bentonite is less effective in reducing the concentration of Mn^{2+} metal ions in water solutions. This inefficacy stems from the limited capacity of activated bentonite to adsorb Mn^{2+} metal ions. These conclusions highlight the importance of considering the specific adsorption capacities of different materials when designing water treatment strategies aimed at reducing metal ion concentrations. Further research may explore alternative adsorbents or modification techniques to enhance the effectiveness of activated bentonite for Mn^{2+} removal in water solutions.

REFERENCES

- Adibmehar, Z., H Faghihian, 2018. Novel ion-imprinted adsorbent for lead removal from aqueous solutions, selectivity and adsorption capacity improvement, and evaluation of adsorption isotherms and. Sep Sci Technol.
- Ajenifuja, E., Ajao, J., Alayande, S., 2016. Synthesis and Characterization of Pure and Ag-TiO₂-Modified Diatomaceous Aluminosilicate Ceramic Membranes for Water Remediation. Journal of Water.
- Alexander, J.A., Ahmad Zaini, M.A., Surajudeen, A., Aliyu, E.N.U., Omeiza, A.U., 2019a. Surface modification of low-cost bentonite adsorbents—A review. Particulate Science and Technology 37, 534–545. <https://doi.org/10.1080/02726351.2018.1438548>
- Alexandre Poirier, Patrick Le Griel, Javier Perez, Daniel Hermida-Merino, Petra Pernot, and N.B., 2022. Metallogels from a Glycolipid Biosurfactant. ACS Sustainable Chem. Eng. 10, 16503–16515. <https://doi.org/10.1021/acssuschemeng.2c01860i>
- Durán, E., Bueno, S., Hermosín, M.L.C.-S. of the T., 2019, U., 2019. Optimizing a low added value bentonite as adsorbent material to remove pesticides from water. Elsevier.
- Elkhalek, A.A., 2022. Environmental Sustainability and the Anthropocene, A Dynamic Behavioral Approach. ijcsrr.org. <https://doi.org/10.47191/ijcsrr/V5-i3-37>
- Gitari, W.M., Izuagie, A.A., Mudzielwana, R., Pindihama, G.K., Ngulube, T., Msagati, T., 2019. Groundwater Defluoridation Using Novel Metal Modified Clay And Diatomaceous Earth Adsorbents. Water Research Commission.
- Gomaa, H., Khalifa, H. et al., 2017. Selective, Photoenhanced Trapping/De trapping of Arsenate Anions Using Mesoporous Blobfish Head TiO₂ Monoliths. ACS Publications 5, 10826–10839. <https://doi.org/10.1021/acssuschemeng.7b02766>
- Guang, Y.S., Ren, X., Zhao, S., Yan, Q.Z., Zhao, G., Xu, Y.H., 2018. A novel 4-phenyl amino thiourea derivative designed for real-time ratiometric–colorimetric detection of toxic Pb²⁺. J Environ Sci Health A Tox Hazard Subst Environ Eng 53, 555–560. <https://doi.org/10.1080/10934529.2018.1425022>
- Hamid, S.A., Shahadat, M., 2017, U., 2017a. Development of cost effective bentonite adsorbent coating for the removal of organic pollutant. Elsevier.
- Innowacje., R.Y. et al. 2023. Agrobiological Properties Of Bentonite In Agriculture. gospodarkainnowacje.pl 40–2023.
- Kheibarian, Z., Soleimani, E., Mardani, H.R., 2022. Green synthesis of Cu@Ag core-shell nanoparticles as efficient colorimetric sensing for Hg(II) ion. Applied Physics A: Materials Science and Processing 128. <https://doi.org/10.1007/S00339-022-05515-Y>
- Kuncoro, E.P., Isnadina, D.R.M., Darmokoesomo, H., Fauziah, O.R., Kusuma, H.S., 2018. Characterization, kinetic, and isotherm data for adsorption of Pb²⁺ from aqueous solution by adsorbent from mixture of bagasse-bentonite. Data Brief 16, 622–629. <https://doi.org/10.1016/j.dib.2017.11.098>



14. Maulani, M., Prima, A., Samura, L., Rinanti, A., Satiyawira, B., Ridaliani, O., Rosyidan, C., Pramadika, H., 2021. The intricate and indirect linkage between covid-19 global pandemic and the oil and gas trade balance of Indonesia. AIP Conf Proc 2363. <https://doi.org/10.1063/5.0061963/962722>
15. Mohammad Hadi Dehghani, Sahar Afsari Sardari, Mojtaba Afsharnia, M.Q. and M.S., 2023. Removal of toxic lead from aqueous solution using a low-cost adsorbent. Sci Rep.
16. Mohammad, S. A., Suzylawati, I., 2020. Study of the adsorption/desorption of MB dye solution using bentonite adsorbent coating. Engineering Journal of Water Process.
17. Nie, R., Yang, C., Zhang, K.D., 2021. Removal of multiple metal ions from wastewater by a multifunctional metal-organic-framework based trap. Water Science and Technology.
18. Nkele, K. et al. 2022. Fabrication of highly reactive MgO-NPs-CaO-hydrous nanocomposite and its application for the removal of manganese from aqueous solution. aet.irost.ir 4, 293–309. <https://doi.org/10.22104/AET.2022.5833.1609>
19. Nwosu, F., Ajala, O., Owoyemi, R., Raheem, B., 2018. Preparation and characterization of adsorbents derived from bentonite and kaolin clays. Appl Water Sci.
20. Pawar, R., Bajaj et al. 2016. Activated bentonite as a low-cost adsorbent for the removal of Cu (II) and Pb (II) from aqueous solutions: Batch and column studies. Elsevier.
21. Poirier, A., Le Griel, P., Perez, J., Hermida-Merino, D., Pernot, P., Baccile, N., 2022. Metallogels from a Glycolipid Biosurfactant. ACS Sustain Chem Eng 10, 16503–16515. <https://doi.org/10.1021/ACSSUSCHEMENG.2C01860>
22. Prima, A., Pramadika, H., Maulani, M., Ristawati, A., Dahani, W., Gio, P.U., 2022. The Undercurrent Indonesia's City Gas Sector with the Moderating Work Forces. PETRO:Jurnal Ilmiah Teknik Perminyakan 11, 34–39. <https://doi.org/10.25105/petro.v11i2.14060>
23. Prima, A., Ridaliani, O., Hamid, A., Pramadika, H., Sanusi, H.P., Rinanti, A., 2021. Deceleration of the development of city gas connections amidst the covid-19 pandemic in the metropolitan area. IOP Conf Ser Earth Environ Sci 802. <https://doi.org/10.1088/1755-1315/802/1/012014>
24. Prima, A., Satiyawira, B., Ridaliani, O., Pramadika, H., 2020. The past performance is the key to the present unplanned turnarounds. International Journal of Scientific and Technology Research 9.
25. Priprem, A., Wankao, L., 2015. Effect of formulations on in vitro skin permeation of some metals from mineral clays. J Pharm Sci 41, 39–46.
26. Salikhanova, D., Usmonova, Z., 2022. Investigations of the Ultimate and Proximate Analysis of Coal Samples from the Singrauli Coalfield, India. ijcsrr.org. <https://doi.org/10.47191/ijcsrr/V6-i12-62>
27. Samura, L., Prima, A., Maulani, M., Rinanti, A., Satiyawira, B., Ridaliani, O., Rosyidan, C., Pramadika, H., 2021. The unforeseen global pandemic as a key factor to the city gas growth in Indonesia. AIP Conf Proc 2363. <https://doi.org/10.1063/5.0062068/962653>
28. Shenashen, M., Akhtar, et al., 2017. Effective, low-cost recovery of toxic arsenate anions from water by using hollow-sphere geode traps. Chemistry–An Asian Journal.
29. Shizong Wang, and J.W., 2022. Enhanced Uranium Removal from Groundwater and the Regeneration of FeO@ Fe₃O₄ by Gamma Irradiation. SSRN.
30. Wijayanti, P., Prima, A., Ristawati, A., 2021. Management tool to avoid predictor having adverse effect on the production, in: AIP Conference Proceedings. <https://doi.org/10.1063/5.0061737>
31. Yu, C.T., Lin, H.M., 2016. Enhancement of Mercury Sorbent Using Metal Aluminate Carbonates with Chloride under Hydrothermal Conditions. Journal of the Chinese Chemical Society 63, 864–872. <https://doi.org/10.1002/JCCS.201600210>

Cite this Article: Mustamina Maulani, Asri Nugrahanti, Bayu Satiyawira, Cahaya Rosyidan, Lisa Samura, Andry Prima, David Michael, Muhammad Dzaki Arkan (2024). Addressing the Environmental Concerns: Statistical Approach for Mg²⁺ and Mn²⁺ Mitigation in Water System Sustainability in Indonesia. International Journal of Current Science Research and Review, 7(2), 1355-1362

Addressing the Environmental Concerns: Statistical Approach for Mg2+ and Mn2+ Mitigation in Water System Sustainability in Indonesia

ORIGINALITY REPORT

16%	12%	9%	10%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

8%
★ lib.bvu.edu.vn
Internet Source

Exclude quotes	On	Exclude matches	Off
Exclude bibliography	On		