











International Journal of GEOMATE

14

H Index

Country	Japan - IIII SIR Ranking of Japan
Subject Area and Category	Agricultural and Biological Sciences Soil Science Earth and Planetary Sciences Geotechnical Engineering and Engineering Geology Engineering Building and Construction Environmental Science Environmental Engineering
Publisher	GEOMATE International Society
Publication type	Journals
ISSN	21862990, 21862982
Coverage	2011-2020
Scope	The journal aims to become an efficient mean of publishing and distributing high quality information from the researchers, scientists and engineers. The main scopes are as follows: Advances in Composite Materials- Computational Mechanics- Foundation and Retaining Walls- Slope Stability- Soil Dynamics- Soil-Structure Interaction- Pavement Technology- Tunnels and Anchors- Site Investigation and Rehabilitation- Ecology and Land Development- Water Resources Planning- Environmental Management - Public Health and Rehabilitation- Earthquake and Tsunami Issues- Safety and Reliability- Geo-Hazard Mitigation- Case History and Practical Experience- Others
	Homepage
	How to publish in this journal
	Contact
	Join the conversation about this journal

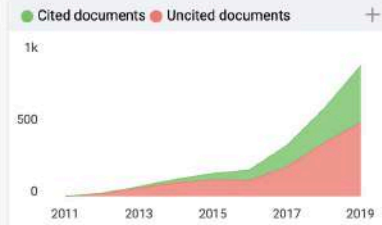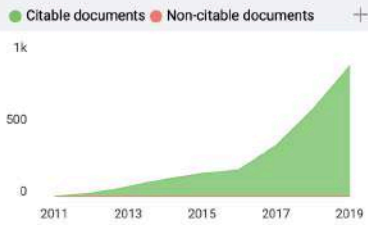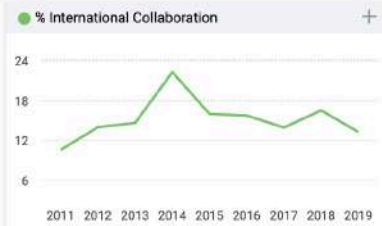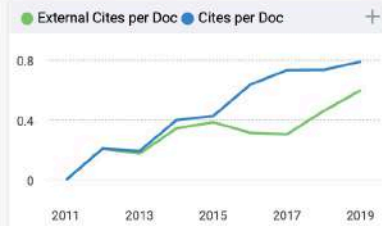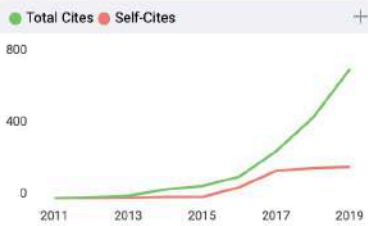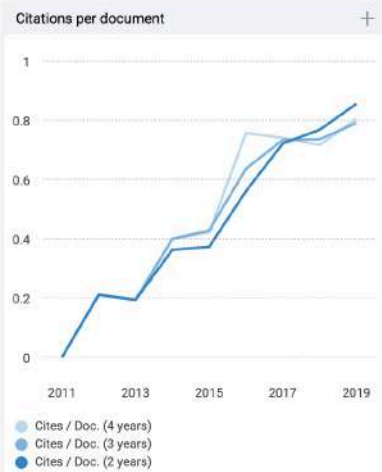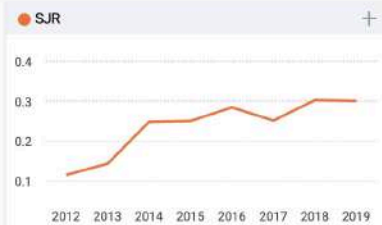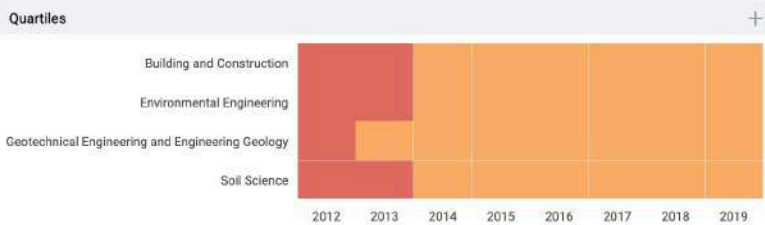

International Journal of GEOMATE

Q3 Building and Construction

SJR 2019 0.3 best quartile

powered by scimagojr.com

← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scima
```

International Journal of GEOMATE

Scopus coverage years: from 2011 to Present

Publisher: GEOMATE International Society

ISSN: 2186-2982 E-ISSN: 2186-2990

Subject area: [Engineering: Building and Construction](#)

[Earth and Planetary Sciences: Geotechnical Engineering and Engineering Geology](#)

[Agricultural and Biological Sciences: Soil Science](#) [Environmental Science: Environmental Engineering](#)

[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Journal Homepage](#)

CiteScore 2019

1.3

[Add CiteScore to your site](#)

SJR 2019

0.300

SNIP 2019

0.785

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

Improved CiteScore methodology
 CiteScore 2019 counts the citations received in 2016-2019 to articles, reviews, conference papers, book chapters and data papers published in 2016-2019, and divides this by the number of publications published in 2016-2019. [Learn more >](#)

CiteScore 2019

$$1.3 = \frac{1,458 \text{ Citations 2016 - 2019}}{1,161 \text{ Documents 2016 - 2019}}$$

Calculated on 06 May, 2020

CiteScoreTracker 2020

$$1.3 = \frac{1,536 \text{ Citations to date}}{1,222 \text{ Documents to date}}$$



Last updated on 09 August, 2020 • Updated monthly

CiteScore rank 2019

Category	Rank	Percentile
Engineering		
Building and Construction	#104/174	40th
Earth and Planetary Sciences		
Geotechnical Engineering and Engineering Geology	#118/189	37th

[View CiteScore methodology >](#) [CiteScore FAQ >](#)



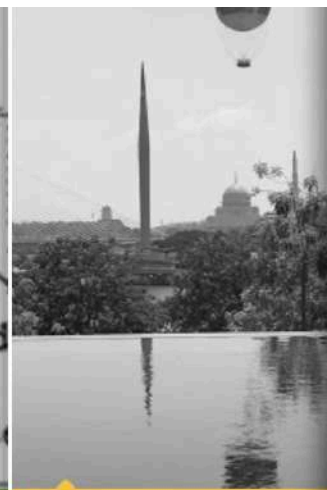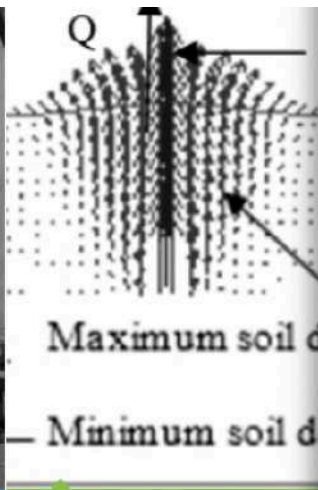

Geotechnique

Materials

Construction

Analyses

Environment

Welcome to GEOMATE Journal (ESCI)

Memorial 1st issue published on 2011.11.11

Paper DOI: Paste paper title in the "Metadata Search" on <http://www.crossref.org/>

Introduction:

- The "International Journal of GEOMATE" is a Scientific Journal of the GEOMATE International Society that encompasses a broad area in Geotechnique, Construction Materials and Environment.
- Special Issue: The journal includes papers on Structure, Engineering and Environment under the category of special issue.
- The key objective of this journal is to promote interdisciplinary research from various regions of the globe. Geomate meaning as GEO-MATE indicating earth friend or nature friend.
- The editorial board of the journal is comprised of extensively qualified researchers, academicians, scientists from Japan and other countries of the world.
- It is peer-reviewed journal that is published monthly (2011-2015 quarterly). All articles published in this journal are available on line.
- Contributors may download the manuscript preparation template for submitting paper or contact to the Editor-in-Chief [editor@geomatejournal.com].

Indexed in: SCOPUS, Thomson Reuters Web of Science (ESCI), Crossref, DOI, EBSCO, Gale Cengage Learning, Ulrichwebs, Global Impact Factor (GIF), etc.

SCOPUS Journal list: <https://www.elsevier.com/solutions/scopus/content>

ISI Master Journal List: <http://ip-science.thomsonreuters.com/mjl/>

- ▶ Publication Ethics
- ▶ Review Policy
- ▶ Content List
- ▶ Copyright, Template etc. (Form 1,2,3,4,5)
- ▶ Evaluation Form
- ▶ Revised Paper Submission
- ▶ Galley Proof Submission
- ▶ Impact Factor by SCOPUS
- ▶ Reviewer Application
- ▶ Discussion
- ▶ Erratum
- ▶ Appointment
- ▶ Page Proof
- ▶ Payment

News updates

Impact Factor by SCOPUS (SJR):
2019: 0.300
2018: 0.302
2017: 0.251





Editorial Board

search...



Editor-in-Chief

Prof. Dr. Zakaria Hossain, Mie University, Japan

Associate Editor-in-Chief

Associate Prof. Dr. John Victor Smith, RMIT University, Australia

Associate Editors

Prof. Dr. Fumio Tatsuoka , Tokyo University of Science, Japan	Prof. Dr. Sai Vanapalli , University of Ottawa, Canada	Prof. Dr. Ian Jefferson , University of Birmingham, United Kingdom
Prof. Dr. Mounir Bouassida , National School of Engineering of Tunis	Prof. Dr. Bujang B.K. Huat , University Putra Malaysia, Malaysia	Prof. Dr. Nemy Banthia , University of British Columbia, Canada
Prof. Dr. Toshinori Sakai , Mie University, Japan	Prof. Dr. Valeriy Perminov , Tomsk Polytechnic University, Russia	Prof. Dr. Jing-Cai Jiang , University of Tokushima, Japan
Prof. Dr. Lilia Robles Austriaco , Angles University Foundation, Philippines	Prof. Dr. Muhammad Ibn Ibrahimy , International Islamic University, Malaysia	Prof. Dr. Shamsul I. Chowdhury , Roosevelt University, USA
Prof. Dr. Isabel Pinto , University of Coimbra, Portugal	Prof. Dr. Mark Jaksa , University of Adelaide, Australia	Prof. Dr. Kaneco Satoshi , Mie University, Japan
Prof. Dr. Junichiro Takeuchi , Kyoto University, Japan	Prof. Dr. Ranjith Pathegama Gamage , Monash University, Australia	Prof. Dr. Kingshuk Roy , Nihon University, Japan
Prof. Dr. Md. Shahin Hossain , Islamic University of Technology, Bangladesh	Prof. Dr. Pedro Arrua , Universidad Tecnológica Nacional, Argentina	Prof. Dr. Miguel A. Pando , University of North Carolina, USA
Prof. Dr. Suksun Horpibulsuk , Suranaree University of Technology, Thailand	Prof. Dr. Musharraf Zaman , University of Oklahoma, USA	Prof. Dr. Rafiqul Tarefder , University of New Mexico, USA
Dr. Stefano Stacul , University of Pisa, Italy	Prof. Dr. Basir Mir , National Institute of Technology Srinagar, India	Prof. Dr. Lily Surayya Eka , State Islamic University Syarif Hidayatullah Jakarta, Indonesia

Publication Ethics

Review Policy

Content List

Copyright, Template etc. (Form 1,2,3,4,5)

Evaluation Form

Revised Paper Submission

Galley Proof Submission

Impact Factor by SCOPUS

Reviewer Application

Discussion

Erratum

Appointment

Page Proof

Payment



Articles (2018 / volume 15 / issue 52)

1. INFLUENCE OF THE STRATIFICATION IN ROCK MASS ON THE STABILITY OF ROADWAYS IN VIETNAMESE COAL MINES

Tran Tuan Minh



Article Type: Research Article **View Abstract** **No of Download** = 794 **Pages** (1-6)

2. CU AND ZN CONCENTRATIONS OF NATURAL OYSTERS IN OSAKA BAY, JAPAN

Tetsuya Fukano and Hiroyuki Ii



Article Type: Research Article **View Abstract** **No of Download** = 634 **Pages** (7-15)

3. PROBABILISTIC SEISMIC HAZARD ANALYSIS OF SOUTH-WESTERN NIGERIA

John Oluwafemi, Olatokunbo Ofuyatan, Solomon Oyeibisi, Tolulope Alayande and Masi Tumba



Article Type: Research Article **View Abstract** **No of Download** = 590 **Pages** (16-22)

4. CURRENT STATUS OF CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT IN VIETNAM: CHALLENGES AND OPPORTUNITIES

Nguyen Van Tuan, Tong Ton Kien, Dang Thi Thanh Huyen, Tran Thi Viet Nga, Nguyen Hoang Giang, Nguyen Hien Dung, Yugo Isobe, Tomonori Ishigaki, and Ken Kawamoto



Article Type: Research Article **View Abstract** **No of Download** = 774 **Pages** (23-29)

5. CONCENTRATIONS OF METAL(LOID)S IN OUTDOOR AND INDOOR DUST FROM RUSSIAN CITY

Tatyana G. Krupnova, Irina V. Mashkova, Svetlana V. Gavrilkina, Evgeniy D. Scalev and Nikita O. Egorov



Article Type: Research Article **View Abstract** **No of Download** = 562 **Pages** (30-37)

6. EFFECTS OF CULVERT SHAPES ON POTENTIAL RISK OF HYDRAULIC FRACTURING ADJACENT TO CULVERTS IN EMBANKMENT DAMS

**Duy Quan Tran, Shinichi Nishimura, Masateru Senge and Tatsuro Nishiyama*



Article Type: Research Article **View Abstract** **No of Download** = 653 **Pages** (38-44)

7. BIOSORPTION OF CU (II) BY SCENEDESMUS OBLIQUUS: OPTIMIZATION IN PHOVASOLI HAEMOTOCOCCUS MEDIUM

Astri Rinanti, Melati Ferianita Fachrul, Rositayanti Hadisoebroto, Mawar D.S. Silalahi



Article Type: Research Article **View Abstract** **No of Download** = 625 **Pages** (45-52)

- [Publication Ethics](#)
- [Review Policy](#)
- [Content List](#)
- [Copyright, Template etc. \(Form 1,2,3,4,5\)](#)
- [Evaluation Form](#)
- [Revised Paper Submission](#)
- [Galley Proof Submission](#)
- [Impact Factor by SCOPUS](#)
- [Reviewer Application](#)
- [Discussion](#)
- [Erratum](#)
- [Appointment](#)
- [Page Proof](#)
- [Payment](#)

ISSN: 2186-2982 (Print) 2186-2990 (Online)



Scopus
EBSCO



GIF
GLOBAL IMPACT FACTOR



International Journal of GEOMATE

(Geotechnique, Construction Materials and Environment)



Tsu, Japan

THE GEOMATE INTERNATIONAL SOCIETY

<https://www.geomatejournal.com>



Tsu, Japan

International Journal of GEOMATE

(Geotechnique, Construction Materials and Environment)
ISSN: 2186 - 2982 (Print) 2186 - 2990 (Online)

Register

Login

Home About Editorial Board Current Archives Membership Content List

Search

Home / Editorial Team

Editorial Team

Editor-in-Chief

Prof. Dr. Zakaria Hossain, Mie University, Japan

Executive Editor-in-Chief

E/Prof. Dr. Takamitsu Kajisa, Mie University, Japan

Associate Editor-in-Chief

Associate Prof. Dr. John Victor Smith, RMIT University, Australia

Associate Editors/Editorial Board Members:

Prof. Dr. Fumio Tatsuoka, Tokyo University of Science, Japan

Prof. Dr. Sai Vanapalli, University of Ottawa, Canada

Prof. Dr. Ian Jefferson, University of Birmingham, United Kingdom

Prof. Dr. Mounir Bouassida, National School of Engineering of Tunis

Prof. Dr. Bujang B.K. Huat, University Putra Malaysia, Malaysia

Prof. Dr. Nemy Banthia, University of British Columbia, Canada

Prof. Dr. Toshinori Sakai, Mie University, Japan

Prof. Dr. Valeriy Perminov, Tomsk Polytechnic University, Russia

Prof. Dr. Jing-Cai Jiang, University of Tokushima, Japan

Prof. Dr. Lilia Robles Austriaco, Angles University Foundation, Philippines

Prof. Dr. Muhammad Ibn Ibrahimy, International Islamic University, Malaysia

Prof. Dr. Shamsul I. Chowdhury, Roosevelt University, USA

Prof. Dr. Isabel Pinto, University of Coimbra, Portugal

Prof. Dr. Mark Jaks, University of Adelaide, Australia

Prof. Dr. Kaneco Satoshi, Mie University, Japan

Prof. Dr. Junichiro Takeuchi, Kyoto University, Japan

Prof. Dr. Ranjith Pathegama Gamage, Monash University, Australia

Prof. Dr. Kingshuk Roy, Nihon University, Japan

Prof. Dr. Arif Ali Baig Moghal, NIT Warangal, India

Prof. Dr. Pedro Arrua, Universidad Tecnológica Nacional, Argentina

Prof. Dr. Miguel A. Pando, Drexel University, Philadelphia, USA

Prof. Dr. Suksun Horpibulsuk, Suranaree University of Technology, Thailand

Prof. Dr. Musharraf Zaman, University of Oklahoma, USA

Prof. Dr. Rafiqul Tarefder, University of New Mexico, USA

Dr. Stefano Stacul, University of Pisa, Italy

Prof. Dr. Basir Mir, National Institute of Technology Srinagar, India

Prof. Dr. Lily Surayya Eka, State Islamic University Syarif Hidayatullah Jakarta, Indonesia

Dr. Engr. Ryan A. Ramirez, University of Santo Tomas, Manila, Philippines

Submit your paper

Journal Menu

Guide For Authors

Paper Template, Copyright, etc.

Aims and Scope

Publication Ethics

Conferences

Reviewer Application and Policy

Fee and Pay Link

Scopus Indexed

International Journal of GEOMATE



Information

For Readers

For Authors

For Librarians

Vol. 15 No. 52 (2018): December 2018

Published: 2021-11-16

Articles

INFLUENCE OF THE STRATIFICATION IN ROCK MASS ON THE STABILITY OF ROADWAYS IN VIETNAMESE COAL MINES

Tran Tuan Minh

1-6



Abstract View : 59

pdf downloads: 75

CU AND ZN CONCENTRATIONS OF NATURAL OYSTERS IN OSAKA BAY, JAPAN

Tetsuya Fukano, Hiroyuki Ii

7-15



Abstract View : 54

pdf downloads: 70

PROBABILISTIC SEISMIC HAZARD ANALYSIS OF SOUTHWESTERN NIGERIA

John Oluwafemi, Olatokunbo Ofuyatan, Solomon Oyebisil, Tolulope Alayande, Masi Tumba

16-22



Abstract View : 58

pdf downloads: 114

CURRENT STATUS OF CONSTRUCTION AND DEMOLITION WASTE MANAGEMENT IN VIETNAM: CHALLENGES AND OPPORTUNITIES

Nguyen Van Tuan, Tong Ton Kien, Dang Thi Thanh Huyen, Tran Thi Viet Nga, Nguyen Hoang Giang, Nguyen Tien Dung, Yugo Isobe, Tomonori Ishigaki, Ken Kawamoto

23-29



CHALLENGES AND OPPORTUNITIES

Nguyen Van Tuan, Tong Ton Kien, Dang Thi Thanh Huyen, Tran Thi Viet Nga, Nguyen Hoang Giang, Nguyen Tien Dung, Yugo Isobe, Tomonori Ishigaki, Ken Kawamoto

23-29



Abstract View : 262

pdf downloads: 1430

CONCENTRATIONS OF METAL(LOID)S IN OUTDOOR AND INDOOR DUST FROM RUSSIAN CITY

Tatyana G. Krupnova, Irina V. Mashkova, Svetlana V. Gavrilkina, Evgeniy D. Scalev, Nikita O. Egorov

30-37



Abstract View : 57

pdf downloads: 72

EFFECTS OF CULVERT SHAPES ON POTENTIAL RISK OF HYDRAULIC FRACTURING ADJACENT TO CULVERTS IN EMBANKMENT DAMS

Duy Quan Tran, Shinichi Nishimura, Masateru Senge, Tatsuhiro Nishiyama

38-44



Abstract View : 116

pdf downloads: 86

BIOSORPTION OF CU (II) BY SCENEDESMUS OBLIQUUS: OPTIMIZATION IN PHOVASOLI HAEMOTOCOCCUS MEDIUM

Astri Rinanti, Melati Feranita Fachrul, Rositayanti Hadisoebroto, Mawar D.S. Silalahi

45-52



Abstract View : 73

pdf downloads: 103

KASHWANI RISK ASSESSMENT: NEW APPROACH FOR OIL AND CONSTRUCTION INDUSTRIES

Ghanim Kashwani, Engui Liu, Waleed Nawaz

53-61



Abstract View : 62

pdf downloads: 156

FLOOD CONTROL STRATEGY IN SAMPANG CITY, EAST JAVA, INDONESIA

Kustamar, Fourry Handoko, Aryuanto Soetedjo

62-67

Submit your paper

Journal Menu

Guide For Authors

Paper Template, Copyright, etc.

Aims and Scope

Publication Ethics

Conferences

Reviewer Application and Policy

Fee and Pay Link

Scopus indexed



Information

For Readers

For Authors

For Librarians

BIOSORPTION OF CU (II) BY *SCENEDESMUS OBLIQUUS*: OPTIMIZATION IN PHOVASOLI HAEMOTOCOCCUS MEDIUM

*Astri Rinanti, Melati Ferianita Fachrul, Rositayanti Hadisoebroto, Mawar D.S. Silalahi

Received: 02 Jun. 2018, Revised: 23 Jun. 2018, Accepted: 05 Oct. 2018

ABSTRACT: Biosorption of copper (Cu^{2+}) in electroplating wastewater by biosorbent using *Scenedesmus obliquus* green algae has been investigated in the artificial medium of Phovasoli Haemotococcus Medium (PHM). The study aims to find an alternative for the treatment of wastewater containing copper (Cu^{2+}) using *S.obliquus* as a biosorbent, uses a batch test with various pH 4, 5, 6, 7 and 8 as well as the various contact time of 60, 120, 180, 240 and 300 minutes. Some ratios of wastes versus nutrients (Cu^{2+} : nutrient) in the treatment were A (1: 3), B (1: 1), C (3: 1) and D (100% of waste) with the initial concentration respectively, A (5.05 mg/L), B (16.54 mg/L), C (21.85 mg/L) and D (30.28 mg/L) at $28^\circ\text{C} \pm 2$. The results of the study show that the biosorption rate and the abilities of the sorbent are influenced by pH and contact time (adsorption rate). The maximum uptake rate for Cu^{2+} was obtained at pH 6 in 240 minutes. In the ratio of waste: nutrient = 1: 3, the uptake rate was $65.54\% \pm 8.04$ while when 100% waste, the uptake rate was $41.99\% \pm 1.01$. The adsorption of copper (Cu^{2+}) is due to the destruction of the cell wall. Analysis of Fourier Transform Infrared (FTIR) shows the adsorption band of functional groups such as carboxyl, amine, and alkene. It indicates the interaction between *S.obliquus* and the copper ion (Cu^{2+}). The adsorption process of this study follows the Freundlich isotherm equation.

Keywords: Biosorption; Copper (Cu^{2+}); Electroplating wastewater; Isotherms Adsorption; Kinetics Adsorption, *S.obliquus*

1. INTRODUCTION

The increasing of technological advances and the rise of industrial activities has an impact on the increase of the waste amount generated in the form of liquid waste, solid waste and gas waste. These wastes may cause environmental pollution which will affect the environment and human health. One of the most hazardous wastes is the heavy metal such as copper (Cu^{2+}).

The existence of Cu^{2+} metal is generated from electroplating industrial activities into water environment, that usually in form of a complex salt or still remain in its elemental form. The concentration of Cu^{2+} metal in electroplating industrial wastewater is regulated in Decree of Ministry of Environment Republic of Indonesia No. 5 of 2014, about Wastewater Quality Standard, with a maximum of 0.5 mg/L. Cu^{2+} metal ion concentration exceeds the Quality Standard judged to be harmful directly to habitat and water organisms life, and indirectly to human health like poisonous, headache and diarrhea [1]

Several sorption methods to separate the heavy metal are chemical precipitation, reverse osmosis, ion exchange, and bioreduction. These processes have several weaknesses, such as requiring high costs and less effective when applied at low waste

concentrations for small concentration scale between 0-100 ppm [2, 3].

Biosorption is a popular technique to separate and regain the metals from liquid waste by utilizing biomass that can bind heavy metal ions from a solution [4, 5, 6]. This method is competitive, relatively cheap and effective as well [4]. The high efficiency of biosorption in a dilute solution can minimize the formation of sludge and ease the regeneration process [3, 7]. From the regeneration process, the sorbent can be used repeatedly and the metal ions can be regained/recovered from the solution (5, 8).

One of the biomasses that can be used in the biosorption process is microalgae such as bacteria, fungi, and algae. The microalgae have an ability to accumulate the heavy metals from waste. Microalgae have the greatest ability to absorb heavy metals [8, 9]. *Scenedesmus obliquus* is one of the types of microalgae that can be used for the adsorption of heavy metals. Based on the previous research [10,11], *S.obliquus* has a resistance property towards heavy metal, thus, it can adsorb copper (Cu^{2+}) in a sufficiently high amount.

The purpose of this study is to find an alternative for the treatment of heavy metal waste especially copper (Cu^{2+}) using *S.obliquus* as a biosorbent. In this study, the growth response of microalgae in the electroplating of industrial waste containing heavy

metals of copper (Cu^{2+}) will be determined. This research is a preliminary study, that pH variation as an early indicator of biochemical mechanisms in heavy metal removal by microalgae, while contact time is needed for kinetics study. So, the adsorption optimum condition regarding the acidity and the contact time will be studied.

2. RESEARCH METHODOLOGY

2.1. Characterization and Preparation of *S.obliquus* as Biosorbent

The isolated *S.obliquus* obtained from Bojongsoang WWTP, Bandung is grown in *Haemotococcus Phavosoli Media* (PHM) as a nutrient [10,12]. The waste characterization aims to determine the initial concentration of copper waste (Cu^{2+}) and to make sure that the original waste consists only copper (Cu^{2+}). The solutions containing only waste and the waste with the addition of in the ratio of 1:1 were studied in order to investigate the mechanism of biosorption of Cu^{2+} on *S.obliquus*.

2.2. Optimization of acidity value (pH)

This research was conducted by preparing ratio of (A) waste : nutrient (PHM growth media as a nutrient) = 1: 3, (B) waste: nutrient = 1:1, (C) waste: nutrient = 3:1 and (D) 100% waste. The acidity (pH) was adjusted by adding a buffer solution to obtain a pH of 4, 5, 6, 7 and 8. In each treatment, the aeration was supplied by a water compressor pump with a flow rate of 0.8 mL/minutes.

2.3. Optimization of contact time variation (Td)

The optimum pH obtained in this study was 6. The study of contact time variation was conducted at this optimum pH. The contact time variations are 60, 120, 180, 240 and 300 minutes. The experiments of pH and contact time influences were performed under the condition where the ambient light intensity was 4000-5000 lux sourced from artificial lighting and at the room temperature of $28^{\circ}\text{C} \pm 2$.

The concentration of copper ions (Cu^{2+}) remained in the waste after the adsorption process was measured using an *Atomic Absorption Spectrophotometer* (AAS). Analysis using AAS was done to know the concentration of metal ion Cu^{2+} contained on wastewater before and after biosorption process in the batch column. AAS could measure concentration inside the samples until $\mu\text{g/L}$. This quantitative analysis technic is using light wave length absorbed by metal element.

The *Fourier Transform Infra-Red* (FTIR) was used to study the functional groups of the biosorbent. The *Scanning Electron Microscopy* (SEM) analysis

was performed in order to find the morphological surface of the biosorbent. SEM is an electronic microscope using electron bundles which reflected in high energy to describe surface form material analyzed. Biosorbent sample was analyzed its morphologic form before and after contacted with Cu^{2+} waste on electroplating wastewater. After dried, the samples (0,71 hingga 1 mm) layered with a thin gold layer (10 nm) using sputter coater and observed using *Scanning Electron Microscope* (20 kV) in vacuum condition of $1,33 \times 10^{-6}$ mBar. SEM analysis is a qualitative analysis instead of quantitative.

The determination of dry weight was conducted by filtrating the solution from the treatment using Whatman no. 42 filter paper with a pore size of 2.5 μm . After filtration, the filter paper was dried in the oven at 105°C for 2 hours and then weighed using the analytical balance.

3. RESULTS AND DISCUSSION

3.1 Determination of Optimum (pH)

It is seen from Fig. 1 that the addition of more nutrients than waste (ratio A) causes the metabolism of *S.obliquus* to be better when compared to the treatment without the addition of the nutrients. Thus, the *S.obliquus* will be able to remove the heavy metals when the nutrients are added. PHM is chosen as microalgae growth media based on research by Rinanti et al. [10]. The research result shows that PHM media contains macro and micronutrient that fitted for *S. obliquus* growth and proved to gives the highest biomass with fast growth rate compared to other growth media like Zarrouk and Schlosser. Rinanti et al. [10] report that microalgae could grow in those three media, but PHM proved to be best growth media, with Optical Density (OD) and cell density (cell/mL) 0.25 and 34.49, respectively, and a total of chlorophyll content (mg/L) of 0.43

In cultures with the acidity value (pH) that is highly acidic such as 4 and 5, the growth of *S. obliquus* is suspected to be inhibited. It was shown by the small removal of heavy metal in treatments A and D. The pH value of 6 and 7 is fairly good for the growth of *S.obliquus*. By giving an adequate amount of the nutrients at pH 6, *S.obliquus* is capable of removing copper ions (Cu^{2+}) for treatment A and B, respectively by $48.84\% \pm 3.48$ and $43.17\% \pm 0.97$. At ratio (C), *S.obliquus* is also capable of removing copper ions (Cu^{2+}) with the removal percentage of $34.25\% \pm 0.92$. This result is similar to that of the ratio (D) with the removal percentage of $36.04\% \pm 0.69$.

Cu accumulation increases ion H^{+} concentration. Due to equilibrium reaction, increasing in pH makes reaction moves to ion H^{+} production that means more Cu being complexed. This metal ion accumulation process tends to remain

in the cells due to rate constant value of metal releases that lower than its absorption. Absorption process and toxic material accumulation inside the cell will break down and excreted, stored or metabolized by microalgae, depends on concentration and chemical potential of the material. Hydrophilic chemical material like Cu usually easier to excreted than hypoxic metal.

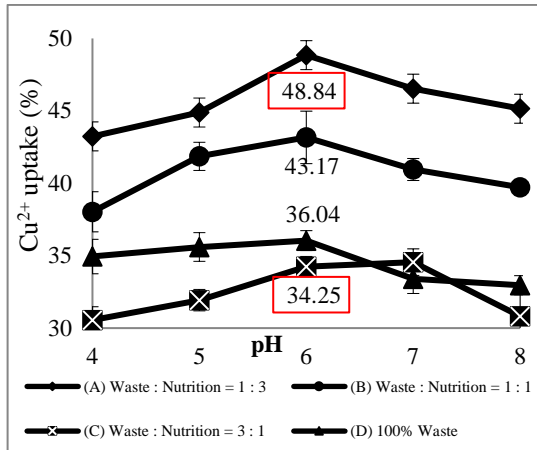


Fig. 1 The effect of variation of acidity value (pH) against the removal (%) at a temperature (28 °C ± 2) and contact time (Td) 60 minutes

Although Cu is hydrophilic metal, some researchers report that Cu could bound and accumulated inside cells. In pH base, metal ion spontaneously reacted with hydroxide ion forming hydroxide metal bond while in pH acid will be a competition between metal ion with H⁺ ion to binding with microalgae cells wall. [2], [4], [14]. Future research will study in various temperature and concentration solid/liquid ratio.

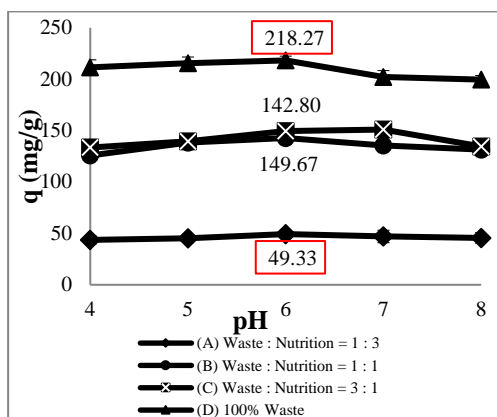


Fig. 2 The effect of variation of adsorption capacity (q) against the removal (%) at a temperature (28 °C ± 2) and contact time (Td) 60 minutes

Fig. 2 shows that the adsorption capacity has the same pattern as the removal efficiency, or in other words, the adsorption capacity is directly proportional to the removal efficiency. At the

medium acidity value (pH) of 6 and 7, *S.obliquus* shows the adsorption capacity (q) for both ratio (A) and ratio (D), respectively providing q value of 49,33 mg/g and 218,27 ± 3,51 mg/g ± 4,16. According to the previous research that has been conducted [10,11, 13, 14], *S.obliquus* can grow well at the optimum pH of 6.

3.2 Determination of Contact Time

Fig. 3 shows that the removal efficiency of copper ions (Cu²⁺) at a ratio (A) tends to be constant from the contact time (Td) 60 minutes to 240 minutes, and this efficiency then declines at the contact time of 300 minutes. The best removal efficiency was 65.54% ± 8.04, obtained at the contact time of 240 minutes. The similar results on the removal efficiency of copper ions (Cu²⁺) are shown in the ratio (D) although its removal efficiency is less than that of the ratio (A). At ratio (D), *S. obliquus* is still able to adsorb copper ions and shows similar removal efficiency patterns as a ratio (A). The highest removal efficiency on the ratio (D) also occurs on contact time (Td) 240 minutes with a removal efficiency of 41.99% ± 1.01.

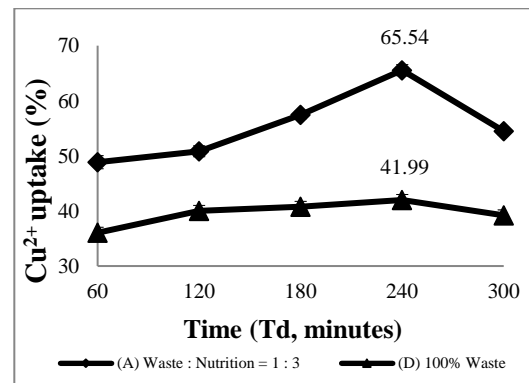


Fig. 3 The effect of variation of contact time (Td, minutes) against the removal (%) in ratio A and D, pH 6 (optimum) and temperature 28°C ± 2

The decrease in the removal efficiency which occurs at the contact time (Td) 300 minutes might be because the cell of *S. obliquus* has reached the saturation point in adsorbing the copper ions (Cu²⁺). The adsorption of heavy metal ions by microorganisms occurs quickly and is reversible. In the reversible reaction, the biosorbent will be saturated at a certain point. After reaching the saturation point, the sorbent will release back the heavy metal ions which have been adsorbed into the solution. When the condition is not saturated, the sorbent will re-adsorb the heavy metals contained in the solution. The reaction will take place continuously [15,16].

Fig. 4 shows that the adsorption capacity (q) is proportional to the removal efficiency for either ratio (A) or ratio (D). The higher the removal efficiency,

the higher the adsorption capacity. The highest adsorption capacity (q) was achieved in treatment A and D on the contact time (T_d) 240 minutes. The values of the adsorption capacities are $59.58 \text{ mg/g} \pm 7.31$ and $228.84 \text{ mg/g} \pm 5.50$ for treatment A and D, respectively. From the calculation of the removal efficiency and the adsorption capacity (q) values, the optimum contact time is at 240 minutes.

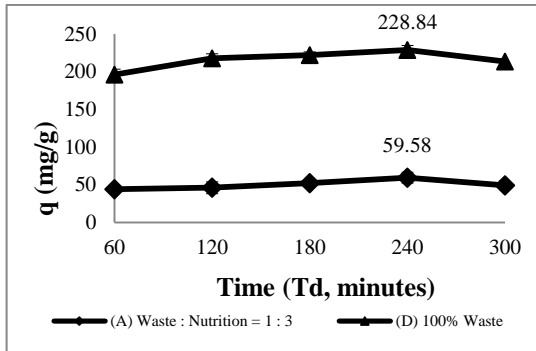


Fig. 4 The effect of variation of contact time (T_d , minutes) to the capacity of adsorption (q) against the removal (%) in ratio A and D, pH 6 (optimum) and temperature $28^\circ\text{C} \pm 2$

Either living or dead biomass could be used in biosorption study, but dead biomass gives more benefit, which is: the effect of poisonous of dissolved heavy metal could not affect the biomass sorption capacity; continuously supply nutrient is unnecessary; could be regenerated and reused in several times of cycles [17,18].

Usage of living microalgae biomass as the absorbent is an interesting option, with economically and effectively advantages of microalgae than other biomass [19]. Those advantages are the low of nutrient demand, high biomass production due to its autotroph, and unlike another biomass such as bacteria and fungi, microalgae usually not produce harmful compound [9]. Based on biosorption statistical data studied by Brinza [20], algae had used as biosorbent 15,3% more than other biomass and 84,6% more than fungi and bacteria.

The mechanisms involved in biosorption hardly identified, except in simple laboratory system. Biological materials are very complex. Besides that, bounding mechanisms of sorbate by biosorbent in biosorption is a complicated process so various kind of different mechanisms could occur at the same time at different rates [21].

Based on its dependence to cell metabolisms, biosorption mechanisms divided into two, dependent metabolisms and independent metabolisms [8,9]. Heavy metal absorption by microorganisms happens at two-stage, passive uptake and active uptake. Related to its dependence to cell metabolisms, passive uptake is metabolisms independent, since its physical-chemical absorption process at the cell surface and not involving cell metabolisms. Active

uptake is metabolisms dependent, since its absorption process involving cell metabolisms [8, 22].

Active uptake is a slow process, including transport between cell membrane, sedimentation, and precipitation. Passive uptake is a fast process, including precipitation, physical-chemical adsorption, ion exchange and complexation [8, 22, 23].

When heavy metal ion dispersed around the cell, metal ion will be bounded in the element at cell walls based on its ability of cells chemical affinity power [24]. Before metal ion reaches cells membrane and cells cytoplasm, it must through the microalgae cell walls containing various polysaccharide and protein that has some active sites capable to bond with metal ion [23].

At that moment, there is an exchange of monovalent and bivalent, e.g. Na, Mg, Ca in the cell wall, replaced by heavy metal ion and then built complex formations between heavy metal ions and functional groups such as carbonyl, amino, thiol, hydroxy, phosphate and hydroxy-carboxyl.

This biosorption process is occurred in short time, reversible, and in dead or living cells. The process effectively occurred in certain pH and present another ion so heavy metal could become sedimented undissolved salt. Therefore, cell walls commonly state as the most important part of cell defense mechanisms, since cell walls are the first barrier against accumulation of toxic heavy metal.

After the biosorption process occurs (passive uptake), the next mechanism is active uptake where *S. obliquus* moves metal ion bounded into cell walls to deeper cell organ (bioaccumulation/absorption). This mechanism happen as metal ion consumptions occurred for cell growth and accumulation of metal ion

Usage of living *S.obliquus* in water remediation process needs to improve due to still many weakness on its process. This free cell using fitted to laboratory necessity, but not applicable in the field. The relatively small cell, low mechanisms power, excess hydrostatic pressure, will reduce cell capability to remediate. In future research, this system needs to improve by immobilized *S.obliquus* cells. Immobilized cells could load more biomass, minimize clogging, more resiliently pressure, maintenance and nutrition unneeded could be using many times, even possible to remove more concentration of heavy metal. In this research, metal ion Cu 2 valence will replace divalent or monovalent ion, existed at cell walls of *S. obliquus* so metal ion outside the cell will be reduced.

FTIR analysis aims to detect the changes in the variation of functional groups of *S.obliquus*. This analysis provides three major advantages as an analytical technique: a fast, non-destructive and requires a very little amount of sample [16]. Fig. 5

shows a spectrum of *Fourier Transform Infra-Red* (FTIR) which indicates the functional groups contained in *S.obliquus*. Before the adsorption process, the absorbance band was observed on 3338.80 cm^{-1} . This band shifted to 3339.52 cm^{-1} in the FTIR spectra of the treatment A and to 3337 cm^{-1} in the treatment D.

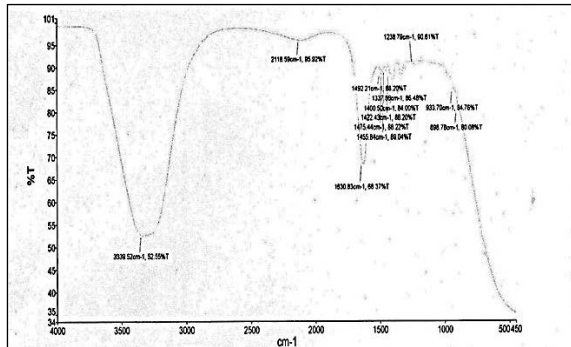


Fig. 5 *Fourier Transform Infra-Red* (FTIR) which indicates a functional group of *S.obliquus* after contacted with copper (Cu^{2+})

The ratio A shows the presence of peak for C-C in the wavenumber of 1455.84 cm^{-1} . This means that the alkene bond has been broken and turned into a group. In addition, there is also a shifting for the absorbance of the amine functional group which is originally showed at the wavenumber value of 1340.70 cm^{-1} . It shifted to 1238.70 cm^{-1} for ratio A and to 1230.20 cm^{-1} for ratio D. The results of FTIR analysis shows that there has been a change in the functional groups of *S. obliquus* due to the interactions with copper ions (Cu^{2+}).

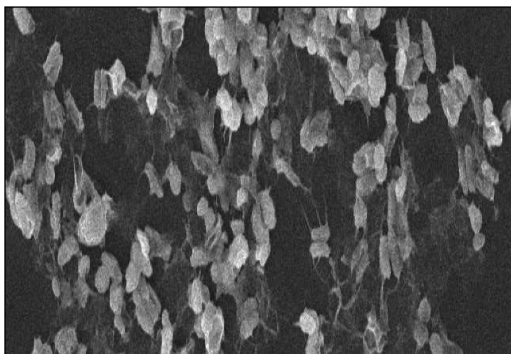


Fig. 6 *S.obliquus* prior to treatment with a magnification of 1000 times with *Scanning Electron Microscopy* (SEM)

The *Scanning Electron Microscopy* (SEM) analysis made it possible to evaluate the morphological changes in the surface of the cells. However, SEM analysis only provides a qualitative analysis and a surface structure estimations. Fig. 6 shows the surface morphology of *S.obliquus* before the adsorption process. The *S.obliquus* cells have a

whip shape, flat, thin, and arranged in a parallel arrangement. The type of colony formed is called *coenobium* [25, 26].

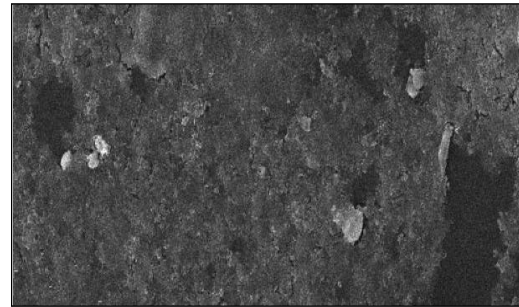


Fig. 7 *S.obliquus* after treatment with waste ratio : nutrient (1:3) to initial concentration 5.05 mg/L , at temperature ($28^\circ\text{C} \pm 2$), pH 6 (optimum) and contact time (Td) 240 minutes (optimum), the magnification of 1000 times seen with *Scanning Electron Microscopy* (SEM)

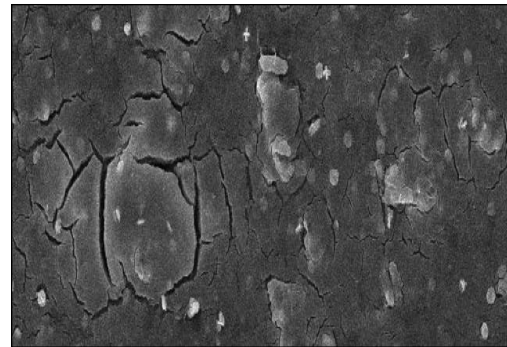


Fig.8 *S.obliquus* after treatment with 100% of waste to initial concentration of early 30.28 mg/L , at a temperature ($28^\circ\text{C} \pm 2$), pH 6 (optimum) and contact time (Td) 240 minutes (optimum), the magnification of 1000 times seem with *Scanning Electron Microscopy* (SEM)

Fig. 7 and Fig. 8 show the occurrence of damages of *S.obliquus* cells after the adsorption of copper ions (Cu^{2+}). The cells are shrinking, the cell shape is not flattened and the cell wall matrix is broken. The changes in the morphology of the surface are normally associated with the cross interference between metal ions and the negatively charged functional groups such as carboxyl groups in the cell wall polymers [25, 27, 28].

Fig. 9 shows the dry weight obtained at the optimum pH of 6. The dry weight for ratio A and ratio D are 1.07×10^{-1} and 8.69×10^{-2} , respectively. The dry weight at pH 6 is higher than the dry weight at pH 5 and 7, which are $1.07 \times 10^{-1}\text{ mg/mL}$ and $8.69 \times 10^{-2}\text{ mg/mL}$, respectively. Fig. 10 shows that the *S.obliquus* is able to perform an optimum adsorption of copper ions at pH 6 and the contact time of 240 minutes. The dry weight of the biomass is $3.70 \times 10^{-1}\text{ mg/mL}$ for ratio A and $2.37 \times 10^{-2}\text{ mg/mL}$ for ratio D.

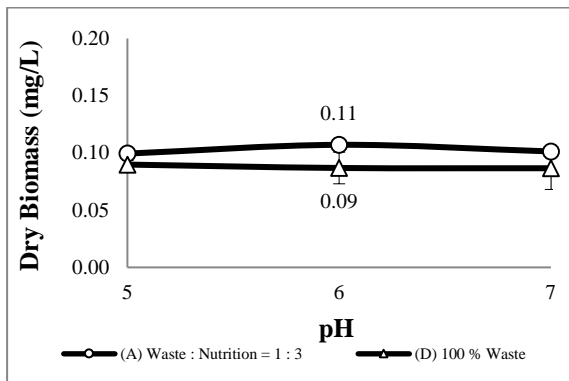


Fig. 9 Dry weight of *S. obliquus* after treatment with acidity value variations (pH) at a temperature ($28^{\circ}\text{C} \pm 2$) and contact time (Td) 60 minutes

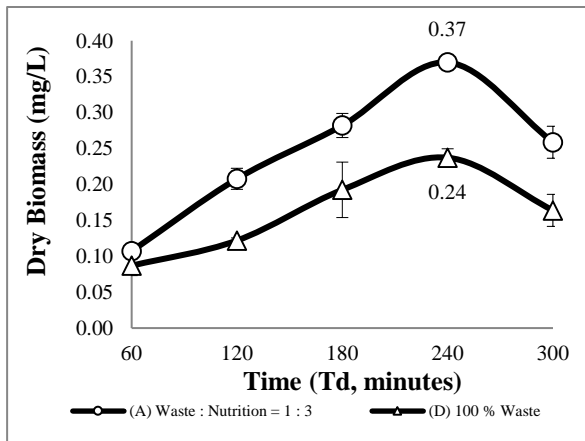


Fig. 10 The dry weight of *S. obliquus* after treatment with the variation of contact time (Td) at a temperature ($28^{\circ}\text{C} \pm 2$) and pH 6 (optimum)

The adsorption processes for ratio A and D fitted the Freundlich and Langmuir isotherm model both. The isotherm is based on the variation of contact time (Td) (in this research: 60, 120, 180, 240 and 300 minutes) at the acidity (pH) value of 6 (optimum), the initial concentration of copper ions (Cu^{2+}) for the ratio A: 5.05 mg/L and for ratio D: 30.28 mg/L. The data fitted the linear curve of Freundlich isotherm with the R^2 value of 0.9961 and 0.9985 for ratio A and D, respectively. Otherwise, R^2 value of Langmuir isotherm is lower, which are 0.9844 and 0.9939 for ratio A and D, respectively.

The Freundlich isotherm is used to describe a non-ideal adsorption on the heterogeneous surfaces. Heterogeneity can be caused by the differences in functional groups on the surface of the adsorbent. Freundlich adsorption isotherms assumed that the adsorption occurs at different layers (multilayer) of the adsorbent [15, 28].

The adsorption processes of A and D fitted the Freundlich isotherms with the n value less than ten. It can be concluded that the adsorption is reversible [20]. The Freundlich isotherm is based on assumptions that adsorbent consists of different classes of adsorption sites. In another side, The Langmuir isotherm assumes that the adsorbent surface adsorption has a number of specific points that are comparable with the adsorbent surface area and the adsorption occurs only in monolayer. According to the theoretical models of adsorption, it is not possible for the adsorption process to proceed on the surface which has been occupied by an adsorbate. If the adsorption point is saturated and the concentration of the adsorbate is increased, the amount of heavy metal ion adsorbed is either increased or decreased [15, 25, 27, 30].

3.3 Adsorption Kinetics.

In this study, the approach in the calculation of the kinetic parameter was using one order model since the biological process occurred mainly in one order. To draw the graph, data at 300 minutes contact is deleted, since it is a decreasing in adsorbate concentration value.

Based on the results of kinetic calculations for treatment A and D, it is obtained that the R^2 value of 0.8103 for treatment A (Figure 11) and 0.8791 for treatment D (Fig. 12). The adsorption kinetics study aims to know the reaction order of the adsorption process. The prediction from the flow of biosorption gives an important information in generating a biosorption system of batch scale [15].

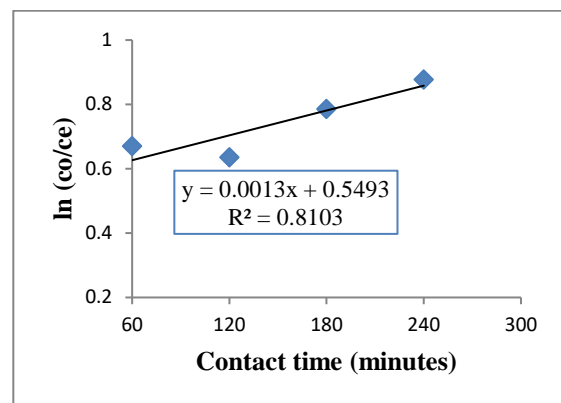


Fig. 11 The kinetics graph-one order of ratio A (waste : nutrient = 1 : 3) with initial concentration 5.05 mg/L, temperature ($28^{\circ}\text{C} \pm 2$), pH 6 (optimum) and contact time (Td) 240 minutes (optimum)

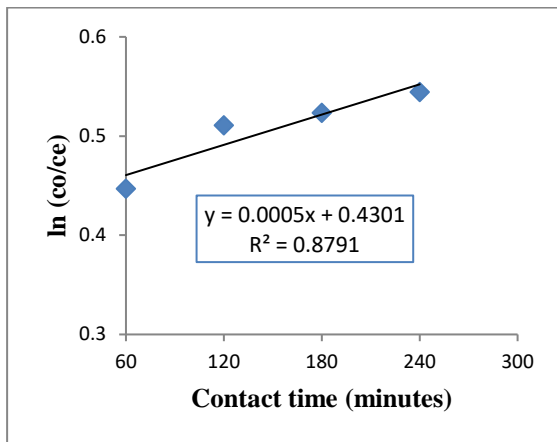


Fig. 12 The kinetics graph of order one in ratio D (100% waste) with initial concentration 30.28 mg/L, temperature ($28^{\circ}\text{C} \pm 2$), pH 6 (optimum) and contact time (Td) 240 minutes (optimum).

4. CONCLUSION

S.obliquus able to grow in a wastewater containing copper heavy metals (Cu^{2+}) either with or without the nutrient addition. In conditions of optimum pH 6 and optimum contact time (Td) of 240 minutes, the removal efficiency of heavy metal ions of copper (Cu^{2+}) reached $65.54\% \pm 8.04$ in the solution containing waste and nutrients in the ratio of 1: 3.

In the solution containing only waste, the removal efficiency was $41.99\% \pm 1.01$. In this study, the effect of heavy metals (Cu^{2+}) on *S.obliquus* cells is shown by the breaking of (the destruction) of carboxyl and amine functional groups, as well as the alkene group. The morphological analysis conducted using SEM shows that there is a damage to the cells of *S.obliquus*. The results of this study fitted the Freundlich isotherm models with R^2 value nearly reaching 1, a little higher than R^2 value of the Langmuir isotherm model. The adsorption kinetics was studied in the order one kinetics with R^2 value of 0.2486 for the solution containing waste and nutrients in the ratio of 1:3 and 0.336 for the solution containing only wastewater.

5. ACKNOWLEDGMENTS

The authors would like to thank Directorate for Research and Community Services as well as Directorate General for Strengthening Research and Development at the Ministry of Research, Technology, and Higher Education Indonesia for funding this study through Universities Prime Research Grant Program (Penelitian Unggulan Perguruan Tinggi-PUPT) 2016, Nomor

003/SP2H/LT/DRPMIII/2016 and 214/SP2H/LT/DRPM/III/2016. The research also thanks to Putri Kusumaningayu for helping to do some laboratory research.

6. REFERENCES

- [1] Paulino, A.T., Minasse, F.A.S., Guilherme, M.R., Reis, A.V., Muniz, E.C., Nozaki, J., Novel adsorbent based on silkworm chrysalides for removal of heavy metals from wastewaters. *J. Colloid Interface Sci*, 301, 2006. pp.479-487.
- [2] Silva, E.A., Cossich, E.S., Tavares, C.G., Cardozo Filho, L., Biosorption of Binary Mixtures of Cr (III) and Cu (II) ions by *Sargassum sp.* *Braz. J. Chem. Eng.*, Vol. 20, No. 3, 2003.
- [3] Ashraf, MA., Maah, MJ., Yusoff, I., Study of Banana peel (*Musa sapientum*) as a Cationic Biosorben. *American-Eurasian Journal Agricultural and Environmental Sci*, Vol. 8, No. 1, 2010, pp. 7-17
- [4] Vijayaraghan K, Jegan JR, Palanivela K, Velan M., Copper Removal from Aqueous Solution by Marine Green Alga *Ulva Reticula*. *Electronic J. Biotechnol.* ISSN 0717-3458, 2005.
- [5] Abbas H. Salman, Ismail M. Ibrahim, Mostafa M. Tarek, Sulaymon H. Abbas, Biosorption of Heavy Metals: A Review. *Journal of Chemical Science and Technology*, Vol. 3, Issue 4, 2014, pp. 74-102.
- [6] Volesky, B., Detoxification of Metal-Bearing Effluents: Biosorption for the Next Century. *Hydrometallurgy*, Vol. 59, 2000, pp. 203-216.
- [7] Chaisuksant, Y. Biosorption of Cadmium (II) and Copper (II) by Pretreated Biomass of Marine Alga *Gracilariafisheri*. Selper Ltd. Thailand, (2003).
- [8] Ahalya, N., Ramachandra, T.V. and Kanamadi R.D., Biosorption of Heavy Metals. *Indian Journal of Biotechnology*, Vol. 7, 2003, pp. 159-169.
- [9] Ferreira, L. S., Rodrigues, M. S., de Carvalho, J. C. M., Lodi, A., Finocchio, E., Perego, P., dan Converti, A., Adsorption of Ni^{2+} , Zn^{2+} and Pb^{2+} onto dry biomass of *Arthrospira (Spirulina) platensis* and *Chlorella vulgaris*. I. Single metal systems. *Chemical Eng. J.*, 173(2), 2011, pp. 326-333. doi:10.1016/j.cej.2011.07.039
- [10] Rinanti, A., Kardena, E., Astuti, D.I., Dewi, K., Growth Response and Chlorophyll Content of *Scenedesmus obliquus* Cultivated in Different Artificial Media. *Asian Journal of Environmental Biology*, Vol. 1 No. 1, 2013, pp. 1-9.

- [11] Rinanti, A., Fachrul, MF., Hadisoebroto, R., Silalahi, M., Improving Biosorption of Cu(II)-Ion on Artificial Wastewater by Immobilized Biosorbent of Tropical Microalgae, International Journal of Geomate, Vol.13, Issue 36, 2017, 00.06-10
- [12] Provasoli, L. and Pintner, I. J., Artificial Media for Fresh-Water Algae: Problems and Suggestions In The Ecology of Algae. Tyron, C. A. & Hartman, R. T. Ed. Special Publication No. 2. University Pittsburgh: Pymatuning Laboratory of Field Biol, 1959, pp. 84-96.
- [13] Gadd, G.M., Biosorption : Critical Review of Scientific Rationale, Environmental Importance and Significance for Pollution Treatment. J. Chem. Technol. Biotechnol., Vol. 84, 2009, pp. 13-28.
- [14] Bueno, B.Y.M., Torem, M.L., Molina, F., dan de Mesquita L.M.S., Biosorption of lead (II), Chromium (III), and Copper (II) by *R. opacus*: Equilibrium and Kinetic Studies. Min. Eng., Vol. 21, 2008, pp. 65-75.
- [15] Schmul, R, Kriey, HM Keizer, Adsorption of Cu (II) and Cr (VI) by Chitosan: Kinetics and Equilibrium Studies Water SA, Journal of Hazardous Material, 2001
- [16] Kaduková, J. and Virčíková, E., Comparison of differences between copper accumulation and biosorption. *Environ. Int.*, Vol. 31, 2005, pp. 227-232.
- [17] Van Wyk, C. S., Removal of heavy metals from metal-containing effluent by yeast biomass. African Journal of Biotechnology, Vol. 10, 2011, pp. 11557-11561.
- [18] Bayramoglu G, Arica M.Y., Construction a hybrid biosorbent using *Scenedesmus quadricauda* and Ca-alginate for biosorption of Cu(II), Zn(II) and Ni(II): Kinetics and equilibrium studies. *Bioresour Technol*, Vol.100, 2009, pp 186–193.
- [19] Singh S, Rai B. N., Rai L. C., Ni (II) and Cr (VI) sorption kinetics by *Microcystis* in the single and multimetallic system. *Process Biochem*, Vol. 36, 2001, pp. 1205-1213.
- [20] Brinza L., Matthew J. Dring, Maria Gavrilescu, Marine micro and macro algal species as biosorbent for heavy metal. *Environmental Engineering and Management Journal* Vol. 6, No. 3, 2007, pp. 237-251.
- [21] Chojnacka K., Biosorption and bioaccumulation – the prospects for practical application. *Environmental International* Vol. 36, No. 3, 2010, pp. 299-307.
- [22] Goyal, N., Jain, S. C., Banerjee, U. C., Comparative studies on the microbial adsorption of heavy metal. *Adv. Environ. Res*, Vol. 7, 2003, pp. 311-319.
- [23] Sannasi, P., J. Kader, B. S. Ismail dan S. Salmijah, Sorption of Cr(VI), Cu(II) and Pb(II) by growing and non-growing cells of bacterial consortium. *Bioresour. Technol.* Vol. 97, 2006, pp. 740-747.
- [24] Droste, R. Theory and Practice of Water and Wastewater Treatment. John Wiley and Sons. New York. The USA. 2007.
- [25] Levy, J. L., Angel, B. M., Stauber, J. L., Poon, W. L., Simpson, S. L., Cheng, S. H. and Jolley, D. F., Uptake and Internalisation of Copper by Three Marine Microalgae: Comparison of Copper-Sensitive and Copper-Tolerant Species. *Aquat, Toxicology*, Vol. 89, 2008, pp. 82-93.
- [26] Matsunaga, Characterization of marine microalgae, *Scenedesmus* sp. strain JPCC GA0024 toward biofuel production, *Biotechnology let*, Volume 31, 2009, pp. 1367-1372
- [27] Sengbusch, P. V, Cell Walls of Algae, University of Hamburg, Department of Biology.
- [28] Ivánová, D., Horváthová, H., Kaduková, J., dan Kavuličová, J., Stability of immobilized biosorbents and its influence on biosorption of copper. *Nova Biotechnologica*, Vol. 10, No. 1, 2010, pp. 45-51.
- [29] Do, D.D., Adsorption Analysis: Equilibria and Kinetics, Vol. 1, Imperial Colleges Press, London, 1998.
- [30] Park, D., Yun, Y.S., Ahn, C.K., dan Park, J.M. Kinetics of the Reduction of Hexavalent Chromium with the Brown Seaweed *Ecklonia* Biomass. *Chemosphere*, Vol. 66, 2007, pp. 939-946.
-
- Copyright © Int. J. of GEOMATE. All rights reserved, including the making of copies unless permission is obtained from the copyright proprietors.
-



Digital Receipt

This receipt acknowledges that Turnitin received your paper. Below you will find the receipt information regarding your submission.

The first page of your submissions is displayed below.

Submission author: Astri Rinanti
Assignment title: Volume 2 Tahun 2018
Submission title: Biosorption in PHM
File name: Biosorption_in_PHM.pdf
File size: 313.98K
Page count: 8
Word count: 5,526
Character count: 27,668
Submission date: 06-Nov-2018 09:21AM (UTC+0700)
Submission ID: 1033669641

International Journal of GEOMATE, Dec. 2018 Vol.15, Issue 52, pp.45-52
Google, Cross Ref, A Tm, DOI, Inspec, Iltis.org, IJ, 2160/2018-52-24251
ISSN: 2186-2982 (Print), 2186-2959 (Online), Inspec

BIOSORPTION OF CU (II) BY *SCENEDESMUS OBLIQUUS*: OPTIMIZATION IN PHOVASOLI HAEMOTOCOCCUS MEDIUM

*Astri Rinanti, Melati Feriantia Fachrud, Rosisyanti Hadiasobroto, Mawar D.S. Sihalabi

Received: 02 Jun. 2018, Revised: 23 Jun. 2018, Accepted: 05 Oct. 2018

ABSTRACT: Biosorption of copper (Cu^{2+}) in electroplating wastewater by biosorbent using *Scenedesmus obliquus* green algae has been investigated in the artificial medium of Phovasoli Haemotococcus Medium (PHM). The study aims to find an alternative for the treatment of wastewater containing copper (Cu^{2+}) using *S.obliquus* as a biosorbent uses a batch test with various pH 4, 5, 6, 7 and 8 as well as the various contact time of 60, 120, 180, 240 and 300 minutes. Some ratios of wastes versus nutrients (Cu^{2+} : nutrient) in the treatment were A (1: 3), B (1: 1), C (3: 1) and D (100% of waste) with the initial concentration respectively, A (5.05 mg/L), B (16.54 mg/L), C (21.85 mg/L) and D (30.28 mg/L) at 28°C ± 2. The results of the study show that the biosorption rate and the abilities of the sorbent are influenced by pH and contact time (adsorption rate). The maximum uptake rate for Cu^{2+} was obtained at pH 6 in 240 minutes. In the ratio of waste : nutrient = 1 : 3, the uptake rate was 65.54% ± 8.08 while when 100% waste, the uptake rate was 41.99% ± 1.01. The adsorption of copper (Cu^{2+}) is due to the destruction of the cell wall. Analysis of Fourier Transform Infrared (FTIR) shows the adsorption band of functional groups such as carbonyl, amine, and alkene. It indicates the interaction between *S.obliquus* and the copper ion (Cu^{2+}). The adsorption process of this study follows the Freundlich isotherm equation.

Keywords: Biosorption, Copper (Cu^{2+}), Electroplating wastewater, Isotherms Adsorption, Kinetics Adsorption, *S.obliquus*

1. INTRODUCTION

The increasing of technological advances and the rise of industrial activities has an impact on the increase of the waste amount generated in the form of liquid waste, solid waste and gas waste. These wastes may cause environmental pollution which will affect the environment and human health. One of the most hazardous wastes is the heavy metal such as copper (Cu^{2+}).

The existence of Cu^{2+} metal is generated from electroplating industrial activities into water environment, that usually in form of a complex salt or still remain in its elemental form. The concentration of Cu^{2+} metal in electroplating industrial wastewater is regulated in Decree of Ministry of Environment Republic of Indonesia No. 5 of 2014 about Wastewater Quality Standard, with a maximum of 0.5 mg/L. Cu^{2+} metal ion concentration exceeds the Quality Standard judged to be harmful directly to habitat and water organisms life, and indirectly to human health like poisonous, headache and diarrhea [1].

Several sorption methods to separate the heavy metal are chemical precipitation, reverse osmosis, ion exchange, and bioadsorption. These processes have several weaknesses, such as requiring high costs and less effective when applied at low waste

concentrations for small concentration scale between 0-100 ppm [2, 3].

Biosorption is a popular technique to separate and regain the metals from liquid waste by utilizing biomass that can bind heavy metal ions from a solution [4, 5, 6]. This method is competitive, relatively cheap and effective as well [4]. The high efficiency of biosorption in a dilute solution can minimize the formation of sludge and ease the regeneration process [3, 7]. From the regeneration process, the sorbent can be used repeatedly and the metal ions can be regained/recovered from the solution [5, 8].

One of the biomasses that can be used in the biosorption process is microalgae such as bacteria, fungi, and algae. The microalgae have an ability to accumulate the heavy metals from waste. Microalgae have the greatest ability to absorb heavy metals [8, 9]. *Scenedesmus obliquus* is one of the types of microalgae that can be used for the adsorption of heavy metals. Based on the previous research [10,11], *S.obliquus* has a resistance property towards heavy metal, thus, it can adsorb copper (Cu^{2+}) in a sufficiently high amount.

The purpose of this study is to find an alternative for the treatment of heavy metal waste especially copper (Cu^{2+}) using *S.obliquus* as a biosorbent. In this study, the growth response of microalgae in the electroplating of industrial waste containing heavy

Biosorption in PHM

by Astri Rinanti

Submission date: 06-Nov-2018 09:21AM (UTC+0700)

Submission ID: 1033669641

File name: Biosorption_in_PHM.pdf (313.98K)

Word count: 5526

Character count: 27668

BIOSORPTION OF CU (II) BY *SCENEDESMUS OBLIQUUS*: OPTIMIZATION IN PHOVASOLI HAEMOTOCOCCUS MEDIUM

*Astri Rinanti, Melati Ferianita Fachrul, Rositayanti Hadisoebroto, Mawar D.S. Silalahi

Received: 02 Jun. 2018, Revised: 23 Jun. 2018, Accepted: 05 Oct. 2018

ABSTRACT: Biosorption of copper (Cu^{2+}) in electroplating wastewater by biosorbent using *Scenedesmus obliquus* green algae has been investigated in the artificial medium of Phovasoli Haemotococcus Medium (PHM). The study aims to find an alternative for the treatment of wastewater containing copper (Cu^{2+}) using *S.obliquus* as a biosorbent, uses a batch test with various pH 4, 5, 6, 7 and 8 as well as the various contact time of 60, 120, 180, 240 and 300 minutes. Some ratios of wastes versus nutrients (Cu^{2+} : nutrient) in the treatment were A (1: 3), B (1: 1), C (3: 1) and D (100% of waste) with the initial concentration respectively, A (5.05 mg/L), B (16.54 mg/L), C (21.85 mg/L) and D (30.28 mg/L) at $28^\circ\text{C} \pm 2$. The results of the study show that the biosorption rate and the abilities of the sorbent are influenced by pH and contact time (adsorption rate). The maximum uptake rate for Cu^{2+} was obtained at pH 6 in 240 minutes. In the ratio of waste: nutrient = 1: 3, the uptake rate was $65.54\% \pm 8.04$ while when 100% waste, the uptake rate was $41.99\% \pm 1.01$. The adsorption of copper (Cu^{2+}) is due to the destruction of the cell wall. Analysis of Fourier Transform Infrared (FTIR) shows the adsorption band of functional groups such as carboxyl, amine, and alkene. It indicates the interaction between *S.obliquus* and the copper ion (Cu^{2+}). The adsorption process of this study follows the Freundlich isotherm equation.

Keywords: Biosorption; Copper (Cu^{2+}); Electroplating wastewater; Isotherms Adsorption; Kinetics Adsorption, *S.obliquus*

1. INTRODUCTION

The increasing of technological advances and the rise of industrial activities has an impact on the increase of the waste amount generated in the form of liquid waste, solid waste and gas waste. These wastes may cause environmental pollution which will affect the environment and human health. One of the most hazardous wastes is the heavy metal such as copper (Cu^{2+}).

The existence of Cu^{2+} metal is generated from electroplating industrial activities into water environment, that usually in form of a complex salt or still remain in its elemental form. The concentration of Cu^{2+} metal in electroplating industrial wastewater is regulated in Decree of Ministry of Environment Republic of Indonesia No. 5 of 2014, about Wastewater Quality Standard, with a maximum of 0.5 mg/L. Cu^{2+} metal ion concentration exceeds the Quality Standard judged to be harmful directly to habitat and water organisms life, and indirectly to human health like poisonous, headache and diarrhea [1]

Several sorption methods to separate the heavy metal are chemical precipitation, reverse osmosis, ion exchange, and bioreduction. These processes have several weaknesses, such as requiring high costs and less effective when applied at low waste

concentrations for small concentration scale between 0-100 ppm [2, 3].

Biosorption is a popular technique to separate and regain the metals from liquid waste by utilizing biomass that can bind heavy metal ions from a solution [4, 5, 6]. This method is competitive, relatively cheap and effective as well [4]. The high efficiency of biosorption in a dilute solution can minimize the formation of sludge and ease the regeneration process [3, 7]. From the regeneration process, the sorbent can be used repeatedly and the metal ions can be regained/recovered from the solution (5, 8).

One of the biomasses that can be used in the biosorption process is microalgae such as bacteria, fungi, and algae. The microalgae have an ability to accumulate the heavy metals from waste. Microalgae have the greatest ability to absorb heavy metals [8, 9]. *Scenedesmus obliquus* is one of the types of microalgae that can be used for the adsorption of heavy metals. Based on the previous research [10,11], *S.obliquus* has a resistance property towards heavy metal, thus, it can adsorb copper (Cu^{2+}) in a sufficiently high amount.

The purpose of this study is to find an alternative for the treatment of heavy metal waste especially copper (Cu^{2+}) using *S.obliquus* as a biosorbent. In this study, the growth response of microalgae in the electroplating of industrial waste containing heavy

metals of copper (Cu^{2+}) will be determined. This research is a preliminary study, that pH variation as an early indicator of biochemical mechanisms in heavy metal removal by microalgae, while contact time is needed for kinetics study. So, the adsorption optimum condition regarding the acidity and the contact time will be studied.

2. RESEARCH METHODOLOGY

2.1. Characterization and Preparation of *S.obliquus* as Biosorbent

The isolated *S.obliquus* obtained from Bojongsoang WWTP, Bandung is grown in *Haemotococcus Phavosoli Media* (PHM) as a nutrient [10,12]. The waste characterization aims to determine the initial concentration of copper waste (Cu^{2+}) and to make sure that the original waste consists only copper (Cu^{2+}). The solutions containing only waste and the waste with the addition of in the ratio of 1:1 were studied in order to investigate the mechanism of biosorption of Cu^{2+} on *S.obliquus*.

2.2. Optimization of acidity value (pH)

This research was conducted by preparing ratio of (A) waste : nutrient (PHM growth media as a nutrient) = 1: 3, (B) waste: nutrient = 1:1, (C) waste: nutrient = 3:1 and (D) 100% waste. The acidity (pH) was adjusted by adding a buffer solution to obtain a pH of 4, 5, 6, 7 and 8. In each treatment, the aeration was supplied by a water compressor pump with a flow rate of 0.8 mL/minutes.

2.3. Optimization of contact time variation (Td)

The optimum pH obtained in this study was 6. The study of contact time variation was conducted at this optimum pH. The contact time variations are 60, 120, 180, 240 and 300 minutes. The experiments of pH and contact time influences were performed under the condition where the ambient light intensity was 4000-5000 lux sourced from artificial lighting and at the room temperature of $28^{\circ}\text{C} \pm 2$.

The concentration of copper ions (Cu^{2+}) remained in the waste after the adsorption process was measured using an *Atomic Absorption Spectrophotometer* (AAS). Analysis using AAS was done to know the concentration of metal ion Cu^{2+} contained on wastewater before and after biosorption process in the batch column. AAS could measure concentration inside the samples until $\mu\text{g/L}$. This quantitative analysis technic is using light wave length absorbed by metal element.

The *Fourier Transform Infra-Red* (FTIR) was used to study the functional groups of the biosorbent. The *Scanning Electron Microscopy* (SEM) analysis

was performed in order to find the morphological surface of the biosorbent. SEM is an electronic microscope using electron bundles which reflected in high energy to describe surface form material analyzed. Biosorbent sample was analyzed its morphologic form before and after contacted with Cu^{2+} waste on electroplating wastewater. After dried, the samples (0,71 hingga 1 mm) layered with a thin gold layer (10 nm) using sputter coater and observed using *Scanning Electron Microscope* (20 kV) in vacuum condition of $1,33 \times 10^{-6}$ mBar. SEM analysis is a qualitative analysis instead of quantitative.

The determination of dry weight was conducted by filtrating the solution from the treatment using Whatman no. 42 filter paper with a pore size of 2.5 μm . After filtration, the filter paper was dried in the oven at 105°C for 2 hours and then weighed using the analytical balance.

3. RESULTS AND DISCUSSION

3.1 Determination of Optimum (pH)

It is seen from Fig. 1 that the addition of more nutrients than waste (ratio A) causes the metabolism of *S.obliquus* to be better when compared to the treatment without the addition of the nutrients. Thus, the *S.obliquus* will be able to remove the heavy metals when the nutrients are added. PHM is chosen as microalgae growth media based on research by Rinanti et al. [10]. The research result shows that PHM media contains macro and micronutrient that fitted for *S. obliquus* growth and proved to gives the highest biomass with fast growth rate compared to other growth media like Zarrouk and Schlosser. Rinanti et al. [10] report that microalgae could grow in those three media, but PHM proved to be best growth media, with Optical Density (OD) and cell density (cell/mL) 0.25 and 34.49, respectively, and a total of chlorophyll content (mg/L) of 0.43

In cultures with the acidity value (pH) that is highly acidic such as 4 and 5, the growth of *S. obliquus* is suspected to be inhibited. It was shown by the small removal of heavy metal in treatments A and D. The pH value of 6 and 7 is fairly good for the growth of *S.obliquus*. By giving an adequate amount of the nutrients at pH 6, *S.obliquus* is capable of removing copper ions (Cu^{2+}) for treatment A and B, respectively by $48.84\% \pm 3.48$ and $43.17\% \pm 0.97$. At ratio (C), *S.obliquus* is also capable of removing copper ions (Cu^{2+}) with the removal percentage of $34.25\% \pm 0.92$. This result is similar to that of the ratio (D) with the removal percentage of $36.04\% \pm 0.69$.

Cu accumulation increases ion H^{+} concentration. Due to equilibrium reaction, increasing in pH makes reaction moves to ion H^{+} production that means more Cu being complexed. This metal ion accumulation process tends to remain

in the cells due to rate constant value of metal releases that lower than its absorption. Absorption process and toxic material accumulation inside the cell will break down and excreted, stored or metabolized by microalgae, depends on concentration and chemical potential of the material. Hydrophilic chemical material like Cu usually easier to excreted than hypoxic metal.

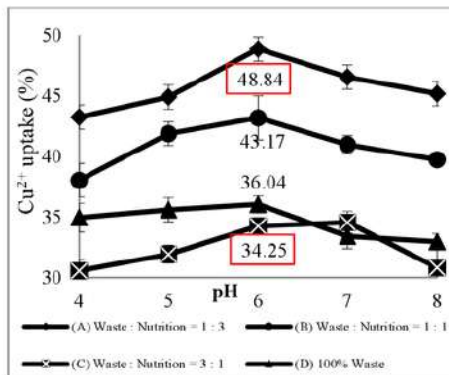


Fig. 1 The effect of variation of acidity value (pH) against the removal (%) at a temperature (28 °C ± 2) and contact time (Td) 60 minutes

Although Cu is hydrophilic metal, some researchers report that Cu could bound and accumulated inside cells. In pH base, metal ion spontaneously reacted with hydroxide ion forming hydroxide metal bond while in pH acid will be a competition between metal ion with H⁺ ion to binding with microalgae cells wall. [2], [4], [14]. Future research will study in various temperature and concentration solid/liquid ratio.

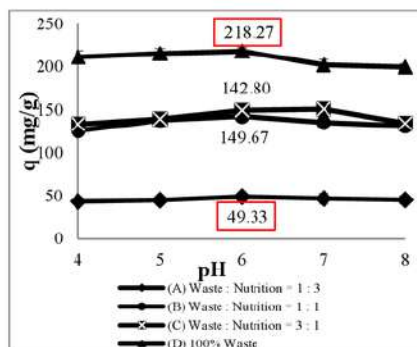


Fig. 2 The effect of variation of adsorption capacity (q) against the removal (%) at a temperature (28 °C ± 2) and contact time (Td) 60 minutes

Fig. 2 shows that the adsorption capacity has the same pattern as the removal efficiency, or in other words, the adsorption capacity is directly proportional to the removal efficiency. At the

medium acidity value (pH) of 6 and 7, *S.obliquus* shows the adsorption capacity (q) for both ratio (A) and ratio (D), respectively providing q value of 49,33 mg/g and 218,27 ± 3,51 mg/g ± 4,16. According to the previous research that has been conducted [10,11, 13, 14], *S.obliquus* can grow well at the optimum pH of 6.

3.2 Determination of Contact Time

Fig. 3 shows that the removal efficiency of copper ions (Cu²⁺) at a ratio (A) tends to be constant from the contact time (Td) 60 minutes to 240 minutes, and this efficiency then declines at the contact time of 300 minutes. The best removal efficiency was 65.54% ± 8.04, obtained at the contact time of 240 minutes. The similar results on the removal efficiency of copper ions (Cu²⁺) are shown in the ratio (D) although its removal efficiency is less than that of the ratio (A). At ratio (D), *S. obliquus* is still able to adsorb copper ions and shows similar removal efficiency patterns as a ratio (A). The highest removal efficiency on the ratio (D) also occurs on contact time (Td) 240 minutes with a removal efficiency of 41.99% ± 1.01.

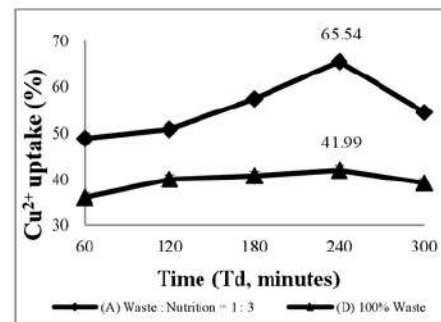


Fig. 3 The effect of variation of contact time (Td, minutes) against the removal (%) in ratio A and D, pH 6 (optimum) and temperature 28°C ± 2

The decrease in the removal efficiency which occurs at the contact time (Td) 300 minutes might be because the cell of *S. obliquus* has reached the saturation point in adsorbing the copper ions (Cu²⁺). The adsorption of heavy metal ions by microorganisms occurs quickly and is reversible. In the reversible reaction, the biosorbent will be saturated at a certain point. After reaching the saturation point, the sorbent will release back the heavy metal ions which have been adsorbed into the solution. When the condition is not saturated, the sorbent will re-adsorb the heavy metals contained in the solution. The reaction will take place continuously [15,16].

Fig. 4 shows that the adsorption capacity (q) is proportional to the removal efficiency for either ratio (A) or ratio (D). The higher the removal efficiency,

the higher the adsorption capacity. The highest adsorption capacity (q) was achieved in treatment A and D on the contact time (T_d) 240 minutes. The values of the adsorption capacities are $59.58 \text{ mg/g} \pm 7.31$ and $228.84 \text{ mg/g} \pm 5.50$ for treatment A and D, respectively. From the calculation of the removal efficiency and the adsorption capacity (q) values, the optimum contact time is at 240 minutes.

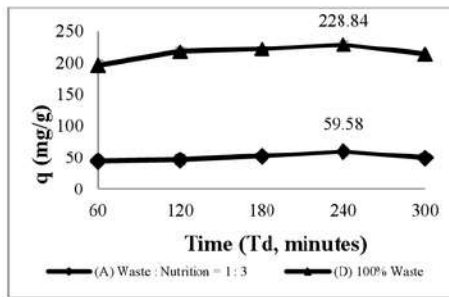


Fig. 4 The effect of variation of contact time (T_d , minutes) to the capacity of adsorption (q) against the removal (%) in ratio A and D, pH 6 (optimum) and temperature $28^\circ\text{C} \pm 2$

Either living or dead biomass could be used in biosorption study, but dead biomass gives more benefit, which is: the effect of poisonous of dissolved heavy metal could not affect the biomass sorption capacity; continuously supply nutrient is unnecessary; could be regenerated and reused in several times of cycles [17,18].

Usage of living microalgae biomass as the absorbent is an interesting option, with economically and effectively advantages of microalgae than other biomass [19]. Those advantages are the low of nutrient demand, high biomass production due to its autotroph, and unlike another biomass such as bacteria and fungi, microalgae usually not produce harmful compound [9]. Based on biosorption statistical data studied by Brinza [20], algae had used as biosorbent 15.3% more than other biomass and 84.6% more than fungi and bacteria.

The mechanisms involved in biosorption hardly identified, except in simple laboratory system. Biological materials are very complex. Besides that, bounding mechanisms of sorbate by biosorbent in biosorption is a complicated process so various kind of different mechanisms could occur at the same time at different rates [21].

Based on its dependence to cell metabolisms, biosorption mechanisms divided into two, dependent metabolisms and independent metabolisms [8,9]. Heavy metal absorption by microorganisms happens at two-stage, passive uptake and active uptake. Related to its dependence to cell metabolisms, passive uptake is metabolisms independent, since its physical-chemical absorption process at the cell surface and not involving cell metabolisms. Active

uptake is metabolisms dependent, since its absorption process involving cell metabolisms [8, 22].

Active uptake is a slow process, including transport between cell membrane, sedimentation, and precipitation. Passive uptake is a fast process, including precipitation, physical-chemical adsorption, ion exchange and complexation [8, 22, 23].

When heavy metal ion dispersed around the cell, metal ion will be bounded in the element at cell walls based on its ability of cells chemical affinity power [24]. Before metal ion reaches cells membrane and cells cytoplasm, it must through the microalgae cell walls containing various polysaccharide and protein that has some active sites capable to bond with metal ion [23].

At that moment, there is an exchange of monovalent and bivalent, e.g. Na, Mg, Ca in the cell wall, replaced by heavy metal ion and then built complex formations between heavy metal ions and functional groups such as carbonyl, amino, thiol, hydroxy, phosphate and hydroxy-carboxyl.

This biosorption process is occurred in short time, reversible, and in dead or living cells. The process effectively occurred in certain pH and present another ion so heavy metal could become sedimented undissolved salt. Therefore, cell walls commonly state as the most important part of cell defense mechanisms, since cell walls are the first barrier against accumulation of toxic heavy metal.

After the biosorption process occurs (passive uptake), the next mechanism is active uptake where *S. obliquus* moves metal ion bounded into cell walls to deeper cell organ (bioaccumulation/absorption). This mechanism happen as metal ion consumptions occurred for cell growth and accumulation of metal ion

Usage of living *S. obliquus* in water remediation process needs to improve due to still many weakness on its process. This free cell using fitted to laboratory necessity, but not applicable in the field. The relatively small cell, low mechanisms power, excess hydrostatic pressure, will reduce cell capability to remediate. In future research, this system needs to improve by immobilized *S. obliquus* cells. Immobilized cells could load more biomass, minimize clogging, more resiliently pressure, maintenance and nutrition unneeded could be using many times, even possible to remove more concentration of heavy metal. In this research, metal ion Cu 2 valence will replace divalent or monovalent ion, existed at cell walls of *S. obliquus* so metal ion outside the cell will be reduced.

FTIR analysis aims to detect the changes in the variation of functional groups of *S. obliquus*. This analysis provides three major advantages as an analytical technique: a fast, non-destructive and requires a very little amount of sample [16]. Fig. 5

shows a spectrum of *Fourier Transform Infra-Red* (FTIR) which indicates the functional groups contained in *S.obliquus*. Before the adsorption process, the absorbance band was observed on 3338.80 cm^{-1} . This band shifted to 3339.52 cm^{-1} in the FTIR spectra of the treatment A and to 3337 cm^{-1} in the treatment D.

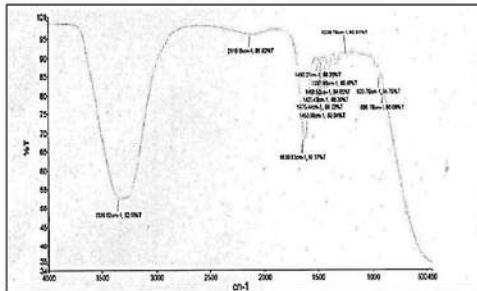


Fig. 5 *Fourier Transform Infra-Red* (FTIR) which indicates a functional group of *S.obliquus* after contacted with copper (Cu^{2+})

The ratio A shows the presence of peak for C-C in the wavenumber of 1455.84 cm^{-1} . This means that the alkene bond has been broken and turned into a group. In addition, there is also a shifting for the absorbance of the amine functional group which is originally showed at the wavenumber value of 1340.70 cm^{-1} . It shifted to 1238.70 cm^{-1} for ratio A and to 1230.20 cm^{-1} for ratio D. The results of FTIR analysis shows that there has been a change in the functional groups of *S. obliquus* due to the interactions with copper ions (Cu^{2+}).

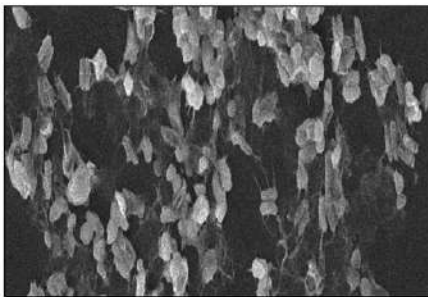


Fig. 6 *S.obliquus* prior to treatment with a magnification of 1000 times with *Scanning Electron Microscopy* (SEM)

The *Scanning Electron Microscopy* (SEM) analysis made it possible to evaluate the morphological changes in the surface of the cells. However, SEM analysis only provides a qualitative analysis and a surface structure estimations. Fig. 6 shows the surface morphology of *S.obliquus* before the adsorption process. The *S.obliquus* cells have a

whip shape, flat, thin, and arranged in a parallel arrangement. The type of colony formed is called *coenobium* [25, 26].

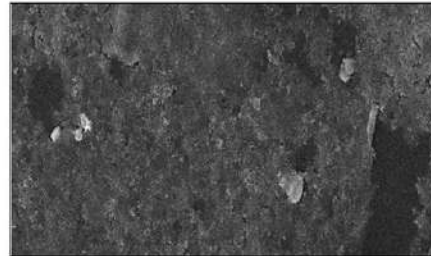


Fig. 7 *S.obliquus* after treatment with waste ratio : nutrient (1:3) to initial concentration 5.05 mg/L , at temperature ($28^\circ\text{C} \pm 2$), pH 6 (optimum) and contact time (T_d) 240 minutes (optimum), the magnification of 1000 times seen with *Scanning Electron Microscopy* (SEM)

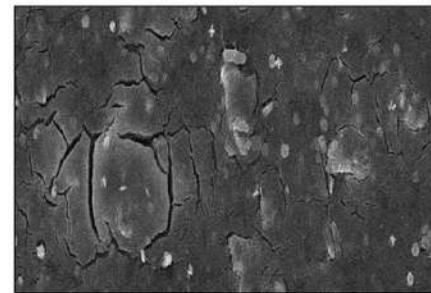


Fig.8 *S.obliquus* after treatment with 100% of waste to initial concentration of early 30.28 mg/L , at a temperature ($28^\circ\text{C} \pm 2$), pH 6 (optimum) and contact time (T_d) 240 minutes (optimum), the magnification of 1000 times seen with *Scanning Electron Microscopy* (SEM)

Fig. 7 and Fig. 8 show the occurrence of damages of *S.obliquus* cells after the adsorption of copper ions (Cu^{2+}). The cells are shrinking, the cell shape is not flattened and the cell wall matrix is broken. The changes in the morphology of the surface are normally associated with the cross interference between metal ions and the negatively charged functional groups such as carboxyl groups in the cell wall polymers [25, 27, 28].

Fig. 9 shows the dry weight obtained at the optimum pH of 6. The dry weight for ratio A and ratio D are 1.07×10^{-1} and 8.69×10^{-2} , respectively. The dry weight at pH 6 is higher than the dry weight at pH 5 and 7, which are $1.07 \times 10^{-1}\text{ mg/mL}$ and $8.69 \times 10^{-2}\text{ mg/mL}$, respectively. Fig. 10 shows that the *S.obliquus* is able to perform an optimum adsorption of copper ions at pH 6 and the contact time of 240 minutes. The dry weight of the biomass is $3.70 \times 10^{-1}\text{ mg/mL}$ for ratio A and $2.37 \times 10^{-2}\text{ mg/mL}$ for ratio D.

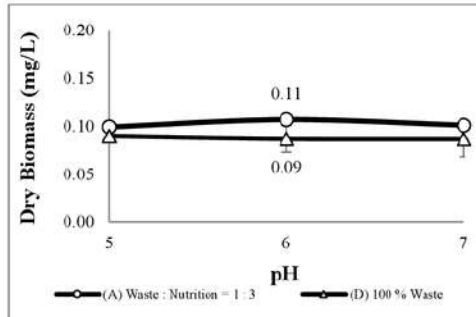


Fig. 9 Dry weight of *S. obliquus* after treatment with acidity value variations (pH) at a temperature ($28^{\circ}\text{C} \pm 2$) and contact time (Td) 60 minutes

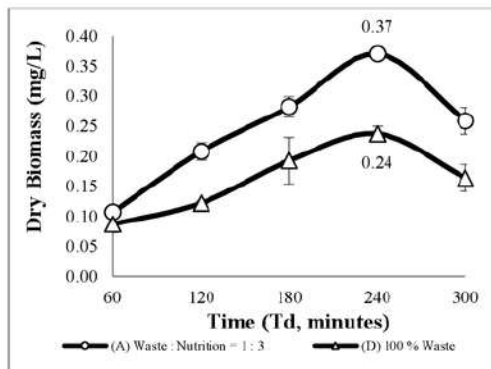


Fig. 10 The dry weight of *S. obliquus* after treatment with the variation of contact time (Td) at a temperature ($28^{\circ}\text{C} \pm 2$) and pH 6 (optimum)

The adsorption processes for ratio A and D fitted the Freundlich and Langmuir isotherm model both. The isotherm is based on the variation of contact time (Td) (in this research: 60, 120, 180, 240 and 300 minutes) at the acidity (pH) value of 6 (optimum), the initial concentration of copper ions (Cu^{2+}) for the ratio A: 5.05 mg/L and for ratio D: 30.28 mg/L. The data fitted the linear curve of Freundlich isotherm with the R^2 value of 0.9961 and 0.9985 for ratio A and D, respectively. Otherwise, R^2 value of Langmuir isotherm is lower, which are 0.9844 and 0.9939 for ratio A and D, respectively.

The Freundlich isotherm is used to describe a non-ideal adsorption on the heterogeneous surfaces. Heterogeneity can be caused by the differences in functional groups on the surface of the adsorbent. Freundlich adsorption isotherms assumed that the adsorption occurs at different layers (multilayer) of the adsorbent [15, 28].

The adsorption processes of A and D fitted the Freundlich isotherms with the n value less than ten. It can be concluded that the adsorption is reversible [20]. The Freundlich isotherm is based on assumptions that adsorbent consists of different classes of adsorption sites. In another side, The Langmuir isotherm assumes that the adsorbent surface adsorption has a number of specific points that are comparable with the adsorbent surface area and the adsorption occurs only in monolayer. According to the theoretical models of adsorption, it is not possible for the adsorption process to proceed on the surface which has been occupied by an adsorbate. If the adsorption point is saturated and the concentration of the adsorbate is increased, the amount of heavy metal ion adsorbed is either increased or decreased [15, 25, 27, 30].

3.3 Adsorption Kinetics.

In this study, the approach in the calculation of the kinetic parameter was using one order model since the biological process occurred mainly in one order. To draw the graph, data at 300 minutes contact is deleted, since it is a decreasing in adsorbate concentration value.

Based on the results of kinetic calculations for treatment A and D, it is obtained that the R^2 value of 0.8103 for treatment A (Figure 11) and 0.8791 for treatment D (Fig. 12). The adsorption kinetics study aims to know the reaction order of the adsorption process. The prediction from the flow of biosorption gives an important information in generating a biosorption system of batch scale [15].

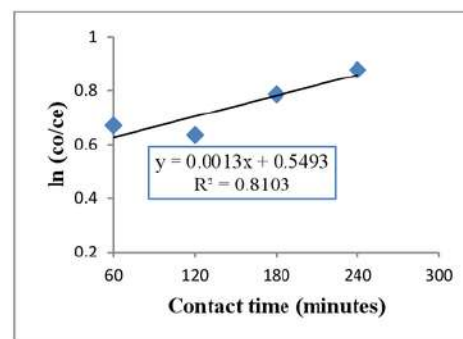


Fig. 11 The kinetics graph-one order of ratio A (waste : nutrient = 1 : 3) with initial concentration 5.05 mg/L, temperature ($28^{\circ}\text{C} \pm 2$), pH 6 (optimum) and contact time (Td) 240 minutes (optimum)

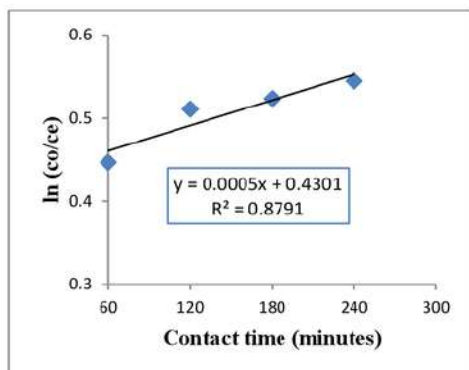


Fig. 12 The kinetics graph of order one in ratio D (100% waste) with initial concentration 30.28 mg/L, temperature (28°C ± 2), pH 6 (optimum) and contact time (Td) 240 minutes (optimum).

4. CONCLUSION

S.obliquus able to grow in a wastewater containing copper heavy metals (Cu²⁺) either with or without the nutrient addition. In conditions of optimum pH 6 and optimum contact time (Td) of 240 minutes, the removal efficiency of heavy metal ions of copper (Cu²⁺) reached 65.54% ± 8.04 in the solution containing waste and nutrients in the ratio of 1: 3.

In the solution containing only waste, the removal efficiency was 41.99% ± 1.01. In this study, the effect of heavy metals (Cu²⁺) on *S.obliquus* cells is shown by the breaking of (the destruction) of carboxyl and amine functional groups, as well as the alkene group. The morphological analysis conducted using SEM shows that there is a damage to the cells of *S.obliquus*. The results of this study fitted the Freundlich isotherm models with R² value nearly reaching 1, a little higher than R² value of the Langmuir isotherm model. The adsorption kinetics was studied in the order one kinetics with R² value of 0.2486 for the solution containing waste and nutrients in the ratio of 1:3 and 0.336 for the solution containing only wastewater.

5. ACKNOWLEDGMENTS

The authors would like to thank Directorate for Research and Community Services as well as Directorate General for Strengthening Research and Development at the Ministry of Research, Technology, and Higher Education Indonesia for funding this study through Universities Prime Research Grant Program (Penelitian Unggulan Perguruan Tinggi-PUPT) 2016, Nomor

003/SP2H/LT/DRPMIII/2016 and 214/SP2H/LT/DRPM/III/2016. The research also thanks to Putri Kusumaningayu for helping to do some laboratory research.

6. REFERENCES

- [1] Paulino, A.T., Minasse, F.A.S., Guilherme, M.R., Reis, A.V., Muniz, E.C., Nozaki, J., Novel adsorbent based on silkworm chrysalides for removal of heavy metals from wastewaters. *J. Colloid Interface Sci.*, 301, 2006, pp.479-487.
- [2] Silva, E.A., Cossich, E.S., Tavares, C.G., Cardozo Filho, L., Biosorption of Binary Mixtures of Cr (III) and Cu (II) ions by *Sargassum sp.* *Braz. J. Chem. Eng.*, Vol. 20, No. 3, 2003.
- [3] Ashraf, MA., Maah, MJ., Yusoff, I., Study of Banana peel (*Musa sapientum*) as a Cationic Biosorben. *American-Eurasian Journal Agricultural and Environmental Sci.*, Vol. 8, No. 1, 2010, pp. 7-17
- [4] Vijayaraghan K, Jegan JR, Palanivela K, Velan M., Copper Removal from Aqueous Solution by Marine Green Alga *Ulva Reticula*. *Electronic J. Biotechnol.* ISSN 0717-3458, 2005.
- [5] Abbas H, Salman, Ismail M, Ibrahim, Mostafa M, Tarek, Sulaymon H, Abbas, Biosorption of Heavy Metals: A Review. *Journal of Chemical Science and Technology*, Vol. 3, Issue 4, 2014, pp. 74-102.
- [6] Volesky, B., Detoxification of Metal-Bearing Effluents: Biosorption for the Next Century. *Hydrometallurgy*, Vol. 59, 2000, pp. 203-216.
- [7] Chaisuksant, Y. Biosorption of Cadmium (II) and Copper (II) by Pretreated Biomass of Marine Alga *Gracilaria fisheri*. *Selper Ltd. Thailand*, (2003).
- [8] Ahalya, N., Ramachandra, T.V. and Kanamadi R.D., Biosorption of Heavy Metals. *Indian Journal of Biotechnology*, Vol. 7, 2003, pp. 159-169.
- [9] Ferreira, L. S., Rodrigues, M. S., de Carvalho, J. C. M., Lodi, A., Finocchio, E., Perego, P., dan Converti, A., Adsorption of Ni²⁺, Zn²⁺ and Pb²⁺ onto dry biomass of *Arthrospira (Spirulina) platensis* and *Chlorella vulgaris*. I. Single metal systems. *Chemical Eng. J.*, 173(2), 2011, pp. 326-333. doi:10.1016/j.cej.2011.07.039
- [10] Rinanti, A., Kardena, E., Astuti, D.I., Dewi, K., Growth Response and Chlorophyll Content of *Scenedesmus obliquus* Cultivated in Different Artificial Media. *Asian Journal of Environmental Biology*, Vol. 1 No. 1, 2013, pp. 1-9.

- [11] Rinanti, A., Fachrul, MF., Hadisoebroto, R., Silalahi, M., Improving Biosorption of Cu(II)-Ion on Artificial Wastewater by Immobilized Biosorbent of Tropical Microalgae, International Journal of Geomate, Vol.13, Issue 36, 2017, 00.06-10
- [12] Provasoli, L. and Pintner, I. J., Artificial Media for Fresh-Water Algae: Problems and Suggestions In The Ecology of Algae. Tyron, C. A. & Hartman, R. T. Ed. Special Publication No. 2. University Pittsburgh: Pymatuning Laboratory of Field Biol. 1959, pp. 84-96.
- [13] Gadd, G.M., Biosorption : Critical Review of Scientific Rationale, Environmental Importance and Significance for Pollution Treatment. J. Chem. Technol. Biotechnol., Vol. 84, 2009, pp. 13-28.
- [14] Bueno, B.Y.M., Torem, M.L., Molina, F., dan de Mesquita L.M.S., Biosorption of lead (II), Chromium (III), and Copper (II) by *R. opacus*: Equilibrium and Kinetic Studies. Min. Eng., Vol. 21, 2008, pp. 65-75.
- [15] Schmul, R, Kriey, HM Keizer, Adsorption of Cu (II) and Cr (VI) by Chitosan: Kinetics and Equilibrium Studies Water SA, Journal of Hazardous Material, 2001
- [16] Kaduková, J. and Virčíková, E., Comparison of differences between copper accumulation and biosorption. *Environ. Int.*, Vol. 31, 2005, pp. 227-232.
- [17] Van Wyk, C. S., Removal of heavy metals from metal-containing effluent by yeast biomass. African Journal of Biotechnology, Vol. 10, 2011, pp. 11557-11561.
- [18] Bayramoglu G, Arica M.Y., Construction a hybrid biosorbent using *Scenedesmus quadricauda* and Ca-alginate for biosorption of Cu(II), Zn(II) and Ni(II): Kinetics and equilibrium studies. *Bioresour Technol*, Vol.100, 2009, pp 186–193.
- [19] Singh S, Rai B. N., Rai L. C., Ni (II) and Cr (VI) sorption kinetics by *Microcystis* in the single and multimetallic system. *Process Biochem*, Vol. 36, 2001, pp. 1205-1213.
- [20] Brinza L., Matthew J. Dring, Maria Gavrilescu, Marine micro and macro algal species as biosorbent for heavy metal. *Environmental Engineering and Management Journal* Vol. 6, No. 3, 2007, pp. 237-251.
- [21] Chojnacka K., Biosorption and bioaccumulation – the prospects for practical application. *Environmental International* Vol. 36, No. 3, 2010, pp. 299-307.
- [22] Goyal, N., Jain, S. C., Banerjee, U. C., Comparative studies on the microbial adsorption of heavy metal. *Adv. Environ. Res.*, Vol. 7, 2003, pp. 311-319.
- [23] Sannasi, P., J. Kader, B. S. Ismail dan S. Salmijah, Sorption of Cr(VI), Cu(II) and Pb(II) by growing and non-growing cells of bacterial consortium. *Bioresour. Technol.* Vol. 97, 2006, pp. 740-747.
- [24] Droste, R. Theory and Practice of Water and Wastewater Treatment. John Wiley and Sons. New York. The USA. 2007.
- [25] Levy, J. L., Angel, B. M., Stauber, J. L., Poon, W. L., Simpson, S. L., Cheng, S. H. and Jolley, D. F., Uptake and Internalisation of Copper by Three Marine Microalgae: Comparison of Copper-Sensitive and Copper-Tolerant Species. *Aquat. Toxicology*, Vol. 89, 2008, pp. 82-93.
- [26] Matsunaga, Characterization of marine microalgae, *Scenedesmus* sp. strain JPCC GA0024 toward biofuel production, *Biotechnology let*, Volume 31, 2009, pp. 1367-1372
- [27] Sengbusch, P. V, Cell Walls of Algae, University of Hamburg, Department of Biology.
- [28] Ivánová, D., Horváthová, H., Kaduková, J., dan Kavuličová, J., Stability of immobilized biosorbents and its influence on biosorption of copper. *Nova Biotechnologica*, Vol. 10, No. 1, 2010, pp. 45-51.
- [29] Do, D.D., Adsorption Analysis: Equilibria and Kinetics, Vol. 1, Imperial Colleges Press, London, 1998.
- [30] Park, D., Yun, Y.S., Ahn, C.K., dan Park, J.M. Kinetics of the Reduction of Hexavalent Chromium with the Brown Seaweed *Ecklonia* Biomass. *Chemosphere*, Vol. 66, 2007, pp. 939-946.

Biosorption in PHM

ORIGINALITY REPORT

4%

SIMILARITY INDEX

2%

INTERNET SOURCES

2%

PUBLICATIONS

4%

STUDENT PAPERS

MATCH ALL SOURCES (ONLY SELECTED SOURCE PRINTED)

2%

★ Submitted to Universitas Brawijaya

Student Paper

Exclude quotes On

Exclude bibliography On

Exclude matches < 20 words