

e-ISSN: 2581-8341

**An Open
Access**

IJCSRR

M
U
L
T
I
D
I
S
C
I
P
L
I
N
A
R
Y

J
O
U
R
N
A
L

**International
Journal of Current
Science Research
and Review**

VOLUME-05

2022

editor@ijcsrr.org

EDITORIAL BOARD



Dr. Arun
Lecturer, Asia Pacific
University of Technology &
Innovation, Malaysia.



Dr. Amit Soni
Prof and head EE Manipal
University Jaipur rajasthan



**Prof. Rudra pd
Ghimire**
DAV B school Kathmandu
Nepal

Impact Factor : 5.995

Author Desk

- » Call For Paper
- » Author Guideline
- » Publication Ethics
- » Publication Process
- » Plagiarism Policy
- » Scope
- » Mode of Payment

Downloads

- » Manuscript Template
- » Copyright form



Prof. Dr. N K Joshi
PhD. MBA MCA Director Modi
institute of management and
technology Kota Rajasthan
India



Hemant amhiya
Ass. Prof. Department of
electrical engineering



**Prof. Dr. C.B.
SENTHILKUMAR**
Ph.D. Professor & Head –
Commerce Department



**Dr. Priyanka
Agarwal**
Ph.D. Assistant Professor
Department Of Commerce
Government P.G. College
Kotdwara



ANSHIKA BANSAL
NET, U-SET Department Of
Commerce Govt.P.G College
Kotdwara



**Dr.Eng.Ahmed
Kadhim Hussein**
P.hd. Assistant Professor
Department of Mechanical
Engineering College of
Engineering University of
Babylon Republic of Iraq



MOHD. MUNTJIR
Assistant Professor
Departments of Computer
Science and Information
Technology



**Dr. Abd El-Aleem
Saad Soliman Desok**
Professor Assistant of
Agricultural Zoology



Rudrarup Gupta
Academic Researcher,
Rupayan Housing Society,
A/102, Central Road, H.B.
Town, Sodepur, P.O. Bijoypur,
Kolkata ,India



Dr. S. PRIYAN
Assistant Professor,
Department of Mathematics



**Professor Jacinta
A.Opara,FCIA**
Professor and Director Centre
for Health and Environmental
Studies



JAGPREET SINGH
Assistant Professor,
Department of
Nanotechnology, Sri Guru
Granth Sahib World
University,

DAFTAR ISI



**International Journal of Current
Science Research and Review**
An Open Access Peer Reviewed Journal

✉ info@ijcsrr.org | 📄 ISSN: 2581-8341

[Home](#)[About us](#)[Editorial Team](#)[Submit Article](#)[Current Issue](#)[Archives](#)[Join us](#)[Contact us](#)

Archives

You are here: [Home](#) / [Archives](#)

VOLUME 05 ISSUE 07 JULY 2022

Vol 5 No 7(2022)

How Decreased Level of Plasma Tryptophan Play Role in Diabetic Patients?

Hafiza Ayesha Qudsia, Iman Bashir, Maria Mustafa
2232-2236

[PDF](#)[Full text](#)

Community Empowerment in the Time of the Covid-19 Pandemic through Strengthening MSMEs in East Java

Nurul Umi Ati
2237-2242

[PDF](#)[Full text](#)

Determination of Geographical and Seasonal Variations of Heavy Metals in Swordfish (*Xiphias gladius*) and Yellowfin Tuna (*Thunnus albacares*)

Digoarachchi, D.A.S.U., Walpita C.N., Sandamali J.D.
2243-2250

[PDF](#)[Full text](#)

Impact Factor : 5.995

Author Desk

- [Call For Paper](#)
- [Author Guideline](#)
- [Publication Ethics](#)
- [Publication Process](#)
- [Plagiarism Policy](#)
- [Scope](#)
- [Mode of Payment](#)

Downloads

- [Manuscript Template](#)
- [Copyright form](#)
- [Journal Cover Page](#)

Information

Theoretical Study of Betalain Compounds from Binahong with a Red Trunk as DSSC (Dye-Sensitized Solar Cell) Material with the DFT (Density Functional Theory) Method

Mohammad Fakhrol Mufid, I Gusti Made Sanjaya
2251-2256

[PDF](#)[Full text](#)

Comparative Analysis of Energy Consumption in Traditional and Modern Buildings in Village Sapni, a Village in Kinnaur District Located in Western Himalayan State of Himachal Pradesh

Shashi Dhar
2257-2263

[PDF](#)[Full text](#)

Analysis of Factors Affecting Poverty Levels in West Nusa Tenggara Province in 2012 – 2021

Edi Irawan
2264-2271

[PDF](#)[Full text](#)

Vermicomposting in Silver Oak Plantation Areas for Sustainable Waste Management and Enhanced Livelihood: A Case Study of Kolli Hills, Tamil Nadu, India

Anindita Roy Saha, Nisha Rani
2272-2282

[PDF](#)[Full text](#)

Exploratory Factor Analysis of the Perceptions of Secondary School Heads of Departments on Teacher Trainees' Pedagogical Practices in Three Districts of Zambia

Aubrey Hibajene Mweemba, Risper Awuor, Ph.D.
2283-2296

[PDF](#)[Full text](#)

The Effect of Variations Concentration of Chloramphenicol on the Imprinting Factor of Molecularly Imprinted Polymer

Dedy Aburizal Khuswanto, Maria Monica Sianita
2297-2304

[PDF](#)[Full text](#)

Proposed Marketing Strategy to Increase Revenue for PT. Pipa Tanpa Kampuh Indonesia in Seamless Steel Pipe Industry

Rendy Kristanto, Satya Aditya Wibowo
2305-2311

[PDF](#)[Full text](#)

The Spatial Relationship between Drug Abuse and Home Burglaries: Northeast District of Penang

Mohd Norashad Nordin, Tarmiji Masron, Norita Jubit, Nuremyliana Yunos
2312-2325

[PDF](#)[Full text](#)

User Experience of Online Examinations and Proctoring: A Case Based Study

Alice M. NJUGUNA
2326-2335

[PDF](#)[Full text](#)

Synthesis and Characterization of Hydroxyapatite Gel - Nanosilver - Clove Flower Extract (*Syzygium Aromaticum* L.) as a Toothpaste Forming Gel

Ivan Nandasyah, Sari Edi Cahyaningrum
2336-2347

[PDF](#)[Full text](#)

The Use of Temperature and Waste Diapers in the Demulsification Process of Crude Oil Samples

Samsol ., Nedi Duwi Putra, Onnie Ridaliani, Havidh Pramadika, Pauhesti ., Ziad Toriq, Asri Nugrahanti, Sigit Rahmawan
2389-2395

[PDF](#)[Full text](#)

Green Synthesis and Characterization of Silver Nanoparticles Derived from Ethanol Extract of Sappan Wood

Rafiqi Rajauddin Amin, Suyatno Sutoyo
2396- 2403

[PDF](#)[Full text](#)

Situational Leadership Practices in School: A Literature Review

Indah Mutiara Sari, Sowiyah ., Hasan Hariri
2404-2413

[PDF](#)[Full text](#)

School Literacy Movement: A Literature Review

Dian Anisa Fitri, Sowiyah .
2414-2418

[PDF](#)[Full text](#)

Effects of Replacing Soybean (*Glycine Max*) with Fermented Sickle Pod (*Senna Obtusifolia*) on the Productive Performance and Carcass Characteristics of Domestic Rabbits

Augustine, C., Jonah, P.M., Igwebuike, J.U., Diarra, S.S., Tizhe, M.A., Babakiri, Y.
2419-2426

[PDF](#)[Full text](#)



The Use of Temperature and Waste Diapers in the Demulsification Process of Crude Oil Samples

Samsol¹, Nedi Duwi Putra², Onnie Ridaliani³, Havidh Pramadika⁴, Pauhesti⁵, Ziad Toriq⁶, Asri Nugrahanti⁷,
Sigit Rahmawan⁸

^{1,2,3,4,5,6,7,8} Petroleum Engineering Department, Universitas Trisakti, Jakarta, Indonesia

ABSTRACT: Currently, the oil wells in Indonesia are getting older, the older the oil well shows the greater the water content, which will cause the formation of a water-in-oil emulsion. The presence of emulsion that occurs in crude oil will cause a decrease in oil quality and oil production. Therefore, a demulsifier is needed to overcome these problems. Because the existing demulsifier are still very few variants and are not environmentally friendly, a new type of demulsifier that is environmentally friendly is needed. Baby diapers can be used as a new type of demulsifier because baby diapers contain *Polymer Superabsorbent* (SAP) which can absorb 200 times water [1]. Superabsorbent Polymer has inert and hydrophilic properties with the working principle of absorbing and trapping water in the emulsion formed on crude oil. In this experiment, the author uses baby diaper waste to separate water and oil in the emulsion formed on the P#441 crude oil sample at a temperature of 26.7°C, 40°C, and 50°C with a centrifuge with a speed of 500, 1000, and 1500. RPM in 1, 2, and 3 minutes. Demulsification process occurs faster in crude oil sample at a temperature of 50°C because of high temperatures can accelerate the process demulsification. The use of baby diapers as nashi demulsifier is in its early stages and can be developed further, but it has been proven to accelerate the demulsification process in the emulsion formed by sample P#441.

KEYWORD: Demulsifier, Diapers waste, Emulsion, Superabsorbent Polymer.

I. INTRODUCTION

The presence of water in crude oil causes the formation of emulsions due to the presence of chemicals that act as natural emulsifiers, namely asphaltene, resin and naphthenic acid. The formation of emulsions in crude oil is highly undesirable because water droplets and salts such as NaCl, MgCl₂, CaCl₂, KCl trapped in crude oil can cause corrosion of pipelines and petroleum refinery equipment. Therefore, the water dispersed in the crude oil emulsion must be separated. Separation of water from crude oil emulsion can be done by mechanical, thermal, electrical and chemical processes [2]. Among the four methods, chemical treatment using a demulsifier can produce the best separation efficiency compared to other methods. Therefore, chemical methods are widely applied in industry. By integrating several methods, such as chemical separation methods combined with thermal methods, it can increase the efficiency of water separation in crude oil [3].

There are still few demulsifier variants, so a new type of demulsifier is needed that is environmentally friendly and economical. Baby diapers can be used as a new type of demulsifier because baby diapers contain *Polymer Superabsorbent* (SAP) which can absorb 200 times water. The main ingredient for making baby diapers is using Polyacrylate Super Absorbent Polymer gel which has hydrophilic properties, can reduce interfacial tension, distribute evenly and facilitate uniform dispersion of cross-linked polymers containing sodium atoms. It absorbs water and distributes between textures and water molecules evenly, and swaps the position of sodium atoms so that water is filled and trapped with polymer texture[4].

Baby diapers that are often used for babies are disposable diapers, because once they are used, they are thrown away and result in a lot of garbage from the baby's diapers. The higher the birth rate, the higher the baby diapers used so that the waste from the baby diapers increases. According to data, the percentage of baby diaper usage in Indonesia is around 97.1%. The time required to decompose baby diaper waste is about 250-500 years to fully decompose. Therefore, it is necessary to reprocess baby diapers into things that can be used so that the waste from baby diapers can be reduced. One way to utilize baby diaper waste is to use baby diaper waste as a demulsifier to break down the stability of the oil and water emulsion. Baby diapers contain *Polymer Superabsorbent* (SAP) which can absorb water hundreds of times, therefore with the Polymer Superabsorbent content and with the right method baby diaper waste can be used as a new demulsifier to break the stability of the oil and water emulsion.

II. METHOD

This paper used an experimental method, where the authors conducted a literature study to prove Polyacrylate SAP from baby diaper waste can be used as demulsifier.

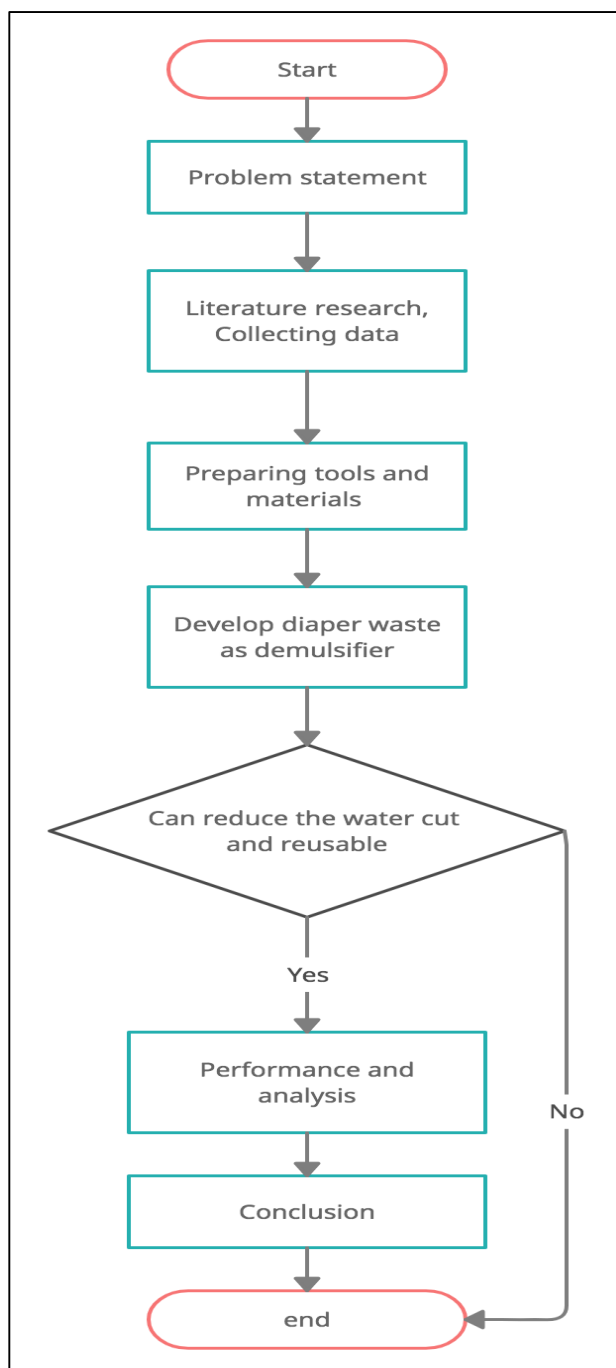


Figure 1. Flowchart

• Materials



Figure 2. Materials

The following is the materials and procedures that the author uses in this experiment:

1. Prepare tools and materials. The tools needed are centrifuge, spinner/heater, test tube, thermometer. And the materials needed are sodium chloride of 20 gram for 20% salinity solution, 100 mL aqua dest for each solution, light crude oil (P # 441), Polyacrylate SAP from baby diaper waste.
2. Make 20% salinity solutions by inputting 20 gram in each beaker filled with 100 mL aquadest. Then make the solution homogeneous by stirring using a spinner until no sodium chloride settles at the bottom of the beaker.
3. After that, enter 5 mL of P #441, 5 mL of 20% salinity solution, and put 1 mL of baby diaper waste into a beaker, then shake until P #441 with water is mixed to form an emulsion.
4. Then, two samples were put into a centrifuge with a period of 1; 2; 3 minutes at speeds 500; 1000; 1500 RPM, at a temperature of 26.7°C, 40°C, and 50°C. Then note any changes in the volume gain of water from each sample.

III. RESULT AND DISSCUSION

In this study, a salinity solution with a concentration of 20% was made to interpret the existing emulsion if it occurs in the field, because it is known that the emulsion contains salt content. Therefore, the authors used sodium chloride as an emulsion-forming component. To prove that diapers waste containing superabsorbent polymer can be used as a demulsifier, it can be seen in Figure 2 which shows the separation of the volume of water in the emulsion formed in the crude oil sample mixed with a 20% salinity solution at a temperature of 26.7°C at a centrifuge speed of 500 RPM in 1 minute.

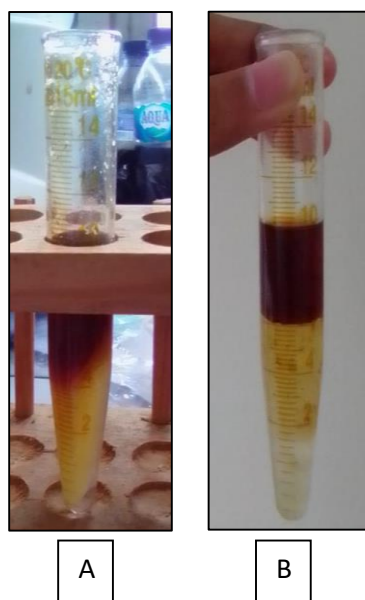


Figure 3. a) The volume of water separated in the 20% emulsion without using waste diapers at a centrifuge speed of 1000 RPM in 1 minute b) The volume of water separated in the 20% emulsion using waste diapers at a centrifuge speed of 1000 RPM in 1 minute

Figure 2 shows that separation with diapers waste is more effective than without using diapers waste, it is proven that diapers waste containing superabsorbent polymer can be used as a demulsifier because of the nature of the superabsorbent polymer which is hydrophilic and can absorb water 200 times its mass.

In addition, to prove that high temperatures can accelerate the demulsification process, it can be seen in graphs 4, 5, 6, and 7.

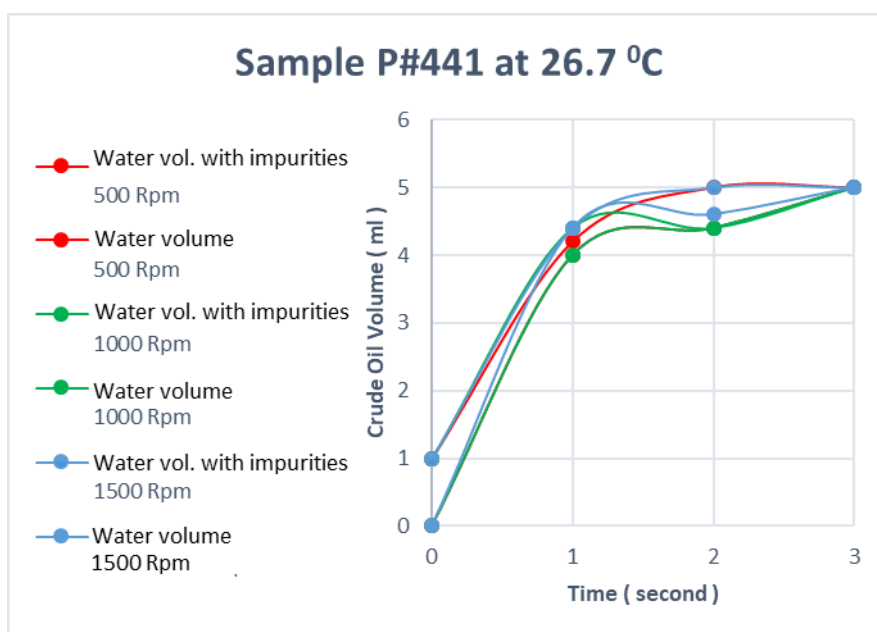


Figure 4. Graph of separate volume of water on a 20% emulsion at 26.7°C

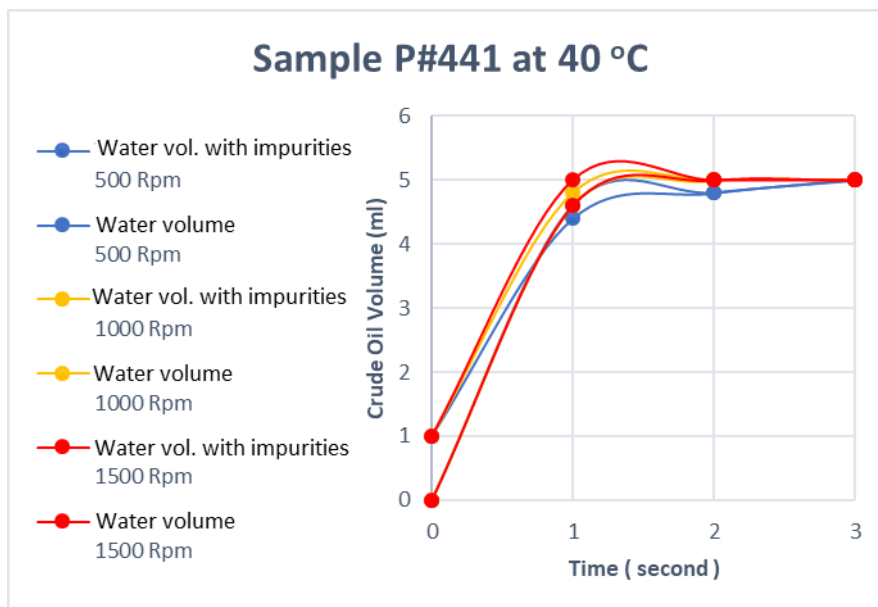


Figure 5. Graph of a separate volume of water on a 20% emulsion at 40°

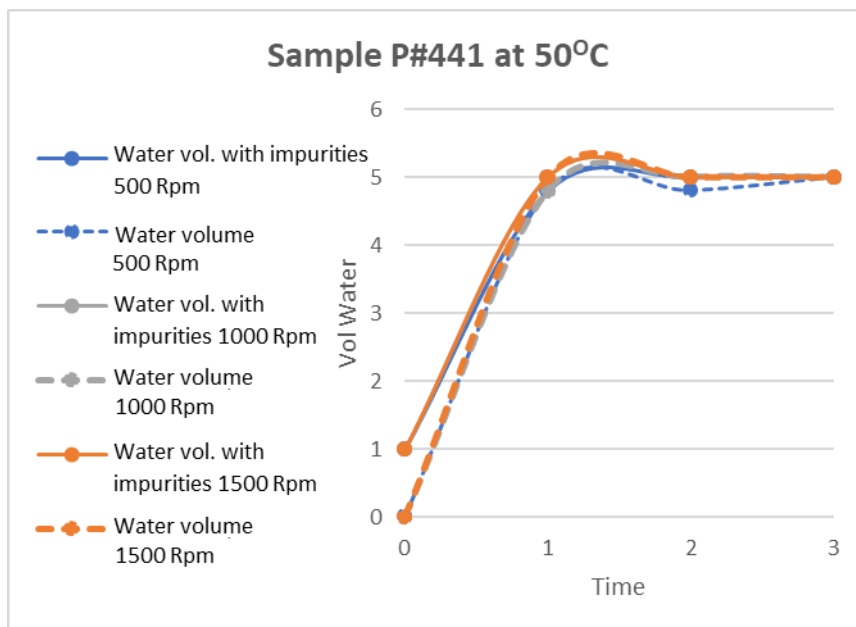


Figure 6. Graph of a separate volume of water on a 20% emulsion at 50°C

It can be seen in Figure 7 that at a temperature of 50°C the water gain is more than that of 26.7°C and 40°C, it is evident that high temperatures can accelerate demulsification.

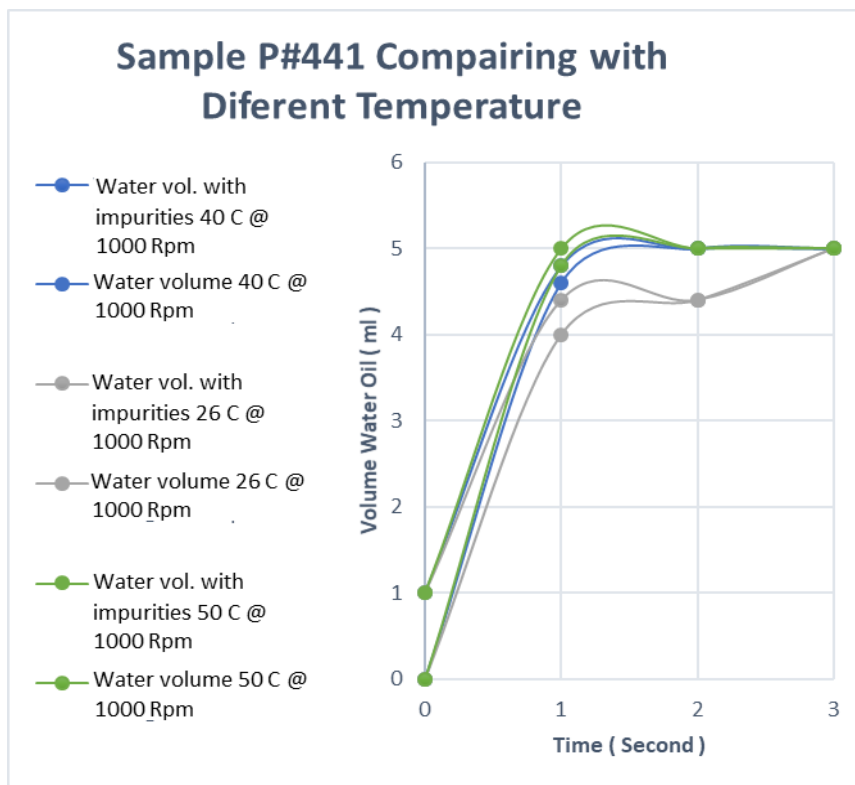


Figure 4. Graph comparison of water volume gain with temperature

IV. CONCLUSION

After To do study in the success diaper baby which containing *super absorbent polymer* which can made emulsifier for damage emulsion stability on oil and water, so Writer can interesting amount conclusion as following:

1. The volume of water obtained is more at the separation by a temperature of 50°C compared to the temperature of 26.7°C and 40°C.
2. High temperatures can accelerate the demulsification process of oil-in-water emulsions.
3. Volume water on emulsion *sample P#441* which given waste diaper baby which contain *superabsorbent polymer* more many compared to with emulsion *sample P#441* which no given waste diaper baby.
4. Waste diaper baby proven could made demulsifier on separation emulsion which occur on oil and water, because on study this separation water which use waste diaper baby.

REFERENCES

1. D. P. Dewanti, A. Ma'rufatin, and R. Nugroho, "Uji Kapasitas Absorpsi Air Oleh Selulosa Dari Tandan Sawit Sebagai Bahan Super Absorbent Polymer (Sap) Pada Popok Sekali Pakai," *J. Rekayasa Lingkungan*, vol. 12, no. 2, p. 2, 2020, doi: 10.29122/jrl.v12i2.4018.
2. A. Resti, E. Kusumastuti, A. P. G, and N. Wijayati, "Indonesian Journal of Chemical Science Optimalisasi Konsentrasi Demulsifier pada Proses Demulsifikasi Minyak Mentah dalam Slop Oil," vol. 9, no. 2, 2020.
3. D. Ariono, "Pemanfaatan Energi Baru Sebagai Perkembangan Teknologi Pemisahan Difusional," *J. Teknol. Kim. dan Ind.*, vol. 2, no. 2, pp. 11–17, 2018.
4. D. A. Rachman, H. Pramadika, and S. Samsol, "Laboratory Study of the Effect of Salinity on the Demulsification Process in High Temperature Crude Oil," *J. Earth Energy Sci. Eng. Technol.*, vol. 3, no. 2, 2020, doi: 10.25105/jeeset.v3i2.7602.
5. Adeyemi, B. J. and Sulaimon, A. A. (2017) 'Effects of ionic interactions on the stability and destabilization of water-in-crude oil emulsions', Society of Petroleum Engineers - Nigeria Annual International Conference and Exhibition 2017, pp. 392–409. doi: 10.2118/189065-ms.



6. Ahmed, T. (2019) Reservoir Engineering Handbook. Fifth Edit. Edited by K. Hammon. Cambridge, US: Joe Hayton. Available at: <https://www.elsevier.com/books-and-journals>.
7. Auflem, I. H. (2002) 'Influence of Asphaltene Aggregation and Pressure on Crude Oil Emulsion Stability by Department of Chemical Engineering', Thesis, (June), p. 58.
8. Bobra, M. (1990) 'A Study Of Water-In-Oil Emulsification', p. 74.
9. Callizo, C. (2016) 'TREBALL DE FI DE GRAU FORMULATION AND CHARACTERIZATION OF BIFONAZOLE MULTIPLE EMULSION Main Field : Pharmaceutical Technology Secondary Fields : Biopharmacy and Pharmacokinetics Legislation and Ethics', (April).
10. Fernando, Y. (2012) Proses Demulsifikasi Heavy Crude Oil Jatibarang.
11. Gafonova, O. V. and Yarranton, H. W. (2001) 'The stabilization of water-in-hydrocarbon emulsions by asphaltenes and resins', Journal of Colloid and Interface Science, 241(2), pp. 469–478. doi: 10.1006/jcis.2001.7731.
12. Gomez, S., Mansi, M. and Fahes, M. (2019) 'Quantifying the non-monotonic effect of salinity on water-in-oil emulsions towards a better understanding of low-salinity-water/oil/rock interactions', Society of Petroleum Engineers - Abu Dhabi International Petroleum Exhibition and Conference 2018, ADIPEC 2018, (Kokal 2005). doi: 10.2118/193284-ms.
13. Irawan, H. and AN, S. (2012) 'Korelasi Permeabilitas Berdasarkan Ukuran Butiran dan Plastisitas Tanah', Universitas Riau.
14. Kilpatrick, P. K. (2012) 'Water-in-crude oil emulsion stabilization: Review and unanswered questions', Energy and Fuels, 26(7), pp. 4017–4026. doi: 10.1021/ef3003262.
15. Kurniawan, A. S. B. (2018) PENGARUH JARAK TEMPUH TERHADAP VISKOSITAS KINEMATIK DAN VISKOSITAS INDEX OLI AHM MPX 2 SAE 10W 30 PADA SEPEDA MOTOR HONDA BEAT. Institut Teknologi Sepuluh Nopember.
16. Manggala, M. R., Kasmungin, S. and Fajarwati, K. (2017) 'Studi Pengembangan Demulsifier Pada Skala Laboratorium Untuk Mengatasi Masalah Emulsi Minyak Di Lapangan" Z", Sumatera Selatan', Prosiding Seminar Nasional Cendekiawan, pp. 145–151.
17. Marlow, B. J. et al. (1987) 'Colloidal stabilization of clays by asphaltenes in hydrocarbon media', Colloids and Surfaces, 24(4), pp. 283–297. doi: 10.1016/0166-6622(87)80235-4.
18. Mehana, M. and Fahes, M. (2016) 'The impact of the geochemical coupling on the fate of fracturing fluid, reservoir characteristics and early well performance in shale reservoirs', Society of Petroleum Engineers - SPE Kingdom of Saudi Arabia Annual Technical Symposium and Exhibition. doi: 10.2118/182744-ms.
19. Mehana, M. and Fahes, M. M. (2018) 'Investigation of double layer expansion in low-salinity waterflooding: Molecular simulation study', SPE Western Regional Meeting Proceedings, 2018-April(2010). doi: 10.2118/190106-ms.
20. Mehana, M., Salman, M. A. L. and Fahes, M. (2017) 'The impact of salinity on water dynamics, hydrocarbon recovery and formation softening in shale: Experimental study', Society of Petroleum Engineers - SPE Kingdom of Saudi Arabia Annual Technical Symposium and Exhibition 2017, pp. 1545–1556. doi: 10.2118/188131-ms.
21. Mohammed, R. A. et al. (1993) 'Dewatering of crude oil emulsions 2. Interfacial properties of the asphaltic constituents of crude oil', Colloids and Surfaces A: Physicochemical and Engineering Aspects, 80(2–3), pp. 237–242. doi: 10.1016/0927-7757(93)80203-Q.
22. Noriko, N. (2013) 'Diapers Bagi Kesehatan Bayi dan Lingkungan', Proceedings Biology Education Conference, Vol. 10, N, p. 5. Available at: <https://jurnal.uns.ac.id/prosbi/article/view/6526/5906>.
23. Peña, A. A. and Hirasaki, G. J. (2003) 'Enhanced characterization of oilfield emulsions via NMR diffusion and transverse relaxation experiments', Advances in Colloid and Interface Science, 105(1–3), pp. 103–150. doi: 10.1016/S0001-8686(03)00092-7.

Cite this Article: Samsol, Nedi Duwi Putra, Onnie Ridaliani, Havidh Pramadika, Pauhesti, Ziad Toriq, Asri Nugrahanti, Sigit Rahmawan (2022). The Use of Temperature and Waste Diapers in the Demulsification Process of Crude Oil Samples. International Journal of Current Science Research and Review, 5(7), 2389-2395