

SJR

SI

SR

CR

EPI

SJR

Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name



Home

Journal Rankings

Journal Value

Country Rankings

Viz Tools

Help

About Us

Colocation Services

Keppel Data Centres

AIP Conference Proceedings



COUNTRY United States Universities and research institutions in United States Media Ranking in United States	SUBJECT AREA AND CATEGORY Physics and Astronomy Physics and Astronomy (miscellaneous)	PUBLISHER American Institute of Physics	SJR 2024 0.153 H-INDEX 90
PUBLICATION TYPE Conferences and Proceedings	ISSN 0094243X, 15517616	COVERAGE 1973-1978, 1983-1984, 1993, 2000-2001, 2003-2025	INFORMATION Homepage How to publish in this journal confproc@aip.org













SCOPE

Today, AIP Conference Proceedings contain over 100,000 articles published in 1700+ proceedings and is growing by 100 volumes every year. This substantial body of scientific literature is testament to our 40-year history as a world-class publishing partner, recognized internationally and trusted by conference organizers worldwide. Whether you are planning a small specialist workshop or organizing the largest international conference, contact us, or read these testimonials, to find out why so many organizers publish with AIP Conference Proceedings.


 Join the conversation about this journal

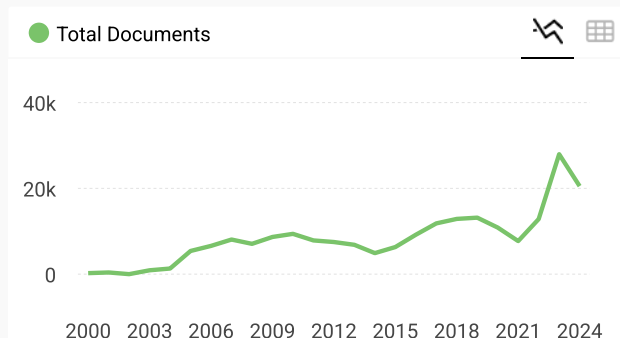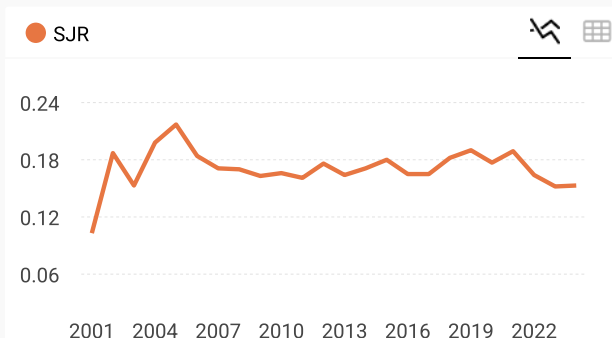

Citations per document

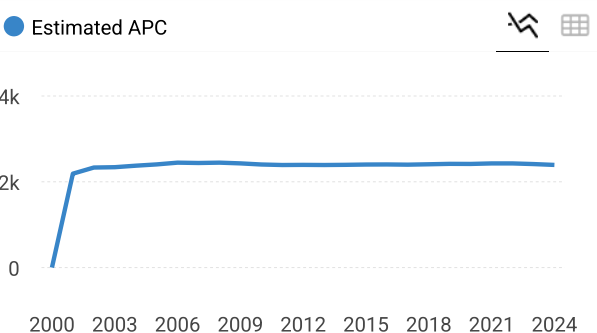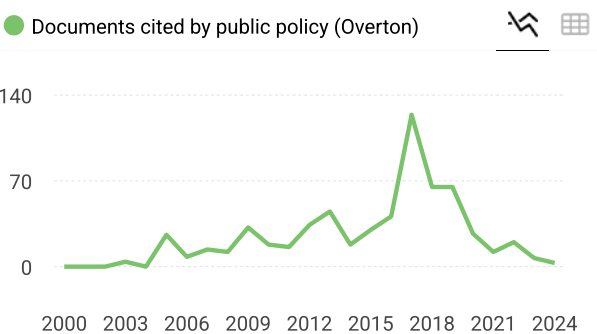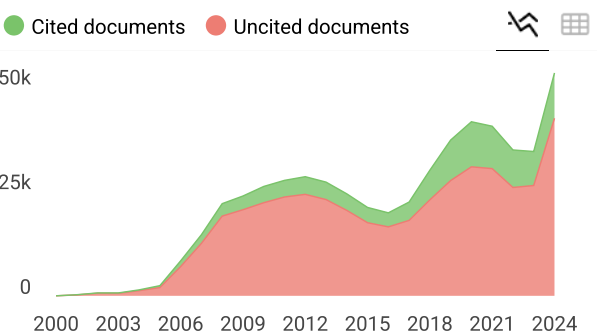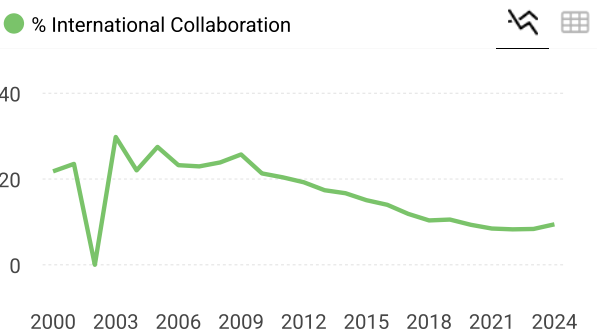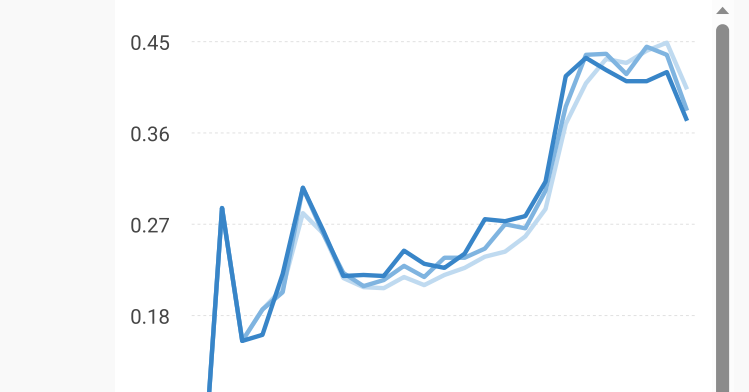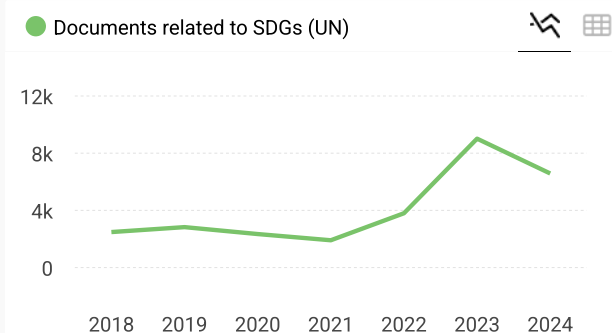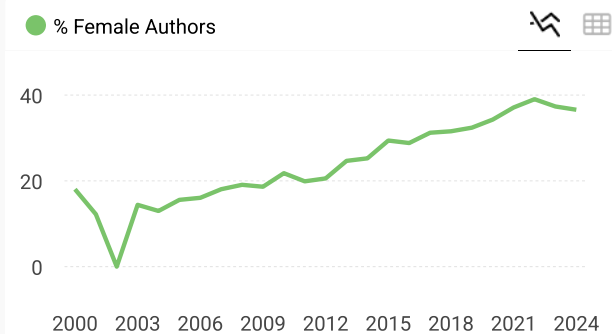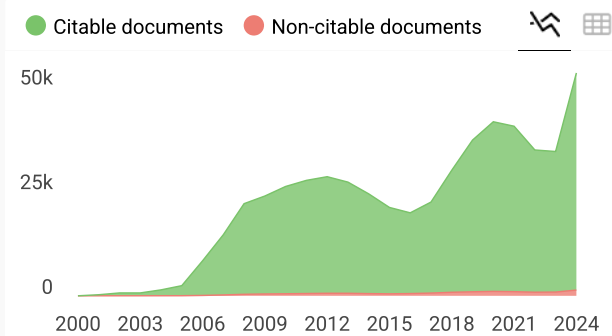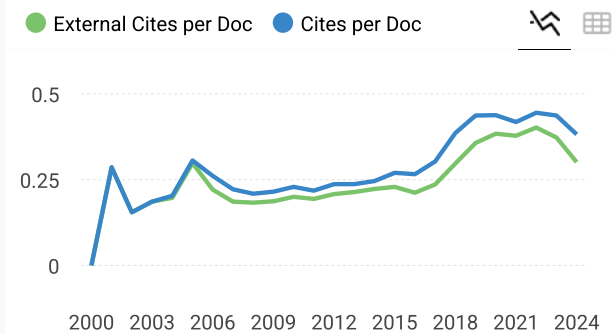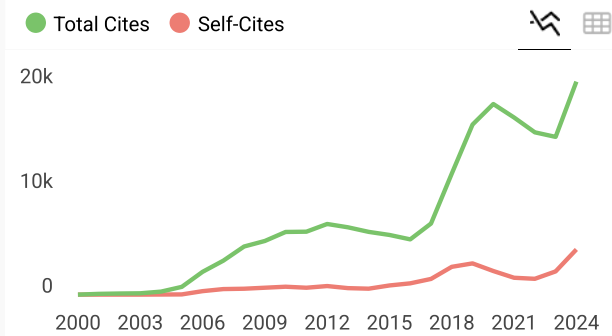

Show this widget in your own website

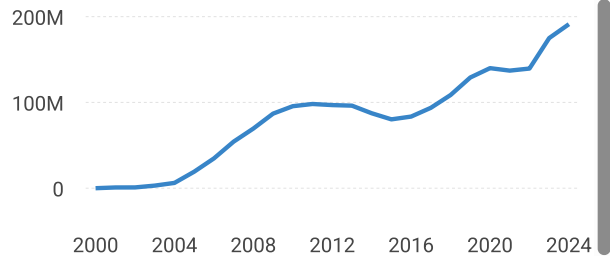

AIP Conference Proceedings

AIP Conference Proceedings

Not yet assigned
quartileSJR 2024
0.15

powered by scimagojr.com


Just copy the code below
and paste within your html
code:

```
<a href="https://www.scima
```



SCImago Graphica

Explore, visually
communicate and make
sense of data with our
[new data visualization
tool](#).



Metrics based on Scopus® data as of March 2025

E

Eswaramoorthy Muthusamy 2 months ago

Is it AIP Conference Proceeding rated as Q1 or Q2 category

← reply

T

Tride 4 weeks ago

Good reputation...sure speed satisfaction publisher.

**Melanie Ortiz** 2 months ago

SCImago Team

Dear Eswaramoorthy,

Thank you for contacting us. As referred below, we calculate the SJR data for all the publication's types, but the Quartile's data are only calculated for Journals and Book Series.

Best regards, SCImago Team

A

Asst.lec. Muthanna Mohammed Abdalkalek 2 months ago

5th International Conference on Earth Science, Minerals, and Energy (ICEMINE)

Yogyakarta, Indonesia • 10 November 2022

Editors • Shofa Rijalul Haq, Widyawanto Prastistho,
Aldin Ardian and Muammar Gomareuzzaman



5th ICEMINE 2022

RESEARCH ARTICLE | SEPTEMBER 06 2024

Preface: The 5th International Conference on Earth Science, Mineral, and Energy (ICEMINE 2022)

AIP Conf. Proc. 3019, 010001 (2024)

<https://doi.org/10.1063/1.20026334>



 Nanotechnology & Materials Science

 Optics & Photonics

 Impedance Analysis

 Scanning Probe Microscopy

 Sensors

 Failure Analysis & Semiconductors



Unlock the Full Spectrum.

From DC to 8.5 GHz.

Your Application. Measured.

[Find out more](#)

 Zurich Instruments

Preface: The 5th International Conference on Earth Science, Mineral, and Energy (ICEMINE 2022)

The 5th International Conference on Earth Science, Mineral, and Energy (ICEMINE) 2022 is an annual event held by Faculty of Mineral Technology, Universitas Pembangunan Nasional Veteran Yogyakarta, proudly present the theme of “Earth Resource Management as a Prime Mover to Achieve Economic Recovery Post Pandemic” where the discussion focused on the earth resources management to be able to improve the economic growth post pandemic situation. More than 60 presenters and speakers from universities and companies in Indonesia and also the contributor countries (South Korea, Japan, Brazil, and Canada) were involved in this conference.

Indonesia has abundant natural resources including renewable and non-renewable. The utilization of natural resources needs to be adjusted with the area development as well as control enhancement by implementing regulation. Energy sector activities should be done with the concept of environmental sustainability starting from exploration, until extraction. This concept could preserve energy resources for the future as well as improve the economic growth. Post Covid-19 pandemic, community lives have not fully recovered from the impact on all sectors of life in society, including the economic sector. Not only the environmental sustainability issue but also the exploration, exploitation, and extraction process have the challenges and opportunities to optimize the national economic growth and energy resilience.

The conference reached final result where the post pandemic could be seen as a challenge to enhance and improve our knowledge and technology in the earth resource management to keep the economic growing. Optimizing the existing methods, implementing a new technology, and collaboration were the important aspects to keep in mind post pandemic situation. The committee also thank the participants and all parties who made ICEMINE 2022 held successfully.

MINING AND METALURGICAL ENGINEERING

Use of plat heat exchanger for binary cycle system in utilization of brine from geothermal exploration well 🛒

[Herianto](#); [Dyah Rini](#); [Dewi Asmorowati](#); [Deshinta Putri](#)

AIP Conf. Proc. 3019, 090001 (2024) <https://doi.org/10.1063/5.0224635>

[Abstract](#) ▾

[View article](#)

[PDF](#)

Polymer injection optimization on Berea core and Native core using reservoir simulation on Layer C of the "CT" field 🛒

[Boni Swadesi](#); [Chrisstella Telenkaho](#); [Dedy Kristanto](#); [Aidil Adham](#); [Saryana](#)

AIP Conf. Proc. 3019, 090002 (2024) <https://doi.org/10.1063/5.0223929>

[Abstract](#) ▾

[View article](#)

[PDF](#)

Choosing the best scenario for field development on EZN field, Lakat formation using decline curve analysis method 🛒

[Edgie Yuda Kaesti](#); [Muhammad Zakiy](#); [Nalendra Adam Firmana](#)

AIP Conf. Proc. 3019, 090003 (2024) <https://doi.org/10.1063/5.0226394>

[Abstract](#) ▾

[View article](#)

[PDF](#)

Calculation of the linear flow rate of a compressible fluid (gas) in a reservoir 🛒

[Listiana Satiawati](#); [Yusraida Khairani Dalimunthe](#); [Harin Widiyatni](#)

AIP Conf. Proc. 3019, 090004 (2024) <https://doi.org/10.1063/5.0228793>

[Abstract](#) ▾

[View article](#)

[PDF](#)

Evaluation of primary cementing in 7 inch production casing using CBL-VDL analysis in the TJ-19 well in the "Alfa" field 🛒

[Sayoga Heru Prayitno](#); [Suwardi](#); [Julianno](#); [Thomas Alfa](#)

AIP Conf. Proc. 3019, 090005 (2024) <https://doi.org/10.1063/5.0226513>

[Abstract](#) ▾

[View article](#)

[PDF](#)

The effectiveness of fir wood lignosulphonate surfactant stability on intermediate oil as biomaterial engineering 🛒

[Jevericov Tetelepta](#); [Orlando Firdaus](#); [Rini Setiati](#); [Muh. Taufiq Fathaddin](#); [Pri Agung Rakhmanto](#); [Iwan Sumirat](#)

AIP Conf. Proc. 3019, 090006 (2024) <https://doi.org/10.1063/5.0226331>

[Abstract](#) ▾

[View article](#)

[PDF](#)

RESEARCH ARTICLE | SEPTEMBER 06 2024

Calculation of the linear flow rate of a compressible fluid (gas) in a reservoir

Listiana Satiawati ; Yusraida Khairani Dalimunthe; Harin Widiyatni

AIP Conf. Proc. 3019, 090004 (2024)

<https://doi.org/10.1063/5.0228793>



 Nanotechnology & Materials Science
  Optics & Photonics
  Impedance Analysis
  Scanning Probe Microscopy
  Sensors
  Failure Analysis & Semiconductors




Unlock the Full Spectrum.

From DC to 8.5 GHz.

Your Application. Measured.

[Find out more](#)

 Zurich Instruments

Calculation of The Linear Flow Rate of a Compressible Fluid (Gas) in a Reservoir

Listiana Satiawati^{a)}, Yusraida Khairani Dalimunthe and Harin Widiyatni

Petroleum Engineering Department, Faculty of Earth and Energy Technology, Universitas Trisakti, West Jakarta, Indonesia

^{a)} Corresponding author: listianasatiawati@trisakti.ac.id

Abstract. Derivation of the equation for the linear flow rate of a compressible fluid or gas in a reservoir has been carried out, the derivation of the gas equation is quite complicated and many factors must be taken into account. Calculations were carried out manually and numerically by using the Fortran 95 program. Numerical calculations were carried out because the calculations were quite complicated and easier when used for repeated calculations. In the middle of the program the price of the pseudo-reduce variable from temperature and pressure has been calculated, then from the data obtained the compressibility factor for natural gas from the Standing Kart Chart, then the calculation is continued again. So that the value of the linear flow rate of the compressible fluid is obtained.

Keywords: linear flow rate, compressible fluid, reservoir.

INTRODUCTION

There are several types of flow in the reservoir, including linear, radial, spherical and semi-spherical flows. Likewise with fluids, there are several kinds of fluids, namely compressible, slightly compressible and incompressible. This research is a continuation of previous research on the derivation of Darcy's equation for linear flow of slightly compressible and incompressible fluids (Satiawati & Yulia, 2019) & (Satiawati, 2022). This research is continued for compressible fluids which include gaseous fluids. In the derivation of the gas flow equation in this reservoir, first, gas is categorized as real gas in standard conditions P_{sc} is 14.7 psi and T_{sc} is 520° Rankine and the Darcy equation is used for linear flow and the unit used is standard cubic foot per day or scf/day. While the viscosity of natural gas is calculated using the Lee Gonzales Eakin method or the LGE Method, and the viscosity value is considered constant for the observed pressure interval. For the natural gas system the value of pseudo critical temperature, T_{pc} (°R) and pseudo-critical pressure, P_{pc} (psia) is obtained from reference no. (Ahmed & Meehan, 2012) & (Ahmed, 2011). The molecular weight of the gas is obtained from the specific gravity data and the gas density is obtained from the real gas equation.

FORMULA

Darcy's equation is an equation that is commonly used to calculate discharge, and the velocity of linear flow and radial flow. Initially Darcy's equation was obtained from the results of the cylindrical tube experiment conducted by Darcy, further analysis of the Darcy equation was derived from the Navier Stokes equation to find a more general case solution (Satiawati & Yulia, 2019) Therefore, Darcy's equation is widely used in the calculation of fluid flow in the reservoir and the results are quite valid because it is supported by analysis and experimentation. For a flat reservoir, the Darcy equation is:

$$v = \frac{q}{A} = -0.001127 \frac{k dP}{\mu dx}$$

v is the flow velocity, q is the volumetric flow rate or discharge, A is the cross-sectional area of the rock, μ is the viscosity of the fluid, $\frac{dP}{dx}$ is the pressure gradient in the same direction as v and q , and k is the rock constant or permeability. The negative sign (-) is because the pressure gradient is negative or not in the direction of the flow.

For linear flow of a compressible fluids or gas. The equation of state for real gases is used

$$P V = Z n R T \quad \text{or} \quad n = \frac{P V}{Z R T}$$

Where:

n is the number of moles of gas

P is pressure

T is temperature

V is the volume, and

Z is the compressibility factor of the gas

Under standard conditions (sc)

$$n = \frac{P V}{Z R T} = \frac{P_{sc} V_{sc}}{Z_{sc} R T_{sc}}$$

And with the approach of the gas compressibility factor under standard conditions the price is close to 1,

$$\frac{PV}{ZT} = \frac{P_{sc} V_{sc}}{T_{sc}}$$

and equality (Boas, 1983) & (Hugh D. Young, 2012),

$$V \text{ (ft}^3\text{)} \sim 5,615 q \text{ (bbl/day)}$$

$$V_{sc} \text{ (ft}^3\text{)} \sim Q_{sc} \text{ (scf/day)},$$

Then get

$$\frac{P(5.615 q)}{ZT} = \frac{P_{sc} V_{sc}}{Q_{sc}}$$

$$q = \left(\frac{P_{sc}}{T_{sc}} \right) \left(\frac{ZT}{P} \right) \left(\frac{Q_{sc}}{5.615} \right)$$

$$\frac{q}{A} = \left(\frac{P_{sc}}{T_{sc}} \right) \left(\frac{ZT}{P} \right) \left(\frac{Q_{sc}}{5.615} \right) \left(\frac{1}{A} \right) = 0.001127 \frac{k dP}{\mu dx}$$

$$\left(\frac{Q_{sc} P_{sc} T}{0.006328 k T_{sc} A} \right) \int_0^L dx = - \int_{P_1}^{P_2} \frac{P dP}{Z \mu_g}$$

Assuming $Z \mu_g$ is constant for the range $P_1 - P_2$

$$\left(\frac{Q_{sc} P_{sc} T}{0.006328 k T_{sc} A} \right) \int_0^L dx = - \frac{1}{Z \mu_g} \int_{P_1}^{P_2} P dP$$

$$\left(\frac{Q_{sc} P_{sc} T}{0.006328 k T_{sc} A} \right) (L - 0) = - \frac{1}{2 Z \mu_g} (P_2^2 - P_1^2)$$

$$Q_{sc} = \frac{0.003164 T_{sc} A k (P_1^2 - P_2^2)}{P_{sc} T (Z \mu_g) L}$$

Set prices $P_{sc} = 14,7$ psi and $T_{sc} = 520^\circ$ Rankine

$$Q_{sc} = \frac{0.111924 A k (P_1^2 - P_2^2)}{T L (Z \mu_g)}$$

Where, T is the temperature in Rankine. P is the upstream and downstream pressure in psi. A is the cross-sectional area in ft². L is the length of the reservoir in ft. k is the absolute permeability in md. Z is the compression factor found on the Standing-Katz chart. And μ_g is the gas viscosity searched by the LGE Method (Lee Gonzales Eakin Method)

RESULTS AND DISCUSSION

Field data

An ideal gas flows in a linear porous medium with the following data:

- Specific gravity 0.72
- Temperature 140°F
- Upstream pressure 2100 psi
- Downstream pressure 1894.73 psi
- Cross-sectional area 4500 ft²
- Total length 2500 ft
- Absolute permeability 60 mD
- Temperature at standard condition 520°R
- Pressure at standard conditions 14.7 psi

The gas flow rate in units of scf/day is:

Derivation of equations for fluid flow in a reservoir with specific gravity data, temperature, upstream and downstream pressures, cross-sectional area, length and absolute permeability. Followed by the calculation of the average pressure, pseudo-critical temperature and pressure, pseudo-reduce of temperature and pressure, then obtained the gas compressibility factor from the Standing Kart Chart. Followed by the calculation of the molecular weight, density and viscosity of the gas, the gas flow rate can be obtained in units of scf/day. The manual calculations are quite complicated, so numerical calculations using the Fortran 99 soft program (Mourik, 2005) are used for calculations with large and repetitive data.

Flowchart

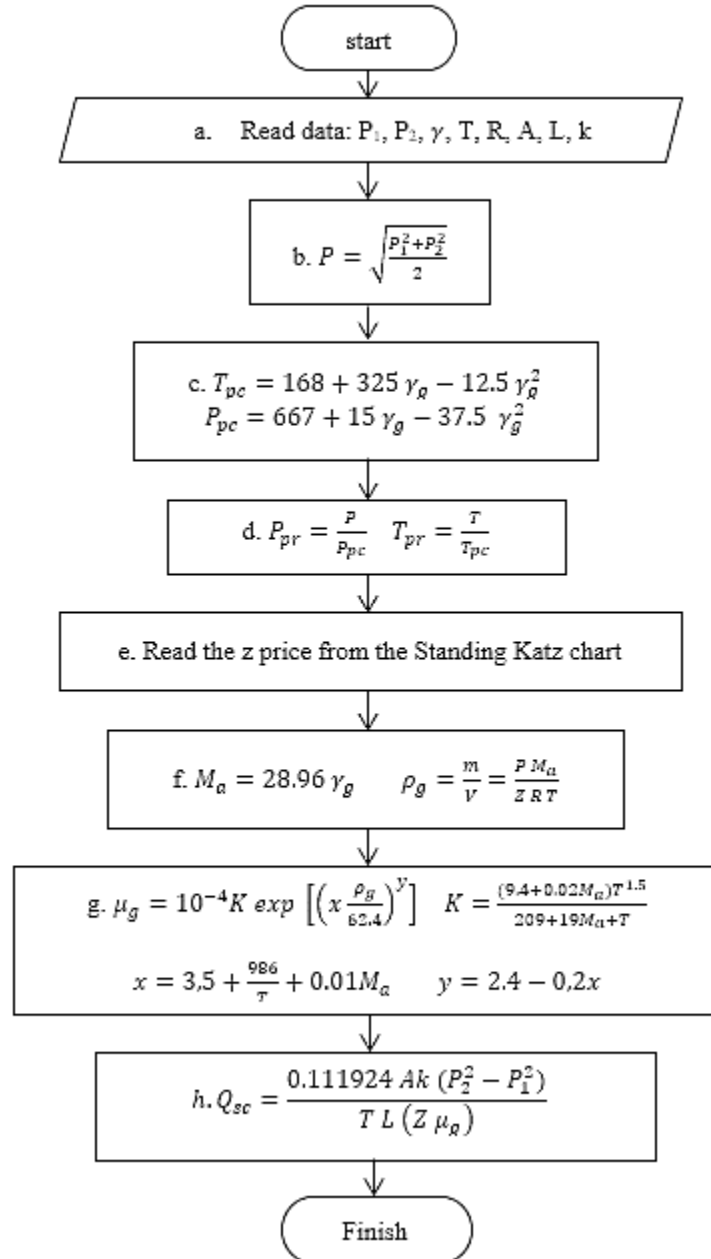


FIGURE 1. Flowchart of gas flow calculation in reservoir

Caption FIGURE 1

- Read data
- Calculating average pressure
- Calculating pseudo critical temperature and pressure
- Calculating pseudo reduce temperature and pressure
- With pseudo reduce temperature and pressure data, the Z value is obtained from the Standing Kart Chart
- Calculate the molecular weight and density of gas from the specific values of gravity and gas density from the real gas equation
- Calculating gas viscosity using LGE method
- Calculate the gas flow rate in the reservoir

Calculations using the Fortran 95 soft program

- a. Pressure up: $p_{up} = 2100$ (psia)
 Pressure down: $p_{down} = 1894.73$ (psia)
 Specific gravity of gas: $g_{gas} = 0.72$
 Temperature: $T = t = 600$ (oRankien / oR)
 General gas constant: $R = r = 10.73$ (psia ft³/(lb-mole R))
 Cross-sectional area: $A = a = 4500$ (ft²)
 Reservoir length: $L = l = 2500$ (ft)
 Permeability: $k = k_k = 60$ (ft²)
- b. $p_{ave} = \sqrt{(p_{up}^{**2.0d0} + p_{down}^{**2.0d0}) / 2.0d0}$
- c. $tpc = 168.0d0 + 328.0d0 * g_{gas} - 12.5d0 * g_{gas}^{**2.0d0}$
 $ppc = 677.0d0 + 15.0d0 * g_{gas} - 37.5d0 * g_{gas}^{**2.0d0}$
- d. $p_r = t / tpc$
 $p_{pr} = p_{ave} / ppc$
- e. Followed by reading the compressibility factor for natural gas z using the Standing Kart Chart, obtained $z = 0.78$.
 See Figure 2
- f. $ma = g_{gas} * 28.96d0$
 $\rho_{hog} = (p_{ave} * ma) / (z * r * t)$
- g. $x = 3.5d0 + 986.0d0 / t + 0.01d0 * ma$
 $y = 2.4d0 - 0.2d0 * x$
 $k = ((9.4d0 + 0.02d0 * ma) * t^{**1.5d0}) / (209.0d0 + 19.0d0 * ma + t)$
 $\mu_g = 10.0d0^{**(-4.0d0) * k * dexp(x * (\rho_{hog} / 62.4d0)^{**y})}$
- h. $q_{sc} = (0.111924d0 * a * k_k * (p_{up}^{**2.0d0} - p_{down}^{**2.0d0})) / (t * l * z * \mu_g)$
 Gas flow rate calculation result = Q_{sc} (scf/day) = $q_{sc} = 1.226433E+06$

Manual flow rate calculation

- Calculation of average pressure

$$\bar{P} = \sqrt{\frac{P_{up}^2 + P_{down}^2}{2}} = \sqrt{\frac{2100^2 + 1894.73^2}{2}} = 2000 \text{ psi}$$

- Calculation of pseudo critical temperature and pressure

$$T_{pc} = 168 + 325\gamma_g - 12.5\gamma_g^2 = 168 + 325 \cdot 0.72 - 12.5 \cdot 0.72^2 = 395.5 \text{ } ^\circ R$$

$$P_{pc} = 677 + 15.0\gamma_g - 37.5\gamma_g^2 = 677 + 15.0 \cdot 0.72 - 37.5 \cdot 0.72^2 = 668.4 \text{ psia}$$

- Calculation of temperature $140^\circ F = 140 + 459.67 = 600 \text{ } ^\circ R$
- Calculation of pseudo reduce temperature and pressure

$$P_{pr} = \frac{\bar{P}}{P_{pc}} = \frac{2000}{668.4} = 2.99$$

$$T_{pr} = \frac{T}{T_{pc}} = \frac{600}{395.5} = 1.52$$

- Followed by reading the compressibility factor for natural gas z using the Standing Kart Chart, obtained $z = 0.78$.
 See Figure 2

- Calculation of Natural Gas Viscosity Using the Lee Gonzales Eakin Method or LGE Method

$$\gamma_g = \frac{M_a}{28.96}$$

Then the molecular weight of the gas is

$$\begin{aligned} M_a &= \gamma_g 28.96 = 0.72 \cdot 28.96 = 20.85 \text{ gram/mol} \\ x &= 3.5 + \frac{986}{T} + 0.01 M_a = 3.5 + \frac{986}{600} + 0.01 \cdot 20.85 = 5.35 \\ y &= 2.4 + 0.2 x = 2.4 + 0.2 \cdot 5.35 = 1.33 \\ K &= \frac{(9.4 + 0.02 M_a) T^{1.5}}{209 + 19 M_a + T} = \frac{(9.4 + 0.02 \cdot 20.85) 600^{1.5}}{209 + 19 \cdot 20.85 + 600} = 119.72 \end{aligned}$$

- Calculation of gas density

$$\rho_g = \frac{m}{V} = \frac{P M_a}{Z R T} = \frac{2000 \cdot 20.85}{0.78 \cdot 10.73 \cdot 600} = 8.3 \frac{\text{lb}}{\text{ft}^3}$$

so the value of viscosity is

$$\mu_g = 10^{-4} K \exp \left[x \left(\frac{\rho_g}{62.4} \right)^y \right] = 10^{-4} \cdot 119.72 \exp \left[5.35 \left(\frac{8.3}{62.4} \right)^{1.33} \right] = 0.0173 \text{ cp}$$

- Then the gas flow rate is

$$\begin{aligned} Q_{sc} &= \frac{0.111924 A k (P_{up}^2 - P_{down}^2)}{T L Z \mu_g} = \frac{0.111924 \cdot 4500 \cdot 60 (2100^2 - 1894.73^2)}{600 \cdot 2500 \cdot 0.78 \cdot 0.0173} \\ &= 1,224,243.9 \text{ scf/day} \end{aligned}$$

CONCLUSIONS AND RECOMMENDATIONS

1. The derived equation can be used to calculate the linear flow rate of a compressible fluid or gas in a reservoir
2. The calculation of the flow rate manually has been done the results are: 1,224,243.9 scf/day
3. Numerical flow rate calculation has been done the result is: 1.226433E+06 scf/day
4. Numerical calculations with the Fortran computer program can be used because they have been validated by manual calculations and to facilitate repeated calculations.

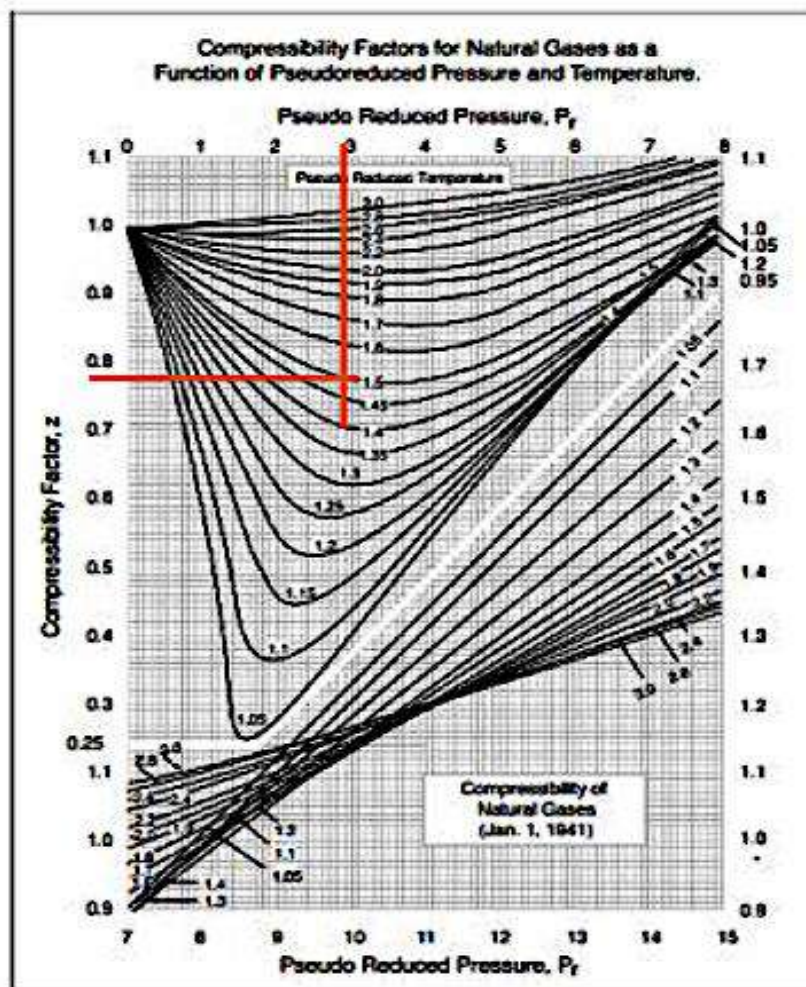


FIGURE 2. Reading of the compressibility factor for natural gas z using a Standing Kart Chart

ACKNOWLEDGMENTS

Thankyou to the Fakultas Teknologi Kebumian dan Energi Universitas Trisakti for funding this research.

REFERENCES

- 1) Ahmed, T. (2011). Reservoir Engineering Handbook (Second). Texas: Gulf Professional Publishing.
- 2) Ahmed, T., & Meehan, D. N. (2012). Advance Reservoir Management and Engineering. Oxford: Gulf Professional Publishing.
- 3) Boas, L. M. (1983). Mathematical Methods In The Physical Sciences. Canada: JOHN WILEY & SONS, INC.
- 4) Hugh D. Young, & R. A. F. (2012). University Physics, 12th edition (13th ed.). San Francisco: Addison-Wesley, 1301 Sansome Street. Retrieved from <https://www.amazon.com/University-Physics-Modern-12th/dp/0321501217>
- 5) Mourik, T. Van. (2005). Fortran Programming Manual, 1–67. Retrieved from <http://www-eio.upc.edu/lceio/manuals/Fortran95-manual.pdf>
- 6) Satiawati, L. (2022). Numerical Pressure Calculation of Unsteady-state Radial Flow on Slightly Compresibility Fluids. *Metrik Serial Teknologi dan Sains*, 3(1), 7–15. Retrieved from <https://publikasi.kocenin.com/index.php/teksi/issue/view/8>
- 7) Satiawati, L., & Yulia, P. S. (2019). Derivation of the Darcy Equation from the Navier-Stokes Equation for Linear and Radial Flow Reservoirs. *PETRO: Scientific Journal of Petroleum Engineering*, 8(2), 65–69. <https://doi.org/10.25105/petro.v8i2.4778>