

MATHLINE

Jurnal Matematika dan Pendidikan Matematika

Pengaruh Metode Pembelajaran *Thinking Skill* Terhadap Kemampuan Komunikasi Matematis Siswa
Durtama, Sri Hartini, Rasyudi

Pengembangan Instrumen Asesmen Otentik Tes Kemampuan Berpikir Kritis pada Pembelajaran Matematika
Riva Panji Yudha

Perbandingan Hasil Belajar Matematika Antara Siswa yang Pembelajarannya Menggunakan Model *Giving Question and Giving Answer* dengan Siswa *Group Achievement Division*
Eryanti, Nandang, Denni Ismunandar

Pengaruh Asesmen *Written* Terhadap Hasil Belajar Matematika Siswa Materi Persamaan Kuadrat
Farid Gunadi

Pengaruh Kemampuan Koneksi Matematis pada Materi Segitiga Beraturan Jenis Asesmen *Alfa Zeta* dan *Mathematical Habits of Mind Level* pada Model Pembelajaran Kooperatif Tipe STAD
Novi Widhyastuti, Ann Juhana Senjaya, Whatt Darmayanti Lesari

Pengaruh Kecerdasan Emosional dan Rasa Percaya Diri Terhadap Penguasaan Konsep Matematika
Muh. Aripka Nurmantoro

Meningkatkan Kemampuan Komunikasi Matematis Mahasiswa Melalui Pembelajaran Kooperatif Tipe *Jigsaw* dalam Mata Kuliah *Geometry* Ruang
Sumarmi, Anggar Titis Prayitno, Mita Nurpalih

Deskripsi Kompetensi Pedagogik Mahasiswa Calon Guru pada Mata Kuliah Analisis Kurikulum Matematika
Salwaik, Nur Wahidin Ashari, Fahrol Roshid



Program Studi Pendidikan Matematika
Universitas Wira Lodra

SERTIFIKAT

Direktorat Jenderal Pendidikan Tinggi, Riset dan Teknologi
Kementerian Pendidikan, Kebudayaan, Riset, dan Teknologi Republik Indonesia



Kutipan dari Keputusan Direktorat Jenderal Pendidikan Tinggi, Riset dan Teknologi
Kementerian Pendidikan, Kebudayaan, Riset, dan Teknologi Republik Indonesia

Nomor 204/E/KPT/2022

Peringkat Akreditasi Jurnal Ilmiah periode II Tahun 2022

Nama Jurnal Ilmiah

Mathline : Jurnal Matematika dan Pendidikan Matematika

E-ISSN: 26223627

Penerbit: Universitas Wiralodra

Ditetapkan Sebagai Jurnal Ilmiah

TERAKREDITASI PERINGKAT 3

Akreditasi Berlaku selama 5 (lima) Tahun, yaitu
Volume 7 nomor 1 tahun 2022 sampai volume 11 nomor 2 tahun 2026

Jakarta, 03 October 2022

Plt. Direktur Jenderal Pendidikan Tinggi,
Riset, dan Teknologi



Catatan:

1. UU ITE No 2 Tahun 2016 Pasal 5 Ayat 1 "Informasi Elektronik adalah data atau kumpulan informasi yang berbentuk data elektronik atau elektronik."
2. Dokumen ini tidak dapat digandakan secara elektronik menggunakan sertifikat elektronik yang diterbitkan oleh BPS E

Prof. Ir. Nizam, M.Sc., DIC, Ph.D., IPU, ASEAN Eng
NIP. 196107061987101001

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1321-1332](#)
 2023 [DOI: 10.31943/mathline.v8i4.492](#) [Accred : Sinta 3](#)

[Modeling The Impact Analysis of The Covid-19 Pandemic On The Tourism Sector In Palopo City With A Nonparametric Regression Approach](#)

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1333-1344](#)
 2023 [DOI: 10.31943/mathline.v8i4.499](#) [Accred : Sinta 3](#)

[Application of Peer Method Tutoring in Cultivating Sense of Belonging Junior High School Students to Online Learning](#)

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1461-1474](#)
 2023 [DOI: 10.31943/mathline.v8i4.508](#) [Accred : Sinta 3](#)

[Application of Monopoly Game Media In Learning Mathematical Counting Operations Grade 3 MIM Talang](#)

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1283-1304](#)
 2023 [DOI: 10.31943/mathline.v8i4.511](#) [Accred : Sinta 3](#)

[Development of Problem-Based Learning-Based Independent Curriculum LKPD to Improve Students' HOTS](#)

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1415-1436](#)
 2023 [DOI: 10.31943/mathline.v8i4.514](#) [Accred : Sinta 3](#)

[Efforts to Overcome Student Difficulties in Function Continuity Material Through The Use Of Structured Worksheets](#)

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1559-1572](#)
 2023 [DOI: 10.31943/mathline.v8i4.524](#) [Accred : Sinta 3](#)


[Customer Segmentation Analysis Using Random Forest & Naïve Bayes Method In The Case of Multi-Class Classification at PT. XYZ](#)

Universitas Wiralodra [Mathline : Jurnal Matematika dan Pendidikan Matematika Vol. 8 No. 4 \(2023\): Mathline: Jurnal Matematika dan Pendidikan Matematika 1359-1372](#)
 2023 [DOI: 10.31943/mathline.v8i4.532](#) [Accred : Sinta 3](#)

Get More with
SINTA Insight

Go to Insight

Citation Per Year By Google Scholar

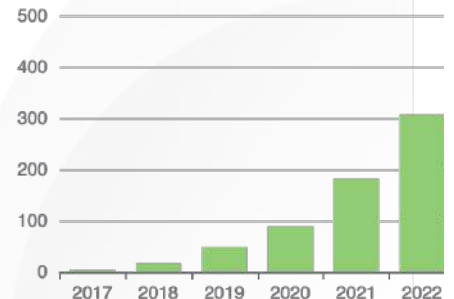

Journal By Google Scholar

	All	Since 2020
Citation	1723	1637
h-index	21	21
i10-index	37	36



CURRENT ANNOUNCEMENTS ABOUT ▾ ARCHIVES REGISTER LOGIN

Q SEARCH

HOME / Editorial Team

Editorial Team

EDITOR IN CHIEF

[Wiwit Damayanti Lestari](#) (Scopus ID: [57511806900](#)) Universitas Wiralodra, Indramayu, Indonesia

EDITORIAL BOARD

[Aloisius L. Son](#) (Scopus ID: [57211269159](#)) Universitas Timor, Indonesia

[Fiki Alghadari](#) (Scopus ID: [57200723866](#)) STKIP Kusuma Negara, Jakarta, Indonesia

[Ahmad Muzaki](#) (Scopus ID: [57199217085](#)) Institut Keguruan dan Ilmu Pendidikan Mataram, Mataram, Indonesia

[Usep Kosasih](#) (Scopus ID: [57196244271](#)) Universitas Islam Nusantara, Bandung, Indonesia

[Sri Adi Widodo](#) (Scopus ID: [57196328078](#)) Universitas Sarjanawiyata Tamansiswa, Yogyakarta

[Farid Gunadi](#) (Scopus ID: [57219986472](#)) Universitas Wiralodra, Indramayu, Indonesia

[Jerito Pereira](#) (Scopus ID : [57224862991](#)) Universidade Nacional Timor Lorosa'e, Dili, Timor-Leste

[Denni Ismunandar](#) (Scopus ID: [57221586999](#)) Universitas Wiralodra, Indramayu, Indonesia

EDITORIAL ASSISTANT

[Luthfiyati Nurafifah](#) (Scopus ID: [57219986503](#)) Universitas Wiralodra, Indramayu, Indonesia

[Mochammad Taufan](#) (Scopus ID: [57219988244](#)) Universitas Wiralodra, Indramayu, Indonesia

[Mellawaty](#) (Scopus ID : 57211276865) Universitas Wiralodra, Indramayu, Indonesia

[Diki Mulyana](#) Universitas Wiralodra Indramayu

Open Journal Systems

INFORMATION

For Readers

For Authors

For Librarians



History

Peer-reviewers

Author Guideline

Indexing and Abstract

Publication Ethics

Focus & Scope

Peer Review Process

Copyright Notice

Open Access Policy

Plagiarism Policy

Article Processing Charge (APC)

ISSN 2622-3627 (Online)

ISSN 2502-5872 (Print)

Declaration Form




CURRENT ANNOUNCEMENTS ABOUT ▾ ARCHIVES REGISTER LOGIN

Q SEARCH

HOME / ARCHIVES / Vol. 8 No. 4 (2023): Mathline: Jurnal Matematika dan Pendidikan Matematika

Vol. 8 No. 4 (2023): Mathline: Jurnal Matematika dan Pendidikan Matematika

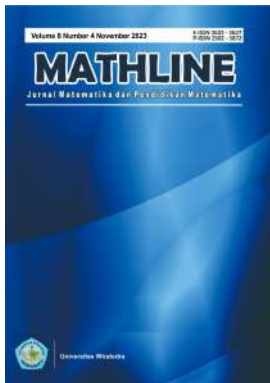

DOI: <https://doi.org/10.31943/mathline.v8i4>

PUBLISHED: 2023-11-15

FULL ISSUE

PDF

ARTICLES

Ethnomathematics: Concept of Geometry and Cultural Wisdom In The Construction of The Minangkabau Gadang House

DOI: <https://doi.org/10.31943/mathline.v8i4.474>

Eva Susanti, Haris Kurniawan, Sri Adi Widodo, Krisna Satrio Perbowo

1259-1270

PDF

Ideals In Matrix Rings Over Commutative Rings

DOI: <https://doi.org/10.31943/mathline.v8i4.481>

Mugi Lestari, Suroto Suroto, Niken Larasati

1271-1282

PDF

Application of Monopoly Game Media In Learning Mathematical Counting Operations Grade 3 MIM Talang

DOI: <https://doi.org/10.31943/mathline.v8i4.511>

Fiqih Jaya Mahendra, Sukartono Sukartono

1283-1304

PDF

Analogical Reasoning in Solving Indirect Problem-Based Area Problems

DOI: <https://doi.org/10.31943/mathline.v8i4.470>

Open Journal Systems

INFORMATION

For Readers

For Authors

For Librarians



History

Peer-reviewers

Author Guideline

Indexing and Abstract

Publication Ethics

Focus & Scope

Peer Review Process

Copyright Notice

Open Access Policy

Plagiarism Policy

Article Processing Charge (APC)

ISSN 2622-3627 (Online)

ISSN 2502-5872 (Print)

Declaration Form

Eka Rahmah Nuridah, Mohammad Faizal Amir

1305-1320

**Comparative Analysis of Numerical Integration Solutions Pias Method and Newton Cotes Method Using Python Programming Language**DOI: <https://doi.org/10.31943/mathline.v8i4.492>

Santi Rahayu, Achmad Hindasyah

1321-1332

**Modeling The Impact Analysis of The Covid-19 Pandemic On The Tourism Sector In Palopo City With A Nonparametric Regression Approach**DOI: <https://doi.org/10.31943/mathline.v8i4.499>

Denysia Denysia, Rahmat Hidayat

1333-1344

**The Influence of Critical Reasoning, Independence, and Resilience to Adversity on The Numeracy Competence of 5th Grade Students in Cluster IV Kerambitan**DOI: <https://doi.org/10.31943/mathline.v8i4.418>

I Gusti Martha Sari

1345-1358

**Customer Segmentation Analysis Using Random Forest & Naïve Bayes Method In The Case of Multi-Class Classification at PT. XYZ**DOI: <https://doi.org/10.31943/mathline.v8i4.532>

Sofia Debi Puspita, Fani Puspitasari, Joko Riyono, Christina Eni Pujiastuti, David Leon Bijlsma, Joseph Andrew Leo

1359-1372

**The Influence of Parents Economic Level And Motivation On Mathematics Learning Outcomes**DOI: <https://doi.org/10.31943/mathline.v8i4.532>

Sodikin Sodikin

1373-1382

**Graph Coloring Implementation Using Welch Powell Algorithm In Lecture Scheduling Design For Mathematics Department**DOI: <https://doi.org/10.31943/mathline.v8i4.537>

Hendra Cipta, Rina Widyasari, Fikri Husin Batubara

1383-1398

**The Relationship of Divergent Thinking Ability, Learning Discipline, and Resilience to Adversity Towards The Mathematics Learning Outcomes of 5th Grade Elementary School Students in Cluster 2 Mekarsari-Baturiti**

English

DOI: <https://doi.org/10.31943/mathline.v8i4.417>

Ni Gusti Agung Made Mahayani, I Made Darmada, Sandra Sukmaning Adji

1399-1414

**Development of Problem-Based Learning-Based Independent Curriculum LKPD to Improve Students' HOTS**DOI: <https://doi.org/10.31943/mathline.v8i4.514>

Arezqi Tunggal Asmana, Abdur Rohim, Khafidhoh Nurul Aini, Vina Pandu Winata

1415-1436

**Tabarru' Fund Sharia Insurance Using The 2019 Mortality Table, Mortality Law and Cost of Insurance Method**

Article Template

Plagiarism Declaration

RECOMMENDED TOOLS



Welcome visitors, We are **Mathline: Jurnal Matematika dan Pendidikan Matematika** glad to have you with us. As for your information, we now have several new regulations and rules to provide high-quality publication. Since 2023 we will accept only proper English manuscript with a fair review. We are currently working on several indexings which will make your manuscript well registered and well cited. We also have done significant change to the template to make it look better and proportional.



DOI: <https://doi.org/10.31943/mathline.v8i4.542>

Fitria Sisca Wulandari, Irma Fauziah, Nina Fitriyati

1437-1448



PDF

Comparative Study of Data Generation for Normal, Lognormal, and Gamma Distributions using PLS and Usury ModelsDOI: <https://doi.org/10.31943/mathline.v8i4.543>

Zalfa Talitha Handarbeni, Irma Fauziah, Nina Fitriyati

1449-1460



PDF

Application of Peer Method Tutoring in Cultivating Sense of Belonging Junior High School Students to Online LearningDOI: <https://doi.org/10.31943/mathline.v8i4.508>

Clara Irmawati Butar-Butar, Tanti Listiani

1461-1474



PDF

Mapping SMA/MA In Surakarta City Using Multidimensional ScalingDOI: <https://doi.org/10.31943/mathline.v8i4.533>

Koryna Aviory, Christina Eva Nuryani

1475-1486



PDF

Preliminary Research: Development of A Teaching Module Based on Problem Based Learning To Improve Students' Mathematical Literacy AbilitiesDOI: <https://doi.org/10.31943/mathline.v8i4.539>

Nur Puji Lestari

1487-1506



PDF

Epistemological and Ethical Philosophy of Mathematics In 21st Century Mathematics Learning PracticesDOI: <https://doi.org/10.31943/mathline.v8i4.547>

Nailul Himmi, Izwita Dewi, Faiz Ahyaningsih

1507-1520



PDF

Magic Forms and The Mathematical Creative Thinking Ability of Secondary School StudentsDOI: <https://doi.org/10.31943/mathline.v8i4.550>

Muntazhimah Muntazhimah

1521-1538



PDF

Application of The Peer Tutor Method to Improve Mathematical Communication Skills in Class X StudentsDOI: <https://doi.org/10.31943/mathline.v8i4.384>

Siti Hazar Khomsyatun

1539-1558



PDF

Efforts to Overcome Student Difficulties in Function Continuity Material Through The Use Of Structured WorksheetsDOI: <https://doi.org/10.31943/mathline.v8i4.524>

Kus Andini Purbaningrum, Rika Sukmawati

1559-1572



PDF

Forecasting The Amount Of Oil and Non-Oil and Gas Exports In Indonesia Using The Box-Jenkins MethodDOI: <https://doi.org/10.31943/mathline.v8i4.403>

Visitors			See more
	226,327		1,201
	344		343
	11,401		722
	5,831		620
	2,123		360
			292

Pageviews: 489,887

FLAG Counter



View MyStat

Supervised By

**CURRENT ISSUE**

A10H 1.0

RSS 2.0

RSS 1.0

Anggita Br Sinaga, Riezky Purnama Sari, Nurviana Nurviana

1573-1588



PDF

Effectiveness of Realistic Mathematic Education (RME) Model Assisted With Jarimatics on Student Problem SolvingDOI: <https://doi.org/10.31943/mathline.v8i4.538>

Mukaromah Mukaromah, Parmin Parmin, Tri Diyah Prastiti

1589-1600



PDF

Mathline : Jurnal Matematika dan Pendidikan Matematika is licensed under a [Attribution-ShareAlike 4.0 International \(CC BY-SA 4.0\)](https://creativecommons.org/licenses/by-sa/4.0/)Reserved p-ISSN [2502-5872](#) e-ISSN [2622-3627](#)[Slot Thailand](#)[Situs Toto](#)[Toto 4d](#)Platform &
workflow by
OJS / PKI

CUSTOMER SEGMENTATION ANALYSIS USING RANDOM FOREST & NAÏVE BAYES METHOD IN THE CASE OF MULTI-CLASS CLASSIFICATION AT PT. XYZ

**Sofia Debi Puspa^{1*}, Fani Puspitasari², Joko Riyono¹, Christina Eni Pujiastuti¹,
David Leon Bijlsma¹, Joseph Andrew Leo³**

¹Departement of Mechanical Engineering, Universitas Trisakti, Jakarta Province, Indonesia

²Departement of Industrial Engineering, Universitas Trisakti, Jakarta Province, Indonesia

³Departement of Computer Science & Business Administration, University of Southern California, United States

*Correspondence: sofia.debi.puspa@trisakti.ac.id

ABSTRACT

Cases of the COVID-19 pandemic are gradually decreasing every day in Indonesia, but the impact of the COVID-19 pandemic has greatly affected various sectors, especially the economy and business. Sales transactions have not yet reached the company's target due to weak public purchasing power. The accuracy of customer segmentation analysis and attractive promo voucher offers are needed to increase the opportunity for people's purchasing power for a product. This study aimed to predict the level of customer purchasing power using the random forest and naïve Bayes methods in the case of multi-class data classification at PT. XYZ. The classification is carried out to determine the type of promo voucher suitable to be offered to customers according to the level of customer purchasing power. The data used is historical daily transaction data from January 1, 2022, to December 31, 2022, which is the transition period for the COVID-19 pandemic. Evaluation using the random forest method produces an accuracy of 99.99%, while the naïve Bayes method produces an accuracy of 92.99%. The random forest and naïve Bayes methods can work very well on large data volumes. However, from the comparison results, it can be concluded that the performance of the random forest method is better than the naïve Bayes method in the multi-class classification case in predicting the level of customer purchasing power at PT. XYZ.

Keywords: Classification, Random Forest, Naïve Bayes, Multi-Class, Customer Segmentation

How to Cite: Puspa, S. D., Puspitasari, F., Riyono, J., Pujiastuti., Bijlsma, D. L., & Leo, J. A. (2023). Customer Segmentation Analysis Using Random Forest & Naïve Bayes Method In The Case of Multi-Class Classification at PT. XYZ. *Mathline: Jurnal Matematika dan Pendidikan Matematika*, 8(4), 1359-1372. <http://doi.org/10.31943/mathline.v8i4.532>

PRELIMINARY

In recent years, there has been an exponential positive growth in the volume of data in the big data phenomenon. Apart from increasing volume, the variety and complexity of data is also experiencing rapid development. The impact of the big data phenomenon is very significant in various sectors, especially the business sector. Today's business competition is determined by the ability to process data to achieve optimal user solutions (Riahi & Riahi, 2018). According to (Romero et al., 2021), studying the current situation based on Business Intelligence (BI) in the economic and business fields can positively impact making effective

and accurate decisions in companies. This includes acquiring analytical skills, IT capabilities, business knowledge, and communication skills. The goal is to enhance a company's market position with innovative solutions and gain a competitive edge in business.

COVID-19 emerged in Wuhan, China, in December 2019 and has devastated global health. It was declared a pandemic by the WHO on March 11, 2020. Lockdowns and quarantine measures have been implemented worldwide to contain its spread. Capital markets have been affected due to uncertainty around its impact on investments (Parwati et al., 2023). In Indonesia, the COVID-19 virus spread rapidly in 2020, leading to restrictions on community activities. This has caused many companies to reduce output capacity by decreasing working hours and stopping machine use. Some businesses were forced to stop operating due to regulatory factors. This has had a significant impact on multiple sectors and has slowed down the Indonesian economy (Badan Pusat Statistik, 2020).

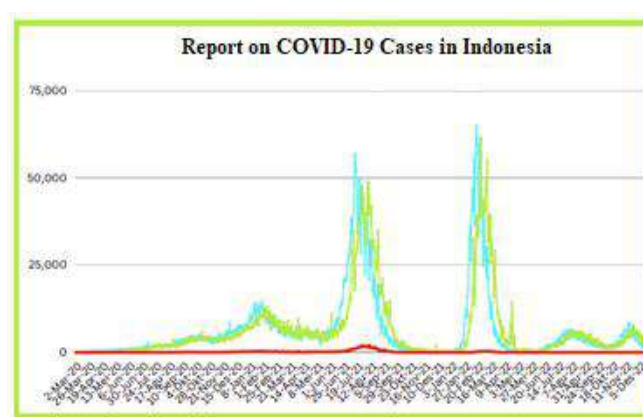


Figure 1. Covid-19 Daily Case Graph

Source: (Komite Penanganan Covid-19 & Pemulihan Ekonomi Nasional, 2023)

In 2021, COVID-19 cases decreased despite a rise in daily new cases in February-March 2022. Daily new cases gradually reduced until December 2022, as shown in Figure 1. This period marked Indonesia's transition from the pandemic, with some business sectors recovering. However, people's purchasing power is still weak, and sales transactions have yet to reach company targets. PT. XYZ is one such company that has started to improve during this transition period.

PT. XYZ operates in the food and beverage (F&B) sector and has 200 outlets throughout Indonesia. PT. XYZ grows along with digitalization, where more than 70% of sales come from online orders. Therefore, to increase people's purchasing power, it is necessary to offer attractive & targeted types of promotional vouchers. Sales transaction data at PT. XYZ has a large data volume with complexity, including menu variations, voucher

types, channels, and many stores with varying customer purchasing power. So, it is necessary to use a data mining-based algorithm to determine the right promotional voucher offer by classifying the purchasing power level of PT customers. XYZ. Accurate analysis based on purchasing power and consumer behavior will increase the opportunity to purchase products offered by marketers (Rahim et al., 2021).

Classification is a data mining technique that predicts future trends based on historical data. It falls under the category of predictive mining, which is a type of supervised learning. There are various methods of classification, such as decision trees, the C4.5 algorithm, random forest, naïve Bayes, support vector machine, neural network, and more. Based on research findings by (Schonlau & Zou, 2020), random forest models have higher prediction accuracy than parametric models like linear regression and logistic regression. Multiclass outcomes and regressions yield greater performance improvements than binary outcomes. Additionally, it has a feature selection process that enables the model to work efficiently on complex parameters of big data (Pavlov, 2019).

According to a research study conducted by (Zaw et al., 2019), the Naïve Bayes method was able to accurately detect 81.25% of tumor images and 100% of non-tumor images, resulting in an overall accuracy rate of 94%. The study concluded that Naïve Bayes is a reliable and fast method for detecting brain tissue abnormalities. In addition, another research study conducted by (Putro et al., 2020) found that Naïve Bayes was effective in customer classification, achieving a precision value of 100%, a recall value of 91%, and an accuracy value of 92%. The Naive Bayes method can also be used for sentiment analysis and has good processing time complexity on big data during text classification, where the algorithm is used as a classification engine (Aprilia et al., 2021). These results highlight the effectiveness and efficiency of Naïve Bayes and Random Forest methods in various classification applications.

Based on the explanation above, this research aims to predict the most suitable promotional voucher offer by classifying the level of customer purchasing power using the Random Forest and Naïve Bayes methods. Furthermore, the model evaluation results will compare the performance of the Random Forest and Naïve Bayes methods to determine the best modeling approach. The benefit of this research is providing insights into the most effective method for classifying customer purchasing power levels, helping the marketing team to create customer segmentation and market analyses.

METHODS

Data mining is a big data analysis technique to find patterns and meaningful relationships hidden in data. Data mining generally processes data originating from observations with large data volumes. As a result, data mining is connected to various other scientific fields, including mathematics (particularly optimization), computer science, machine learning, artificial intelligence, image processing, text mining, and others (Durugkar et al., 2022).

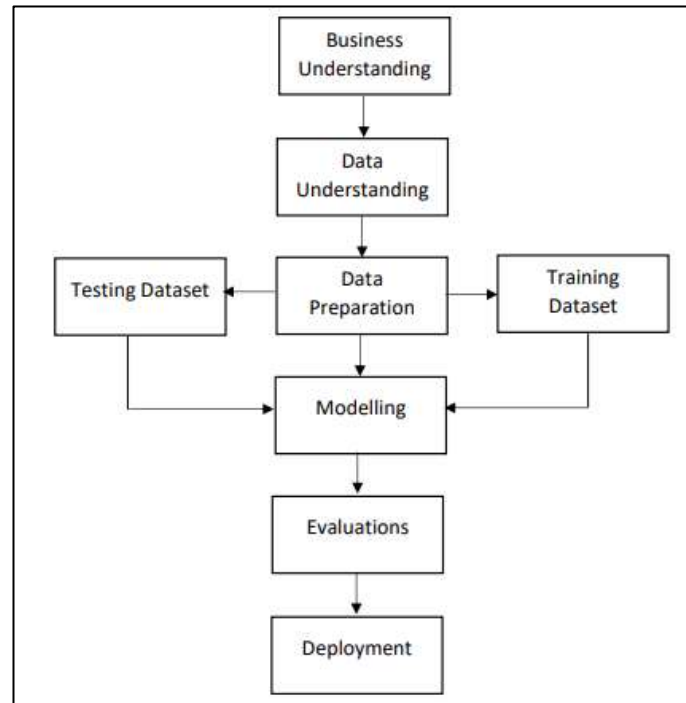


Figure 2. Flowchart Research

Cross-Industry Standard Process for Data Mining (Crisp-DM) is a data mining process model (data mining framework). CRISP-DM explicitly introduces business understanding and data understanding as the primary foundation for digging deeper insights to achieve business goals. The research flowchart is shown in Figure 2, and the model life cycle of the CRISP-DM process in this research is as follows (Schröder et al., 2021).

1. Business Understanding

The following are the stages of business understanding:

a. Determine business goals

The first step of this research is to identify the problem and further investigate the company's business objectives, products, and sales system by conducting interviews with relevant parties.

b. Conducting an assessment

Evaluating the data availability and assessing the situation to determine whether the data held follows the analysis needs.

c. Determining data mining objectives

In this research, the data mining method aims to obtain knowledge in predicting the suitable type of voucher offer based on customers' level of purchasing power from each outlet location.

2. Data Understanding

The process of data understanding begins with collecting initial data and the results of activities as a first step in getting to know the data well. This helps to identify initial insights and interesting subsets of the data, which can be used to form hypotheses about valuable information. The data used in this research is primary data with 416,603 sales transaction data, including holidays. This data is daily sales transaction data from 200 outlets across Indonesia.

3. Data Preparation

The data preparation stage involves all activities in forming the dataset that will be used in modeling. At this stage, attribute selection, table formation, transformation, and data cleaning are carried out to remove missing values and outliers until the data is ready for modeling. The data variables used in this research are outlet location, transaction time, channel, and average ticket (AT), which have been divided into several classes according to the level of purchasing power.

4. Modeling

In this stage, we first visualize the data and then select and implement data mining techniques to solve the problem. For this research, we utilized the Random Forest and Naïve Bayes algorithms. The data for classification was divided into two groups- training data and testing data with the assistance of R Studio Statistical Computing software.

5. Evaluations

Evaluation is used to determine the level of accuracy or error rate in a model that has been created. This helps to assess the model's effectiveness in solving a particular problem. Additionally, evaluation can be used to compare the performance of different algorithms that are used to solve the same problem.

6. Deployment

After evaluating the modeling results, the Decision Support System (DSS). is implemented to predict suitable vouchers based on customer's purchasing power. It is

important to monitor the models for accuracy in case of operational changes. For this research, primary data was sourced from PT. XYZ covers the period between January 1, 2022, and December 31, 2022, which is the transition period for the COVID-19 pandemic, where the Indonesian economy is starting to recover from the impact of the pandemic. The classification analysis was conducted using the Random Forest & Naïve Bayes method using R statistical computing software.

Random forest was designed by (Breiman, 2001), which is a supervised learning method developed from the work of (Amit & Geman, 1997; Ho, 1998; Dietterich, 2000). This method significantly improves performance compared to single tree classifiers such as C4.5. Random forest is a powerful tool for prediction modeling because it can handle datasets with a large number of predictor variables. However, it is often beneficial to minimize the number of predictors needed to obtain accurate outcome predictions to improve efficiency. Random forest is a combination of several predictor trees called decision trees, such that each tree depends on the values of a random vector sampled independently and with the same distribution for all trees in the forest (Breiman, 2001). Random forest prediction results are obtained through the majority of results from each individual decision tree, namely through voting for classification and averaging for regression. A Random Forest consisting of N trees can be formulated in the equation (1) below

$$l(y) = \operatorname{argmax}_c \left(\sum_{n=1}^N I_{h_n(y)=c} \right) \quad (1)$$

where I is the indicator function and h_n is the n -th tree (Speiser et al., 2019).

The random forest algorithm can be divided into two stages, namely, forming a random forest and then making predictions from the random forest classifier formed in the first stage. The formation of a random forest can be briefly explained through the following pseudocode in Figure 3 (Robin & Jean-Michel, 2020):

1. Randomly select k features from a total of m features, where $k \ll m$ (k is much smaller than m)
2. Among k features, calculate node d using the best-split point
3. Split nodes into daughter nodes using the best split
4. Repeat steps 1 to 3 until l nodes are reached
5. Create a forest by repeating steps 1 to 4 n times to form n trees

Figure 3. Pseudocode of Random Forest

The Naïve Bayes method is a classic classification technique that utilizes statistical calculations, specifically Bayes' Theorem. The main feature of Naïve Bayes classification is the strong assumption that all parameters are independent. Thomas Bayes, a British

statistician, proposed this method, which involves predicting future possibilities based on previous experiences. Bayes' theorem can be written in equation (2)

$$P(C|X) = \frac{P(X|C)P(C)}{P(X)} \quad (2)$$

where $P(C|X)$ is a posterior, $P(X|C)$ is a likelihood, $P(C)$ is class prior probability, and $P(X)$ is predictor prior probability (Kubat, 2021). Naïve Bayes classification estimates the probability equation in (3) & (4) as follows :

$$P(y) = \frac{n_y}{n} \quad (3)$$

$$P(x_i|y) = \frac{n_{y \cap x_i}}{n_y} \quad (4)$$

where n is the total number of data points in the training data set; n_y is the number of target data points of class y ; $n_{y \cap x_i}$ is the number of data points with target class y ; and i is an attribute variable of x_i (Makruf et al., 2021).

By using the maximum likelihood estimation principle, Naive Bayes classification determines the most probable category for a given sample (Larose & Larose, 2019).

$$P(C_i|X) = \text{Max}\{P(C_1|X), P(C_2|X), \dots, P(C_n|X)\} \quad (5)$$

Suppose the sample $X = (A_1, A_2, \dots, A_k)$ is an attribute vector, A_j is the j th attribute which may have several different value x_j . In Naïve Bayes classification, it is assumed that the attributes are independent of each other, so:

$$P(X|C_i) = \prod_{j=1}^k P(A_j = x_j|C_i) \quad (6)$$

$$P(C_i|X) = \frac{\prod_{j=1}^k P(A_j = x_j|C_i)P(C_i)}{P(X)} \quad (7)$$

$$\text{Let } \frac{1}{P(X)} = \alpha (> 0), \text{ that is } P(C_i|X) = \alpha \prod_{j=1}^k P(A_j = x_j|C_i) P(C_i) \quad (8)$$

Bayesian decision theory, a fundamental approach to decision-making under the probability framework, makes optimal classification decisions based on probabilities and costs of misclassification when all relevant probabilities are known. The pseudocode for the Naive Bayes classifier algorithm is briefly shown in Figure 4 (Zhou, 2021).

1. Read the training dataset T
2. Calculate the mean and standard deviation of the predictor variables in each class
3. Repeat then calculate the probability of f_i using the gauss density equation in each class until the probability of all predictor variables ($f_1, f_2, f_3, \dots, f_n$) has been calculated
4. Calculate the likelihood for each class
5. Get the greatest likelihood

Figure 4. Pseudocode of Naïve Bayes

Table 1 shows the confusion matrix for the multi-class classification case with k classes. Furthermore, from the confusion matrix, an evaluation of the algorithm's performance is calculated based on accuracy, precision, recall (sensitivity), and specificity sequentially using the formula shown in equations (9), (10), (11), and (12) where TP refers to truly identified as a positive result, TN refers to truly identified as negative, FP refers to falsely identified as positive result and FN refers to falsely identified as negative result (Markoulidakis et al., 2021).

Table 1. Confusion Matrix Form for Multi-Class Classification

		Actual			
		Class 1	Class 2	...	Class k
Prediction	Class 1	f_{11}	f_{12}	...	f_{1k}
	Class 2	f_{21}	f_{22}	...	f_{2k}
	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
	Class k	f_{k1}	f_{k2}	...	f_{kk}

$$\text{Accuracy} = \frac{\sum_{i=1}^N TP(C_i)}{\sum_{i=1}^N \sum_{j=1}^N C_{i,j}} \quad (9)$$

$$\text{Precision of Class } C_i = \frac{TP(C_i)}{TP(C_i) + FP(C_i)} \quad (10)$$

$$\text{Recall of Class } C_i = \frac{TP(C_i)}{TP(C_i) + FN(C_i)} \quad (11)$$

$$\text{Spcificity of Class } C_j = \frac{\sum_{i=1}^N \sum_{k=1, k \neq j}^N C_{i,k}}{\sum_{i=1}^N \sum_{k=1, k \neq j}^N C_{i,k}} \quad (12)$$

RESULT AND DISCUSSION

Data Description

At PT. XYZ, the sales transaction app, provides valuable insights into overall sales volume and product performance. However, some limitations need to be addressed:

1. It is necessary to determine the appropriate type of voucher promo based on the level of purchasing power of customers.
2. The type of voucher offered does not consider transaction times during high and low sales volume periods on specific dates.
3. The app does not provide additional information, such as sales predictions and analysis of factors influencing sales. Therefore, supporting data is needed for informed decision-making by the Business Director.

Data preparation is proposed in this research after carrying out business understanding and data understanding. In data preparation, data cleaning, feature selection, data transformation, viewing data dimensions, reviewing the structure of the input dataset, and checking for missing data from certain customers are carried out. In detail, the features of the dataset are shown in Table 2 to provide a more comprehensive understanding.

Table 2. Dataset After Pre-Processing

No	Column	Type	Details
1	Location	Factor (Class Object)	Location of outlets spread across Indonesia, such as Bali, Jakarta, West Java, Central Java, South Sumatera, North Sumatera, and others.
2	Month	Factor (Class Object)	Month of sales transaction such as January, February, March, etc.
3	Week in year	Factor (Class Object)	Period per week where sales transactions occur such as week1, week2, week3, ..., and week 52
4	Quartal	Factor (Class Object)	Sales transaction quarter period such as Q1, Q2, Q3 and Q4.
5	Channel	Factor (Class Object)	Types of transaction services such as Gojek, Grab, Shopeefood, Traveloka, Dine In, Carry Out and others.
6	AT	Integer	Average Ticket is the average price paid per customer in one visit
7	Decision	Factor (Class Object)	Class types on customer purchasing power are divided into 6 classes

Figure 5 shows the distribution of location and channel variables through histogram visualization. Five locations have the highest outlets, including Jakarta, Bodetabek (Bogor, Depok, Tangerang, Bekasi), West Java, East Java, and Central Java, which show the highest sales of PT. XYZ in meeting higher raw material inventories. Moreover, for channels, the five highest types of service are Carry Out, Grab, Gojek, Applications, and Shopeefood, which show that the highest service interest is purchasing in stores via Carry Out. However, the influence of e-commerce such as Grab, Gojek, and Shoppefood is enormous in online purchases of PT. XYZ.

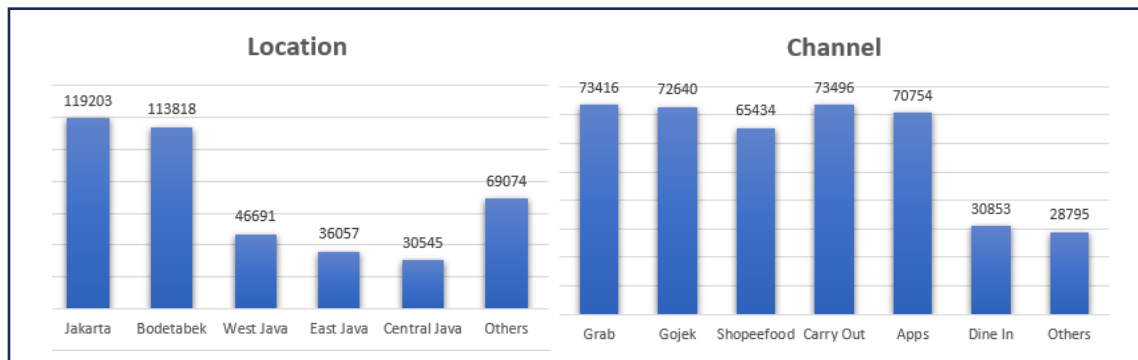


Figure 5. Variable Distribution

Random Forest Classification Analysis Results

The classification of offering the suitable voucher type to customers uses the Random Forest and Naïve Bayes algorithms. This research divides the data into training and testing data with proportions of 75% and 25%, respectively. This division is the best parameter in experiments that have been carried out previously. The analysis results with random forest used a number of trees of 500 to obtain a minimum error of 0.01% (see Figure 6). The more trees used, the smaller the error obtained, but in PT. XYZ transaction data will have the smallest error by using 500 trees.

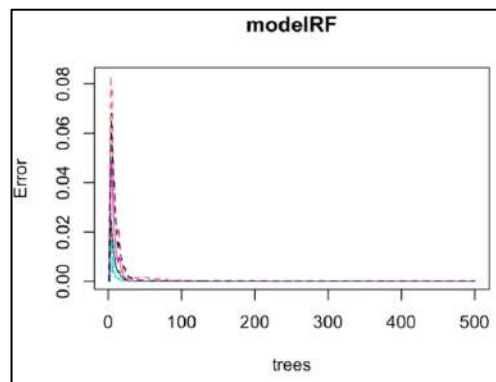


Figure 6. Plot of Error Rate Against Number of Trees

Based on the evaluation of the Random Forest algorithm using a confusion matrix for multi-class classification of test data, it was found that the classification accuracy was 99.99%. Table 3 shows that the random forest model was able to accurately classify 195,698 out of 195,715 data according to their actual class. Specifically, it correctly predicted 4,491 data for class 1, 27,799 data for class 2, 62,186 data for class 3, 62,980 data for class 4, 25,651 data for class 5, and 12,591 data for class 6.

Table 3. Confusion Matrix Random Forest on Testing Data

		Actual					
		Class 1	Class 2	Class 3	Class 4	Class 5	Class 6
Prediction	Class 1	4491	6	0	0	0	0
	Class 2	0	27799	0	0	0	0
	Class 3	0	0	62186	5	0	0
	Class 4	0	0	0	62980	4	0
	Class 5	0	0	0	0	25651	2
	Class 6	0	0	0	0	0	12591

Table 4. Random Forest Algorithm Evaluation

	Precision	Recall	Specificity
Class 1	99,867%	100%	99,99%
Class 2	100%	99,98%	100%
Class 3	99,99%	99,99%	100%
Class 4	99,99%	99,99%	100%
Class 5	99,99%	99,98%	100%
Class 6	100%	99,98%	100%

Table 4 displays the precision, recall, and specificity values used to evaluate the random forest model. The accuracy, precision, and recall values produced from the evaluation showed high values, indicating that the random forest algorithm performs well and effectively classifies data. The algorithm determines suitable promotional vouchers based on customer purchasing power level data, which helps handle large volumes of data.

Naïve Bayes Classification Analysis Results

Applying the Naïve Bayes classification algorithm to test data produces a multi-class confusion matrix, as seen in Table 5. The model achieved an accuracy of 92.99% and successfully classified 182,002 out of 195,715 customer purchasing power level data according to their actual class. The algorithm accurately predicted 4,083 data for class 1, 26,275 data for class 2, 57,613 data for class 3, 59,398 data for class 4, 24,116 data for class 5, and 10,517 data for class 6.

In addition, the naïve Bayes model has demonstrated high precision and recall results, as indicated in Table 6. Hence, based on the accuracy, precision, recall, and specificity results, the Naïve Bayes algorithm proves to be highly effective in classifying large volume customer purchasing power level data.

Table 5. Confusion Matrix Naïve Bayes on Testing Data

		Actual					
		Class 1	Class 2	Class 3	Class 4	Class 5	Class 6
Prediction	Class 1	4083	314	0	0	0	8
	Class 2	309	26275	1739	0	0	273
	Class 3	0	1192	57613	2219	0	174
	Class 4	0	0	2834	59398	1191	365
	Class 5	0	0	0	1368	24116	1256
	Class 6	99	24	0	0	348	10517

Table 6. Naïve Bayes Algorithm Evaluation

	Precision	Recall	Specificity
Class 1	92,69%	90,91%	99,83%
Class 2	91,88%	94,49%	98,62%
Class 3	94,14%	92,65%	97,32%
Class 4	93,12%	94,30%	96,69%
Class 5	90,19%	94%	98,46%
Class 6	95,71%	83,5%	99,74%

Comparison of Random Forest & Naïve Bayes Algorithms

After analyzing the results of both the random forest and naïve Bayes algorithms, it can be concluded that the random forest method performs better than the naïve Bayes method in predicting the level of customer purchasing power in the case of multi-class classification of PT. XYZ data, involving large data volumes. The accuracy, precision, and recall values produced by the random forest method are more significant than the naïve Bayes method (see Table 7). Therefore, determining the prediction of the type of promo voucher based on the level of customer purchasing power is recommended using a random forest model for more accurate multi-class classification.

Table 7. Comparison of Random Forest & Naïve Bayes Evaluation

	Random Forest				Naïve Bayes			
	Acc	Precision	Recall	Specificity	Acc	Precision	Recall	Specificity
Class 1	99,99%	99,87%	100%	99,99%	92,99%	92,69%	90,91%	99,83%
Class 2		100%	99,98%	100%		91,88%	94,49%	98,62%
Class 3		99,99%	99,99%	100%		94,14%	92,65%	97,32%
Class 4		99,99%	99,99%	100%		93,12%	94,30%	96,69%
Class 5		99,99%	99,98%	100%		90,19%	94%	98,46%
Class 6		100%	99,98%	100%		95,71%	83,5%	99,74%

CONCLUSION

This research aims to classify the level of purchasing power of PT customers. XYZ using random forest and naïve Bayes methods in multi-class classification cases. This classification will determine the type of promotional voucher that will be offered to customers according to the level of purchasing power and time. The data used is sales transaction data per day from January 1, 2022, to December 31, 2022, where this period is the transition era of the COVID-19 pandemic. The data consists of 416,603 row data and 7-column data, where the data is divided into training data (75%) and testing data (25%). This division is the best parameter in the experiment. Random forest and naïve Bayes methods are effective for large data volumes. Evaluation using the random forest method produces an accuracy of 99.99%, while the performance of the Naïve Bayes algorithm has an accuracy of 92.99%. The random forest method's precision, recall, and specificity values

are also higher than those of the naïve Bayes algorithm. Therefore, it can be concluded that the performance of the random forest method is better than the naïve Bayes method in the case of multi-class classification in predicting the level of customer purchasing power at PT. XYZ. This means that in determining the type of promotional voucher based on the customer's purchasing power level, it is recommended that PT. XYZ uses a random forest model for more accurate multi-class classification.

REFERENCES

- Aprilia, N. P., Pratiwi, D., & Ariwibowo, A. B. (2021). Sentiment Visualization of Covid-19 Vaccine Based On Naive Bayes Analysis. *Journal of Information Technology and Computer Science*, 6(2), 195-208. <https://doi.org/10.25126/jitecs.202162353>
- Amit, Y., & Geman, D. (1997). Shape Quantization and Recognition with Randomized Trees. *Neural Computation*, 9(7). <https://doi.org/10.1162/neco.1997.9.7.1545>
- Badan Pusat Statistik. (2020). Analisis Hasil Survei Dampak COVID-19 Jilid 2. *Analisis Hasil Survei Dampak COVID-19 Terhadap Pelaku Usaha*.
- Breiman, L. (2001). Random forests. *Machine Learning*, 45(1), 5–32. <https://doi.org/10.1023/A:1010933404324>
- Dietterich, T. G. (2000). Experimental comparison of three methods for constructing ensembles of decision trees: bagging, boosting, and randomization. *Machine Learning*, 40(2), 139-157. <https://doi.org/10.1023/A:1007607513941>
- Durugkar, S. R., Raja, R., Nagwanshi, K. K., & Kumar, S. (2022). Introduction to data mining. In *Data Mining and Machine Learning Applications* (pp. 1–19). wiley. <https://doi.org/10.1002/9781119792529.ch1>
- Ho, T. K. (1998). The random subspace method for constructing decision forests. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 20(8), 832-844. <https://doi.org/10.1109/34.709601>
- Komite Penanganan Covid-19 dan Pemulihan Ekonomi Nasional. (2023, February 3). *Kasus Covid-19 di Indonesia*. <https://Covid19.Go.Id/Id>.
- Kubat, M. (2021). An Introduction to Machine Learning. In *An Introduction to Machine Learning*. Springer International Publishing. <https://doi.org/10.1007/978-3-030-81935-4>
- Larose, C. D., & Larose, D. T. (2019). Data science using python and R. In *Data Science Using Python and R*. Wiley Blackwell. <https://doi.org/10.1002/9781119526865>
- Makruf, M., Bramantoro, A., Alyamani, H. J., Alesawi, S., & Alturki, R. (2021). Classification methods comparison for customer churn prediction in the telecommunication industry. *International Journal of Advanced and Applied Sciences*, 8(12), 1-8. <https://doi.org/10.21833/ijaas.2021.12.001>
- Markoulidakis, I., Kopsiaftis, G., Rallis, I., & Georgoulas, I. (2021). Multi-class confusion matrix reduction method and its application on net promoter score classification problem. *The 14th Pervasive Technologies Related to Assistive Environments Conference*, 412–419. <https://dl.acm.org/doi/abs/10.1145/3453892.3461323>
- Parwati, L. S., Nugrahani, E. H., & Budiarti, R. (2023). Forecasting Stock Price Using Armax-Garchx Model During The Covid-19 Pandemic. *Mathline: Jurnal Matematika Dan Pendidikan Matematika*, 8(2), 489–502. <https://doi.org/10.31943/mathline.v8i2.413>
-

- Pavlov, Y. L. (2019). Random forests. In *Random Forests*. De Gruyter Mouton. <https://doi.org/10.4324/9781003109396-5>
- Putro, H. F., Vuldari, R. T., & Saptomo, W. L. Y. (2020). Penerapan Metode Naive Bayes Untuk Klasifikasi Pelanggan. *Jurnal Teknologi Informasi Dan Komunikasi (TIKoSIN)*, 8(2), 19-24. <https://doi.org/10.30646/tikomsin.v8i2.500>
- Rahim, M. A., Mushafiq, M., Khan, S., & Arain, Z. A. (2021). RFM-based repurchase behavior for customer classification and segmentation. *Journal of Retailing and Consumer Services*, 61, 102566. <https://doi.org/10.1016/j.jretconser.2021.102566>
- Riahi, Y., & Riahi, S. (2018). Big data and big data analytics: Concepts, types and technologies. *International Journal of Research and Engineering*, 5(9), 524–528. <http://dx.doi.org/10.21276/ijre.2018.5.9.5>
- Robin, G & Jean-Michel, P. (2020). Random Forests with R. In *Use R*. Springer Cham. <http://www.springer.com/series/6991>
- Schonlau, M., & Zou, R. Y. (2020). The random forest algorithm for statistical learning. *Stata Journal*, 20(1), 3–29. <https://doi.org/10.1177/1536867X20909688>
- Schröer, C., Kruse, F., & Gómez, J. M. (2021). A systematic literature review on applying CRISP-DM process model. *Procedia Computer Science*, 181, 526–534. <https://doi.org/10.1016/j.procs.2021.01.199>
- Speiser, J. L., Miller, M. E., Tooze, J., & Ip, E. (2019). A comparison of random forest variable selection methods for classification prediction modeling. In *Expert Systems with Applications* (Vol. 134, pp. 93–101). Elsevier Ltd. <https://doi.org/10.1016/j.eswa.2019.05.028>
- Romero, C. A. T, Ortiz, J. H., Khalaf, O. I., & Prado, A. R. (2021). Business intelligence: business evolution after industry 4.0. In *Sustainability (Switzerland)*, 13(18), 10026. <https://doi.org/10.3390/su131810026>
- Zaw, H. T., Maneerat, N., & Win, K. Y. (2019). Brain tumor detection based on Naïve Bayes classification. *Proceeding - 5th International Conference on Engineering, Applied Sciences and Technology, ICEAST 2019*, 1-4, <https://doi.org/10.1109/ICEAST.2019.8802562>
- Zhou, Z. H. (2021). Machine Learning. In *Machine Learning*. Springer Nature. <https://doi.org/10.1007/978-981-15-1967-3>

CUSTOMER SEGMENTATION ANALYSIS USING RANDOM FOREST & NAÏVE BAYES METHOD IN THE CASE OF MULTICLASS CLASSIFICATION AT PT. XYZ

by Joko Riyono FTI

Submission date: 06-Nov-2025 03:46PM (UTC+0700)

Submission ID: 2805021880

File name: 17.MATHLINE.pdf (1.48M)

Word count: 5156

Character count: 27228

CUSTOMER SEGMENTATION ANALYSIS USING RANDOM FOREST & NAÏVE BAYES METHOD IN THE CASE OF MULTI-CLASS CLASSIFICATION AT PT. XYZ

**Sofia Debi Puspa^{1*}, Fani Puspitasari², Joko Riyono¹, Christina Eni Pujiastuti¹,
David Leon Bijlsma¹, Joseph Andrew Leo³**

¹Departement of Mechanical Engineering, Universitas Trisakti, Jakarta Province, Indonesia

²Departement of Industrial Engineering, Universitas Trisakti, Jakarta Province, Indonesia

³Departement of Computer Science & Business Administration, University of Southern California, United States

*Correspondence: sofia.debi.puspa@trisakti.ac.id

ABSTRACT

Cases of the COVID-19 pandemic are gradually decreasing every day in Indonesia, but the impact of the COVID-19 pandemic has greatly affected various sectors, especially the economy and business. Sales transactions have not yet reached the company's target due to weak public purchasing power. The accuracy of customer segmentation analysis and attractive promo voucher offers are needed to increase the opportunity for people's purchasing power for a product. This study aimed to predict the level of customer purchasing power using the random forest and naïve Bayes methods in the case of multi-class data classification at PT. XYZ. The classification is carried out to determine the type of promo voucher suitable to be offered to customers according to the level of customer purchasing power. The data used is historical daily transaction data from January 1, 2022, to December 31, 2022, which is the transition period for the COVID-19 pandemic. Evaluation using the random forest method produces an accuracy of 99.99%, while the naïve Bayes method produces an accuracy of 92.99%. The random forest and naïve Bayes methods can work very well on large data volumes. However, from the comparison results, it can be concluded that the performance of the random forest method is better than the naïve Bayes method in the multi-class classification case in predicting the level of customer purchasing power at PT. XYZ.

Keywords: Classification, Random Forest, Naïve Bayes, Multi-Class, Customer Segmentation

How to Cite: Puspa, S. D., Puspitasari, F., Riyono, J., Pujiastuti, C., Bijlsma, D. L., & Leo, J. A. (2023). Customer Segmentation Analysis Using Random Forest & Naïve Bayes Method In The Case of Multi-Class Classification at PT. XYZ. *Mathline: Jurnal Matematika dan Pendidikan Matematika*, 8(4), 1359-1372. <http://doi.org/10.31943/mathline.v8i4.532>

PRELIMINARY

In recent years, there has been an exponential positive growth in the volume of data in the big data phenomenon. Apart from increasing volume, the variety and complexity of data is also experiencing rapid development. The impact of the big data phenomenon is very significant in various sectors, especially the business sector. Today's business competition is determined by the ability to process data to achieve optimal user solutions (Riahi & Riahi, 2018). According to (Romero et al., 2021), studying the current situation based on Business Intelligence (BI) in the economic and business fields can positively impact making effective

and accurate decisions in companies. This includes acquiring analytical skills, IT capabilities, business knowledge, and communication skills. The goal is to enhance a company's market position with innovative solutions and gain a competitive edge in business.

COVID-19 emerged in Wuhan, China, in December 2019 and has devastated global health. It was declared a pandemic by the WHO on March 11, 2020. Lockdowns and quarantine measures have been implemented worldwide to contain its spread. Capital markets have been affected due to uncertainty around its impact on investments (Parwati et al., 2023). In Indonesia, the COVID-19 virus spread rapidly in 2020, leading to restrictions on community activities. This has caused many companies to reduce output capacity by decreasing working hours and stopping machine use. Some businesses were forced to stop operating due to regulatory factors. This has had a significant impact on multiple sectors and has slowed down the Indonesian economy (Badan Pusat Statistik, 2020).

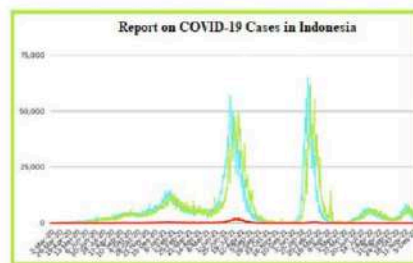


Figure 1. Covid-19 Daily Case Graph

Source: (Komite Penanganan Covid-19 & Pemulihan Ekonomi Nasional, 2023)

In 2021, COVID-19 cases decreased despite a rise in daily new cases in February-March 2022. Daily new cases gradually reduced until December 2022, as shown in Figure 1. This period marked Indonesia's transition from the pandemic, with some business sectors recovering. However, people's purchasing power is still weak, and sales transactions have yet to reach company targets. PT. XYZ is one such company that has started to improve during this transition period.

PT. XYZ operates in the food and beverage (F&B) sector and has 200 outlets throughout Indonesia. PT. XYZ grows along with digitalization, where more than 70% of sales come from online orders. Therefore, to increase people's purchasing power, it is necessary to offer attractive & targeted types of promotional vouchers. Sales transaction data at PT. XYZ has a large data volume with complexity, including menu variations, voucher

types, channels, and many stores with varying customer purchasing power. So, it is necessary to use a data mining-based algorithm to determine the right promotional voucher offer by classifying the purchasing power level of PT customers. XYZ. Accurate analysis based on purchasing power and consumer behavior will increase the opportunity to purchase products offered by marketers (Rahim et al., 2021).

Classification is a data mining technique that predicts future trends based on historical data. It falls under the category of predictive mining, which is a type of supervised learning. There are various methods of classification, such as decision trees, the C4.5 algorithm, random forest, naïve Bayes, support vector machine, neural network, and more. Based on research findings by (Schonlau & Zou, 2020), random forest models have higher prediction accuracy than parametric models like linear regression and logistic regression. Multiclass outcomes and regressions yield greater performance improvements than binary outcomes. Additionally, it has a feature selection process that enables the model to work efficiently on complex parameters of big data (Pavlov, 2019).

According to a research study conducted by (Zaw et al., 2019), the Naïve Bayes method was able to accurately detect 81.25% of tumor images and 100% of non-tumor images, resulting in an overall accuracy rate of 94%. The study concluded that Naïve Bayes is a reliable and fast method for detecting brain tissue abnormalities. In addition, another research study conducted by (Putro et al., 2020) found that Naïve Bayes was effective in customer classification, achieving a precision value of 100%, a recall value of 91%, and an accuracy value of 92%. The Naïve Bayes method can also be used for sentiment analysis and has good processing time complexity on big data during text classification, where the algorithm is used as a classification engine (Aprilia et al., 2021). These results highlight the effectiveness and efficiency of Naïve Bayes and Random Forest methods in various classification applications.

Based on the explanation above, this research aims to predict the most suitable promotional voucher offer by classifying the level of customer purchasing power using the Random Forest and Naïve Bayes methods. Furthermore, the model evaluation results will compare the performance of the Random Forest and Naïve Bayes methods to determine the best modeling approach. The benefit of this research is providing insights into the most effective method for classifying customer purchasing power levels, helping the marketing team to create customer segmentation and market analyses.

METHODS

Data mining is a big data analysis technique to find patterns and meaningful relationships hidden in data. Data mining generally processes data originating from observations with large data volumes. As a result, data mining is connected to various other scientific fields, including mathematics (particularly optimization), computer science, machine learning, artificial intelligence, image processing, text mining, and others (Durugkar et al., 2022).

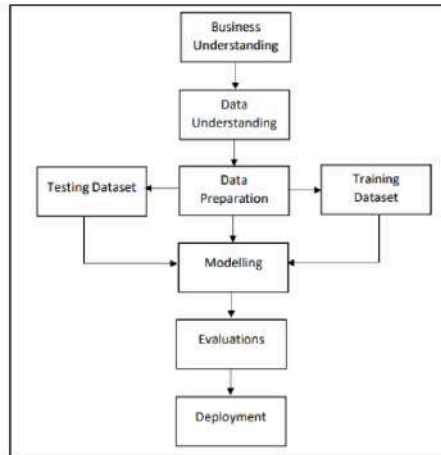


Figure 2. Flowchart Research

Cross-Industry Standard Process for Data Mining (Crisp-DM) is a data mining process model (data mining framework). CRISP-DM explicitly introduces business understanding and data understanding as the primary foundation for digging deeper insights to achieve business goals. The research flowchart is shown in Figure 2, and the model life cycle of the CRISP-DM process in this research is as follows (Schröder et al., 2021).

1. Business Understanding

The following are the stages of business understanding:

a. Determine business goals

The first step of this research is to identify the problem and further investigate the company's business objectives, products, and sales system by conducting interviews with relevant parties.

b. Conducting an assessment

Evaluating the data availability and assessing the situation to determine whether the data held follows the analysis needs.

c. Determining data mining objectives

In this research, the data mining method aims to obtain knowledge in predicting the suitable type of voucher offer based on customers' level of purchasing power from each outlet location.

2. Data Understanding

The process of data understanding begins with collecting initial data and the results of activities as a first step in getting to know the data well. This helps to identify initial insights and interesting subsets of the data, which can be used to form hypotheses about valuable information. The data used in this research is primary data with 416,603 sales transaction data, including holidays. This data is daily sales transaction data from 200 outlets across Indonesia.

3. Data Preparation

The data preparation stage involves all activities in forming the dataset that will be used in modeling. At this stage, attribute selection, table formation, transformation, and data cleaning are carried out to remove missing values and outliers until the data is ready for modeling. The data variables used in this research are outlet location, transaction time, channel, and average ticket (AT), which have been divided into several classes according to the level of purchasing power.

4. Modeling

In this stage, we first visualize the data and then select and implement data mining techniques to solve the problem. For this research, we utilized the Random Forest and Naïve Bayes algorithms. The data for classification was divided into two groups- training data and testing data with the assistance of R Studio Statistical Computing software.

5. Evaluations

Evaluation is used to determine the level of accuracy or error rate in a model that has been created. This helps to assess the model's effectiveness in solving a particular problem. Additionally, evaluation can be used to compare the performance of different algorithms that are used to solve the same problem.

6. Deployment

After evaluating the modeling results, the Decision Support System (DSS). is implemented to predict suitable vouchers based on customer's purchasing power. It is

important to monitor the models for accuracy in case of operational changes. For this research, primary data was sourced from PT. XYZ covers the period between January 1, 2022, and December 31, 2022, which is the transition period for the COVID-19 pandemic, where the Indonesian economy is starting to recover from the impact of the pandemic. The classification analysis was conducted using the Random Forest & Naïve Bayes method using R statistical computing software.

Random forest was designed by (Breiman, 2001), which is a supervised learning method developed from the work of (Amit & Geman, 1997; Ho, 1998; Dietterich, 2000). This method significantly improves performance compared to single tree classifiers such as C4.5. Random forest is a powerful tool for prediction modeling because it can handle datasets with a large number of predictor variables. However, it is often beneficial to minimize the number of predictors needed to obtain accurate outcome predictions to improve efficiency. Random forest is a combination of several predictor trees called decision trees, such that each tree depends on the values of a random vector sampled independently and with the same distribution for all trees in the forest (Breiman, 2001). Random forest prediction results are obtained through the majority of results from each individual decision tree, namely through voting for classification and averaging for regression. A Random Forest consisting of N trees can be formulated in the equation (1) below

$$l(y) = \operatorname{argmax}_c (\sum_{n=1}^N I_{h_n(y)=c}) \quad (1)$$

where I is the indicator function and h_n is the n -th tree (Speiser et al., 2019).

The random forest algorithm can be divided into two stages, namely, forming a random forest and then making predictions from the random forest classifier formed in the first stage. The formation of a random forest can be briefly explained through the following pseudocode in Figure 3 (Robin & Jean-Michel, 2020):

1. Randomly select k features from a total of m features, where $k \ll m$ (k is much smaller than m)
2. Among k features, calculate node d using the best-split point
3. Split nodes into daughter nodes using the best split
4. Repeat steps 1 to 3 until l nodes are reached
5. Create a forest by repeating steps 1 to 4 n times to form n trees

Figure 3. Pseudocode of Random Forest

The Naïve Bayes method is a classic classification technique that utilizes statistical calculations, specifically Bayes' Theorem. The main feature of Naïve Bayes classification is the strong assumption that all parameters are independent. Thomas Bayes, a British

statistician, proposed this method, which involves predicting future possibilities based on previous experiences. Bayes' theorem can be written in equation (2)

$$P(C|X) = \frac{P(X|C)P(C)}{P(X)} \quad (2)$$

where $P(C|X)$ is a posterior, $P(X|C)$ is a likelihood, $P(C)$ is class prior probability, and $P(X)$ is predictor prior probability (Kubat, 2021). Naïve Bayes classification estimates the probability equation in (3) & (4) as follows :

$$P(y) = \frac{n_y}{n} \quad (3)$$

$$P(x_i|y) = \frac{n_{y \cap x_i}}{n_y} \quad (4)$$

where n is the total number of data points in the training data set; n_y is the number of target data points of class y ; $n_{y \cap x_i}$ is the number of data points with target class y ; and i is an attribute variable of x_i (Makruf et al., 2021).

By using the maximum likelihood estimation principle, Naive Bayes classification determines the most probable category for a given sample (Larose & Larose, 2019).

$$P(C_i|X) = \text{Max}\{P(C_1|X), P(C_2|X), \dots, P(C_n|X)\} \quad (5)$$

Suppose the sample $X = (A_1, A_2, \dots, A_k)$ is an attribute vector, A_j is the j th attribute which may have several different value x_j . In Naïve Bayes classification, it is assumed that the attributes are independent of each other, so:

$$P(X|C_i) = \prod_{j=1}^k P(A_j = x_j | C_i) \quad (6)$$

$$P(C_i|X) = \frac{\prod_{j=1}^k P(A_j = x_j | C_i) P(C_i)}{P(X)} \quad (7)$$

$$\text{Let } \frac{1}{P(X)} = \alpha (> 0), \text{ that is } P(C_i|X) = \alpha \prod_{j=1}^k P(A_j = x_j | C_i) P(C_i) \quad (8)$$

Bayesian decision theory, a fundamental approach to decision-making under the probability framework, makes optimal classification decisions based on probabilities and costs of misclassification when all relevant probabilities are known. The pseudocode for the Naive Bayes classifier algorithm is briefly shown in Figure 4 (Zhou, 2021).

1. Read the training dataset T
2. Calculate the mean and standard deviation of the predictor variables in each class
3. Repeat then calculate the probability of f_i using the gauss density equation in each class until the probability of all predictor variables ($f_1, f_2, f_3, \dots, f_n$) has been calculated
4. Calculate the likelihood for each class
5. Get the greatest likelihood

Figure 4. Pseudocode of Naïve Bayes

Table 1 shows the confusion matrix for the multi-class classification case with k classes. Furthermore, from the confusion matrix, an evaluation of the algorithm's performance is calculated based on accuracy, precision, recall (sensitivity), and specificity sequentially using the formula shown in equations (9), (10), (11), and (12) where TP refers to truly identified as a positive result, TN refers to truly identified as negative, FP refers to falsely identified as positive result and FN refers to falsely identified as negative result (Markoulidakis et al., 2021).

Table 1. Confusion Matrix Form for Multi-Class Classification

		Actual			
		Class 1	Class 2	...	Class k
Prediction	Class 1	f_{11}	f_{12}	...	f_{1k}
	Class 2	f_{21}	f_{22}	...	f_{2k}
	$\vdots$	$\vdots$	$\vdots$	$\vdots$	$\vdots$
	Class k	f_{k1}	f_{k2}	...	f_{kk}

$$\text{Accuracy} = \frac{\sum_{i=1}^N TP(C_i)}{\sum_{i=1}^N \sum_{j=1}^N C_{ij}} \quad (9)$$

$$\text{Precision of Class } C_i = \frac{TP(C_i)}{TP(C_i) + FP(C_i)} \quad (10)$$

$$\text{Recall of Class } C_i = \frac{TP(C_i)}{TP(C_i) + FN(C_i)} \quad (11)$$

$$\text{Spcificity of Class } C_j = \frac{\sum_{i=1}^N \sum_{k=1, k \neq j}^N C_{ik}}{\sum_{i=1}^N \sum_{k=1, k \neq j}^N C_{ik}} \quad (12)$$

RESULT AND DISCUSSION

Data Description

At PT. XYZ, the sales transaction app, provides valuable insights into overall sales volume and product performance. However, some limitations need to be addressed:

1. It is necessary to determine the appropriate type of voucher promo based on the level of purchasing power of customers.
2. The type of voucher offered does not consider transaction times during high and low sales volume periods on specific dates.
3. The app does not provide additional information, such as sales predictions and analysis of factors influencing sales. Therefore, supporting data is needed for informed decision-making by the Business Director.

Data preparation is proposed in this research after carrying out business understanding and data understanding. In data preparation, data cleaning, feature selection, data transformation, viewing data dimensions, reviewing the structure of the input dataset, and checking for missing data from certain customers are carried out. In detail, the features of the dataset are shown in Table 2 to provide a more comprehensive understanding.

Table 2. Dataset After Pre-Processing

No	Column	Type	Details
1	Location	Factor (Class Object)	Location of outlets spread across Indonesia, such as Bali, Jakarta, West Java, Central Java, South Sumatera, North Sumatera, and others.
2	Month	Factor (Class Object)	Month of sales transaction such as January, February, March, etc.
3	Week in year	Factor (Class Object)	Period per week where sales transactions occur such as week1, week2, week3, ..., and week 52
4	Quartal	Factor (Class Object)	Sales transaction quarter period such as Q1, Q2, Q3 and Q4.
5	Channel	Factor (Class Object)	Types of transaction services such as Gojek, Grab, Shopeefood, Traveloka, Dine In, Carry Out and others.
6	AT	Integer	Average Ticket is the average price paid per customer in one visit
7	Decision	Factor (Class Object)	Class types on customer purchasing power are divided into 6 classes

Figure 5 shows the distribution of location and channel variables through histogram visualization. Five locations have the highest outlets, including Jakarta, Bodetabek (Bogor, Depok, Tangerang, Bekasi), West Java, East Java, and Central Java, which show the highest sales of PT. XYZ in meeting higher raw material inventories. Moreover, for channels, the five highest types of service are Carry Out, Grab, Gojek, Applications, and Shopeefood, which show that the highest service interest is purchasing in stores via Carry Out. However, the influence of e-commerce such as Grab, Gojek, and Shoppefood is enormous in online purchases of PT. XYZ.

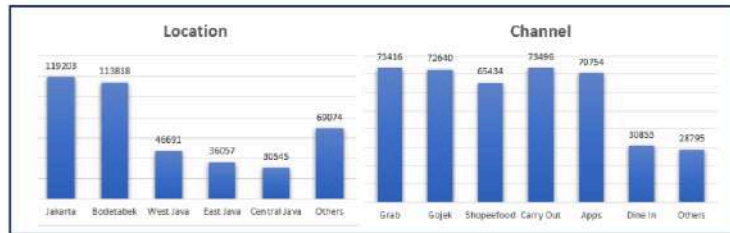


Figure 5. Variable Distribution

Random Forest Classification Analysis Results

The classification of offering the suitable voucher type to customers uses the Random Forest and Naïve Bayes algorithms. This research divides the data into training and testing data with proportions of 75% and 25%, respectively. This division is the best parameter in experiments that have been carried out previously. The analysis results with random forest used a number of trees of 500 to obtain a minimum error of 0.01% (see Figure 6). The more trees used, the smaller the error obtained, but in PT. XYZ transaction data will have the smallest error by using 500 trees.




Figure 6. Plot of Error Rate Against Number of Trees

Based on the evaluation of the Random Forest algorithm using a confusion matrix for multi-class classification of test data, it was found that the classification accuracy was 99.99%. Table 3 shows that the random forest model was able to accurately classify 195,698 out of 195,715 data according to their actual class. Specifically, it correctly predicted 4,491 data for class 1, 27,799 data for class 2, 62,186 data for class 3, 62,980 data for class 4, 25,651 data for class 5, and 12,591 data for class 6.

Table 3. Confusion Matrix Random Forest on Testing Data

		Actual					
		Class 1	Class 2	Class 3	Class 4	Class 5	Class 6
Prediction	Class 1	4491	6	0	0	0	0
	Class 2	0	27799	0	0	0	0
	Class 3	0	0	62186	5	0	0
	Class 4	0	0	0	62980	4	0
	Class 5	0	0	0	0	25651	2
	Class 6	0	0	0	0	0	12591

Table 4. Random Forest Algorithm Evaluation

	Precision	Recall	Specificity
Class 1	99,867%	100%	99,99%
Class 2	100%	99,98%	100%
Class 3	99,99%	99,99%	100%
Class 4	99,99%	99,99%	100%
Class 5	99,99%	99,98%	100%
Class 6	100%	99,98%	100%

Table 4 displays the precision, recall, and specificity values used to evaluate the random forest model. The accuracy, precision, and recall values produced from the evaluation showed high values, indicating that the random forest algorithm performs well and effectively classifies data. The algorithm determines suitable promotional vouchers based on customer purchasing power level data, which helps handle large volumes of data.

Naïve Bayes Classification Analysis Results

Applying the Naïve Bayes classification algorithm to test data produces a multi-class confusion matrix, as seen in Table 5. The model achieved an accuracy of 92.99% and successfully classified 182,002 out of 195,715 customer purchasing power level data according to their actual class. The algorithm accurately predicted 4,083 data for class 1, 26,275 data for class 2, 57,613 data for class 3, 59,398 data for class 4, 24,116 data for class 5, and 10,517 data for class 6.

In addition, the naïve Bayes model has demonstrated high precision and recall results, as indicated in Table 6. Hence, based on the accuracy, precision, recall, and specificity results, the Naïve Bayes algorithm proves to be highly effective in classifying large volume customer purchasing power level data.

Table 5. Confusion Matrix Naïve Bayes on Testing Data

		Actual					
		Class 1	Class 2	Class 3	Class 4	Class 5	Class 6
Prediction	Class 1	4083	314	0	0	0	8
	Class 2	309	26275	1739	0	0	273
	Class 3	0	1192	57613	2219	0	174
	Class 4	0	0	2834	59398	1191	365
	Class 5	0	0	0	1368	24116	1256
	Class 6	99	24	0	0	348	10517

Table 6. Naïve Bayes Algorithm Evaluation

	Precision	Recall	Specificity
Class 1	92,69%	90,91%	99,83%
Class 2	91,88%	94,49%	98,62%
Class 3	94,14%	92,65%	97,32%
Class 4	93,12%	94,30%	96,69%
Class 5	90,19%	94%	98,46%
Class 6	95,71%	83,5%	99,74%

Comparison of Random Forest & Naïve Bayes Algorithms

After analyzing the results of both the random forest and naïve Bayes algorithms, it can be concluded that the random forest method performs better than the naïve Bayes method in predicting the level of customer purchasing power in the case of multi-class classification of PT. XYZ data, involving large data volumes. The accuracy, precision, and recall values produced by the random forest method are more significant than the naïve Bayes method (see Table 7). Therefore, determining the prediction of the type of promo voucher based on the level of customer purchasing power is recommended using a random forest model for more accurate multi-class classification.

Table 7. Comparison of Random Forest & Naïve Bayes Evaluation

	Random Forest				Naïve Bayes			
	Acc	Precision	Recall	Specificity	Acc	Precision	Recall	Specificity
Class 1	99,99%	99,87%	100%	99,99%	92,99%	92,69%	90,91%	99,83%
Class 2		100%	99,98%	100%		91,88%	94,49%	98,62%
Class 3		99,99%	99,99%	100%		94,14%	92,65%	97,32%
Class 4		99,99%	99,99%	100%		93,12%	94,30%	96,69%
Class 5		99,99%	99,98%	100%		90,19%	94%	98,46%
Class 6		100%	99,98%	100%		95,71%	83,5%	99,74%

CONCLUSION

This research aims to classify the level of purchasing power of PT customers. XYZ using random forest and naïve Bayes methods in multi-class classification cases. This classification will determine the type of promotional voucher that will be offered to customers according to the level of purchasing power and time. The data used is sales transaction data per day from January 1, 2022, to December 31, 2022, where this period is the transition era of the COVID-19 pandemic. The data consists of 416,603 row data and 7-column data, where the data is divided into training data (75%) and testing data (25%). This division is the best parameter in the experiment. Random forest and naïve Bayes methods are effective for large data volumes. Evaluation using the random forest method produces an accuracy of 99.99%, while the performance of the Naïve Bayes algorithm has an accuracy of 92.99%. The random forest method's precision, recall, and specificity values

are also higher than those of the naïve Bayes algorithm. Therefore, it can be concluded that the performance of the random forest method is better than the naïve Bayes method in the case of multi-class classification in predicting the level of customer purchasing power at PT. XYZ. This means that in determining the type of promotional voucher based on the customer's purchasing power level, it is recommended that PT. XYZ uses a random forest model for more accurate multi-class classification.

REFERENCES

- Aprilia, N. P., Pratiwi, D., & Ariwibowo, A. B. (2021). Sentiment Visualization of Covid-19 Vaccine Based On Naive Bayes Analysis. *Journal of Information Technology and Computer Science*, 6(2), 195-208. <https://doi.org/10.25126/jitecs.202162353>
- Amit, Y., & Geman, D. (1997). Shape Quantization and Recognition with Randomized Trees. *Neural Computation*, 9(7). <https://doi.org/10.1162/neco.1997.9.7.1545>
- Badan Pusat Statistik. (2020). Analisis Hasil Survei Dampak COVID-19 Jilid 2. *Analisis Hasil Survei Dampak COVID-19 Terhadap Pelaku Usaha*.
- Breiman, L. (2001). Random forests. *Machine Learning*, 45(1), 5-32. <https://doi.org/10.1023/A:1010933404324>
- Dietterich, T. G. (2000). Experimental comparison of three methods for constructing ensembles of decision trees: bagging, boosting, and randomization. *Machine Learning*, 40(2), 139-157. <https://doi.org/10.1023/A:1007607513941>
- Durugkar, S. R., Raja, R., Nagwanshi, K. K., & Kumar, S. (2022). Introduction to data mining. In *Data Mining and Machine Learning Applications* (pp. 1-19). Wiley. <https://doi.org/10.1002/9781119792529.ch1>
- Ho, T. K. (1998). The random subspace method for constructing decision forests. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 20(8), 832-844. <https://doi.org/10.1109/34.709601>
- Komite Penanganan Covid-19 dan Pemulihan Ekonomi Nasional. (2023, February 3). *Kasus Covid-19 di Indonesia*. <https://Covid19.Go.Id/Id>.
- Kubat, M. (2021). An Introduction to Machine Learning. In *An Introduction to Machine Learning*. Springer International Publishing. <https://doi.org/10.1007/978-3-030-81935-4>
- Larose, C. D., & Larose, D. T. (2019). Data science using python and R. In *Data Science Using Python and R*. Wiley Blackwell. <https://doi.org/10.1002/9781119526865>
- Makruf, M., Bramantoro, A., Alyamani, H. J., Alesawi, S., & Alturki, R. (2021). Classification methods comparison for customer churn prediction in the telecommunication industry. *International Journal of Advanced and Applied Sciences*, 8(12), 1-8. <https://doi.org/10.21833/ijaas.2021.12.001>
- Markoulidakis, I., Kopsiaftis, G., Rallis, I., & Georgoulas, I. (2021). Multi-class confusion matrix reduction method and its application on net promoter score classification problem. *The 14th Pervasive Technologies Related to Assistive Environments Conference*, 412-419. <https://dl.acm.org/doi/abs/10.1145/3453892.3461323>
- Parwati, L. S., Nugrahani, E. H., & Budiarti, R. (2023). Forecasting Stock Price Using Armax-Garchx Model During The Covid-19 Pandemic. *Mathline: Jurnal Matematika Dan Pendidikan Matematika*, 8(2), 489-502. <https://doi.org/10.31943/mathline.v8i2.413>

- Pavlov, Y. L. (2019). Random forests. In *Random Forests*. De Gruyter Mouton. <https://doi.org/10.4324/9781003109396-5>
- Putro, H. F., Vuldari, R. T., & Saptomo, W. L. Y. (2020). Penerapan Metode Naive Bayes Untuk Klasifikasi Pelanggan. *Jurnal Teknologi Informasi Dan Komunikasi (TIKomsin)*, 8(2), 19-24. <https://doi.org/10.30646/tikomsin.v8i2.500>
- Rahim, M. A., Mushafiq, M., Khan, S., & Arain, Z. A. (2021). RFM-based repurchase behavior for customer classification and segmentation. *Journal of Retailing and Consumer Services*, 61, 102566. <https://doi.org/10.1016/j.jretconser.2021.102566>
- Riahi, Y., & Riahi, S. (2018). Big data and big data analytics: Concepts, types and technologies. *International Journal of Research and Engineering*, 5(9), 524–528. <http://dx.doi.org/10.21276/ijre.2018.5.9.5>
- Robin, G & Jean-Michel, P. (2020). Random Forests with R. In *Use R*. Springer Cham. <http://www.springer.com/series/6991>
- Schonlau, M., & Zou, R. Y. (2020). The random forest algorithm for statistical learning. *Stata Journal*, 20(1), 3–29. <https://doi.org/10.1177/1536867X20909688>
- Schröer, C., Kruse, F., & Gómez, J. M. (2021). A systematic literature review on applying CRISP-DM process model. *Procedia Computer Science*, 181, 526–534. <https://doi.org/10.1016/j.procs.2021.01.199>
- Speiser, J. L., Miller, M. E., Tooze, J., & Ip, E. (2019). A comparison of random forest variable selection methods for classification prediction modeling. In *Expert Systems with Applications* (Vol. 134, pp. 93–101). Elsevier Ltd. <https://doi.org/10.1016/j.eswa.2019.05.028>
- Romero, C. A. T, Ortiz, J. H., Khalaf, O. I., & Prado, A. R. (2021). Business intelligence: business evolution after industry 4.0. In *Sustainability (Switzerland)*, 13(18), 10026. <https://doi.org/10.3390/su131810026>
- Zaw, H. T., Maneerat, N., & Win, K. Y. (2019). Brain tumor detection based on Naïve Bayes classification. *Proceeding - 5th International Conference on Engineering, Applied Sciences and Technology, ICEAST 2019*, 1-4, <https://doi.org/10.1109/ICEAST.2019.8802562>
- Zhou, Z. H. (2021). Machine Learning. In *Machine Learning*. Springer Nature. <https://doi.org/10.1007/978-981-15-1967-3>

CUSTOMER SEGMENTATION ANALYSIS USING RANDOM FOREST & NAÏVE BAYES METHOD IN THE CASE OF MULTICLASS CLASSIFICATION AT PT. XYZ

ORIGINALITY REPORT

13%	9%	9%	7%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

PRIMARY SOURCES

1	Vishruti Desai, Unnati Shah, Saurya Mehta, Makhania Monil, Patel Tirth. "Chapter 4 Impact of COVID-19 on IT Business", Springer Science and Business Media LLC, 2023 Publication	1%
2	Submitted to Universiti Teknologi MARA Student Paper	1%
3	pdfcookie.com Internet Source	1%
4	Submitted to University of Hertfordshire Student Paper	1%
5	www.researchgate.net Internet Source	1%
6	A.H.G. Kusumah, C.U. Abdullah, D. Turgarini, M. Ruhimat, O. Ridwanudin, Y. Yuniawati. "Promoting Creative Tourism: Current Issues in Tourism Research", CRC Press, 2021 Publication	1%
7	Submitted to Brunel University Student Paper	1%
8	www.imm.dtu.dk Internet Source	1%
9	Dheeraj Bansal, David Evans, Barrie Jones. "A Real-Time Predictive Maintenance System for Machine Systems - An Alternative to	<1%

Expensive Motion Sensing Technology", 2005
Sensors for Industry Conference, 2005

Publication

-
- | | | |
|----|---|------|
| 10 | 0-www-mdpi-com.brum.beds.ac.uk
<small>Internet Source</small> | <1 % |
|----|---|------|
-
- | | | |
|----|--|------|
| 11 | Astri Ayu Nastiti, Laurentinus Anindito Wisnu Susanto, Desi Natalia Muskananfola, Gusti Ayu Dwi Yanti. "Decision-Level Fusion on Healthcare", ITM Web of Conferences, 2025
<small>Publication</small> | <1 % |
|----|--|------|
-
- | | | |
|----|---|------|
| 12 | razak.utm.my
<small>Internet Source</small> | <1 % |
|----|---|------|
-
- | | | |
|----|--|------|
| 13 | Submitted to The University of Wolverhampton
<small>Student Paper</small> | <1 % |
|----|--|------|
-
- | | | |
|----|---|------|
| 14 | pure.ulster.ac.uk
<small>Internet Source</small> | <1 % |
|----|---|------|
-
- | | | |
|----|---|------|
| 15 | Shashi Kumar, Paul Siqueira, Himanshu Govil, Shefali Agrawal. "Spaceborne Synthetic Aperture Radar Remote Sensing - Techniques and Applications", CRC Press, 2023
<small>Publication</small> | <1 % |
|----|---|------|
-
- | | | |
|----|---|------|
| 16 | preprod.simplilearn.com
<small>Internet Source</small> | <1 % |
|----|---|------|
-
- | | | |
|----|--|------|
| 17 | Submitted to Academic Library Consortium
<small>Student Paper</small> | <1 % |
|----|--|------|
-
- | | | |
|----|---|------|
| 18 | docplayer.net
<small>Internet Source</small> | <1 % |
|----|---|------|
-
- | | | |
|----|--|------|
| 19 | "Advances in Artificial Intelligence and Machine Learning in Big Data Processing", Springer Science and Business Media LLC, 2025
<small>Publication</small> | <1 % |
|----|--|------|
-

20	ejournals.umn.ac.id Internet Source	<1 %
21	"Sustainable Data Management", Springer Science and Business Media LLC, 2025 Publication	<1 %
22	Rehab H. Werida, Mohamed T. Amralla, Nader N. Bekhit, Mena Youssef, Gaidaa M. Dogheim. "Assessment of Safety and Acceptance toward Covid-19 Vaccines: A cross-sectional Study in Egypt", Cold Spring Harbor Laboratory, 2025 Publication	<1 %
23	naymote.com Internet Source	<1 %
24	Submitted to SASTRA University Student Paper	<1 %
25	acris.aalto.fi Internet Source	<1 %
26	mahito.info Internet Source	<1 %
27	paulgp.github.io Internet Source	<1 %
28	www.idnfinancials.com Internet Source	<1 %
29	www.sci-int.com Internet Source	<1 %

Exclude quotes On

Exclude matches < 10 words

Exclude bibliography On

CUSTOMER SEGMENTATION ANALYSIS USING RANDOM FOREST & NAÏVE BAYES METHOD IN THE CASE OF MULTICLASS CLASSIFICATION AT PT. XYZ

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/100

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8

PAGE 9

PAGE 10

PAGE 11

PAGE 12

PAGE 13

PAGE 14