



SURAT - TUGAS

Nomor : 105/PL.01.11 /FTI-STD/XII/2023

- Dasar :
1. Bahwa guna mendukung kegiatan Tri Dharma Perguruan Tinggi yang terdiri dari Pendidikan, Penelitian dan Pengabdian Kepada Masyarakat, dimana ketiganya menjadi poin penting dalam mewujudkan visi dari perguruan tinggi.
 2. Bahwa mengingat pentingnya kegiatan penelitian dan publikasi ilmiah bagi Dosen dalam lingkup Fakultas Teknologi Industri Universitas Trisakti Tahun Akademik 2023/2024, maka dipandang perlu menugaskan para dosen untuk melaksanakan kegiatan Publikasi Ilmiah.
 3. Bahwa agar kegiatan Publikasi Ilmiah bagi dosen dapat berjalan dengan baik serta memperoleh hasil yang maksimal, maka Dekan Fakultas Teknologi Industri Universitas Trisakti dengan ini :

MENUGASKAN :

- K e p a d a : Dosen Tetap Fakultas Teknologi Industri Universitas Trisakti
- U n i t : Fakultas Teknologi Industri Universitas Trisakti
- U n t u k : Berperan aktif dalam melaksanakan penelitian dan melakukan publikasi ilmiah pada jurnal nasional terakreditasi dan jurnal internasional bereputasi.
- Waktu : Tahun Akademik 2023/2024

Demikian surat tugas ini untuk dilaksanakan dengan sebaik-baiknya dan penuh tanggung jawab.

Jakarta, 19 Desember 2023

D e k a n,



Prof. Dr. Ir. Rianti Dewi Sulamet-Ariobimo, ST, M.Eng, IPM



VOLUME 9 NUMBER 1 JUNE 2024

ISSN: 2528-1682, e-ISSN: 2527-9165



Published by:
Department of Informatics
UIN Sunan Gunung Djati Bandung

SERTIFIKAT

Direktorat Jenderal Penguatan Riset dan Pengembangan,
Kementerian Riset, Teknologi dan Pendidikan Tinggi



Kutipan dari Keputusan Direktur Jenderal Penguatan Riset dan Pengembangan
Kementerian Riset, Teknologi dan Pendidikan Tinggi No. SK/111/2019

Nomor 36/E/KPT/2019

Peringkat Akreditasi Jurnal Ilmiah Periode VII Tahun 2019

Nama Jurnal Ilmiah

JOIN (Jurnal Online Informatika)

E-ISSN: 25279165

Penerbit: Jurusan Teknik Informatika, UIN Sunan Gunung Djati Bandung

Ditetapkan Sebagai Jurnal Ilmiah

TERAKREDITASI PERINGKAT 2

Akreditasi Berlaku Selama 5 (lima) Tahun, Yaitu
Volume 4 Nomor 1 Tahun 2019 sampai Volume 8 Nomor 2 Tahun 2023

Jakarta, 13 Desember 2019

Direktur Jenderal Penguatan Riset dan Pengembangan



Dr. Muhammad Dimiyati
NIP. 195912171984021001

TERAKREDITASI



Get More with
SINTA Insight

Go to Insight

**JOIN (JURNAL ONLINE INFORMATIKA)**

JURUSAN TEKNIK INFORMATIKA, UIN SUNAN GUNUNG DJATI BANDUNG

P-ISSN : 25281682 <> E-ISSN : 25279165 Subject Area : Science

**6.6**
Impact**2927**
Google
Citations**Sinta 2**
Current
Accreditation[Google Scholar](#) [Garuda](#) [Website](#) [Editor URL](#)

History Accreditation

2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027

GarudaGoogle Scholar

Search...

The Impact of Online Reviews to Predict The Number of International TouristsDepartment of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\) Vol 10 No 1 \(2025\) 77-92](#)

2025 DOI: 10.15575/join.v10i1.1409 Accred : Sinta 2

Application of Self-Organizing Map and K-Means to Cluster Bandwidth Usage Patterns in Campus EnvironmentDepartment of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\) Vol 10 No 1 \(2025\) 66-76](#)


2025 DOI: 10.15575/join.v10i1.1438 Accred : Sinta 2

Study of the Application of Text Augmentation with Paraphrasing to Overcome Imbalanced Data in Indonesian Text ClassificationDepartment of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\) Vol 10 No 1 \(2025\) 132-142](#)

2025 DOI: 10.15575/join.v10i1.1472 Accred : Sinta 2

Road Damage Detection Using YOLOv7 with Cluster Weighted Distance-IoU NMS

Citation Per Year By Google Scholar

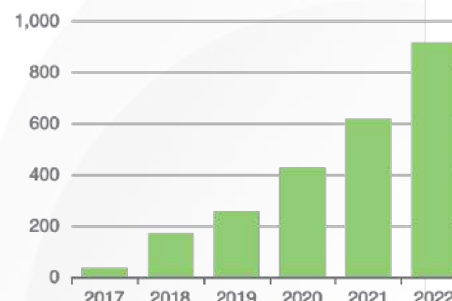

Journal By Google Scholar

	All	Since 2020
Citation	2927	2863
h-index	25	25
i10-index	58	58

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 10 No 1 (2025) 122-131

 2025  DOI: [10.15575/join.v10i1.1481](#)  Accred : Sinta 2

[LLM-Based Information Retrieval for Disease Detection Using Semantic Similarity](#)

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 10 No 1 (2025) 32-41

 2025  DOI: [10.15575/join.v10i1.1486](#)  Accred : Sinta 2

[Modality-based Modeling with Data Balancing and Dimensionality Reduction for Early Stunting Detection](#)

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 10 No 1 (2025) 53-65

 2025  DOI: [10.15575/join.v10i1.1495](#)  Accred : Sinta 2

[Adoption of Artificial Intelligence and Digital Resources among Academicians of Islamic Higher Education Institutions in Indonesia](#)

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 10 No 1 (2025) 42-52

 2025  DOI: [10.15575/join.v10i1.1549](#)  Accred : Sinta 2

[Pyramid Quantum Neural Network Based Resource Allocation with IoT: A Deep Learning Method](#)

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 10 No 1 (2025) 143-152

 2025  DOI: [10.15575/join.v10i1.1578](#)  Accred : Sinta 2

[Performance Comparative Study of Machine Learning Classification Algorithms for Food Insecurity Experience by Households in West Java](#)

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 9 No 1 (2024) 128-137

 2024  DOI: [10.15575/join.v9i1.1012](#)  Accred : Sinta 2

[Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images](#)

Department of Informatics, UIN Sunan Gunung Djati Bandung [JOIN \(Jurnal Online Informatika\)](#) Vol 9 No 1 (2024) 89-99

 2024  DOI: [10.15575/join.v9i1.1178](#)  Accred : Sinta 2

[Previous](#) [1](#) [2](#) [3](#) [4](#) [5](#) [Next](#)

Page 3 of 48 | Total Records 479

JOIN

JURNAL ONLINE INFORMATIKA

ISSN: 2528-1682 (PRINTED) | 2527-9165 (ONLINE)

jokoriyono171

PUBLISHED BY:

[HOME](#) [CURRENT](#) [ARCHIVES](#) [ABOUT](#) [CONTACT](#)

[Q SEARCH](#)

[HOME](#) / [ARCHIVES](#) / Vol. 9 No. 1 (2024)

Vol. 9 No. 1 (2024)



All articles in this issue (15 original research articles) were authored/co-authored by 7 (seven) countries (Indonesia, Malaysia, Egypt, Iraq, United States, India, and Ghana).

DOI: <https://doi.org/10.15575/join.v9i1>

PUBLISHED: 2024-04-23

ARTICLE

A Comparison of Ryu and Pox Controllers: A Parallel Implementation

Muhammad Ikhwananda Rizaldi, Department of Informatics, University of Muhammadiyah Malang, Indonesia

Elsa Annas Sonia Yusuf, Department of Informatics, University of Muhammadiyah Malang, Indonesia

Denar Regata Akbi, Department of Informatics, University of Muhammadiyah Malang, Indonesia

Wildan Suharso, Department of Informatics, University of Muhammadiyah Malang, Indonesia

[DOI](#) : [10.15575/join.v9i1.1181](https://doi.org/10.15575/join.v9i1.1181) [Abstract View](#) : 751 [PDF downloads](#): 619

1-9

[PDF](#)

Modeling Face Detection Application Using Convolutional Neural Network and Face-API for Effective and Efficient Online Attendance Tracking

Carles Juliandy, Department of Information Technology, Universitas Mikroskil, Indonesia

Ng Poi Wong, Department Computer Science, Universitas Mikroskil, Indonesia

Darwin, Department Computer Science, Universitas Mikroskil, Indonesia

[DOI](#) : [10.15575/join.v9i1.1203](https://doi.org/10.15575/join.v9i1.1203) [Abstract View](#) : 936 [PDF downloads](#): 781

10-17

[PDF](#)

Deep Learning Based LSTM Model for Predicting the Number of Passengers for Public Transport Bus Operators

Joko Siswanto, Politeknik Keselamatan Transportasi Jalan; Faculty of Information Technology, Satya Wacana Christian University, Indonesia

<https://orcid.org/0000-0003-3795-2155>

Danny Manongga, Faculty of Information Technology, Satya Wacana Christian University, Indonesia

Irwan Sembiring, Faculty of Information Technology, Satya Wacana Christian University, Indonesia

Sutarto Wijono, Faculty of Information Technology, Satya Wacana Christian University, Indonesia

[DOI](#) : [10.15575/join.v9i1.1245](https://doi.org/10.15575/join.v9i1.1245) [Abstract View](#) : 1406 [PDF downloads](#): 781

18-28

[PDF](#)

[MAKE A SUBMISSION](#)[ACCREDITED](#)[EDITORIAL TEAM](#)[CITEDNESS IN SCOPUS](#)[PEER REVIEW PROCESS](#)[FOCUS AND SCOPE](#)[PUBLICATION ETHICS](#)[AUTHOR GUIDELINES](#)[AUTHOR FEES](#)[DATA SHARING POLICY](#)[REVENUE SOURCES](#)[ADVERTISING POLICY](#)[DIRECT MARKETING](#)[RETRACTION-CORRECTIONS](#)[COPYRIGHT NOTICE](#)[PLAGIARISM CHECK](#)[REFERENCES MANAGEMENT](#)[JOURNAL HISTORY](#)[TOOLS](#)

Analysis of Data and Feature Processing on Stroke Prediction using Wide Range Machine Learning Model

Untari Novia Wisesty, School of Computing, Telkom University, Bandung, Indonesia
Tjokorda Agung Budi Wirayuda, School of Computing, Telkom University, Bandung, Indonesia
Febryanti Sthevanie, School of Computing, Telkom University, Bandung, Indonesia
Rita Rismala, School of Computing, Telkom University, Bandung, Indonesia
[doi](#) DOI : 10.15575/join.v9i1.1249 [Abstract View](#) : 1211 [PDF downloads](#): 650

29-40

**Case Study in Network Security System Using Random Port Knocking Method on The Principles of Availability, Confidentiality and Integrity**

Tati Ernawati, Informatics Engineering Study Program, TEDC Bandung Polytechnic, Indonesia
<https://orcid.org/0000-0002-0108-1098>
Idham Kholid, Informatics Engineering Study Program, TEDC Bandung Polytechnic, Indonesia
Dahlan, Informatics Engineering Study Program, TEDC Bandung Polytechnic, Indonesia
Dini Rohmayani, Informatics Engineering Study Program, TEDC Bandung Polytechnic, Indonesia
[doi](#) DOI : 10.15575/join.v9i1.1254 [Abstract View](#) : 679 [PDF downloads](#): 509

41-51

**Improving with Hybrid Feature Selection in Software Defect Prediction**

Muhammad Yoga Adha Pratama, Department of Computer Science, University of Lambung Mangkurat, Kalimantan Selatan, Indonesia
Rudy Herteno, Department of Computer Science, University of Lambung Mangkurat, Kalimantan Selatan, Indonesia
Mohammad Reza Faisal, Department of Computer Science, University of Lambung Mangkurat, Kalimantan Selatan, Indonesia
Radityo Adi Nugroho, Department of Computer Science, University of Lambung Mangkurat, Kalimantan Selatan, Indonesia
Friska Abadi, Department of Computer Science, University of Lambung Mangkurat, Kalimantan Selatan, Indonesia
[doi](#) DOI : 10.15575/join.v9i1.1307 [Abstract View](#) : 646 [PDF downloads](#): 379

52-60

**Water Level Time Series Forecasting Using TCN Study Case in Surabaya**

Deni Saepudin, School of Computing, Telkom University, Bandung, Indonesia
Egi Shidqi Rabbani, School of Computing, Telkom University, Bandung, Indonesia
Dio Navialdy, School of Computing, Telkom University, Bandung, Indonesia
Didit Adytia, School of Computing, Telkom University, Bandung, Indonesia
[doi](#) DOI : 10.15575/join.v9i1.1312 [Abstract View](#) : 828 [PDF downloads](#): 433

61-69

**Realizing the Promise of Artificial Intelligence in Hepatocellular Carcinoma through Opportunities and Recommendations for Responsible Translation**

Tamer A. Addissouky, Department of Biochemistry, Science Faculty, Menoufia University, Menoufia; Al-Hadi University College, Baghdad, Iraq; MLS ASCP, United States; MLS Ministry of Health, Alexandria, Egypt
<https://orcid.org/0000-0003-3797-9155>
Majeed M. A. Ali, Al-Hadi University College, Baghdad, Iraq
Ibrahim El Tantawy El Sayed, Department of Biochemistry, Science Faculty, Menoufia University, Menoufia, Egypt
Mahmood Hasen Shuhata Alubiady, Al-Hadi University College, Baghdad, Iraq
[doi](#) DOI : 10.15575/join.v9i1.1297 [Abstract View](#) : 813 [PDF downloads](#): 306

70-79

**AI-Powered Real-time Accessibility Enhancement: A Solution for Web Content Accessibility Issues**

Samir Dash, Cisco Systems (India) Pvt. Ltd., Bengaluru, Karnataka, India
[doi](#) DOI : 10.15575/join.v9i1.1310 [Abstract View](#) : 946 [PDF downloads](#): 767

80-88

**Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images**

Joko Riyono, Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia
Christina Eni Pujiastuti, Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia
Sofia Debi Puspa, Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia
Supriyadi, Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia
Fayza Nayla Riyana Putri, Information System, Universitas Diponegoro, Semarang, Indonesia
[Abstract View](#) : 486 [PDF downloads](#): 496

89-99



DECLARATION FORM

Declaration
Form

MANUSCRIPT TEMPLATE

Manuscript
Template

JOIN STATS



last update May 27, 2024

SAER : Comparison of Rule Prediction Algorithms on Constructing a Corpus for Taxation Related Tweet Aspect-Based Sentiment Analysis

Annisa Mufidah Sopian, 3Department of Informatics, Faculty of Science and Informatics, Universitas Jenderal Achmad Yani, Indonesia 100-110

Ridwan Ilyas, 3Department of Informatics, Faculty of Science and Informatics, Universitas Jenderal Achmad Yani, Indonesia

Fatan Kasyidi, 3Department of Informatics, Faculty of Science and Informatics, Universitas Jenderal Achmad Yani, Indonesia

Asep Id Hadiana, Faculty of Information and Communication Technology, Universiti Teknikal Malaysia Melaka, Melaka, Malaysia

Abstract View : 562 PDF downloads: 339

**Development of a Mobile-Based Application for Classifying Caladium Plants Using the CNN Algorithm**

Rudy Chandra, Information Technology, Faculty of Vocational Studies, Institut Teknologi Del, Indonesia 111-118

<https://orcid.org/0000-0002-2267-6365>

Tegar Arifin Prasetyo, Information Technology, Faculty of Vocational Studies, Institut Teknologi Del, Indonesia

<https://orcid.org/0000-0001-8058-7961>

Heni Ernita Lumbangaol, Information Technology, Faculty of Vocational Studies, Institut Teknologi Del, Indonesia

Veny Siahaan, Information Technology, Faculty of Vocational Studies, Institut Teknologi Del, Indonesia

Johan Immanuel Sianipar, Information Technology, Faculty of Vocational Studies, Institut Teknologi Del, Indonesia

DOI : 10.15575/join.v9i1.1296 Abstract View : 508 PDF downloads: 387

**A Mathematical Modelling and Behaviour Simulation of a Smart Grid Cyber-Physical System**

Elvis Tamakloe, Department of Computer Engineering, Kwame Nkrumah University of Science and Technology, KNUST- Kumasi, Ghana 119-127

Klogo Selorm Griffith, Department of Computer Engineering, Kwame Nkrumah University of Science and Technology, KNUST- Kumasi, Ghana

Benjamin Kommey, Department of Computer Engineering, Kwame Nkrumah University of Science and Technology, KNUST- Kumasi, Ghana

DOI : 10.15575/join.v9i1.1344 Abstract View : 409 PDF downloads: 226

**Performance Comparative Study of Machine Learning Classification Algorithms for Food Insecurity Experience by Households in West Java**

Khusnia Nurul Khikmah, IPB University, Indonesia 128-137

<http://orcid.org/0000-0002-9142-6968>

Bagus Sartono, IPB University, Indonesia

Budi Susetyo, IPB University, Indonesia

Gerry Alfa Dito, IPB University, Indonesia

DOI : 10.15575/join.v9i1.1012 Abstract View : 534 PDF downloads: 558

**Data Balancing Techniques Using the PCA-KMeans and ADASYN for Possible Stroke Disease Cases**

Ung Ungkawa, Department of Informatics, Institut Teknologi Nasional Bandung, Indonesia 138-147

<https://orcid.org/0000-0003-3693-9821>

Muhammad Avilla Rafi, Department of Informatics, Institut Teknologi Nasional Bandung, Indonesia

DOI : 10.15575/join.v9i1.1293 Abstract View : 1011 PDF downloads: 434



Published by:

Informatics Department, Faculty of Science and Technology, UIN Sunan Gunung Djati Bandung.

Jl. A.H. Nasution No. 105 Cibiru Bandung, Indonesia. 40614. Phone (022) 7800525 / Fax (022) 7803936.

Email : join@uinsgd.ac.id p-ISSN: [2528-1682](#) e-ISSN: [2527-9165](#)



Platform &
workflow by
OJS / PKP



HOME CURRENT ARCHIVES ABOUT CONTACT

SEARCH

HOME / Editorial Team

Editorial Team

Editor-in-chief

[Dian Sa'adillah Maylawati](#), **Scopus**[®] H-Index: 15, Department of Informatics, UIN Sunan Gunung Djati Bandung, **Indonesia**

Managing Editor

- [Ichsan Budiman](#), **Scopus**[®] H-Index: 2, Department of Informatics, UIN Sunan Gunung Djati Bandung, **Indonesia**
- [Rifqi Syamsul Fuadi](#), **Scopus**[®] H-Index: 3, UIN Sunan Gunung Djati Bandung, **Indonesia**

Editorial Board

1. [Asif Ali Laghari](#), **Scopus**[®] H-Index: 26, Sindh Madressatul Islam University, **Pakistan**.
2. [Muhammed Ali Abdul Hameed](#), **Scopus**[®] H-Index: 16, Fuel Cell Institute Universiti Kebangsaan Malaysia, **Malaysia**.
3. [Anton Abdulbasah Kamil](#), **Scopus**[®] H-Index: 15, Nisantasi University, **Turkey**.
4. [Saiyed Umer](#), **Scopus**[®] H-Index: 16, Department of Computer Science & Engineering Aliah University, Newtown, Kolkata-700156, **India**.
5. [Vadim A. Zhmud](#), **Scopus**[®] H-Index: 12, Novosibirsk Institute of Software Systems, **Russia**.
6. [Wildan Budiawan Zulfikar](#), **Scopus**[®] H-Index: 10, UIN Sunan Gunung Djati Bandung, **Indonesia**.
7. [Ali Rahman](#), **Scopus**[®] H-Index: 5, UIN Sunan Gunung Djati Bandung, **Indonesia**.
8. [Ichsan Taufik](#), **Scopus**[®] H-Index: 5, PhD Student in Asia e-University, **Malaysia**.
9. [Rio Guntur Utomo](#), **Scopus**[®] H-Index: 5, University of Southampton, **United Kingdom**.
10. [Yazan Abdelmajid Abu Huson](#), **Scopus**[®] H-Index: 4, Department of Accounting, University of Valencia, **Spain**.
11. [Vedapradha R](#), **Scopus**[®] H-Index: 3, School of Commerce Mount Carmel College, Autonomous, **India**.
12. [Rian Andrian](#), **Scopus**[®] H-Index: 3, Universitas Pendidikan Indonesia, **Indonesia**.
13. [Nur Lukman](#), **Scopus**[®] H-Index: 2, PhD Student in Asia e-University, **Malaysia**.
14. [Shavkat Seytov](#), **Scopus**[®] H-Index: 2, Tashkent State University of Economics, **Uzbekistan**.
15. [Dina Hamdy Darwish](#), **Scopus**[®] H-Index: 2, Department of Artificial Intelligence, Faculty of Computer Science and Information Technology, Ahran Canadian University, **Egypt**.

Editor Advisory Board

1. [Muhammad Ali Ramdhani](#), **Scopus**[®] H-Index: 25, UIN Sunan Gunung Djati Bandung, **Indonesia**
2. [Giacomo Cabri](#), **Scopus**[®] H-Index: 23, Department FIM, University of Modena and Reggio Emilia, **Italy**.
3. [Anjar Wanto](#), **Scopus**[®] H-Index: 16, STIKOM Tunas Bangsa Pematangsiantar, **Indonesia**.
4. [Tanweer Alam](#), **Scopus**[®] H-Index: 16, Islamic University of Madinah, **Saudi Arabia**.
5. [Ayu Purwarianti](#), **Scopus**[®] H-Index: 15, Institut Teknologi Bandung, **Indonesia**.
6. [A'ang Subiyakto](#), **Scopus**[®] H-Index: 13, UIN Syarif Hidayatullah Jakarta, **Indonesia**.
7. [Rinaldi Munir](#), **Scopus**[®] H-Index: 10, Institut Teknologi Bandung, **Indonesia**.
8. [Husni Teja Sukmana](#), **Scopus**[®] H-Index: 10, UIN Syarif Hidayatullah Jakarta, **Indonesia**.
9. [Mohamad Irfan](#), **Scopus**[®] H-Index: 9, Asia e-University, **Malaysia**.
10. [Mailasan Jayakrishnan](#), **Scopus**[®] H-Index: 8, Xiamen University Malaysia, **Malaysia**.
11. [Moch Arif Bijaksana](#), **Scopus**[®] H-Index: 8, Telkom University, **Indonesia**.
12. [Satrya Fajri Pratama](#), **Scopus**[®] H-Index: 7, Sheffield Hallam University, Sheffield, **United Kingdom**.

MAKE A SUBMISSION

ACCREDITED



EDITORIAL TEAM

CITEDNESS IN SCOPUS

PEER REVIEW PROCESS

FOCUS AND SCOPE

PUBLICATION ETHICS

AUTHOR GUIDELINES

AUTHOR FEES

DATA SHARING POLICY

REVENUE SOURCES

ADVERTISING POLICY

DIRECT MARKETING

RETRACTION-CORRECTIONS

COPYRIGHT NOTICE

PLAGIARISM CHECK

REFERENCES MANAGEMENT

JOURNAL HISTORY

TOOLS



13. [Yana Aditia Gerhana](#), **Scopus**[®] H-Index: 7, Asia e-University, **Malaysia**.
14. [Wisnu Uriawan](#), **Scopus**[®] H-Index: 6, University of Lyon (INSA de Lyon), **France**.
15. [Ahmad Wisnu Mulyadi](#), **Scopus**[®] H-Index: 5, Virtual Patient Engine, Artificial Intelligence Research Team, BioMed X, **Germany**.
16. [Ahmad Ashraf Abdul Halim](#), **Scopus**[®] H-Index: 5, Faculty of Electronic Engineering & Technology (FKTEN), Universiti Malaysia Perlis (UniMAP), **Malaysia**.
17. [Cecep Nurul Alam](#), **Scopus**[®] H-Index: 5, Asia e-University, **Malaysia**.
18. [Ana Hadiana](#), **Scopus**[®] H-Index: 5, Research Center for Informatics, BRIN, **Indonesia**.
19. [Esa Firmansyah](#), **Scopus**[®] H-Index: 5, STMIK Sumedang, **Indonesia**.
20. [Vandha Pradwiyasma Widartha](#), **Scopus**[®] H-Index: 4, Department of Information System, Pukyong National University, **South Korea**.
21. [Santosh Gore](#), **Scopus**[®] H-Index: 4, Director, Sai Info Solution, **India**.
22. [Aulia Akhrian Syahidi](#), **Scopus**[®] H-Index: 4, Smart City Information System Study Program, Politeknik Negeri Banjarmasin, **Indonesia**.
23. [Setio Basuki](#), **Scopus**[®] H-Index: 4, Universitas Muhammadiyah Malang, **Indonesia**.
24. [Arini Arini](#), **Scopus**[®] H-Index: 4, UIN Syarif Hidayatullah Jakarta, **Indonesia**.
25. [Muhammad Irwan Padli Nasution](#), **Scopus**[®] H-Index: 4, UIN Sumatera Utara, **Indonesia**.
26. [Nunik Destria Arianti](#), **Scopus**[®] H-Index: 4, Universitas Nusaputra, **Indonesia**.
27. [Dian Nuraiman](#), **Scopus**[®] H-Index: 3, RMIT University, Australia, **Australia**.
28. [Abdelaziz Hessane](#), **Scopus**[®] H-Index: 3, Department of Computer Sciences, FSTE, Moulay Ismail University of Meknès, **Morocco**.
29. [Undang Syaripudin](#), **Scopus**[®] H-Index: 3, Asia e-University, **Malaysia**.
30. [Mohamed Osman Suliman Omara](#), **Scopus**[®] H-Index: 2, International College of Semiconductor Technology National Yang Ming Chiao Tung University, **Taiwan**.
31. [Chan Voeun](#), **Scopus**[®] H-Index: 1, National Polytechnic Institute of Cambodia, **Cambodia**.
32. [Areeg Alfouri](#), **Scopus**[®] H-Index: 1, Faculty of Medicine Al-Balqa Applied University, **Jordan**.
33. [G Vinoda Reddy](#), **Scopus**[®] H-Index: 1, Department CSE(AI&ML), CMR Technical Campus, Medichal Hyderabad, **India**.

English Language Advisor

[Kiki Nuriska Denhas](#), **Scopus**[®] H-Index: 1, Universitas Islam Negeri Walisongo Semarang, **Indonesia**



DECLARATION FORM



Declaration
Form

MANUSCRIPT TEMPLATE



Manuscript
Template

JOIN STATS



last update May 27, 2024

Published by:

Informatics Department, Faculty of Science and Technology, UIN Sunan Gunung Djati Bandung.

Jl. A.H. Nasution No. 105 Cibiru Bandung, Indonesia. 40614. Phone (022) 7800525 / Fax (022) 7803936.

Email : join@uinsgd.ac.id p-ISSN: [2528-1682](#) e-ISSN: [2527-9165](#)



This work is licensed under a [Creative Commons Attribution-NoDerivs 2.0 Generic License](#).

Platform &
workflow by
OJS / PKP

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyana Putri⁵

^{1,2,3,4}Fakultas Teknologi Industri, Universitas Trisakti, Jakarta

⁵Information System, Universitas Diponegoro, Semarang

Article Info

Article history:

Received September 02, 2023

Revised February 15, 2024

Accepted April 21, 2024

Available Online May 06, 2024

Keywords:

Canny

Chan-Vese

K-Means Clustering

Lungs

Segmentation

X-Ray Image

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image. In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method. This research shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

Corresponding Author:

Joko Riyono,

Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia.

Email: jokoriyono@trisakti.ac.id

1. INTRODUCTION

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Lung health can be influenced by many factors such as lifestyle, environmental hygiene, and heredity [1]. If there is a malfunction in the lungs, human health will be disrupted as a whole. Therefore, examination of lung malfunction should be done as early as possible.

The procedure carried out in a lung examination usually requires investigations because lung diseases generally have similar symptoms such as coughing, fever, decreased body weight, loss of appetite, and so on [2]. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure [3]. This examination aims to see directly and assess the severity of lung conditions.

The chest X-ray procedure provides an image based on the diffraction of electromagnetic waves, namely X-rays. The use of this light makes it possible to see human organs visually without having to do a surgical procedure (non-invasive procedure). This procedure produces a two-dimensional image as a representation of the condition of the lungs in the human body and basically this examination is only done through visual observation [4]. Therefore, of course, proper analysis is needed in determining the diagnosis through chest X-ray images.

With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Of course, this can also be applied to chest x-ray images.

Digital image processing is one of the areas of research in computer science. Broadly speaking, digital image processing works by analyzing digital images in such a way as to obtain a more perfect image. Not only that, image processing in research is also used in extracting information on images as needed. To extract information on several parts of an image, it is usually done with the segmentation method first.

Basically, the segmentation method is used to separate objects in an image. Image segmentation works by dividing digital images into several segments based on the characteristics of the image. This method allows for the separation of objects from the background. This is of course very necessary in research related to image analysis to extract or obtain information from the desired parts of the image.

Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image [5]. This aims to reduce the detector's inference time when processing the entire image because with segmentation, the detector does not need to process the entire image but only the region selected by the segmentation algorithm. Image segmentation aims to classify areas that have similarities so that they can also distinguish objects in the image from their background [6].

There are two segmentation techniques that are often used and can be divided into two categories, namely Region Segmentation which is a segmentation technique to find regions that meet certain homogeneity criteria such as finding color values that have similarities with other pixels so that they can be used as one region and Edge-Based Segmentation which is a technique for finding edges between regions between different characteristics [7].

The Chan-Vese strategy could be a locale division procedure, which could be a strategy that works without borders. The dynamic form show is one of the working models of division procedure that employs vitality and constrain imperatives on the picture into cluster locales [6]. The dynamic form demonstrate is commonly utilized in different picture preparing applications, particularly in therapeutic picture processing such as chest X-ray pictures, brain CT looks or MRI pictures of organs. Positive edge models are utilized in advanced picture preparing by pixel separation. The Chan-Vese strategy is utilized to distinguish visual objects with developmental energies. The advancement of the Mumford-Shah demonstrate and this demonstrate is based on the vitality diminishment issue, which can be re-expressed as equations of unequivocal levels, driving to a less difficult way of understanding the issue [8].

Canny identify is an edge-based division method found by John F. Canny in 1986 [9]. Basically, the Canny strategy works by employing a grayscale picture as input and producing concentrated discontinuities as yield or edge images. In its application, there are steps for shrewd edge location strategy i.e. smooth or channel commotion, calculate incline quality or slope course, apply delay edge prepare setting, not max [10]. This strategy has criteria that moreover ended up its advantage in picture division strategy, specifically Canny Detector has the capacity to distinguish edges based on indicated convolution parameters and is adaptable in decide the level of edge thickness discovery, to supply a least of separate between the edge of the location result and the initial edge, as it were one reaction on each edge to play down clutter within the post-processing step there [11].

Previous research has been carried out by Elsha Heny Pratiwi and Dwi Juniandi in 2022 regarding their research entitled Clustering Lung Disease Based on Chest X-Rays Using Fractal Dimensions Box Counting and K-Medoids. In his research, clustering of lung diseases was carried out based on the results of information from x-ray images of the lungs obtained through the canny segmentation method and resulted in an accuracy of 87% [12].

In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method.

2. METHOD

This research was conducted through a quantitative approach because the entire process was carried out using data in the form of numbers as an analytical tool. The data in this research is a type of data in the form of images obtained from previous studies. It can be said, the data used in this study is secondary data. Secondary data is data that is already available and collected by other parties outside the agency under study. Secondary data can generally be obtained through websites, books, articles,

internal organizational records and so on [13]. In this study, data was obtained through a site that contains many types of datasets that are commonly used by researchers in conducting research, namely Kaggle.

The image data used as the research subject is an x-ray image of the chest from patients with Covid-19 lung disease, tuberculosis, pneumonia, and healthy lungs which will also be used to extract information from the image in the form of numerical data from the results of segmented image. This numeric data will be used again in the clustering process to produce disease cluster classes based on the number of white pixel areas in the segmented image. In this study, there are several stages described as a flowchart as shown in Figure 1 below:

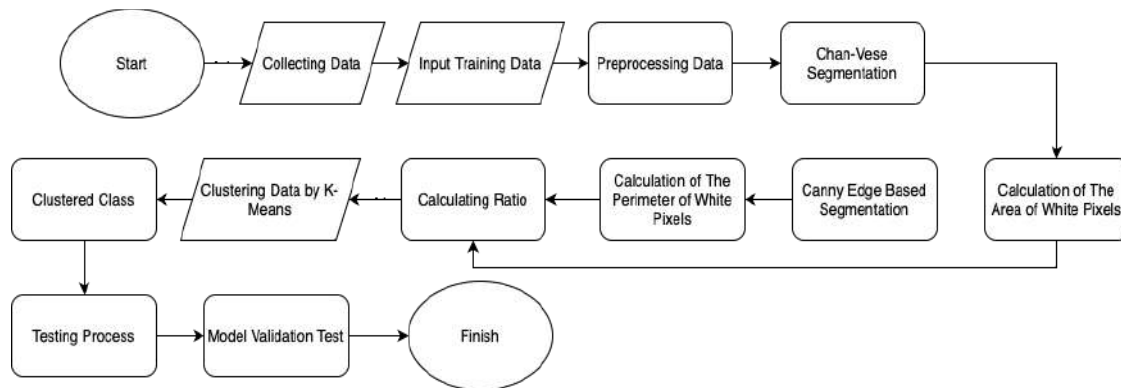


Figure 1. Research Methods Flowchart

The segmentation process applied to the image aims to obtain the features used in the analysis process, in this case, namely the white area in the segmented image [14]. This white area represents the damaged area of the lungs. Before the segmentation process is carried out, the image goes through several two stages in the data preprocessing process, namely the Resize process, Grayscale Process and the Filtering process with Histogram Equalization.

The image segmentation process is carried out twice, namely by the Chan-Vese method and Canny edge detection. The Chan-Vese method is an improvement from the edge-based model, because it bases edge detection on an image not based on image gradients but is based on curve evolution techniques, the Mumford-shah function for segmentation and level set [6]. This is because, detection using image gradients is less effective because discrete gradients are limited and the stop function is never null at an edge and allows the curve to pass through the existing boundaries. In the Chan-Vese model, initial contours can be applied anywhere in the image and the Chan-Vese model will automatically detect all contours, regardless of the position of the original contours. Active contour models are commonly used in various image processing applications, especially in medical image processing, such as chest X-ray images, brain CT scans or MRI images of the body. Positive edge models are used in digital image processing through pixel separation. The evolution of the Mumford-Shah model and this model is based on the energy reduction problem, which can be reformatted in the formula of definite levels, making the problem easier to solve [6].

Edge detection in an image is a process that produces the edges of an image object, its purpose is to mark the part that becomes a detailed image. Canny edge detection is one of the edge detection algorithms that has a minimum error rate and produces optimal edge images [15]. The edge (edge) is a sudden (large) change in the value of the intensity of gray degrees in a short distance. The purpose of edge detection is to group objects in the image, and is also used to further analyze the image.

The segmentation process, crucial for feature extraction, employed two methods: Chan-Vese and Canny edge detection. The Chan-Vese method, based on curve evolution techniques and Mumford-Shah function, aimed to detect damaged areas in the lungs by focusing on the white regions in segmented images. The Canny edge detection, known for its minimum error rate and optimal edge images, identified sudden changes in intensity, marking detailed parts of the images. Both methods contributed to obtaining precise data on the white pixel area representing lung damage.

After the segmentation process is complete, numerical data will be obtained in the form of white pixel area in the image which will then be used in the clustering process to group the data into several classes, namely the Covid-19 class, Tuberculosis, Pneumonia, and Normal or healthy lung class. Mathematically, K-Means clustering is carried out in 4 stages as [16]:

1. Initialize the centroid values randomly

$$v = \frac{\sum_{i=1}^n x_i}{n}, i=1,2,3,...,n \quad (1)$$

Information :

v : centroid on cluster

x_i : i -th object

n : number of objects/number of cluster member objects.

2. Place each data point to the nearest centroid by calculating the distance of each data point to the centroid in Euclidean distance

$$(x,y)=||x-y||=\sqrt{\sum_{i=1}^n (x_i-y_i)^2}, i=1,2,3,...,n \quad (2)$$

Information :

x_i : i th x object

y_i : y -th power

n : number of objects

3. Recalculate the centroid of the newly formed cluster by calculating the mean of each data point in the cluster.
4. Perform optimization to meet the criteria by repeating the last two steps.

The research strategy systematically applied these methods, and testing procedures involved applying the segmentation methods to chest X-ray images, extracting numerical data, and using K-Means clustering to classify diseases and healthy lungs based on the white pixel area in the segmented image. The research incorporated a robust testing process to evaluate the effectiveness of the applied methodologies. Each dataset was labeled with respective class names, facilitating the testing process. The assessment involved comparing the number of white pixels in test images to predetermined clustering classes.

3. RESULT AND DISCUSSION

The first stage in this study was to collect x-ray image data used as objects in this study. Data in the form of digital data will be processed in the Joint Photographic Experts Group (*jpeg) format. The x-ray image data used is x-ray data including Covid-19 disease, Tuberculosis, Pneumonia and healthy lungs.

Table 1. Datasets

No.	Class	Total Data
1	Covid-19	107
2	Tuberculosis	651
3	Pneumonia	752
4	Normal Lungs	1342

In table 1, there are types and amounts of data used in this research process. All data is collected through the Kaggle website which provides various kinds of datasets for research purposes. This data is obtained by downloading the required dataset.

The next step is image preprocessing. The image preprocessing stage goes through three stages which aim to improve the quality of the raw data (image) before further analysis. These three stages are resizing all image sizes to 256x256 pixels so that all images are the same size, changing all RGB images to Grayscale images, and carrying out the filtering process with the Histogram Equalization Method.

3.1. Preprocessing Process

3.1.1. Image Resizing Process

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns. Image size normalization process is done by imresize function via MATLAB. This process will display an image with a size of 256x256 as shown below:

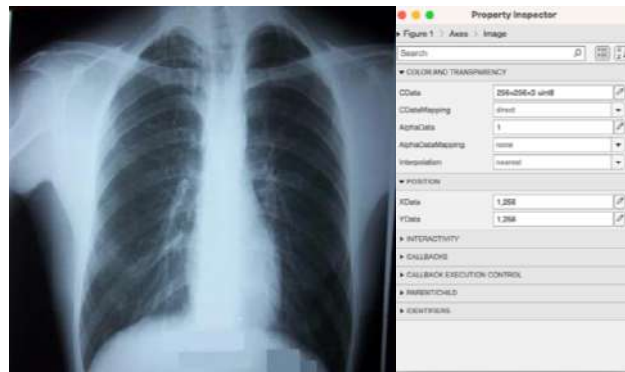


Figure 2. Resize Image

3.1.2. Grayscale Image Process

The grayscale image process in the image aims to change the RGB (Red, Green, Blue) image to a grayscale image with an intensity of 0 to 255 (8-bit image). The grayscale image process in MATLAB is done with the function `rgb2gray`. The results of this stage can be seen in the Figure 3 below:



Figure 3. Grayscale Image

3.1.3. Filtering Image Process With Histogram Equalization

Filtering process aims to improve image quality by reducing noise and adjusting image brightness. The filtering process in this research uses the Histogram Equalization method, which is a graphic equalization that represents the distribution of grayscale image intensities [19]. The filtering process in this study uses the Histogram Equalization technique, which is a graphic equalization process that represents the distribution of grayscale image intensities [17]. This process is done with the `histeq` function in MATLAB. The image on the right from Figure 5 shows that the image already has better contrast and a flatter histogram than Figure 4.

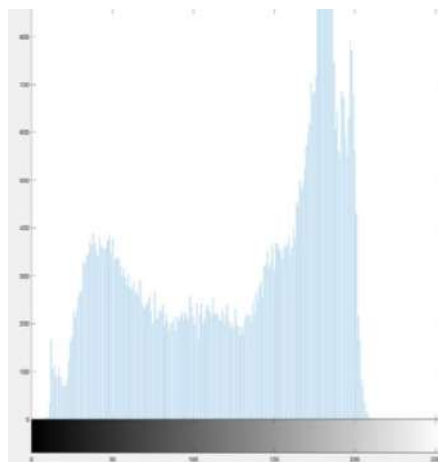


Figure 4. Before Filtering

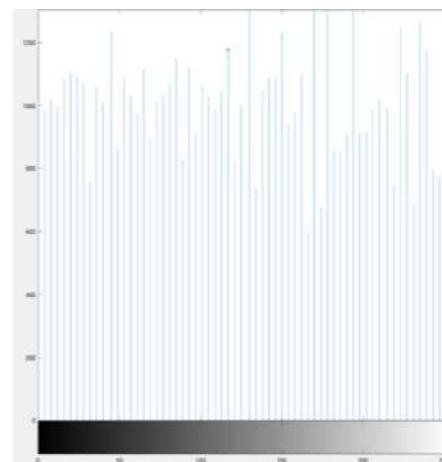


Figure 1. After Filtering

3.2. Calculation Process of The White Area of The Chan-ve-se Segmentation Image

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns [18]. Image size normalization process is done by `imresize` function via MATLAB. This process will display an image with a size of 256x256 as shown below:

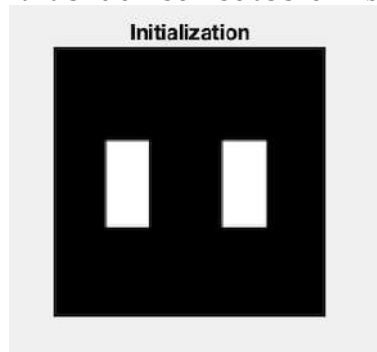


Figure 6. Initialization Mask

The segmentation process using the Chan-Vese method will produce black and white images as shown in Figure 7 which is a comparison of the images before and after segmentation.

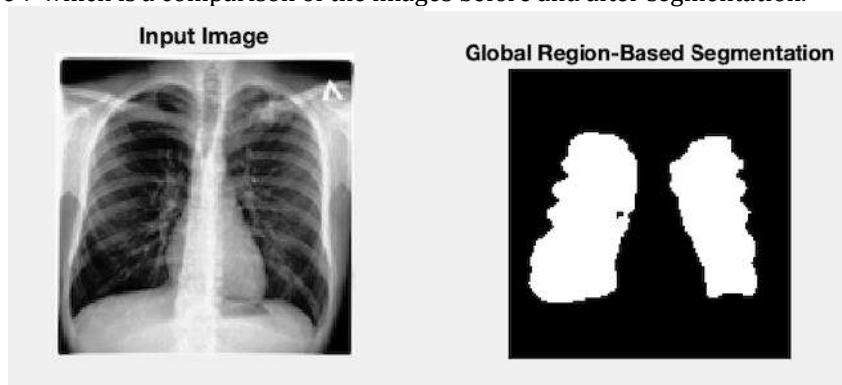


Figure 7. Comparison of Raw and Segmented Image

The next step is to convert the segmented image into a binary image with the `im2bw` function and fill in imperfect image areas that have holes with the `imfill` function. After everything has been done, the calculation of the area of white pixels in the image can be done with the `regionprops` function, which is a function in Matlab that is used to measure the properties of a binary image. Data on the area of white pixels in segmented images can be seen in Table 2 for Covid-19, Table 3 for Tuberculosis, Table 4 for Pneumonia, Table 5 for Normal Lungs.

Table 2. Area of White Pixels of Covid-19 Image

No.	Data	Area
1	'COVID19(460) Small.jpeg'	2060
2	'COVID19(461) Small.jpeg'	2070
3	'COVID19(462) Small.jpeg'	2313
4	'COVID19(463) Small.jpeg'	2416
5	'COVID19(464) Small.jpeg'	3384

Table 3. Area of White Pixels of Tuberculosis Image

No.	Data	Area
1	'Tuberculosis-1 Small.jpeg'	4326
2	'Tuberculosis-10 Small.jpeg'	3676
3	'Tuberculosis-100 Small.jpeg'	4255
4	'Tuberculosis-101 Small.jpeg'	4462
5	'Tuberculosis-102 Small.jpeg'	3340

Table 4. Area of White Pixels of Pneumonia Image

No.	Data	Area
1	'person1000_2931.jpeg'	3320
2	'person1000_1681.jpeg'	2040
3	'person1000_2932.jpeg'	1799
4	'person1000_2932.jpeg'	1761
5	'person1000_2934.jpeg'	3039

Table 5. Area of White Pixels of Normal Lungs Image

No.	Data	Area
1	'IM-0115-0001.jpeg'	2194
2	'IM-0117-0001.jpeg'	1842
3	'IM-0119-0001.jpeg'	1732
4	'IM-0122-0001.jpeg'	2010
5	'IM-0125-0001.jpeg'	1787

3.3. Calculation Process of The White Area of The Canny Edge-Based Segmentation Image

The next image segmentation process uses the second method, namely Canny Edge Detection. With this process, we will find a border around the chan-ve-segmented image by detecting changes in brightness levels and generating the circumference of the image as another variable needed in the clustering process.

This segmentation process uses the edge function in Matlab. By using the edge function, an image of the Canny edge detection results will be obtained as shown in Figure 9 below.

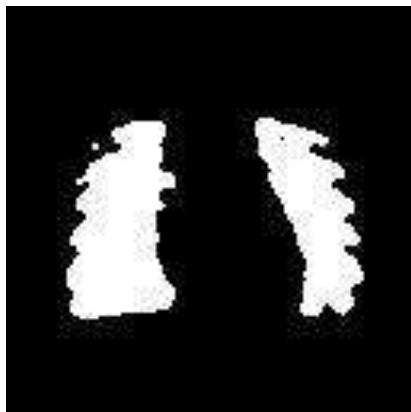


Figure 8. Chan-Vese Segmentation

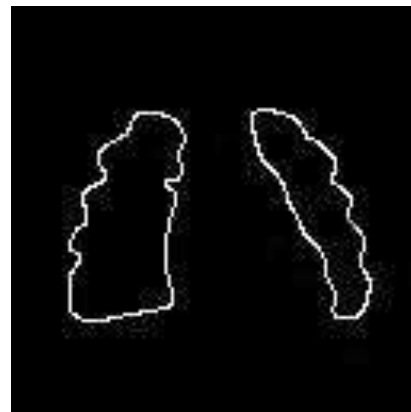


Figure 9. Canny Segmentation

Through the image segmentation results from Chan-Vese and then Canny, we get the circumference of the edge that surrounds the image. The results are described in the Table 6 for Covid-19, Table 7 for Tuberculosis, Table 8 for Pneumonia, Table 9 for Normal Lungs.

Table 6. White Pixels Circumference of Covid-19 Image

No.	Data	Circumference
1	'COVID19(460) Small.jpeg'	499
2	'COVID19(461) Small.jpeg'	401
3	'COVID19(462) Small.jpeg'	376
4	'COVID19(463) Small.jpeg'	431
5	'COVID19(464) Small.jpeg'	446

Table 7. White Pixels Circumference of Tuberculosis Image

No.	Data	Circumference
1	'Tuberculosis-1 Small.jpeg'	484
2	'Tuberculosis-10 Small.jpeg'	480
3	'Tuberculosis-100 Small.jpeg'	474
4	'Tuberculosis-101 Small.jpeg'	492
5	'Tuberculosis-102 Small.jpeg'	479

Table 8. White Pixels Circumference of Pneumonia Image

No.	Data	Circumference
1	'person1000_2931.jpeg'	586
2	'person1000_1681.jpeg'	382
3	'person1000_2932.jpeg'	394
4	'person1000_2932.jpeg'	399
5	'person1000_2934.jpeg'	346

Table 9. White Pixels Circumference of Normal Lungs Image

No.	Data	Circumference
1	'IM-0115-0001.jpeg'	491
2	'IM-0117-0001.jpeg'	498
3	'IM-0119-0001.jpeg'	468
4	'IM-0122-0001.jpeg'	397
5	'IM-0125-0001.jpeg'	491

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

$$\text{Calculation : } \frac{\text{The Number of Pixels of The Canny Detection Segmented Image}}{\text{The Number of Pixels of The Chan-Vese Segmented Image}} = \frac{491}{2060} = 4,12825651 \quad (3)$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below, The research involved a detailed analysis of various medical images, and the results are presented in Tables 10 to 13, showcasing the white pixel ratios for different categories of lung images. Each table provides specific details for the examined images, including the file names, circumference, area, and the calculated white pixel ratio.

Table 10. White Pixels Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	'COVID19(460) Small.jpeg'	499	2060	0,24223301
2	'COVID19(461) Small.jpeg'	401	2070	0,19371981
3	'COVID19(462) Small.jpeg'	376	2313	0,16255945
4	'COVID19(463) Small.jpeg'	431	2416	0,17839404
5	'COVID19(464) Small.jpeg'	446	3384	0,13179669

Table 10 outlines the white pixel ratios for several Covid-19 chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. For instance, 'COVID19(460) Small.jpeg' has a circumference of 499, an area of 2060, and a calculated ratio of 0.24223301

Table 11. White Pixels Ratio of Tuberculosis Image

No.	Data	Circumference	Area	Ratio
1	'Tuberculosis-1 Small.jpeg'	484	4326	0,11188165
2	'Tuberculosis-10 Small.jpeg'	480	3676	0,19371981
3	'Tuberculosis-100 Small.jpeg'	474	4255	0,16255945
4	'Tuberculosis-101 Small.jpeg'	492	4462	0,17839404
5	'Tuberculosis-102 Small.jpeg'	479	3340	0,13179669

In Table 11, the white pixel ratios for Tuberculosis chest X-ray images are presented. Similar to Table 10, it includes file names, circumference, area, and the calculated ratio. For example, 'Tuberculosis-1 Small.jpeg' has a circumference of 484, an area of 4326, and a calculated ratio of 0.11188165.

Table 12. White Pixels Ratio of Pneumonia Image

No.	Data	Circumference	Area	Ratio
1	'person1000_2931.jpeg'	586	3320	0,17650602
2	'person1000_1681.jpeg'	382	2040	0,19371981
3	'person1000_2932.jpeg'	394	1799	0,16255945
4	'person1000_2932.jpeg'	399	1761	0,17839404
5	'person1000_2934.jpeg'	346	3039	0,13179669

Table 12 provides information on the white pixel ratios for Pneumonia chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. 'person1000_2931.jpeg' has a circumference of 586, an area of 3320, and a calculated ratio of 0.17650602, as an example

Table 13. White Pixels Ratio of Normal Lungs Image

No.	Data	Circumference	Area	Ratio
1	'IM-0115-0001.jpeg'	491	2194	0,22379216
2	'IM-0117-0001.jpeg'	498	1842	0,27035831
3	'IM-0119-0001.jpeg'	468	1732	0,27020785
4	'IM-0122-0001.jpeg'	397	2010	0,19751244
5	'IM-0125-0001.jpeg'	491	1787	0,27476217

The white pixel ratios for images of normal lungs are detailed in this table. It includes file names, circumference, area, and the calculated ratio. 'IM-0115-0001.jpeg' has a circumference of 491, an area of 2194, and a calculated ratio of 0.22379216, as one example. These tables collectively provide a comprehensive overview of the white pixel ratios across different types of chest X-ray images, contributing valuable insights into the characteristics of each category.

3.5. Clustering Data by K-Means

After all image processing has been completed, the next step is the clustering process using the K-Means method. This process begins by calculating the average of all data including data on the ratio of Covid-19, Tuberculosis, Pneumonia, and Healthy Lungs. The average value is obtained with the data from the previous ratio calculation process.

Table 14. Mean Value Data

No.	Data	Average (Mean)
1	Covid-19 Lungs	0.16540681
2	Tuberculosis Lungs	0.10936217
3	Pneumonia Lungs	0.2004141
4	Normal Lungs	0.24035373

As in the table 14, you can see the average of each disease data. This clustering process is carried out so that four cluster classes are obtained, namely Cluster 0, Cluster 1, Cluster 2, Cluster 3. Determining the name of the cluster is done by finding the value that is closest to the average in the data for each disease. Cluster 0 has the closest value to the average value in the Covid-19 data, as well as Cluster 1 for Tuberculosis data, Cluster 2 for Pneumonia data, Cluster 3 for Normal Lung data. The clustering process is carried out using the Jupyter Notebook software and the cluster results and centroid values are shown in the table below:

Table 15. Centroid for Each Cluster

No.	Cluster	Centroid
1	Cluster 0 (Covid-19 Lungs)	0.154021
2	Cluster 1 (Tuberculosis Lungs)	0.083526
3	Cluster 2 (Pneumonia Lungs)	0.189932
4	Cluster 3 (Normal Lungs)	0.239203

The clustering process was executed using the Jupyter Notebook software, a popular tool for interactive and collaborative data analysis. The results of this process, including the identified clusters and their corresponding centroid values, are summarized in Table 15. This table elucidates the outcomes of the clustering process, showcasing the centroids for each identified cluster. The clusters are differentiated based on the types of lung conditions:

1. Cluster 0 (Covid-19 Lungs): The centroid value for this cluster is 0.154021, representing the average position of data points within the cluster. This centroid is indicative of the characteristics associated with chest X-ray images depicting Covid-19 affected lungs.
2. Cluster 1 (Tuberculosis Lungs): With a centroid value of 0.083526, this cluster represents the average features of chest X-ray images illustrating Tuberculosis affected lungs.
3. Cluster 2 (Pneumonia Lungs): The centroid value for this cluster is 0.189932, indicating the central tendency of features in chest X-ray images depicting Pneumonia affected lungs.
4. Cluster 3 (Normal Lungs): This cluster is characterized by a centroid value of 0.239203, suggesting the average features of chest X-ray images portraying normal, healthy lungs.

3.6. Testing Process

All the data analyzed both have their own name labels so that the testing process can be easily carried out. The testing process is carried out by seeing whether the value of the number of white pixels in the test image belongs to the predetermined clustering class. The results can be seen in the table 16. The testing process can be carried out in several steps as follows:

1. Grouping data for each category in the cluster class and match the value of the calculation of the previous ratio with the predetermined centroid point.
2. Count the amount of data for each category that is correctly included in the clustering class according to its name label.

Table 16. Result of The Cluster

	Classes	Actual Class			
		Covid-19	Tuberculosis	Pneumonia	Normal
Predicted Class	Covid-19	73	12	9	13
	Tuberculosis	56	521	42	32
	Pneumonia	20	11	702	19
	Normal	126	112	116	988

3.7. Result of Model Validation Test

The table shows that the number of data labeled Covid-19 that is correctly included in the Covid-19 lung cluster class is as much as the total data, the amount of data labeled as Tuberculosis that is correctly included in the Tuberculosis lung cluster class is as much as the total data, the amount of data labeled Pneumonia that is correctly included in the Pneumonia lung cluster class as much as the total data, and the number of data labeled Normal that is correctly included in the Normal lung cluster class as much as the total data.

The validation test is carried out with equation (4) [12] and shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

$$\text{Accuracy} = \frac{\text{The Number of Clustered Data That Corresponds To The Data Label}}{\text{Total}} \times 100\% = \frac{2284}{2852} \times 100\% = 80\% \quad (4)$$

5. CONCLUSION

The findings of this study reveal that the application of the K-Means Clustering method to images resulting from Chan-Vese segmentation and Canny Edge Detection yields an overall accuracy of 80%. This accuracy is computed by assessing the alignment of the data in the cluster class with its corresponding data label. However, it is crucial to acknowledge that several factors can influence this result, with the quantity of data being a notable one. The accuracy is intricately linked to the dataset size, and obtaining a higher or lower accuracy level is contingent on factors beyond just employing the right methodology.

In delving deeper into the observed results, it becomes evident that while the chosen methods—Chan-Vese segmentation and Canny Edge Detection—have demonstrated a commendable accuracy, there exists potential for improvement. Further research avenues could explore the application of alternative segmentation and edge detection methods. Investigating the effectiveness of cutting-edge techniques or hybrid approaches might contribute to enhanced accuracy, especially in detecting more complex lung diseases.

For future studies, researchers might also consider varying the quantity of data used for analysis. A comprehensive investigation with an increased dataset size could provide a more nuanced understanding of the methodology's performance. Balancing the right method with an optimal amount of data holds the potential to yield more accurate and robust results.

Additionally, it would be valuable to extend this research to encompass a broader spectrum of lung diseases, including those of a more intricate nature. Exploring diverse datasets with varying complexities could further validate and generalize the applicability of the clustering method, thereby contributing to advancements in the field of lung disease detection.

REFERENCES

- [1] Niederman, M. S., & Cilloniz, C. (2022). Aspiration pneumonia. *Revista Espanola de Quimioterapia*, 35. <https://doi.org/10.37201/req/s01.17.2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Frailty-Associated Pneumonia? *Geriatrics (Switzerland)*, 7(5). <https://doi.org/10.3390/geriatrics7050115>
- [3] Natarajan, A., Beena, P. M., Devnikar, A. V., & Mali, S. (2020). A systemic review on tuberculosis. In *Indian Journal of Tuberculosis* (Vol. 67, Issue 3). <https://doi.org/10.1016/j.ijtb.2020.02.005>
- [4] Kiani, D. (2023). X-Ray Diffraction (XRD). In *Springer Handbooks*. https://doi.org/10.1007/978-3-031-07125-6_25
- [5] Patil, B. M., & Burkpalli, V. (2022). Segmentation of cotton leaf images using a modified chan vese method. *Multimedia Tools and Applications*, 81(11). <https://doi.org/10.1007/s11042-022-12436-8>
- [6] Song, J., Pan, H., Liu, W., Xu, Z., & Pan, Z. (2021). The Chan-Vese Model with Elastica and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3047848>
- [7] Wang, Z., Wang, K., Yang, F., Pan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and Sobel operator. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.005>
- [8] Zheng, D., Bao, C., Shi, Z., Ling, H., & Ma, K. (2022). Unsupervised Deep Learning Meets Chan-Vese Model. *CSIAM Transactions on Applied Mathematics*, 3(4). <https://doi.org/10.4208/csiam-am.SO-2021-0049>
- [9] Sekehravani, E. A., Babulak, E., & Masoodi, M. (2020). Implementing canny edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [10] Pradeep Kumar Reddy, R., & Nagaraju, C. (2019). Improved canny edge detection technique using S-membership function. *International Journal of Engineering and Advanced Technology*, 8(6). <https://doi.org/10.35940/ijeat.E7419.088619>
- [11] Huang, M., Liu, Y., & Yang, Y. (2022). Edge detection of ore and rock on the surface of explosion pile based on improved Canny operator. *Alexandria Engineering Journal*, 61(12). <https://doi.org/10.1016/j.aej.2022.04.019>
- [12] Pratiwi, E. H., & Juniati, D. (2022). CLUSTERING OF LUNG DISEASE BASED ON CHEST X-RAY USING DIMENSIONS FRACTAL BOX COUNTING AND K-MEDOIDS. *Jurnal Riset Dan Aplikasi Matematika (JRAM)*, 6(1), 1–12. <https://doi.org/10.26740/JRAM.V6N1.P1-12>
- [13] Bookstaver, M. (2021). Secondary Data Analysis. In *The Encyclopedia of Research Methods in Criminology and Criminal Justice: Volume II: Parts 5-8*. <https://doi.org/10.1002/9781119111931.ch107>
- [14] Ferreira, W. D., Ferreira, C. B. R., da Cruz Júnior, G., & Soares, F. (2020). A review of digital image forensics. *Computers and Electrical Engineering*, 85. <https://doi.org/10.1016/j.compeleceng.2020.106685>
- [15] Sundani, D., Widiyanto, S., Karyanti, Y., & Wardani, D. T. (2019). Identification of image edge using quantum canny edge detection algorithm. *Journal of ICT Research and Applications*, 13(2). <https://doi.org/10.5614/itbj.ict.res.appl.2019.13.2.4>
- [16] Sinaga, K. P., & Yang, M. S. (2020). Unsupervised K-means clustering algorithm. *IEEE Access*, 8. <https://doi.org/10.1109/ACCESS.2020.2988796>
- [17] Rao, B. S. (2020). Dynamic Histogram Equalization for contrast enhancement for digital images. *Applied Soft Computing Journal*, 89. <https://doi.org/10.1016/j.asoc.2020.106114>
- [18] Baskar, A., Rajappa, M., Vasudevan, S. K., & Muruges, T. S. (2023). Digital Image Processing. In *Digital Image Processing*. <https://doi.org/10.1201/9781003217428>
- [19] Agrawal, S., Panda, R., Mishro, P. K., & Abraham, A. (2022). A novel joint histogram equalization based image contrast enhancement. *Journal of King Saud University - Computer and Information Sciences*, 34(4). <https://doi.org/10.1016/j.jksuci.2019.05.010>

BUKTI KORESPONDENSI

ARTIKEL JURNAL NASIONAL TERAKREDITASI DIKTI ATAU JURNAL NASIONAL TERAKREDITASI KEMENRISTEKDIKTI PERINGKAT 1 DAN 2

Judul Artikel : Enhancing Lung Disease Classification through K-Means Clustering,
Chan-Vese Segmentation, and Canny Edge Detection on X-Ray
Segmented Images
Jurnal : JOIN Jurnal Vol 9 No.1 (2024) Hal.89-99
Penulis : Joko Riyono, Christina Eni Pujiastuti, Sofia Debi Puspa, Supriyadi, Fayza Nayla
Riyana Putri

No	Perihal	Tanggal
1	Bukti konfirmasi submit artikel dan artikel yang disubmit	2 September 2023
2	Bukti Review Round 1 dan respon ke reviewer	12 Februari 2024
3	Bukti Konfirmasi resubmit revisi artikel	15 februari 2024
4	Bukti Konfirmasi artikel accepted dan LOA	21 April 2024
5	Bukti konfirmasi artikel published online	6 Mei 2024

**1. Bukti Konfirmasi Submit Artikel dan Artikel yang
Disubmit (2 September 2023)**

mail.google.com/mail/u/0/#search/join+jurnal/FMfcgzStwqRmrHrChJBj/WmgkGfDZBrN

join jurnal

Compose

Mail 99+
Chat 2
Meet

Inbox 7,989
Starred
Snoozed
Sent
Drafts 118
Categories
More
Labels +
Contacts
Emailed Contacts

[JOIN] Submission Acknowledgement External Inbox X

Sep 2, 2023, 8:05 PM

Ichsan Budiman -join@uinsgd.ac.id
to me
Joko Riyono:

Thank you for submitting the manuscript, "K-Means Clustering of Lung Disease Based on The Result of X-Ray Segmented Image" to Jurnal Online Informatika. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site.

Manuscript URL: <https://join.uinsgd.ac.id/index.php/join/authorDashboard/submission/1178>
Username: jokoriyono171

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Ichsan Budiman
JOIN (Jurnal Online Informatika)

Thank you for your information. Thank you for the information. Thank you for your response.

Reply Forward

30°C Cerah 10:05 29/08/2023

K-Means Clustering of Lung Disease Based on The Result of X-Ray Segmented Image

Article Info

Article history:

Received Sep 3, 2019

Revised May 17, 2020

Accepted June 28, 2020

Keywords:

Lungs

X-Ray Image

Segmentation

Chan-Vese

Canny

K-Means Clustering

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image. In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method. This research shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

Corresponding Author:

1. INTRODUCTION

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Lung health can be influenced by many factors such as lifestyle, environmental hygiene, and heredity (Niederman & Cilloniz, 2022). If there is a malfunction in the lungs, human health will be disrupted as a whole. Therefore, examination of lung malfunction should be done as early as possible.

The procedure carried out in a lung examination usually requires investigations because lung diseases generally have similar symptoms such as coughing, fever, decreased body weight, loss of appetite, and so on (Smithard & Yoshimatsu, 2022). Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure (Natarajan et al., 2020). This examination aims to see directly and assess the severity of lung conditions.

The chest X-ray procedure provides an image based on the diffraction of electromagnetic waves, namely X-rays. The use of this light makes it possible to see human organs visually without having to do a surgical procedure (non-invasive procedure) (Bunaciu et al., 2015). This procedure produces a two-dimensional image as a representation of the condition of the lungs in the human body and basically this examination is only done through visual observation (Kiani, 2023). Therefore, of course, proper analysis is needed in determining the diagnosis through chest X-ray images.

With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Of course, this can also be applied to chest x-ray images.

Digital image processing is one of the areas of research in computer science. Broadly speaking, digital image processing works by analyzing digital images in such a way as to obtain a more perfect image (Seeram, 2004). Not only that, image processing in research is also used in extracting information on images as needed. To extract information on several parts of an image, it is usually done with the segmentation method first.

Basically, the segmentation method is used to separate objects in an image. Image segmentation works by dividing digital images into several segments based on the characteristics of the image. This method allows for the separation of objects from the background. This is of course very necessary in research related to image analysis to extract or obtain information from the desired parts of the image.

Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image (Patil & Burkpalli, 2022). This aims to reduce the detector's inference time when processing the entire image because with segmentation, the detector does not need to process the entire image but only the region selected by the segmentation algorithm. Image segmentation aims to classify areas that have similarities so that they can also distinguish objects in the image from their background (Song et al., 2021).

There are two segmentation techniques that are often used and can be divided into two categories, namely Region Segmentation which is a segmentation technique to find regions that meet certain homogeneity criteria such as finding color values that have similarities with other pixels so that they can be used as one region and Edge-Based Segmentation which is a technique for finding edges between regions between different characteristics (Z. Wang et al., 2018).

The Chan-Vese strategy could be a locale division procedure, which could be a strategy that works without borders. The dynamic form show is one of the working models of division procedure that employments vitality and constrain imperatives on the picture into cluster locales (Song et al., 2021). The dynamic form demonstrate is commonly utilized in different picture preparing applications, particularly in therapeutic picture processing such as chest X-ray pictures, brain CT looks or MRI pictures of organs. Positive edge models are utilized in advanced picture preparing by pixel separation. The Chan-Vese strategy is utilized to distinguish visual objects with developmental energies. The advancement of the Mumford-Shah demonstrate and this demonstrate is based on the vitality diminishment issue, which can be re-expressed as equations of unequivocal levels, driving to a less difficult way of understanding the issue (Zheng et al., 2022).

Canny identify is an edge-based division method found by John F. Canny in 1986 (Sekehravani et al., 2020). Basically, the Canny strategy works by employing a grayscale picture as input and producing concentrated discontinuities as yield or edge images. In its application, there are steps for shrewd edge location strategy i.e. smooth or channel commotion, calculate incline quality or slope course, apply delay edge prepare setting, not max (Pradeep Kumar Reddy & Nagaraju, 2019). This strategy has criteria that moreover ended up its advantage in picture division strategy, specifically Canny Detector has the capacity to distinguish edges based on indicated convolution parameters and is adaptable in decide the level of edge thickness discovery, to supply a least of separate between the edge of the location result and the initial edge, as it were one reaction on each edge to play down clutter within the post-processing step there (Huang et al., 2022).

Previous research has been carried out by Elsha Heny Pratiwi and Dwi Juniandi in 2022 regarding their research entitled Clustering Lung Disease Based on Chest X-Rays Using Fractal Dimensions Box Counting and K-Medoids. In his research, clustering of lung diseases was carried out based on the results of information from x-ray images of the lungs obtained through the canny segmentation method and resulted in an accuracy of 87% (Pratiwi & Juniati, 2022).

In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method.

2. METHOD

This research was conducted through a quantitative approach because the entire process was carried out using data in the form of numbers as an analytical tool. The data in this research is a type of data in the form of images obtained from previous studies. It can be said, the data used in this study is secondary data. Secondary data is data that is already available and collected by other parties outside the agency under study (Johnston, 2014). Secondary data can generally be obtained through websites, books, articles, internal organizational records and so on (Bookstaver, 2021). In this study, data was obtained through a site that contains many types of datasets that are commonly used by researchers in conducting research, namely Kaggle.

The image data used as the research subject is an x-ray image of the chest from patients with Covid-19 lung disease, tuberculosis, pneumonia, and healthy lungs which will also be used to extract information from the image in the form of numerical data from the results of segmented image. This numeric data will be used again in the clustering process to produce disease cluster classes based on the number of white pixel areas in the segmented image. In this study, there are several stages described as a flowchart as shown in Figure 1 below:

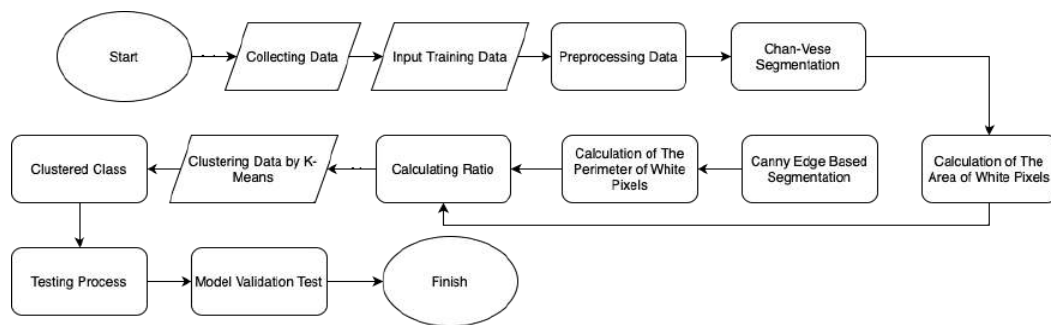


Figure 1. Research Methods Flowchart

The segmentation process applied to the image aims to obtain the features used in the analysis process, in this case, namely the white area in the segmented image (Ferreira et al., 2020). This white area represents the damaged area of the lungs. Before the segmentation process is carried out, the image goes through several two stages in the data preprocessing process, namely the Resize process, Grayscale Process and the Filtering process with Histogram Equalization.

The image segmentation process is carried out twice, namely by the Chan-Vese method and Canny edge detection. The Chan-Vese method is an improvement from the edge-based model, because it bases edge detection on an image not based on image gradients but is based on curve evolution techniques, the Mumford-shah function for segmentation and level set (Patil & Burkpalli, 2022). This is because, detection using image gradients is less effective because discrete gradients are limited and the stop function is never null at an edge and allows the curve to pass through the existing boundaries. In the Chan-Vese model, initial contours can be applied anywhere in the image and the Chan-Vese model will automatically detect all contours, regardless of the position of the original contours. Active contour models are commonly used in various image processing applications, especially in medical image processing, such as chest X-ray images, brain CT scans or MRI images of the body. Positive edge models are used in digital image processing through pixel separation (X. F. Wang et al., 2010). The evolution of the Mumford-Shah model and this model is based on the energy reduction problem, which can be reformatted in the formula of definite levels, making the problem easier to solve (Song et al., 2021).

Edge detection in an image is a process that produces the edges of an image object, its purpose is to mark the part that becomes a detailed image. Canny edge detection is one of the edge detection algorithms that has a minimum error rate and produces optimal edge images (Sundani et al., 2019). The edge (edge) is a sudden (large) change in the value of the intensity of gray degrees in a short distance (Rong et al., 2014). The purpose of edge detection is to group objects in the image, and is also used to further analyze the image.

After the segmentation process is complete, numerical data will be obtained in the form of white pixel area in the image which will then be used in the clustering process to group the data into several classes, namely the Covid-19 class, Tuberculosis, Pneumonia, and Normal or healthy lung class. Mathematically, K-Means clustering is carried out in 4 stages as follows (Sinaga & Yang, 2020):

1. Initialize the centroid values randomly

$$v = \frac{\sum_{i=1}^n x_i}{n}, i=1,2,3,...,n \quad (1)$$

Information :

v : centroid on cluster

x_i : i -th object

n : number of objects/number of cluster member objects.

2. Place each data point to the nearest centroid by calculating the distance of each data point to the centroid in Euclidean distance

$$(x,y)=\|x-y\|=\sqrt{\sum_{i=1}^n (x_i-y_i)^2}, i=1,2,3,...,n \quad (2)$$

Information :

x_i : i th x object

y_i : y -th power

n : number of objects

3. Recalculate the centroid of the newly formed cluster by calculating the mean of each data point in the cluster.
4. Perform optimization to meet the criteria by repeating the last two steps.

3. RESULT AND DISCUSSION

The first stage in this study was to collect x-ray image data used as objects in this study. Data in the form of digital data will be processed in the Joint Photographic Experts Group (*jpeg) format. The x-ray image data used is x-ray data including Covid-19 disease, Tuberculosis, Pneumonia and healthy lungs.

Table 1. Datasets

No.	Class	Total Data
1	Covid-19	107
2	Tuberculosis	651
3	Pneumonia	752
4	Normal Lungs	1342

In table 1, there are types and amounts of data used in this research process. All data is collected through the Kaggle website which provides various kinds of datasets for research purposes. This data is obtained by downloading the required dataset.

The next step is image preprocessing. The image preprocessing stage goes through three stages which aim to improve the quality of the raw data (image) before further analysis. These three stages are resizing all image sizes to 256x256 pixels so that all images are the same size, changing all RGB images to Grayscale images, and carrying out the filtering process with the Histogram Equalization Method.

3.1. Preprocessing Process

3.1.1. Image Resizing Process

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns (Q. Wang & Yuan, 2014). Image size normalization process is done by `imresize` function via MATLAB. This process will display an image with a size of 256x256 as shown below:

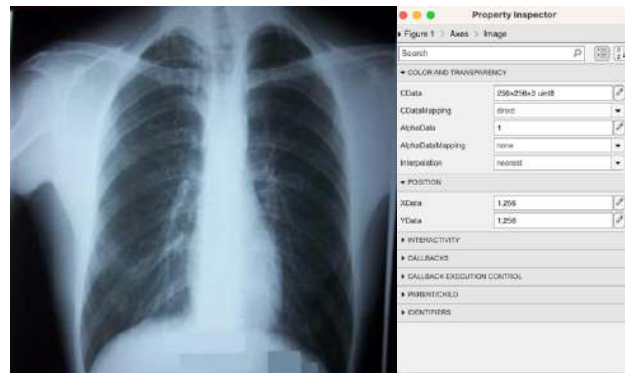


Figure 2. Resize Image

3.1.2. Grayscale Image Process

The grayscale process in the image aims to change the RGB (Red, Green, Blue) image to a grayscale image with an intensity of 0 to 255 (8-bit image) (Seeram, 2004). The grayscale process in MATLAB is done with the function `rgb2gray`. The results of this stage can be seen in the Figure 3 below:



Figure 3. Grayscale Image

3.1.3. Filtering Image Process With Histogram Equalization

Filtering process aims to improve image quality by reducing noise and adjusting image brightness. The filtering process in this research uses the Histogram Equalization method, which is a graphic equalization that represents the distribution of grayscale image intensities (Agrawal et al., 2022). The filtering process in this study uses the Histogram Equalization technique, which is a graphic equalization process that represents the distribution of grayscale image intensities (Rao, 2020). This process is done with the `histeq` function in MATLAB. The image on the right from Figure 5 shows that the image already has better contrast and a flatter histogram than Figure 4.

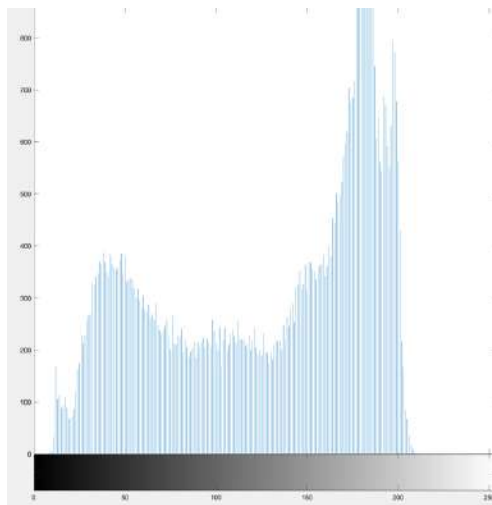


Figure 4. Before Filtering

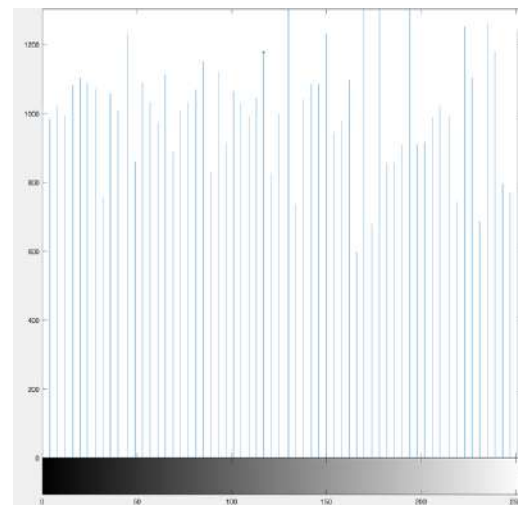


Figure 1. After Filtering

3.2. Calculation Process of The White Area of The Chan-ve-se Segmentation Image

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns (Baskar et al., 2023). Image size normalization process is done by `imresize` function via MATLAB. This process will display an image with a size of 256x256 as shown below:

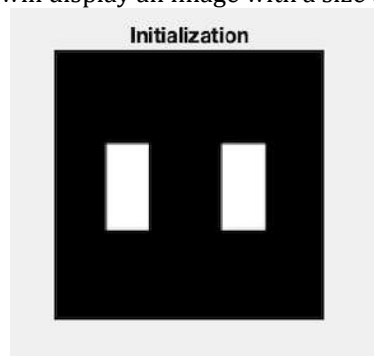


Figure 6. Initialization Mask

The segmentation process using the Chan-Vese method will produce black and white images as shown in Figure 7 which is a comparison of the images before and after segmentation.

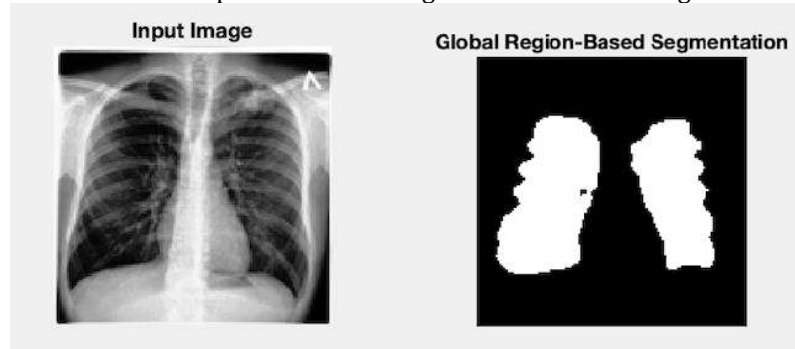


Figure 7. Comparison of Raw and Segmented Image

The next step is to convert the segmented image into a binary image with the `im2bw` function and fill in imperfect image areas that have holes with the `imfill` function. After everything has been

done, the calculation of the area of white pixels in the image can be done with the regionprops function, which is a function in Matlab that is used to measure the properties of a binary image. Data on the area of white pixels in segmented images can be seen in Table 2 for Covid-19, Table 3 for Tuberculosis, Table 4 for Pneumonia, Table 5 for Normal Lungs.

Table 2. Area of White Pixels of Covid-19 Image

No.	Data	Area
1	'COVID19(460) Small.jpeg'	2060
2	'COVID19(461) Small.jpeg'	2070
3	'COVID19(462) Small.jpeg'	2313
4	'COVID19(463) Small.jpeg'	2416
5	'COVID19(464) Small.jpeg'	3384

Table 3. Area of White Pixels of Tuberculosis Image

No.	Data	Area
1	'Tuberculosis-1 Small.jpeg'	4326
2	'Tuberculosis-10 Small.jpeg'	3676
3	'Tuberculosis-100 Small.jpeg'	4255
4	'Tuberculosis-101 Small.jpeg'	4462
5	'Tuberculosis-102 Small.jpeg'	3340

Table 4. Area of White Pixels of Pneumonia Image

No.	Data	Area
1	'person1000_2931.jpeg'	3320
2	'person1000_1681.jpeg'	2040
3	'person1000_2932.jpeg'	1799
4	'person1000_2932.jpeg'	1761
5	'person1000_2934.jpeg'	3039

Table 5. Area of White Pixels of Normal Lungs Image

No.	Data	Area
1	'IM-0115-0001.jpeg'	2194
2	'IM-0117-0001.jpeg'	1842
3	'IM-0119-0001.jpeg'	1732
4	'IM-0122-0001.jpeg'	2010
5	'IM-0125-0001.jpeg'	1787

3.3. Calculation Process of The White Area of The Canny Edge-Based Segmentation Image

The next image segmentation process uses the second method, namely Canny Edge Detection. With this process, we will find a border around the chan-ve-se segmented image by detecting changes in brightness levels and generating the circumference of the image as another variable needed in the clustering process.

This segmentation process uses the edge function in Matlab. By using the edge function, an image of the Canny edge detection results will be obtained as shown in Figure 9 below.

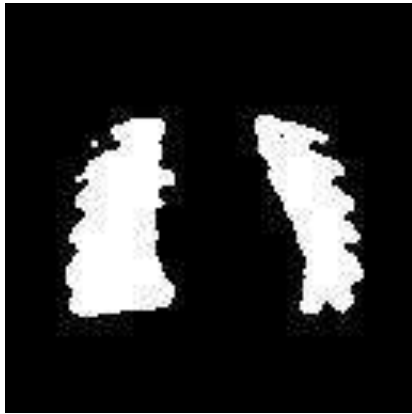


Figure 8. Chan-Vese Segmentation

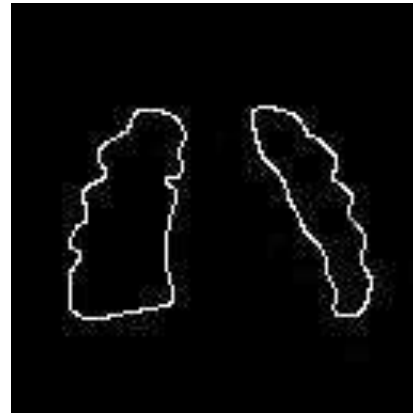


Figure 9. Canny Segmentation

Through the image segmentation results from Chan-Vese and then Canny, we get the circumference of the edge that surrounds the image. The results are described in the Table 6 for Covid-19, Table 7 for Tuberculosis, Table 8 for Pneumonia, Table 9 for Normal Lungs.

Table 6. White Pixels Circumference of Covid-19 Image

No.	Data	Circumference
1	'COVID19(460) Small.jpeg'	499
2	'COVID19(461) Small.jpeg'	401
3	'COVID19(462) Small.jpeg'	376
4	'COVID19(463) Small.jpeg'	431
5	'COVID19(464) Small.jpeg'	446

Table 7. White Pixels Circumference of Tuberculosis Image

No.	Data	Circumference
1	'Tuberculosis-1 Small.jpeg'	484
2	'Tuberculosis-10 Small.jpeg'	480
3	'Tuberculosis-100 Small.jpeg'	474
4	'Tuberculosis-101 Small.jpeg'	492
5	'Tuberculosis-102 Small.jpeg'	479

Table 8. White Pixels Circumference of Pneumonia Image

No.	Data	Circumference
1	'person1000_2931.jpeg'	586
2	'person1000_1681.jpeg'	382
3	'person1000_2932.jpeg'	394
4	'person1000_2932.jpeg'	399
5	'person1000_2934.jpeg'	346

Table 9. White Pixels Circumference of Normal Lungs Image

No.	Data	Circumference
1	'IM-0115-0001.jpeg'	491
2	'IM-0117-0001.jpeg'	498
3	'IM-0119-0001.jpeg'	468
4	'IM-0122-0001.jpeg'	397
5	'IM-0125-0001.jpeg'	491

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

Calculation :

$$\frac{\text{The number of pixels of the canny detection image}}{\text{The number of pixels of the chan-veese segmentend image}} = \frac{491}{2060} = 4,12825651 \quad (3)$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below:

Table 10. White Pixels Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	'COVID19(460) Small.jpeg'	499	2060	0,24223301
2	'COVID19(461) Small.jpeg'	401	2070	0,19371981
3	'COVID19(462) Small.jpeg'	376	2313	0,16255945
4	'COVID19(463) Small.jpeg'	431	2416	0,17839404
5	'COVID19(464) Small.jpeg'	446	3384	0,13179669

Table 11. White Pixels Ratio of Tuberculosis Image

No.	Data	Circumference	Area	Ratio
1	'Tuberculosis-1 Small.jpeg'	484	4326	0,11188165
2	'Tuberculosis-10 Small.jpeg'	480	3676	0,19371981
3	'Tuberculosis-100 Small.jpeg'	474	4255	0,16255945
4	'Tuberculosis-101 Small.jpeg'	492	4462	0,17839404
5	'Tuberculosis-102 Small.jpeg'	479	3340	0,13179669

Table 12. White Pixels Ratio of Pneumonia Image

No.	Data	Circumference	Area	Ratio
1	'person1000_2931.jpeg'	586	3320	0,17650602
2	'person1000_1681.jpeg'	382	2040	0,19371981
3	'person1000_2932.jpeg'	394	1799	0,16255945
4	'person1000_2932.jpeg'	399	1761	0,17839404
5	'person1000_2934.jpeg'	346	3039	0,13179669

Table 13. White Pixels Ratio of Normal Lungs Image

No.	Data	Circumference	Area	Ratio
1	'IM-0115-0001.jpeg'	491	2194	0,22379216
2	'IM-0117-0001.jpeg'	498	1842	0,27035831
3	'IM-0119-0001.jpeg'	468	1732	0,27020785
4	'IM-0122-0001.jpeg'	397	2010	0,19751244
5	'IM-0125-0001.jpeg'	491	1787	0,27476217

3.5. Clustering Data by k-Means

After all image processing has been completed, the next step is the clustering process using the K-Means method. This process begins by calculating the average of all data including data on the

ratio of Covid-19, Tuberculosis, Pneumonia, and Healthy Lungs. The average value is obtained with the data from the previous ratio calculation process.

Table 14. Mean Value Data

No.	Data	Average (Mean)
1	Covid-19 Lungs	0.16540681
2	Tuberculosis Lungs	0.10936217
3	Pneumonia Lungs	0.2004141
4	Normal Lungs	0.24035373

As in the table 14, you can see the average of each disease data. This clustering process is carried out so that four cluster classes are obtained, namely Cluster 0, Cluster 1, Cluster 2, Cluster 3. Determining the name of the cluster is done by finding the value that is closest to the average in the data for each disease. Cluster 0 has the closest value to the average value in the Covid-19 data, as well as Cluster 1 for Tuberculosis data, Cluster 2 for Pneumonia data, Cluster 3 for Normal Lung data. The clustering process is carried out using the Jupyter Notebook software and the cluster results and centroid values are shown in the table below:

Table 15. Centroid for Each Cluster

No.	Cluster	Centroid
1	Cluster 0 (Covid-19 Lungs)	0.154021
2	Cluster 1 (Tuberculosis Lungs)	0.083526
3	Cluster 2 (Pneumonia Lungs)	0.189932
4	Cluster 3 (Normal Lungs)	0.239203

3.6. Testing Process

All the data analyzed both have their own name labels so that the testing process can be easily carried out. The testing process is carried out by seeing whether the value of the number of white pixels in the test image belongs to the predetermined clustering class. The results can be seen in the table 16. The testing process can be carried out in several steps as follows:

1. Grouping data for each category in the cluster class and match the value of the calculation of the previous ratio with the predetermined centroid point.
2. Count the amount of data for each category that is correctly included in the clustering class according to its name label.

Table 16. Result of The Cluster

	Classes	Actual Class			
		Covid-19	Tuberculosis	Pneumonia	Normal
Predicted Class	Covid-19	73	12	9	13
	Tuberculosis	56	521	42	32
	Pneumonia	20	11	702	19
	Normal	126	112	116	988

3.7. Result of Model Validation Test

The table shows that the number of data labeled Covid-19 that is correctly included in the Covid-19 lung cluster class is as much as the total data, the amount of data labeled as Tuberculosis that is correctly included in the Tuberculosis lung cluster class is as much as the total data, the amount of data labeled Pneumonia that is correctly included in the Pneumonia lung cluster class as much as the

total data, and the number of data labeled Normal that is correctly included in the Normal lung cluster class as much as the total data.

The validation test is carried out with equation (4) (Pratiwi & Juniati, 2022) and shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

$$\text{Accuracy} = \frac{\text{The Number Of Clustered Data That Corresponds To The Data Label}}{\text{Total}} \times 100\% = \frac{2284}{2852} \times 100\% = 0.80084151 \times 100\% = 80\% \quad (4)$$

4. CONCLUSION



The results of this study indicate that the accuracy of applying the K-Means Clustering method to images resulting from Chan-Vese segmentation and Canny Edge Detection is 80%. This result is obtained by calculating the amount of data in the cluster class that corresponds to its own data label. Of course, this is influenced by many things. One of them is the amount of data. Besides applying the right method, with the right amount of data it is possible to get a higher or lower level of accuracy. It is hoped that for future research, the application of other methods and the use of appropriate amounts of data can help research related to the detection of more complex lung diseases.



REFERENCES



- [1] Niederman, M. S., & Cilloniz, C. (2022). Aspiration pneumonia. *Revista Espanola de Quimioterapia*, 35. <https://doi.org/10.37201/req/s01.17.2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Frailty-Associated Pneumonia? *Geriatrics (Switzerland)*, 7(5). <https://doi.org/10.3390/geriatrics7050115>
- [3] Natarajan, A., Beena, P. M., Devnikar, A. V., & Mali, S. (2020). A systemic review on tuberculosis. In *Indian Journal of Tuberculosis* (Vol. 67, Issue 3). <https://doi.org/10.1016/j.ijtb.2020.02.005>
- [4] Bunaciu, A. A., Udristioiu, E. gabriela, & Aboul-Enein, H. Y. (2015). X-Ray Diffraction: Instrumentation and Applications. In *Critical Reviews in Analytical Chemistry* (Vol. 45, Issue 4). <https://doi.org/10.1080/10408347.2014.949616>
- [5] Kiani, D. (2023). X-Ray Diffraction (XRD). In *Springer Handbooks*. https://doi.org/10.1007/978-3-031-07125-6_25
- [6] Seeram, E. (2004). Digital image processing. *Radiologic Technology*, 75(6). <https://doi.org/10.47893/ijipvs.2022.1083>
- [7] Patil, B. M., & Burkpalli, V. (2022). Segmentation of cotton leaf images using a modified chan vese method. *Multimedia Tools and Applications*, 81(11). <https://doi.org/10.1007/s11042-022-12436-8>
- [8] Song, J., Pan, H., Liu, W., Xu, Z., & Pan, Z. (2021). The Chan-Vese Model with Elastica and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3047848>
- [9] Wang, Z., Wang, K., Yang, F., Pan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and Sobel operator. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.005>
- [10] Zheng, D., Bao, C., Shi, Z., Ling, H., & Ma, K. (2022). Unsupervised Deep Learning Meets Chan-Vese Model. *CSIAM Transactions on Applied Mathematics*, 3(4). <https://doi.org/10.4208/csiam-am.SO-2021-0049>
- [11] Sekehravani, E. A., Babulak, E., & Masoodi, M. (2020). Implementing canny edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [12] Pradeep Kumar Reddy, R., & Nagaraju, C. (2019). Improved canny edge detection technique using S-membership function. *International Journal of Engineering and Advanced Technology*, 8(6). <https://doi.org/10.35940/ijeat.E7419.088619>
- [13] Huang, M., Liu, Y., & Yang, Y. (2022). Edge detection of ore and rock on the surface of explosion pile based on improved Canny operator. *Alexandria Engineering Journal*, 61(12). <https://doi.org/10.1016/j.aej.2022.04.019>
- [14] Pratiwi, E. H., & Juniati, D. (2022). CLUSTERING OF LUNG DISEASE BASED ON CHEST X-RAY USING DIMENSIONS FRACTAL BOX COUNTING AND K-MEDOIDS. *Jurnal Riset Dan Aplikasi Matematika (JRAM)*, 6(1), 1–12. <https://doi.org/10.26740/JRAM.V6N1.P1-12>
- [15] Johnston, M. P. (2014). *Secondary Data Analysis : A Method of which the Time Has Come*. *Qualitative and Quantitative Methods in Libraries (QQML)*, 3.
- [16] Bookstaver, M. (2021). *Secondary Data Analysis*. In *The Encyclopedia of Research Methods in Criminology and Criminal Justice: Volume II: Parts 5-8*. <https://doi.org/10.1002/9781119111931.ch107>
- [17] Ferreira, W. D., Ferreira, C. B. R., da Cruz Júnior, G., & Soares, F. (2020). A review of digital image forensics. *Computers and Electrical Engineering*, 85. <https://doi.org/10.1016/j.compeleceng.2020.106685>
- [18] Wang, X. F., Huang, D. S., & Xu, H. (2010). An efficient local Chan-Vese model for image segmentation. *Pattern Recognition*, 43(3), 603–618. <https://doi.org/10.1016/j.patcog.2009.08.002>
- [19] Sundani, D., Widiyanto, S., Karyanti, Y., & Wardani, D. T. (2019). Identification of image edge using quantum canny edge detection algorithm. *Journal of ICT Research and Applications*, 13(2). <https://doi.org/10.5614/itbj.ict.res.appl.2019.13.2.4>

-
- [20] Rong, W., Li, Z., Zhang, W., & Sun, L. (2014). An improved Canny edge detection algorithm. 2014 IEEE International Conference on Mechatronics and Automation, IEEE ICMA 2014, 577–582. <https://doi.org/10.1109/ICMA.2014.6885761>
- [21] Sinaga, K. P., & Yang, M. S. (2020). Unsupervised K-means clustering algorithm. IEEE Access, 8. <https://doi.org/10.1109/ACCESS.2020.2988796>
- [22] Wang, Q., & Yuan, Y. (2014). Learning to resize image. Neurocomputing, 131, 357–367. <https://doi.org/10.1016/j.neucom.2013.10.007>
- [23] Rao, B. S. (2020). Dynamic Histogram Equalization for contrast enhancement for digital images. Applied Soft Computing Journal, 89. <https://doi.org/10.1016/j.asoc.2020.106114>
- [24] Baskar, A., Rajappa, M., Vasudevan, S. K., & Muruges, T. S. (2023). Digital Image Processing. In Digital Image Processing. <https://doi.org/10.1201/9781003217428>
- [25] Agrawal, S., Panda, R., Mishro, P. K., & Abraham, A. (2022). A novel joint histogram equalization based image contrast enhancement. Journal of King Saud University - Computer and Information Sciences, 34(4). <https://doi.org/10.1016/j.jksuci.2019.05.010>

2. Bukti Review Round 1 dan Respon Kepada Reviewer
(12 Februari 2024)

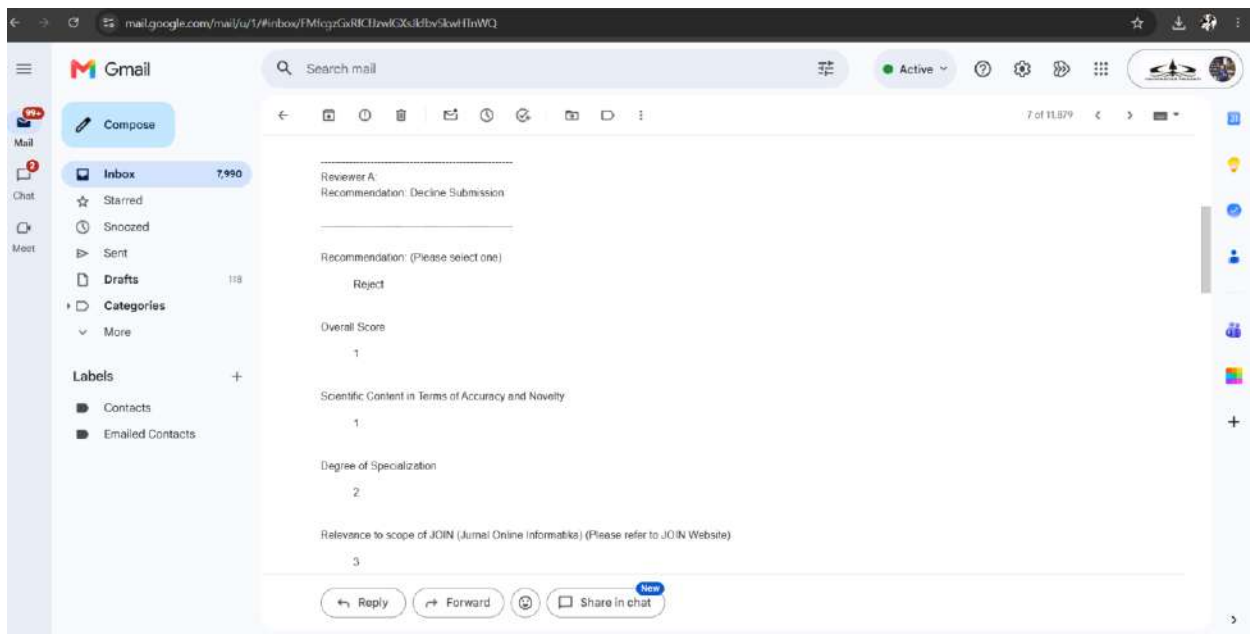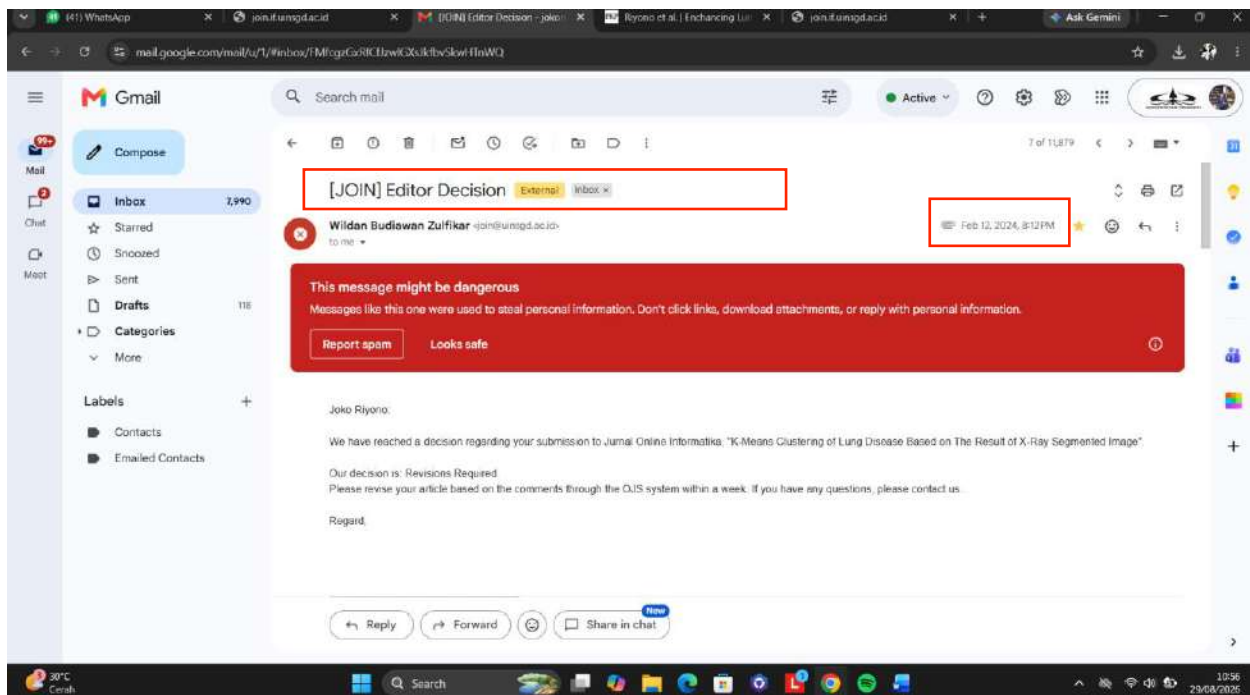

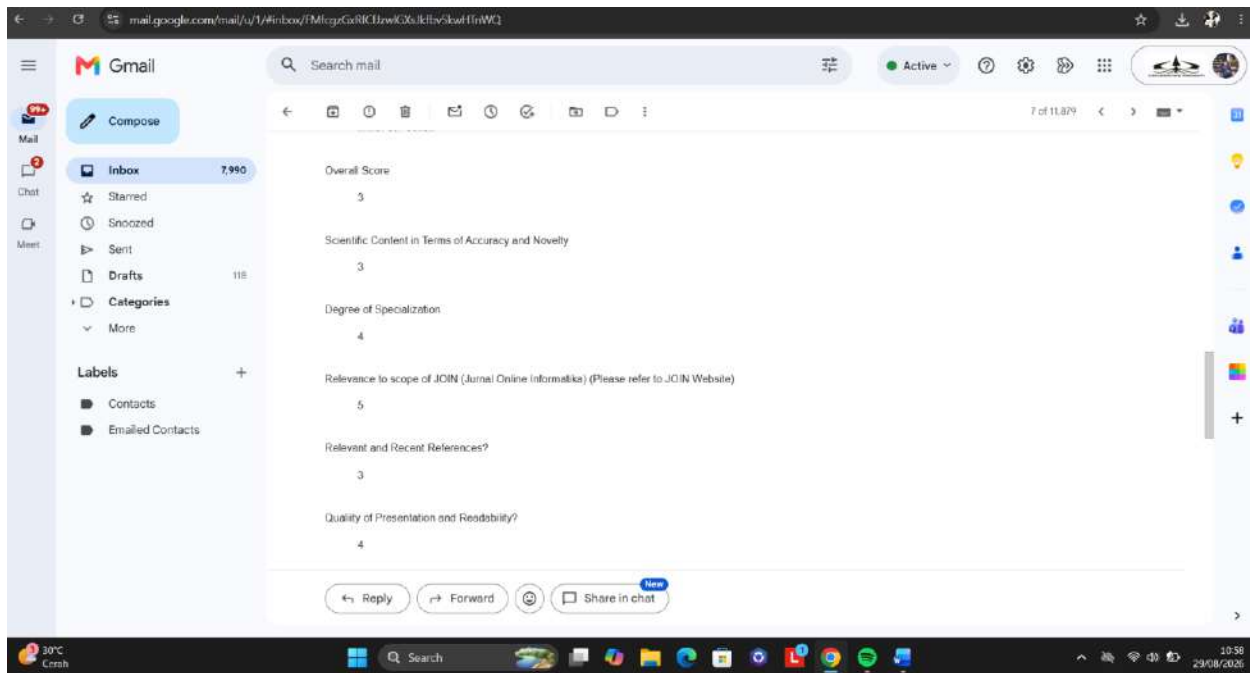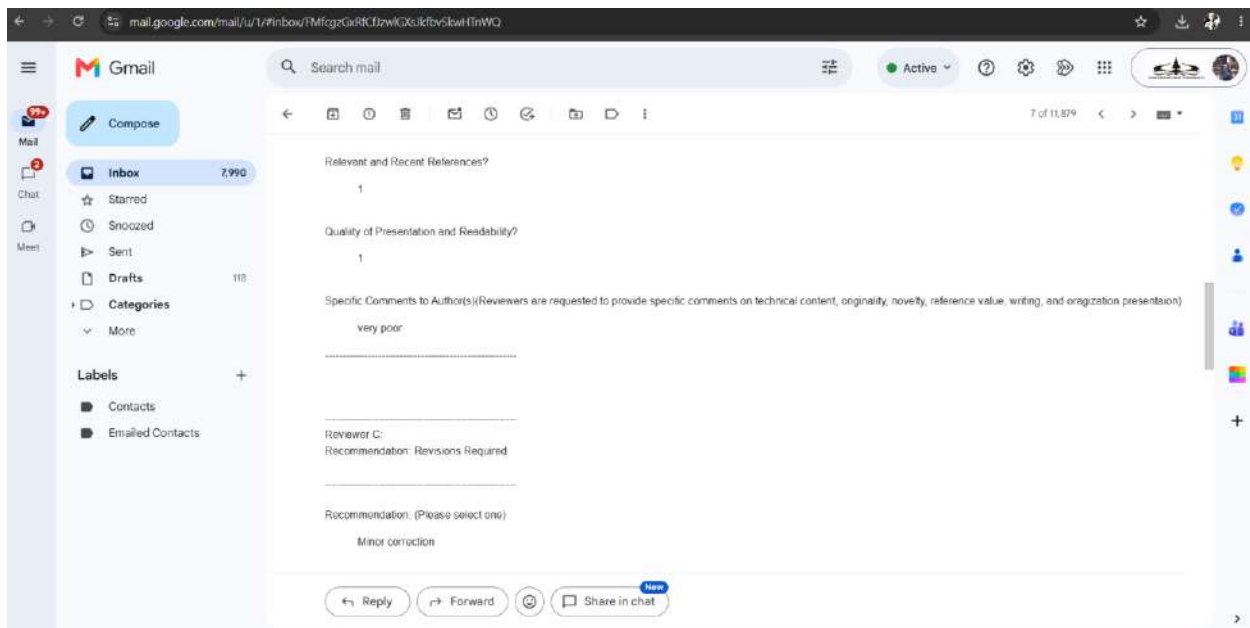

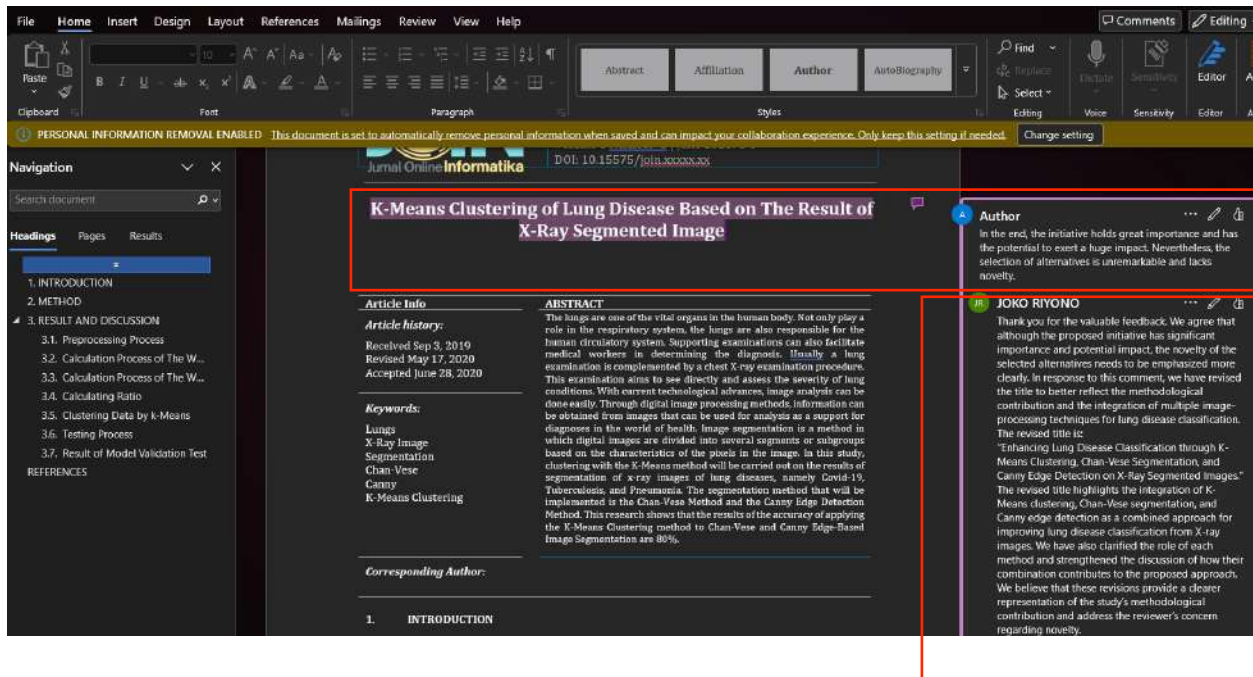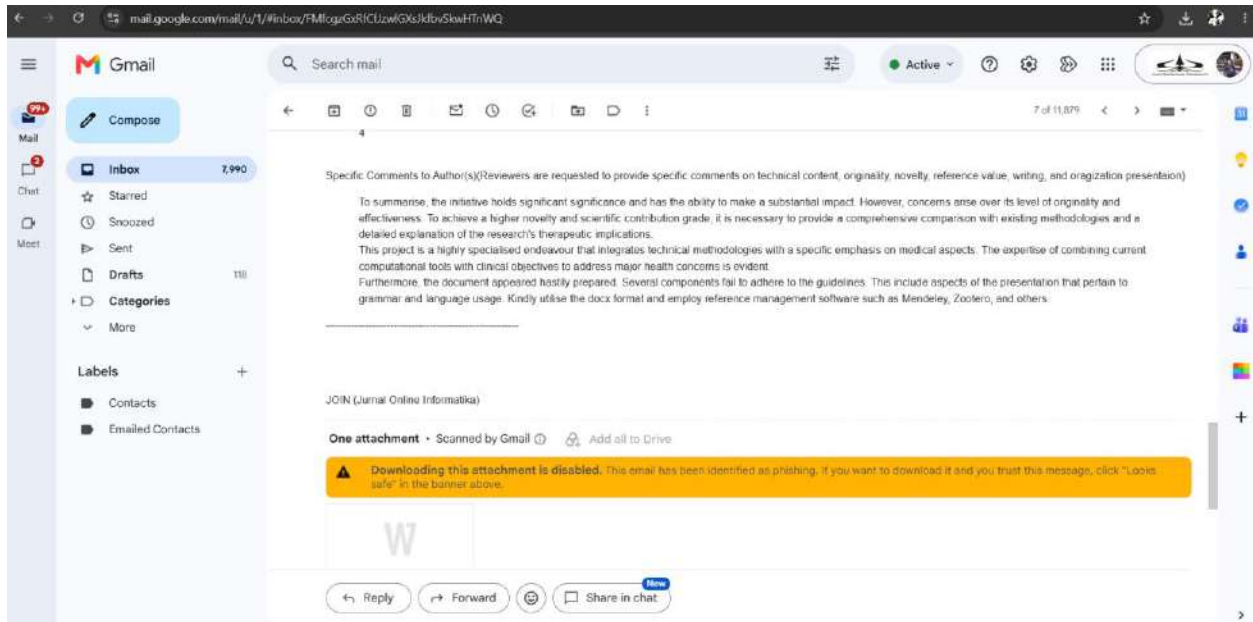

File Home Insert Design Layout References Mailings Review View Help

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Search document

Headings Pages Results

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

3.7. Result of Model Validation Test

REFERENCES

Corresponding Author:

1. INTRODUCTION

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Lung health can be influenced by many factors such as lifestyle, environmental hygiene, and heredity (Niederman & Gilouin, 2022). If there is a malfunction in the lungs, human health will be disrupted as a whole. Therefore, examination of lung malfunctions should be done as early as possible.

The procedure carried out in a lung examination usually requires investigation because lung diseases generally have similar symptoms such as coughing, fever, decreased body weight, loss of appetite, and so on (Smithard & Yoshimatsu, 2022). Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure (Natarajan et al., 2020). This examination aims to see directly and assess the severity of lung conditions.

The chest X-ray procedure provides an image based on the diffraction of electromagnetic waves, namely X-rays. The use of this light makes it possible to see human organs visually without having to do a surgical procedure (non-invasive procedure) (Bunaciu et al., 2015). This procedure produces a two-dimensional image as a representation of the condition of the lungs in the human body and basically this examination is only done through visual observation (Kiant, 2023). Therefore, of course, proper analysis

Author

Revisit the writing pattern and guidelines for writing references.

JOKO RIVONO

Thank you for the valuable comment. We have carefully revisited the writing pattern and reference formatting throughout the manuscript. The references have been thoroughly checked and revised to ensure consistency and compliance with the journal's guidelines. We have also verified the consistency between the in-text citations and the reference list.

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Search document

Headings Pages Results

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

3.7. Result of Model Validation Test

REFERENCES

JOIRN | Volume 5 No 1 | June 2020: 1-3

2. METHOD

This research was conducted through a quantitative approach because the entire process was carried out using data in the form of numbers as an analytical tool. The data in this research is a type of data in the form of images obtained from previous studies. It can be said, the data used in this study is secondary data. Secondary data is data that is already available and collected by other parties outside the agency under study (Johnston, 2014). Secondary data can generally be obtained through websites, books, articles, internal organizational records and so on (Bookstaver, 2021). In this study, data was obtained through a site that contains many types of datasets that are commonly used by researchers in conducting research, namely Kaggle.

The image data used as the research subject is an x-ray image of the chest from patients with Covid-19 lung disease, tuberculosis, pneumonia, and healthy lungs which will also be used to extract information from the image in the form of numerical data from the results of segmented image. This numeric data will be used again in the clustering process to produce disease cluster classes based on the number of white pixel areas in the segmented image. In this study, there are several stages described as a flowchart as shown in Figure 1 below:

```
graph TD; Start([Start]) --> CollectingData[Collecting Data]; CollectingData --> InputTrainingData[Input Training Data]; InputTrainingData --> PreprocessingData[Preprocessing Data]; PreprocessingData --> ChestXraySegmentation[Chest X-ray Segmentation]; ChestXraySegmentation --> ClusteringClass[Clustering Class]; ClusteringClass --> CalculatingClassByK-Means[Calculating Class by K-Means]; CalculatingClassByK-Means --> CalculatingRatio[Calculating Ratio]; CalculatingRatio --> CalculatingTheChangeOfWhitePixel[Calculation of The Change of White Pixel]; CalculatingTheChangeOfWhitePixel --> ClusteringEdgeBasedSegmentation[Clustering Edge Based Segmentation]; ClusteringEdgeBasedSegmentation --> CalculationOfTheAreaOfWhitePixel[Calculation of The Area of White Pixel]; CalculationOfTheAreaOfWhitePixel --> TestingProcess[Testing Process]; TestingProcess --> ModelValidationTest[Model Validation Test]; ModelValidationTest --> End([End]);
```

Figure 1. Research Methods Flowchart

Author

Provide a chronological explanation of the research, including details about the research strategy, research approach (such as algorithm, Pseudocode or other methods), testing procedures, and data collecting.

JOKO RIVONO

Thank you for the valuable comment. We have revised the manuscript to provide a more detailed and chronological explanation of the research process. The revised methodology now describes the research strategy and approach step by step, beginning with data collection and preprocessing, followed by image segmentation using K-Means clustering and the Chan-Vese method, feature extraction using Canny edge detection, and lung disease classification. We have also added a clearer explanation of the algorithms and their implementation procedures, including the sequence of operations applied to the X-ray images. In addition, the testing procedures and evaluation process have been described in greater detail, including the data preparation, experimental procedure, and performance evaluation. These revisions are intended to provide a clearer and more reproducible description of the overall research workflow.

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Search document

Headings Pages Results

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

3.7. Result of Model Validation Test

REFERENCES

pixel area in the image which will then be used in the clustering process to group the data into several

JOIRN (Jurnal Online Information)

p-ISSN: 2528-1682
e-ISSN: 2527-9165

clusters, namely the Covid-19 class, Tuberculosis, Pneumonia, and Normal or healthy lung class. Mathematically, K-Means clustering is carried out in 4 stages as follows (Dongge & Yang, 2020):

1. Initialize the centroid values randomly

$$y = \begin{bmatrix} y_1 \\ y_2 \\ y_3 \\ y_4 \end{bmatrix} = \begin{bmatrix} 2.3 \\ 2.3 \\ 2.3 \\ 2.3 \end{bmatrix} \quad (1)$$

Information:
 y : centroid on cluster
 k : k-th object
 n : number of objects/number of cluster member objects.

2. Place each data point to the nearest centroid by calculating the distance of each data point to the centroid in Euclidean distance

$$(x,y) \rightarrow |x - y| = \sqrt{\sum_{j=1}^n (x_j - y_j)^2}, \quad j=1,2,3,...,n \quad (2)$$

Information:

Author

Please ensure that this area is formatted in accordance with the provided guidance or template.

JOKO RIVONO

Thank you for the valuable comment. We have carefully reviewed and revised the section to ensure that its formatting, structure, and presentation are consistent with the provided guidelines and template. The necessary adjustments have been made throughout the section accordingly.

File Home Insert Design Layout References Mailings Review View Help

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Search document

Headings

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

3.7. Result of Model Validation Test

REFERENCES

1094 | Volume 5 No. 1 | June 2020, 1-3

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

Calculation:

$$\frac{491}{2060} = 0.23834951$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below:

Table 10: White Pixel Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	"COVID19(460) Small.jpeg"	499	2060	0.2422301
2	"COVID19(461) Small.jpeg"	401	2070	0.19371881
3	"COVID19(462) Small.jpeg"	376	2313	0.16255645
4	"COVID19(463) Small.jpeg"	431	2416	0.17839434
5	"COVID19(464) Small.jpeg"	416	2384	0.17419662

Author

Construct the formula section in accordance with the provided guideline or template.

JOKO RIVONO

Thank you for the valuable comment. We have revised the formula section to ensure that the equations, numbering, formatting, and presentation are consistent with the provided guidelines and template. The formula section has been carefully checked and adjusted accordingly.

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

Calculation:

$$\frac{491}{2060} = 0.23834951$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below:

Table 10: White Pixel Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	"COVID19(460) Small.jpeg"	499	2060	0.2422301
2	"COVID19(461) Small.jpeg"	401	2070	0.19371881
3	"COVID19(462) Small.jpeg"	376	2313	0.16255645
4	"COVID19(463) Small.jpeg"	431	2416	0.17839434
5	"COVID19(464) Small.jpeg"	416	2384	0.17419662

Author

Please provide further details regarding this section, rather than simply stating "shown in the table below".

JOKO RIVONO

Thank you for the valuable comment. We have revised this section by providing a more detailed explanation of the results and information presented in the table. The revised text now describes the key findings, relevant comparisons, and important observations from the data, rather than simply referring the reader to the table. This revision provides better context and helps clarify the significance of the presented results.

Table 11: White Pixel Ratio of Tuberculosis Image

No.	Data	Circumference	Area	Ratio
1	"Tuberculosis-1 Small.jpeg"	484	4326	0.11189165
2	"Tuberculosis-10 Small.jpeg"	480	2675	0.18011081

Table 12: White Pixel Ratio of Pneumonia Image

No.	Data	Circumference	Area	Ratio
1	"Pneumonia-1 Small.jpeg"	484	4326	0.11189165
2	"Pneumonia-10 Small.jpeg"	480	2675	0.18011081

Table 13: White Pixel Ratio of Normal Image

No.	Data	Circumference	Area	Ratio
1	"Normal-1 Small.jpeg"	484	4326	0.11189165
2	"Normal-10 Small.jpeg"	480	2675	0.18011081

Table 14: Mean Value Data

No.	Data	Average (Mean)
1	Covid-19 Lung	0.18549881
2	Tuberculosis Lung	0.10926277
3	Pneumonia Lung	0.2094141
4	Normal Lung	0.24025573

As in the table 14, you can see the average of each disease data. This clustering process is carried out so that four cluster classes are obtained, namely Cluster 0, Cluster 1, Cluster 2, Cluster 3. Determining the name of the cluster is done by finding the value that is closest to the average in the data for each disease. Cluster 0 has the closest value to the average value in the Covid-19 data, as well as Cluster 1 for Tuberculosis data, Cluster 2 for Pneumonia data, Cluster 3 for Normal Lung data. The clustering process is carried out using the Jupyter Notebook software and the cluster results and centroid values are shown in the table below:

Table 15: Centroid for Each Cluster

No.	Cluster	Centroid
1	Cluster 0 (Covid-19 Lung)	0.18549881
2	Cluster 1 (Tuberculosis Lung)	0.10926277
3	Cluster 2 (Pneumonia Lung)	0.2094141
4	Cluster 3 (Normal Lung)	0.24025573

3.6. Testing Process

All the data analyzed both have their own name labels so that the testing process can be easily carried out. The testing process is carried out by seeing whether the value of the number of white pixels in the test image belongs to the pre-determined clustering data. The results can be seen in the table 16.

Author

Table 15 lacks an explanation.

JOKO RIVONO

Thank you for the valuable comment. We have added a detailed explanation of Table 15 to clarify the information presented and highlight the key findings and relevant comparisons. The accompanying discussion has also been revised to explain the significance of the results presented in the table.

File Home Insert Design Layout References Mailings Review View Help

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Headings

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

The testing process can be carried out in several steps as follows:

1. Grouping data for each category in the cluster class and match the value of the calculation of the previous ratio with the predetermined centroid point.
2. Count the amount of data for each category that is correctly included in the clustering class according to its name label.

Table 16. Result of The Cluster

	Actual Class			
Classes	Covid-19	Tuberculosis	Pneumonia	Normal
Covid-19	73	12	9	13
Tuberculosis	56	521	42	32
Pneumonia	20	11	702	19
Normal	126	112	116	988

Author

Please conform all formats to the prescribed guide/template. Additionally, it is important to consider the font size, utilisation of lines, and other related factors.

JOKO RIVONO

Thank you for the valuable comment. We have carefully reviewed and revised the entire manuscript to ensure that all formatting conforms to the prescribed guidelines and template. We have also checked the font size, line spacing, alignment, margins, tables, figures, equations, and other formatting elements to ensure consistency throughout the manuscript.

File Home Insert Design Layout References Mailings Review View Help

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Headings

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

3.7. Result of Model Validation Test

REFERENCES

JOIN | Volume 5 No. 11 June 2020 1-13

The validation test is carried out with equation (4) (Pratiwi & Imanati, 2022) and shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Ganny Edge-Based Image Segmentation are 80%.

$$\text{Accuracy} = \frac{\text{Observed Results} - \text{Expected Results}}{\text{Total Data}} \times 100\% = \frac{0.80084151 \times 100\%}{1} \times 100\% = 80\% (4)$$

4. CONCLUSION

The results of this study indicate that the accuracy of applying the K-Means Clustering method to images resulting from Chan-Vese segmentation and Ganny Edge Detection is 80%. This result is obtained by calculating the amount of data in the cluster class that corresponds to its own data label. Of course, this is influenced by many things. One of them is the amount of data. Besides applying the right method, with the right amount of data it is possible to get a higher or lower level of accuracy. It is hoped that for future research, the application of other methods and the use of appropriate amounts of data can help research related to the detection of more complex lung diseases.

REFERENCES

- [1] Miederman, M. S., & Cilleoin, C. (2022). Aspiration pneumonia. *Revista Espanola de Otorrinolaringia*, 25. <https://doi.org/10.37781/revista.117-2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Febrile-Associated Pneumonia? Geriatrics (Basel, Switzerland), 7(3). <https://doi.org/10.3390/geriatrics7030014>
- [3] Natarajan, A. Senna, P. M., Boudhar, A. V., & Mall, S. (2020). A systematic review on tuberculosis in Indian Journal of Tuberculosis (Vol. 97, Issue 3). <https://doi.org/10.1016/j.tube.2020.02.008>
- [4] Rosandi, A. A., Dargotolo, E., Gholisla, & Abou-Senna, H. Y. (2015). X-Ray Diffraction: Instrumentation and Applications. In: Critical Reviews in Analytical Chemistry (Vol. 45, Issue 4). <https://doi.org/10.1080/10440321.2015.1044032>
- [5] Kiani, D. (2022). X-Ray Diffraction (XRD). In Springer Handbooks. https://doi.org/10.1007/978-3-031-07122-6_25
- [6] Soenen, E. (2004). Digital image processing. *Radiologic Technology*, 75(6). <https://doi.org/10.5795/A.7506.2004.7506.003>
- [7] Patti, B. M., & Baricordi, V. (2022). Segmentation of cotton leaf images using a modified chan-vee method. *Naturwissenschaften*, 7(1). <https://doi.org/10.1007/s42464-022-00001-0>
- [8] Song, J., Fan, H., Liu, W., Xu, Z., & Fan, Z. (2022). The Chan-Vese Model with Elastic and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3041936>
- [9] Wang, Z., Wang, K., Yang, P., Fan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and total variation. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.002>
- [10] Zhang, D., Bao, C., Shi, Z., Liu, H., & Ma, R. (2022). Unsupervised Deep Learning Yarns Chan-Vese Model. *GLAM Transactions on Applied Mathematics*, 3(6). <https://doi.org/10.4236/ajam.2022.30606>
- [11] Sulehriyanti, R. A., Bahadik, R., & Mawardi, M. (2020). Implementing fuzzy edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [12] Pradeep Kumar Reddy, B., & Nagaraja, G. (2019). Improved active edge detection technique using S-transform function.

Author

In addition, please provide an explanation for the observed results and outline the potential avenues for further study or plans.

JOKO RIVONO

Thank you for the valuable comment. We have expanded the discussion section to provide a clearer explanation of the observed results, including the factors that may have contributed to the obtained performance. We have also added potential directions for future research, including further improvement of the proposed approach, the use of larger and more diverse datasets, and evaluation using other relevant methods and experimental settings. These additions provide a clearer interpretation of the findings and outline possible avenues for further study.

File Home Insert Design Layout References Mailings Review View Help

PERSONAL INFORMATION REMOVAL ENABLED This document is set to automatically remove personal information when saved and can impact your collaboration experience. Only keep this setting if needed. Change setting

Navigation

Headings

1. INTRODUCTION

2. METHOD

3. RESULT AND DISCUSSION

3.1. Preprocessing Process

3.2. Calculation Process of The W...

3.3. Calculation Process of The W...

3.4. Calculating Ratio

3.5. Clustering Data by k-Means

3.6. Testing Process

3.7. Result of Model Validation Test

REFERENCES

that for future research, the application of other methods and the use of appropriate amounts of data can help research related to the detection of more complex lung diseases.

REFERENCES

- [1] Miederman, M. S., & Cilleoin, C. (2022). Aspiration pneumonia. *Revista Espanola de Otorrinolaringia*, 25. <https://doi.org/10.37781/revista.117-2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Febrile-Associated Pneumonia? Geriatrics (Switzerland), 7(3). <https://doi.org/10.3390/geriatrics7030014>
- [3] Natarajan, A. Senna, P. M., Boudhar, A. V., & Mall, S. (2020). A systematic review on tuberculosis in Indian Journal of Tuberculosis (Vol. 97, Issue 3). <https://doi.org/10.1016/j.tube.2020.02.008>
- [4] Rosandi, A. A., Dargotolo, E., Gholisla, & Abou-Senna, H. Y. (2015). X-Ray Diffraction: Instrumentation and Applications. In: Critical Reviews in Analytical Chemistry (Vol. 45, Issue 4). <https://doi.org/10.1080/10440321.2015.1044032>
- [5] Kiani, D. (2022). X-Ray Diffraction (XRD). In Springer Handbooks. https://doi.org/10.1007/978-3-031-07122-6_25
- [6] Soenen, E. (2004). Digital image processing. *Radiologic Technology*, 75(6). <https://doi.org/10.5795/A.7506.2004.7506.003>
- [7] Patti, B. M., & Baricordi, V. (2022). Segmentation of cotton leaf images using a modified chan-vee method. *Naturwissenschaften*, 7(1). <https://doi.org/10.1007/s42464-022-00001-0>
- [8] Song, J., Fan, H., Liu, W., Xu, Z., & Fan, Z. (2022). The Chan-Vese Model with Elastic and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3041936>
- [9] Wang, Z., Wang, K., Yang, P., Fan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and total variation. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.002>
- [10] Zhang, D., Bao, C., Shi, Z., Liu, H., & Ma, R. (2022). Unsupervised Deep Learning Yarns Chan-Vese Model. *GLAM Transactions on Applied Mathematics*, 3(6). <https://doi.org/10.4236/ajam.2022.30606>
- [11] Sulehriyanti, R. A., Bahadik, R., & Mawardi, M. (2020). Implementing fuzzy edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [12] Pradeep Kumar Reddy, B., & Nagaraja, G. (2019). Improved active edge detection technique using S-transform function.

Author

It is recommended to use references that are no more than five years old. Inclusion of the important journals or conferences in the Scopus or WoS index would be quite desirable. It is recommended to incorporate further references.

JOKO RIVONO

Thank you for the valuable comment. We have reviewed and updated the references throughout the manuscript by incorporating more recent and relevant publications, particularly those published within the last five years. We have also added references from reputable journals and conferences indexed in Scopus or Web of Science where appropriate. Furthermore, additional relevant references have been incorporated to strengthen the theoretical background, support the methodology, and provide a more comprehensive discussion of the research findings.

**3. Bukti Konfirmasi Resubmit Revisi Artikel dan Revisi Artikelnya
(15 Februari 2024)**

[← Back to Submissions](#)[Journal Online Informatika](#)[Back to Submissions](#)[\[JOIN\] Editor Decision](#)

2024-04-21 02:53 PM

[\[JOIN\] Editor Decision](#)

2024-05-06 02:56 AM

Reviewer's Attachments

[Q Search](#)[3937](#) [Join-review-assignment-1178-Article+Text-3624.docx](#)February
3, 2024

Revisions

[Q Search](#)[Upload File](#)[3956](#) [revisi.docx](#)February
15, 2024

Article Text

Review Discussions

[Add discussion](#)

Name	From	Last Reply	Replies	Closed
No Items				

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Article Info

Article history:

Received Sep 3, 2019

Revised May 17, 2020

Accepted June 28, 2020

Keywords:

Lungs

X-Ray Image

Segmentation

Chan-Vese

Canny

K-Means Clustering

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image. In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method. This research shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

Corresponding Author:

1. INTRODUCTION

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Lung health can be influenced by many factors such as lifestyle, environmental hygiene, and heredity [1]. If there is a malfunction in the lungs, human health will be disrupted as a whole. Therefore, examination of lung malfunction should be done as early as possible.

The procedure carried out in a lung examination usually requires investigations because lung diseases generally have similar symptoms such as coughing, fever, decreased body weight, loss of appetite, and so on [2]. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure [3]. This examination aims to see directly and assess the severity of lung conditions.

The chest X-ray procedure provides an image based on the diffraction of electromagnetic waves, namely X-rays. The use of this light makes it possible to see human organs visually without having to do a surgical procedure (non-invasive procedure). This procedure produces a two-dimensional image as a representation of the condition of the lungs in the human body and basically this examination is only done through visual observation [4]. Therefore, of course, proper analysis is needed in determining the diagnosis through chest X-ray images.

With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Of course, this can also be applied to chest x-ray images.

Digital image processing is one of the areas of research in computer science. Broadly speaking, digital image processing works by analyzing digital images in such a way as to obtain a more perfect image. Not only that, image processing in research is also used in extracting information on images as needed. To extract information on several parts of an image, it is usually done with the segmentation method first.

Basically, the segmentation method is used to separate objects in an image. Image segmentation works by dividing digital images into several segments based on the characteristics of the image. This method allows for the separation of objects from the background. This is of course very necessary in research related to image analysis to extract or obtain information from the desired parts of the image.

Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image [5]. This aims to reduce the detector's inference time when processing the entire image because with segmentation, the detector does not need to process the entire image but only the region selected by the segmentation algorithm. Image segmentation aims to classify areas that have similarities so that they can also distinguish objects in the image from their background [6].

There are two segmentation techniques that are often used and can be divided into two categories, namely Region Segmentation which is a segmentation technique to find regions that meet certain homogeneity criteria such as finding color values that have similarities with other pixels so that they can be used as one region and Edge-Based Segmentation which is a technique for finding edges between regions between different characteristics [7].

The Chan-Vese strategy could be a locale division procedure, which could be a strategy that works without borders. The dynamic form show is one of the working models of division procedure that employments vitality and constrain imperatives on the picture into cluster locales [6]. The dynamic form demonstrate is commonly utilized in different picture preparing applications, particularly in therapeutic picture processing such as chest X-ray pictures, brain CT looks or MRI pictures of organs. Positive edge models are utilized in advanced picture preparing by pixel separation. The Chan-Vese strategy is utilized to distinguish visual objects with developmental energies. The advancement of the Mumford-Shah demonstrate and this demonstrate is based on the vitality diminishment issue, which can be re-expressed as equations of unequivocal levels, driving to a less difficult way of understanding the issue [8].

Canny identify is an edge-based division method found by John F. Canny in 1986 [9]. Basically, the Canny strategy works by employing a grayscale picture as input and producing concentrated discontinuities as yield or edge images. In its application, there are steps for shrewd edge location strategy i.e. smooth or channel commotion, calculate incline quality or slope course, apply delay edge prepare setting, not max [10]. This strategy has criteria that moreover ended up its advantage in picture division strategy, specifically Canny Detector has the capacity to distinguish edges based on indicated convolution parameters and is adaptable in decide the level of edge thickness discovery, to supply a least of separate between the edge of the location result and the initial edge, as it were one reaction on each edge to play down clutter within the post-processing step there [11].

Previous research has been carried out by Elsha Heny Pratiwi and Dwi Juniandi in 2022 regarding their research entitled Clustering Lung Disease Based on Chest X-Rays Using Fractal Dimensions Box Counting and K-Medoids. In his research, clustering of lung diseases was carried out based on the results of information from x-ray images of the lungs obtained through the canny segmentation method and resulted in an accuracy of 87% [12].

In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method.

2. METHOD

This research was conducted through a quantitative approach because the entire process was carried out using data in the form of numbers as an analytical tool. The data in this research is a type of data in the form of images obtained from previous studies. It can be said, the data used in this study is secondary data. Secondary data is data that is already available and collected by other parties outside the agency under study. Secondary data can generally be obtained through websites, books, articles, internal organizational records and so on [13]. In this study, data was obtained through a site that

contains many types of datasets that are commonly used by researchers in conducting research, namely Kaggle.

The image data used as the research subject is an x-ray image of the chest from patients with Covid-19 lung disease, tuberculosis, pneumonia, and healthy lungs which will also be used to extract information from the image in the form of numerical data from the results of segmented image. This numeric data will be used again in the clustering process to produce disease cluster classes based on the number of white pixel areas in the segmented image. In this study, there are several stages described as a flowchart as shown in Figure 1 below:

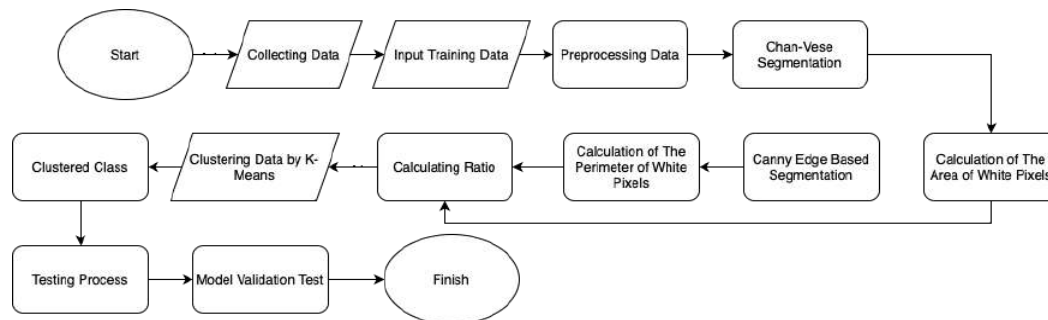


Figure 1. Research Methods Flowchart

The segmentation process applied to the image aims to obtain the features used in the analysis process, in this case, namely the white area in the segmented image [14]. This white area represents the damaged area of the lungs. Before the segmentation process is carried out, the image goes through several two stages in the data preprocessing process, namely the Resize process, Grayscale Process and the Filtering process with Histogram Equalization.

The image segmentation process is carried out twice, namely by the Chan-Vese method and Canny edge detection. The Chan-Vese method is an improvement from the edge-based model, because it bases edge detection on an image not based on image gradients but is based on curve evolution techniques, the Mumford-shah function for segmentation and level set [6]. This is because, detection using image gradients is less effective because discrete gradients are limited and the stop function is never null at an edge and allows the curve to pass through the existing boundaries. In the Chan-Vese model, initial contours can be applied anywhere in the image and the Chan-Vese model will automatically detect all contours, regardless of the position of the original contours. Active contour models are commonly used in various image processing applications, especially in medical image processing, such as chest X-ray images, brain CT scans or MRI images of the body. Positive edge models are used in digital image processing through pixel separation. The evolution of the Mumford-Shah model and this model is based on the energy reduction problem, which can be reformatted in the formula of definite levels, making the problem easier to solve [6].

Edge detection in an image is a process that produces the edges of an image object, its purpose is to mark the part that becomes a detailed image. Canny edge detection is one of the edge detection algorithms that has a minimum error rate and produces optimal edge images [15]. The edge (edge) is a sudden (large) change in the value of the intensity of gray degrees in a short distance. The purpose of edge detection is to group objects in the image, and is also used to further analyze the image.

The segmentation process, crucial for feature extraction, employed two methods: Chan-Vese and Canny edge detection. The Chan-Vese method, based on curve evolution techniques and Mumford-Shah function, aimed to detect damaged areas in the lungs by focusing on the white regions in segmented images. The Canny edge detection, known for its minimum error rate and optimal edge images, identified sudden changes in intensity, marking detailed parts of the images. Both methods contributed to obtaining precise data on the white pixel area representing lung damage.

After the segmentation process is complete, numerical data will be obtained in the form of white pixel area in the image which will then be used in the clustering process to group the data into several classes, namely the Covid-19 class, Tuberculosis, Pneumonia, and Normal or healthy lung class. Mathematically, K-Means clustering is carried out in 4 stages as [16]:

1. Initialize the centroid values randomly

$$v = \frac{\sum_{i=1}^n x_i}{n}; i=1,2,3,...n \quad (1)$$

Information :

v : centroid on cluster

x_i : i-th object

n : number of objects/number of cluster member objects.

2. Place each data point to the nearest centroid by calculating the distance of each data point to the centroid in Euclidean distance

$$(x,y)=||x-y||=\sqrt{\sum_{i=1}^n (x_i-y_i)^2}, i=1,2,3,...n \quad (2)$$

Information :

x_i : ith x object

y_i : y-th power

n : number of objects

3. Recalculate the centroid of the newly formed cluster by calculating the mean of each data point in the cluster.
4. Perform optimization to meet the criteria by repeating the last two steps.

The research strategy systematically applied these methods, and testing procedures involved applying the segmentation methods to chest X-ray images, extracting numerical data, and using K-Means clustering to classify diseases and healthy lungs based on the white pixel area in the segmented image. The research incorporated a robust testing process to evaluate the effectiveness of the applied methodologies. Each dataset was labeled with respective class names, facilitating the testing process. The assessment involved comparing the number of white pixels in test images to predetermined clustering classes.

3. RESULT AND DISCUSSION

The first stage in this study was to collect x-ray image data used as objects in this study. Data in the form of digital data will be processed in the Joint Photographic Experts Group (*jpeg) format. The x-ray image data used is x-ray data including Covid-19 disease, Tuberculosis, Pneumonia and healthy lungs.

Table 1. Datasets

No.	Class	Total Data
1	Covid-19	107
2	Tuberculosis	651
3	Pneumonia	752
4	Normal Lungs	1342

In table 1, there are types and amounts of data used in this research process. All data is collected through the Kaggle website which provides various kinds of datasets for research purposes. This data is obtained by downloading the required dataset.

The next step is image preprocessing. The image epreprocessing stage goes through three stages which aim to improve the quality of the raw data (image) before further analysis. These three stages are resizing all image sizes to 256x256 pixels so that all images are the same size, changing all RGB images to Grayscale images, and carrying out the filtering process with the Histogram Equalization Method.

3.1. Preprocessing Process

3.1.1. Image Resizing Process

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns. Image size normalization process is done by imresize function via MATLAB. This process will display an image with a size of 256x256 as shown below:

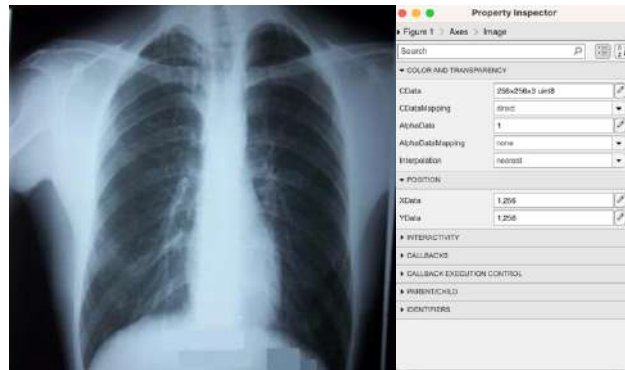


Figure 2. Resize Image

3.1.2. Grayscale Image Process

The grayscale image process in the image aims to change the RGB (Red, Green, Blue) image to a grayscale image with an intensity of 0 to 255 (8-bit image). The grayscale image process in MATLAB is done with the function `rgb2gray`. The results of this stage can be seen in the Figure 3 below:



Figure 3. Grayscale Image

3.1.3. Filtering Image Process With Histogram Equalization

Filtering process aims to improve image quality by reducing noise and adjusting image brightness. The filtering process in this research uses the Histogram Equalization method, which is a graphic equalization that represents the distribution of grayscale image intensities [19]. The filtering process in this study uses the Histogram Equalization technique, which is a graphic equalization process that represents the distribution of grayscale image intensities [17]. This process is done with the `histeq` function in MATLAB. The image on the right from Figure 5 shows that the image already has better contrast and a flatter histogram than Figure 4.

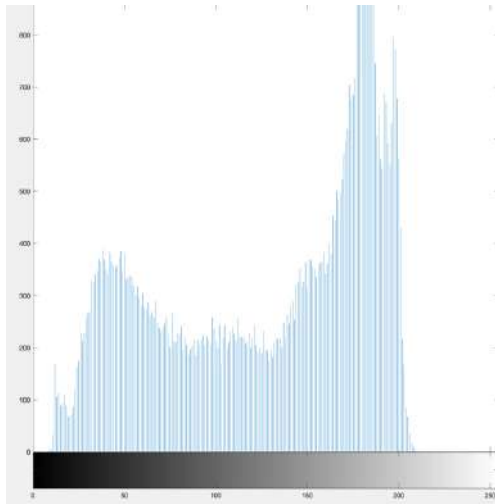


Figure 4. Before Filtering

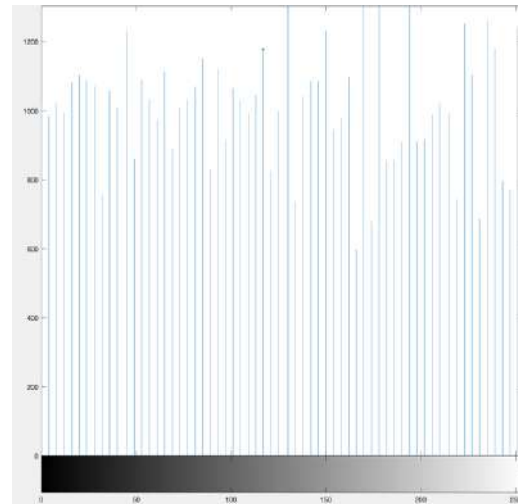


Figure 1. After Filtering

3.2. Calculation Process of The White Area of The Chan-ve-se Segmentation Image

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns [18]. Image size normalization process is done by `imresize` function via MATLAB. This process will display an image with a size of 256x256 as shown below:

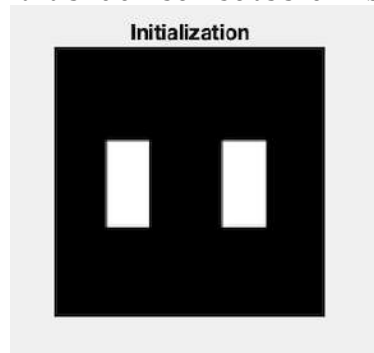


Figure 6. Initialization Mask

The segmentation process using the Chan-Vese method will produce black and white images as shown in Figure 7 which is a comparison of the images before and after segmentation.

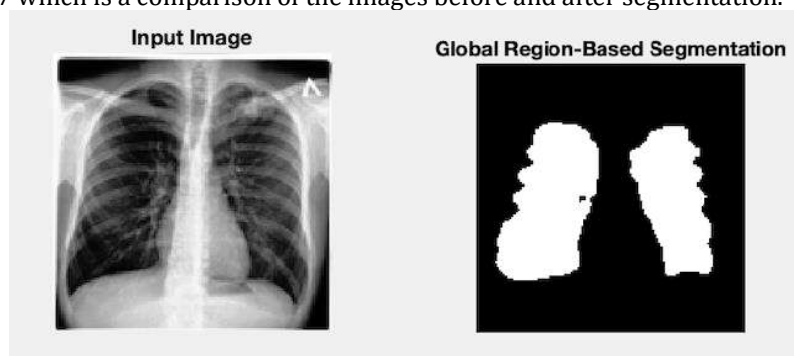


Figure 7. Comparison of Raw and Segmented Image

The next step is to convert the segmented image into a binary image with the `im2bw` function and fill in imperfect image areas that have holes with the `imfill` function. After everything has been done,

the calculation of the area of white pixels in the image can be done with the regionprops function, which is a function in Matlab that is used to measure the properties of a binary image. Data on the area of white pixels in segmented images can be seen in Table 2 for Covid-19, Table 3 for Tuberculosis, Table 4 for Pneumonia, Table 5 for Normal Lungs.

Table 2. Area of White Pixels of Covid-19 Image

No.	Data	Area
1	'COVID19(460) Small.jpeg'	2060
2	'COVID19(461) Small.jpeg'	2070
3	'COVID19(462) Small.jpeg'	2313
4	'COVID19(463) Small.jpeg'	2416
5	'COVID19(464) Small.jpeg'	3384

Table 3. Area of White Pixels of Tuberculosis Image

No.	Data	Area
1	'Tuberculosis-1 Small.jpeg'	4326
2	'Tuberculosis-10 Small.jpeg'	3676
3	'Tuberculosis-100 Small.jpeg'	4255
4	'Tuberculosis-101 Small.jpeg'	4462
5	'Tuberculosis-102 Small.jpeg'	3340

Table 4. Area of White Pixels of Pneumonia Image

No.	Data	Area
1	'person1000_2931.jpeg'	3320
2	'person1000_1681.jpeg'	2040
3	'person1000_2932.jpeg'	1799
4	'person1000_2932.jpeg'	1761
5	'person1000_2934.jpeg'	3039

Table 5. Area of White Pixels of Normal Lungs Image

No.	Data	Area
1	'IM-0115-0001.jpeg'	2194
2	'IM-0117-0001.jpeg'	1842
3	'IM-0119-0001.jpeg'	1732
4	'IM-0122-0001.jpeg'	2010
5	'IM-0125-0001.jpeg'	1787

3.3. Calculation Process of The White Area of The Canny Edge-Based Segmentation Image

The next image segmentation process uses the second method, namely Canny Edge Detection. With this process, we will find a border around the chan-veese segmented image by detecting changes in brightness levels and generating the circumference of the image as another variable needed in the clustering process.

This segmentation process uses the edge function in Matlab. By using the edge function, an image of the Canny edge detection results will be obtained as shown in Figure 9 below.

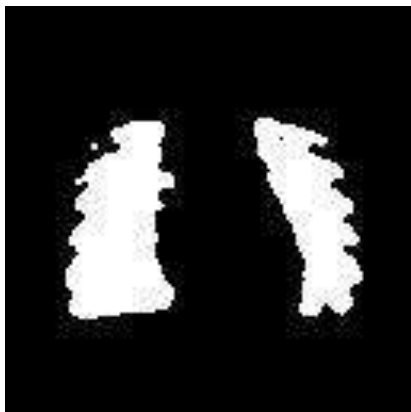


Figure 8. Chan-Vese Segmentation

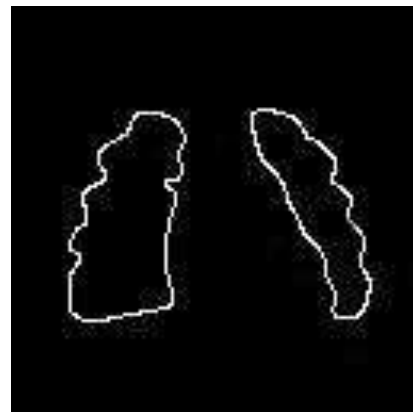


Figure 9. Canny Segmentation

Through the image segmentation results from Chan-Vese and then Canny, we get the circumference of the edge that surrounds the image. The results are described in the Table 6 for Covid-19, Table 7 for Tuberculosis, Table 8 for Pneumonia, Table 9 for Normal Lungs.

Table 6. White Pixels Circumference of Covid-19 Image

No.	Data	Circumference
1	'COVID19(460) Small.jpeg'	499
2	'COVID19(461) Small.jpeg'	401
3	'COVID19(462) Small.jpeg'	376
4	'COVID19(463) Small.jpeg'	431
5	'COVID19(464) Small.jpeg'	446

Table 7. White Pixels Circumference of Tuberculosis Image

No.	Data	Circumference
1	'Tuberculosis-1 Small.jpeg'	484
2	'Tuberculosis-10 Small.jpeg'	480
3	'Tuberculosis-100 Small.jpeg'	474
4	'Tuberculosis-101 Small.jpeg'	492
5	'Tuberculosis-102 Small.jpeg'	479

Table 8. White Pixels Circumference of Pneumonia Image

No.	Data	Circumference
1	'person1000_2931.jpeg'	586
2	'person1000_1681.jpeg'	382
3	'person1000_2932.jpeg'	394
4	'person1000_2932.jpeg'	399
5	'person1000_2934.jpeg'	346

Table 9. White Pixels Circumference of Normal Lungs Image

No.	Data	Circumference
1	'IM-0115-0001.jpeg'	491
2	'IM-0117-0001.jpeg'	498
3	'IM-0119-0001.jpeg'	468
4	'IM-0122-0001.jpeg'	397
5	'IM-0125-0001.jpeg'	491

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

$$\text{Calculation : } \frac{\text{The Number of Pixels of The Canny Detection Segmented Image}}{\text{The Number of Pixels of The Chan-Vese Segmented Image}} = \frac{491}{2060} = 4,12825651 \quad (3)$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below, The research involved a detailed analysis of various medical images, and the results are presented in Tables 10 to 13, showcasing the white pixel ratios for different categories of lung images. Each table provides specific details for the examined images, including the file names, circumference, area, and the calculated white pixel ratio.

Table 10. White Pixels Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	'COVID19(460) Small.jpeg'	499	2060	0,24223301
2	'COVID19(461) Small.jpeg'	401	2070	0,19371981
3	'COVID19(462) Small.jpeg'	376	2313	0,16255945
4	'COVID19(463) Small.jpeg'	431	2416	0,17839404
5	'COVID19(464) Small.jpeg'	446	3384	0,13179669

Table 10 outlines the white pixel ratios for several Covid-19 chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. For instance, 'COVID19(460) Small.jpeg' has a circumference of 499, an area of 2060, and a calculated ratio of 0.24223301

Table 11. White Pixels Ratio of Tuberculosis Image

No.	Data	Circumference	Area	Ratio
1	'Tuberculosis-1 Small.jpeg'	484	4326	0,11188165
2	'Tuberculosis-10 Small.jpeg'	480	3676	0,19371981
3	'Tuberculosis-100 Small.jpeg'	474	4255	0,16255945
4	'Tuberculosis-101 Small.jpeg'	492	4462	0,17839404
5	'Tuberculosis-102 Small.jpeg'	479	3340	0,13179669

In Table 11, the white pixel ratios for Tuberculosis chest X-ray images are presented. Similar to Table 10, it includes file names, circumference, area, and the calculated ratio. For example, 'Tuberculosis-1 Small.jpeg' has a circumference of 484, an area of 4326, and a calculated ratio of 0.11188165.

Table 12. White Pixels Ratio of Pneumonia Image

No.	Data	Circumference	Area	Ratio
1	'person1000_2931.jpeg'	586	3320	0,17650602
2	'person1000_1681.jpeg'	382	2040	0,19371981
3	'person1000_2932.jpeg'	394	1799	0,16255945
4	'person1000_2932.jpeg'	399	1761	0,17839404
5	'person1000_2934.jpeg'	346	3039	0,13179669

Table 12 provides information on the white pixel ratios for Pneumonia chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. 'person1000_2931.jpeg' has a circumference of 586, an area of 3320, and a calculated ratio of 0.17650602, as an example

Table 13. White Pixels Ratio of Normal Lungs Image

No.	Data	Circumference	Area	Ratio
1	'IM-0115-0001.jpeg'	491	2194	0,22379216
2	'IM-0117-0001.jpeg'	498	1842	0,27035831
3	'IM-0119-0001.jpeg'	468	1732	0,27020785
4	'IM-0122-0001.jpeg'	397	2010	0,19751244
5	'IM-0125-0001.jpeg'	491	1787	0,27476217

The white pixel ratios for images of normal lungs are detailed in this table. It includes file names, circumference, area, and the calculated ratio. 'IM-0115-0001.jpeg' has a circumference of 491, an area of 2194, and a calculated ratio of 0.22379216, as one example. These tables collectively provide a comprehensive overview of the white pixel ratios across different types of chest X-ray images, contributing valuable insights into the characteristics of each category.

3.5. Clustering Data by K-Means

After all image processing has been completed, the next step is the clustering process using the K-Means method. This process begins by calculating the average of all data including data on the ratio of Covid-19, Tuberculosis, Pneumonia, and Healthy Lungs. The average value is obtained with the data from the previous ratio calculation process.

Table 14. Mean Value Data

No.	Data	Average (Mean)
1	Covid-19 Lungs	0.16540681
2	Tuberculosis Lungs	0.10936217
3	Pneumonia Lungs	0.2004141
4	Normal Lungs	0.24035373

As in the table 14, you can see the average of each disease data. This clustering process is carried out so that four cluster classes are obtained, namely Cluster 0, Cluster 1, Cluster 2, Cluster 3. Determining the name of the cluster is done by finding the value that is closest to the average in the data for each disease. Cluster 0 has the closest value to the average value in the Covid-19 data, as well as Cluster 1 for Tuberculosis data, Cluster 2 for Pneumonia data, Cluster 3 for Normal Lung data. The clustering process is carried out using the Jupyter Notebook software and the cluster results and centroid values are shown in the table below:

Table 15. Centroid for Each Cluster

No.	Cluster	Centroid
1	Cluster 0 (Covid-19 Lungs)	0.154021
2	Cluster 1 (Tuberculosis Lungs)	0.083526
3	Cluster 2 (Pneumonia Lungs)	0.189932

No.	Cluster	Centroid
4	Cluster 3 (Normal Lungs)	0.239203

The clustering process was executed using the Jupyter Notebook software, a popular tool for interactive and collaborative data analysis. The results of this process, including the identified clusters and their corresponding centroid values, are summarized in Table 15. This table elucidates the outcomes of the clustering process, showcasing the centroids for each identified cluster. The clusters are differentiated based on the types of lung conditions:

1. Cluster 0 (Covid-19 Lungs): The centroid value for this cluster is 0.154021, representing the average position of data points within the cluster. This centroid is indicative of the characteristics associated with chest X-ray images depicting Covid-19 affected lungs.
2. Cluster 1 (Tuberculosis Lungs): With a centroid value of 0.083526, this cluster represents the average features of chest X-ray images illustrating Tuberculosis affected lungs.
3. Cluster 2 (Pneumonia Lungs): The centroid value for this cluster is 0.189932, indicating the central tendency of features in chest X-ray images depicting Pneumonia affected lungs.
4. Cluster 3 (Normal Lungs): This cluster is characterized by a centroid value of 0.239203, suggesting the average features of chest X-ray images portraying normal, healthy lungs.

3.6. Testing Process

All the data analyzed both have their own name labels so that the testing process can be easily carried out. The testing process is carried out by seeing whether the value of the number of white pixels in the test image belongs to the predetermined clustering class. The results can be seen in the table 16. The testing process can be carried out in several steps as follows:

1. Grouping data for each category in the cluster class and match the value of the calculation of the previous ratio with the predetermined centroid point.
2. Count the amount of data for each category that is correctly included in the clustering class according to its name label.

Table 16. Result of The Cluster

	Classes	Actual Class			
		Covid-19	Tuberculosis	Pneumonia	Normal
Predicted Class	Covid-19	73	12	9	13
	Tuberculosis	56	521	42	32
	Pneumonia	20	11	702	19
	Normal	126	112	116	988

3.7. Result of Model Validation Test

The table shows that the number of data labeled Covid-19 that is correctly included in the Covid-19 lung cluster class is as much as the total data, the amount of data labeled as Tuberculosis that is correctly included in the Tuberculosis lung cluster class is as much as the total data, the amount of data labeled Pneumonia that is correctly included in the Pneumonia lung cluster class as much as the total data, and the number of data labeled Normal that is correctly included in the Normal lung cluster class as much as the total data.

The validation test is carried out with equation (4) [12] and shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

$$\text{Accuracy} = \frac{\text{The Number of Clustered Data That Corresponds To The Data Label}}{\text{Total}} \times 100\% = \frac{2284}{2852} \times 100\% = 80\% \quad (4)$$

5. CONCLUSION

The findings of this study reveal that the application of the K-Means Clustering method to images resulting from Chan-Vese segmentation and Canny Edge Detection yields an overall accuracy of

80%. This accuracy is computed by assessing the alignment of the data in the cluster class with its corresponding data label. However, it is crucial to acknowledge that several factors can influence this result, with the quantity of data being a notable one. The accuracy is intricately linked to the dataset size, and obtaining a higher or lower accuracy level is contingent on factors beyond just employing the right methodology.

In delving deeper into the observed results, it becomes evident that while the chosen methods—Chan-Vese segmentation and Canny Edge Detection—have demonstrated a commendable accuracy, there exists potential for improvement. Further research avenues could explore the application of alternative segmentation and edge detection methods. Investigating the effectiveness of cutting-edge techniques or hybrid approaches might contribute to enhanced accuracy, especially in detecting more complex lung diseases.

For future studies, researchers might also consider varying the quantity of data used for analysis. A comprehensive investigation with an increased dataset size could provide a more nuanced understanding of the methodology's performance. Balancing the right method with an optimal amount of data holds the potential to yield more accurate and robust results.

Additionally, it would be valuable to extend this research to encompass a broader spectrum of lung diseases, including those of a more intricate nature. Exploring diverse datasets with varying complexities could further validate and generalize the applicability of the clustering method, thereby contributing to advancements in the field of lung disease detection.

REFERENCES

- [1] Niederman, M. S., & Cilloniz, C. (2022). Aspiration pneumonia. *Revista Espanola de Quimioterapia*, 35. <https://doi.org/10.37201/req/s01.17.2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Frailty-Associated Pneumonia? *Geriatrics (Switzerland)*, 7(5). <https://doi.org/10.3390/geriatrics7050115>
- [3] Natarajan, A., Beena, P. M., Devnikar, A. V., & Mali, S. (2020). A systemic review on tuberculosis. In *Indian Journal of Tuberculosis* (Vol. 67, Issue 3). <https://doi.org/10.1016/j.ijtb.2020.02.005>
- [4] Kiani, D. (2023). X-Ray Diffraction (XRD). In *Springer Handbooks*. https://doi.org/10.1007/978-3-031-07125-6_25
- [5] Patil, B. M., & Burkpalli, V. (2022). Segmentation of cotton leaf images using a modified chan vese method. *Multimedia Tools and Applications*, 81(11). <https://doi.org/10.1007/s11042-022-12436-8>
- [6] Song, J., Pan, H., Liu, W., Xu, Z., & Pan, Z. (2021). The Chan-Vese Model with Elastica and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3047848>
- [7] Wang, Z., Wang, K., Yang, F., Pan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and Sobel operator. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.005>
- [8] Zheng, D., Bao, C., Shi, Z., Ling, H., & Ma, K. (2022). Unsupervised Deep Learning Meets Chan-Vese Model. *CSIAM Transactions on Applied Mathematics*, 3(4). <https://doi.org/10.4208/csiam-am.SO-2021-0049>
- [9] Sekehravani, E. A., Babulak, E., & Masoodi, M. (2020). Implementing canny edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [10] Pradeep Kumar Reddy, R., & Nagaraju, C. (2019). Improved canny edge detection technique using S-membership function. *International Journal of Engineering and Advanced Technology*, 8(6). <https://doi.org/10.35940/ijeat.E7419.088619>
- [11] Huang, M., Liu, Y., & Yang, Y. (2022). Edge detection of ore and rock on the surface of explosion pile based on improved Canny operator. *Alexandria Engineering Journal*, 61(12). <https://doi.org/10.1016/j.aej.2022.04.019>
- [12] Pratiwi, E. H., & Juniati, D. (2022). CLUSTERING OF LUNG DISEASE BASED ON CHEST X-RAY USING DIMENSIONS FRACTAL BOX COUNTING AND K-MEDOIDS. *Jurnal Riset Dan Aplikasi Matematika (JRAM)*, 6(1), 1–12. <https://doi.org/10.26740/JRAM.V6N1.P1-12>
- [13] Bookstaver, M. (2021). Secondary Data Analysis. In *The Encyclopedia of Research Methods in Criminology*

and Criminal Justice: Volume II: Parts 5-8. <https://doi.org/10.1002/9781119111931.ch107>

- [14] Ferreira, W. D., Ferreira, C. B. R., da Cruz Júnior, G., & Soares, F. (2020). A review of digital image forensics. *Computers and Electrical Engineering*, 85. <https://doi.org/10.1016/j.compeleceng.2020.106685>
- [15] Sundani, D., Widiyanto, S., Karyanti, Y., & Wardani, D. T. (2019). Identification of image edge using quantum canny edge detection algorithm. *Journal of ICT Research and Applications*, 13(2). <https://doi.org/10.5614/itbj.ict.res.appl.2019.13.2.4>
- [16] Sinaga, K. P., & Yang, M. S. (2020). Unsupervised K-means clustering algorithm. *IEEE Access*, 8. <https://doi.org/10.1109/ACCESS.2020.2988796>
- [17] Rao, B. S. (2020). Dynamic Histogram Equalization for contrast enhancement for digital images. *Applied Soft Computing Journal*, 89. <https://doi.org/10.1016/j.asoc.2020.106114>
- [18] Baskar, A., Rajappa, M., Vasudevan, S. K., & Muruges, T. S. (2023). Digital Image Processing. In *Digital Image Processing*. <https://doi.org/10.1201/9781003217428>
- [19] Agrawal, S., Panda, R., Mishro, P. K., & Abraham, A. (2022). A novel joint histogram equalization based image contrast enhancement. *Journal of King Saud University - Computer and Information Sciences*, 34(4). <https://doi.org/10.1016/j.jksuci.2019.05.010>

4. Bukti Konfirmasi Artikel Accepted dan LOA
(21 April 2024)

☰

7,991

Compose

Inbox

Starred

Snoozed

Sent

Drafts

Categories

More

Labels

Contacts

Emailed Contacts

join journal

Active

18 of 26

[JOIN] Editor Decision

External

Inbox x

join informatika

to me

Joko Riyono

We have reached a decision regarding your submission to [Jurnal Online Informatika](#), "K-Means Clustering of Lung Disease Based on The Result of X-Ray Segmented Image".

Our decision is to: Accept Submission.

Please revise your article based on the reviewer's comments through the system if any revision (within a week). We will inform you for the copyediting and publication process.

The fee for publication of original papers in this journal is Free Charge (for abroad Authors) or IDR 1.500.000,00 (for local Authors). Accepted manuscripts will not be published until payment has been received. The mode of payment is through Direct Deposit from any bank to our bank account with the following details:

This is the name and bank account to transfer the fee:
Bank account Number: 1310021106788

Bank Name: Bank Mandiri
Name: Dhioa Ayu Pratiwi

*Please email your copy of the publication fee deposit slip and mention your ID Article to:
join@unsgd.ac.id and dhioay3612@gmail.com

Sun, Apr 21, 2024, 9:53 PM

Bandung, April 22, 2024

LETTER OF ACCEPTANCE

Dear Authors Joko Riyono

We are pleased to inform you that your manuscript entitled: *K-Means Clustering of Lung Disease Based on The Result of X-Ray Segmented Image* (Article ID: 1178) has been **ACCEPTED** for publication in the forthcoming issue (Vol 9 No 1) of "Jurnal Online Informatika (JOIN)" after successfully passing the review process and revisions made by authors. The manuscript also checked for plagiarism by Turitin that showed the Similarity Index is acceptable (SI<25%). The authors will also receive the galley proof of the final revision after all of the quality control checks and prior to publishing the article.

Thank you for choosing to publish in our journal.

Warm Regards,

Editor in Chief of Jurnal Online Informatika (JOIN),



Dian Sa'adillah Maylawati

**5.Bukti Konfirmasi Artikel Published
(6 Mei 2024)**

99+

Mail

Chat

Meet

Compose

Inbox7,992

Starred

Snoozed

Sent

Drafts116

Categories

More

Labels

Contacts

Emailed Contacts

join journal

Active

12 of 26

[JOIN] Editor Decision

External

Inbox.k

W

join informatika

to me

May 6, 2024, 9:56 AM

Joko Riyono

The editing of your submission, "K-Means Clustering of Lung Disease Based on The Result of X-Ray Segmented image," is complete. We are now sending it to production.

Submission URL: <https://join.itainsgd.ac.id/index.php/join/authorDashboard/submission/1178>

Please ensure the authorship, affiliation, and metadata in OJS have been corrected in the editing document. This is the last opportunity to make substantial copyediting changes to the submission. The proofreading stage, which follows the preparation of the galley, is restricted to correcting typographical and layout errors. We are not responsible for changes after the article is published.

If you are unable to undertake this work at this time or have any questions, please contact me. We will be waiting for your confirmation and correction until May 08, 2024.

Thank you for your contribution to this journal.

Regards,

JOIN (Jurnal Online Informatika)

Submissions

My Queue1

Archives2

Help

Archived Submissions

Search

Filters

New Submission

1178

Riyono et al.

Enchancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation,...

1

Published

View

1

Production galleys created

0

Open discussions

Last activity recorded on Monday, June 10, 2024.



Dokumen

Uji Kemiripan

Jurnal Internasional ke-1

Bukti lampiran :

1. Standar operasional prosedur
2. Dokumen yang di *exclude*
(karena merupakan dokumen jurnal ini sendiri)
3. Hasil uji kemiripan artikel jurnal internasional

Joko Riyono et al., "Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

doi: <https://doi.org/10.15575/join.v9i1.1178>

Link: <https://join.if.uinsgd.ac.id/index.php/join/article/download/1178/308/4191>



Protokol dalam melakukan Uji Similarity

1. Persiapan dokumen.

Persiapkan dokumen yang akan diuji similaritasnya.

Joko Riyono *et al.*, " Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images
"penerbit, UINSRGD vol. 9, no. 1, pp. 94861 - 94869, Juni , 2024,

doi: <https://doi.org/10.15575/join.v9i1.1178>

Link: : <https://join.if.uinsgd.ac.id/index.php/join/article/download/1178/308/4191>

2. Persiapan Perangkat Lunak Turnitin.

- ❖ Buka Turnitin melalui https://www.turnitin.com/login_page.asp



- ❖ Masukkan alamat email dan password



- ❖ Pilih kelas pada daftar “Class Name”
- ❖ Pilih salah satu Assignment pada daftar “Assignment title”.

3. Pengecekan Similarity

- ❖ Pada Assignment title yang dipilih, klik “Submit”
- ❖ Pilih email yang sesuai
- ❖ Ketik judul pada kolom “Submission title”
- ❖ Klik “Choose from this computer” untuk unggah dokumen
- ❖ Kemudian klik “Upload”
- ❖ Klik “Confirm”
- ❖ Klik “Go to Assignment Inbox”
- ❖ Klik nilai “Similarity”
- ❖ Hasil Similarity ditampilkan sebagai berikut:
- ❖ Klik “Filters and Settings”

☐ General Turnitin repository

☒ Do not store the submitted papers

Compare submissions for similarity ⓘ
Select at least one source for comparison.

☒ General Turnitin repository

☒ Website content

☒ Periodicals, journals and publications

Exclude from Similarity Report ⓘ

☒ Exclude bibliographic materials

☒ Exclude quoted materials

☐ Exclude small matches

Translated Matching ⓘ

☐ Enable Translated Matching

Terdapat filter yaitu:

- a) *Exclude Bibliography*

Exclude bibliography dilakukan karena daftar pustaka bukan merupakan substansi orisinal karya ilmiah, melainkan kumpulan sumber referensi yang memang harus dituliskan secara identik sesuai kaidah sitasi akademik.


b) *Exclude Quotes*

Exclude quotes dilakukan karena kutipan langsung yang telah disertai sumber sitasi secara benar bukan termasuk plagiarisme, melainkan bagian dari praktik akademik yang sah dalam mendukung argumentasi ilmiah.

❖ Selanjutnya dilakukan “*Exclude Sources*”

Sumber yang di*exclude* beserta alasannya ditampilkan pada tabel berikut;

Dokumen sebelum di *exclude* (93%)

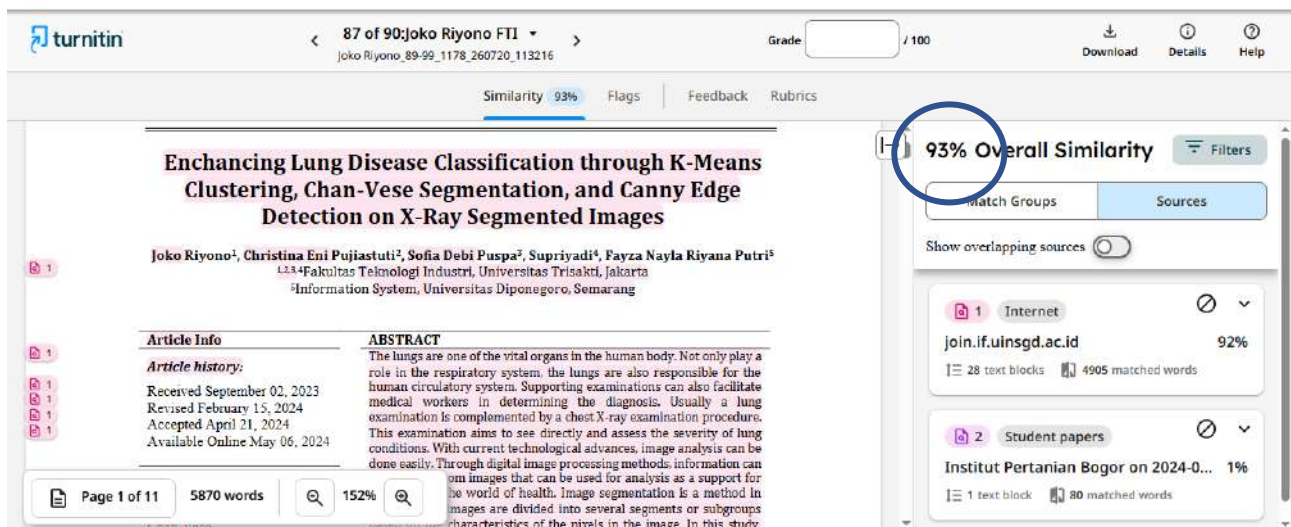

The screenshot shows a Turnitin Similarity Report for a document titled "Enchancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images" by Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, and Fayza Nayla Riyana Putri⁵. The overall similarity is 93%. The report includes a table of sources with the following data:

Source	Similarity	Text Blocks	Matched Words
Internet	92%	28	4905
Student papers	1%	1	80



Dokumen yang di *Exclude*

turnitin

87 of 90:Joko Riyono FTI

Grade /100

Download Details Help

Similarity 93% Flags Feedback Rubrics

93% Overall Similarity

Match Groups Sources

Show overlapping sources

1 Internet 92%
join.if.uinsgd.ac.id
28 text blocks 4905 matched words

2 Student papers 1%
Institut Pertanian Bogor on 2024-0...
1 text block 80 matched words

JOIN (Jurnal Online Informatika)
p-ISSN: 2528-1682, e-ISSN: 2527-9165
Volume 9 Number 1 | June 2024: 89-99
DOI: 10.15575/join.v9i1.1178

Enchancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyana Putri⁵
^{1,2,3,4,5}Fakultas Teknologi Industri, Universitas Trisakti, Jakarta
^{1,2,3,4,5}Information System, Universitas Diponegoro, Semarang

Page 1 of 11 5870 words 152%

Ekslude 1 :
Terdeteksi Karya
sendiri UINSGD

turnitin

87 of 90:Joko Riyono FTI

Grade /100

Download Details Help

Similarity 92% Flags Feedback Rubrics

92% Overall Similarity

Match Groups Sources

Show overlapping sources

1 Publication 90%
Joko Riyono, Christina Eni Pujiastuti...
23 text blocks 4799 matched words

2 Student papers 1%
Institut Pertanian Bogor on 2024-0...
1 text block 80 matched words

Enchancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyana Putri⁵
^{1,2,3,4,5}Fakultas Teknologi Industri, Universitas Trisakti, Jakarta
^{1,2,3,4,5}Information System, Universitas Diponegoro, Semarang

Article Info

Article history

Received September 02, 2023
Revised February 15, 2024
Accepted April 21, 2024
Available Online May 06, 2024

Keywords

Canny
Chan-Vese
K-Means Clustering
Lungs
Segmentation

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image. In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis and Pneumonia. The segmentation method that will be used is the Chan-Vese Method and the Canny Edge Detection method. The results of the accuracy of applying the clustering method to Chan-Vese and Canny Edge-Based segmentation are 80%.

Page 1 of 11 5870 words 152%

Ekslude 2
Sumber Karya
Ilmiah Trisakti



UNIVERSITAS TRISAKTI
FAKULTAS TEKNOLOGI INDUSTRI
FACULTY OF INDUSTRIAL TECHNOLOGY - UNIVERSITAS TRISAKTI

Kampus A - Jl. Kyai Tapa No. 1 - Grogol - Jakarta Barat 11440 - Indonesia

Telp : +62-21-5663232 (Hunting)

Pesawat : Sekretariat Fakultas : 8405, TM : 8434, TE : 8413, TI : 8407, TIF : 8436

E-mail : ftiusakti@trisakti.ac.id

Website : https://fti.trisakti.ac.id/

Turnitin Similarity Report for document 87 of 90: Joko Riyono FTI. The overall similarity is 26%. The report shows 3 exclusions. The article information includes the title 'Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspita³, Supriyadi⁴, Fayza Nayla Rikyana Putri⁵' and the abstract. The keywords are Canny, Chan-Vese, K-Means Clustering, Lungs, and Segmentation. The article history shows it was received on September 02, 2023, revised on February 15, 2024, accepted on April 21, 2024, and available online on May 06, 2024. The article is 5870 words long and 152% similar. The sources list includes 'Internet' (11%) and 'ejournal.uin-suska.ac.id' (9%).

Ekslude 3 Garuda
Kemenristek

Turnitin Similarity Report for document 87 of 90: Joko Riyono FTI. The overall similarity is 20%. The report shows 4 exclusions. The article information includes the title 'Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspita³, Supriyadi⁴, Fayza Nayla Rikyana Putri⁵' and the abstract. The keywords are Canny, Chan-Vese, K-Means Clustering, Lungs, and Segmentation. The article history shows it was received on September 02, 2023, revised on February 15, 2024, accepted on April 21, 2024, and available online on May 06, 2024. The article is 5870 words long and 152% similar. The sources list includes 'Internet' (10%) and 'Ooi Wei Heng, Aimi Salihah Abdul ...' (2%).

Ekslude 4
discovery
research life

DOKUMEN TURNITIN SEBELUM EXCLUDE

Joko Riyono FTI

Joko Riyono_89-99_1178_260720_113216

 GENAP 2025-2026

Document Details

Submission ID

trn:oid::3618:147872534

Submission Date

Aug 10, 2026, 9:34 PM GMT+7

Download Date

Aug 10, 2026, 10:50 PM GMT+7

File Name

Joko Riyono_89-99_1178_260720_113216.pdf

File Size

469.4 KB

11 Pages

5,870 Words

31,044 Characters

93% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography
- Quoted Text
- Small Matches (less than 10 words)

Match Groups

-  **26 Not Cited or Quoted 93%**
Matches with neither in-text citation nor quotation marks
-  **0 Missing Quotations 0%**
Matches that are still very similar to source material
-  **0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 93%  Internet sources
- 93%  Publications
- 7%  Submitted works (Student Papers)

Integrity Flags

0 Integrity Flags for Review

Our system's algorithms look deeply at a document for any inconsistencies that would set it apart from a normal submission. If we notice something strange, we flag it for you to review.

A Flag is not necessarily an indicator of a problem. However, we'd recommend you focus your attention there for further review.

Match Groups

- 26 Not Cited or Quoted 93%**
Matches with neither in-text citation nor quotation marks
- 0 Missing Quotations 0%**
Matches that are still very similar to source material
- 0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 93% Internet sources
- 93% Publications
- 7% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Internet		
		join.if.uinsgd.ac.id	91%
2	Student papers		
		Institut Pertanian Bogor on 2024-09-05	1%

**JOIN (Jurnal Online Informatika)**

p-ISSN: 2528-1682, e-ISSN: 2527-9165

Volume 9 Number 1 | June 2024: 89-99

DOI: 10.15575/join.v9i1.1178

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyana Putri⁵^{1,2,3,4}Fakultas Teknologi Industri, Universitas Trisakti, Jakarta⁵Information System, Universitas Diponegoro, Semarang**Article Info****Article history:**

Received September 02, 2023

Revised February 15, 2024

Accepted April 21, 2024

Available Online May 06, 2024

Keywords:

Canny

Chan-Vese

K-Means Clustering

Lungs

Segmentation

X-Ray Image

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image. In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method. This research shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

Corresponding Author:

Joko Riyono,

Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia.

Email: jokoriyono@trisakti.ac.id

1. INTRODUCTION

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Lung health can be influenced by many factors such as lifestyle, environmental hygiene, and heredity [1]. If there is a malfunction in the lungs, human health will be disrupted as a whole. Therefore, examination of lung malfunction should be done as early as possible.

The procedure carried out in a lung examination usually requires investigations because lung diseases generally have similar symptoms such as coughing, fever, decreased body weight, loss of appetite, and so on [2]. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure [3]. This examination aims to see directly and assess the severity of lung conditions.

The chest X-ray procedure provides an image based on the diffraction of electromagnetic waves, namely X-rays. The use of this light makes it possible to see human organs visually without having to do a surgical procedure (non-invasive procedure). This procedure produces a two-dimensional image as a representation of the condition of the lungs in the human body and basically this examination is only done through visual observation [4]. Therefore, of course, proper analysis is needed in determining the diagnosis through chest X-ray images.

With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Of course, this can also be applied to chest x-ray images.

Digital image processing is one of the areas of research in computer science. Broadly speaking, digital image processing works by analyzing digital images in such a way as to obtain a more perfect image. Not only that, image processing in research is also used in extracting information on images as needed. To extract information on several parts of an image, it is usually done with the segmentation method first.

Basically, the segmentation method is used to separate objects in an image. Image segmentation works by dividing digital images into several segments based on the characteristics of the image. This method allows for the separation of objects from the background. This is of course very necessary in research related to image analysis to extract or obtain information from the desired parts of the image.

Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image [5]. This aims to reduce the detector's inference time when processing the entire image because with segmentation, the detector does not need to process the entire image but only the region selected by the segmentation algorithm. Image segmentation aims to classify areas that have similarities so that they can also distinguish objects in the image from their background [6].

There are two segmentation techniques that are often used and can be divided into two categories, namely Region Segmentation which is a segmentation technique to find regions that meet certain homogeneity criteria such as finding color values that have similarities with other pixels so that they can be used as one region and Edge-Based Segmentation which is a technique for finding edges between regions between different characteristics [7].

The Chan-Vese strategy could be a locale division procedure, which could be a strategy that works without borders. The dynamic form show is one of the working models of division procedure that employs vitality and constrain imperatives on the picture into cluster locales [6]. The dynamic form demonstrate is commonly utilized in different picture preparing applications, particularly in therapeutic picture processing such as chest X-ray pictures, brain CT looks or MRI pictures of organs. Positive edge models are utilized in advanced picture preparing by pixel separation. The Chan-Vese strategy is utilized to distinguish visual objects with developmental energies. The advancement of the Mumford-Shah demonstrate and this demonstrate is based on the vitality diminishment issue, which can be re-expressed as equations of unequivocal levels, driving to a less difficult way of understanding the issue [8].

Canny identify is an edge-based division method found by John F. Canny in 1986 [9]. Basically, the Canny strategy works by employing a grayscale picture as input and producing concentrated discontinuities as yield or edge images. In its application, there are steps for shrewd edge location strategy i.e. smooth or channel commotion, calculate incline quality or slope course, apply delay edge prepare setting, not max [10]. This strategy has criteria that moreover ended up its advantage in picture division strategy, specifically Canny Detector has the capacity to distinguish edges based on indicated convolution parameters and is adaptable in decide the level of edge thickness discovery, to supply a least of separate between the edge of the location result and the initial edge, as it were one reaction on each edge to play down clutter within the post-processing step there [11].

Previous research has been carried out by Elsha Heny Pratiwi and Dwi Juniandi in 2022 regarding their research entitled Clustering Lung Disease Based on Chest X-Rays Using Fractal Dimensions Box Counting and K-Medoids. In his research, clustering of lung diseases was carried out based on the results of information from x-ray images of the lungs obtained through the canny segmentation method and resulted in an accuracy of 87% [12].

In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method.

2. METHOD

This research was conducted through a quantitative approach because the entire process was carried out using data in the form of numbers as an analytical tool. The data in this research is a type of data in the form of images obtained from previous studies. It can be said, the data used in this study is secondary data. Secondary data is data that is already available and collected by other parties outside the agency under study. Secondary data can generally be obtained through websites, books, articles,

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images (Joko Riyono¹, Christina Eni Pujiastuti², Sopia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyani Putri⁵)

90

1

internal organizational records and so on [13]. In this study, data was obtained through a site that contains many types of datasets that are commonly used by researchers in conducting research, namely Kaggle.

The image data used as the research subject is an x-ray image of the chest from patients with Covid-19 lung disease, tuberculosis, pneumonia, and healthy lungs which will also be used to extract information from the image in the form of numerical data from the results of segmented image. This numeric data will be used again in the clustering process to produce disease cluster classes based on the number of white pixel areas in the segmented image. In this study, there are several stages described as a flowchart as shown in Figure 1 below:

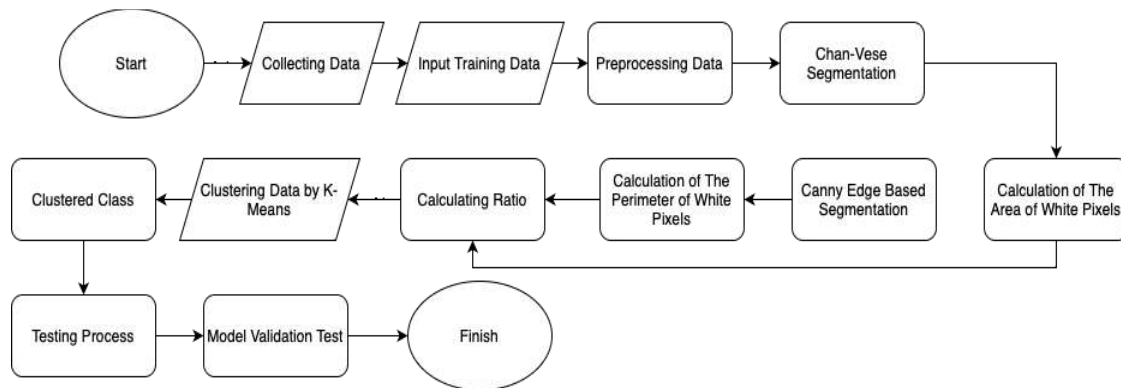


Figure 1. Research Methods Flowchart

The segmentation process applied to the image aims to obtain the features used in the analysis process, in this case, namely the white area in the segmented image [14]. This white area represents the damaged area of the lungs. Before the segmentation process is carried out, the image goes through several two stages in the data preprocessing process, namely the Resize process, Grayscale Process and the Filtering process with Histogram Equalization.

The image segmentation process is carried out twice, namely by the Chan-Vese method and Canny edge detection. The Chan-Vese method is an improvement from the edge-based model, because it bases edge detection on an image not based on image gradients but is based on curve evolution techniques, the Mumford-shah function for segmentation and level set [6]. This is because, detection using image gradients is less effective because discrete gradients are limited and the stop function is never null at an edge and allows the curve to pass through the existing boundaries. In the Chan-Vese model, initial contours can be applied anywhere in the image and the Chan-Vese model will automatically detect all contours, regardless of the position of the original contours. Active contour models are commonly used in various image processing applications, especially in medical image processing, such as chest X-ray images, brain CT scans or MRI images of the body. Positive edge models are used in digital image processing through pixel separation. The evolution of the Mumford-Shah model and this model is based on the energy reduction problem, which can be reformatted in the formula of definite levels, making the problem easier to solve [6].

Edge detection in an image is a process that produces the edges of an image object, its purpose is to mark the part that becomes a detailed image. Canny edge detection is one of the edge detection algorithms that has a minimum error rate and produces optimal edge images [15]. The edge (edge) is a sudden (large) change in the value of the intensity of gray degrees in a short distance. The purpose of edge detection is to group objects in the image, and is also used to further analyze the image.

The segmentation process, crucial for feature extraction, employed two methods: Chan-Vese and Canny edge detection. The Chan-Vese method, based on curve evolution techniques and Mumford-Shah function, aimed to detect damaged areas in the lungs by focusing on the white regions in segmented images. The Canny edge detection, known for its minimum error rate and optimal edge images, identified sudden changes in intensity, marking detailed parts of the images. Both methods contributed to obtaining precise data on the white pixel area representing lung damage.

After the segmentation process is complete, numerical data will be obtained in the form of white pixel area in the image which will then be used in the clustering process to group the data into several classes, namely the Covid-19 class, Tuberculosis, Pneumonia, and Normal or healthy lung class. Mathematically, K-Means clustering is carried out in 4 stages as [16]:

1. Initialize the centroid values randomly

$$v = \frac{\sum_{i=1}^n x_i}{n}, i=1,2,3,...n \quad (1)$$

Information :

v : centroid on cluster

x_i : i -th object

n : number of objects/number of cluster member objects.

2. Place each data point to the nearest centroid by calculating the distance of each data point to the centroid in Euclidean distance

$$(x,y)=||x-y||=\sqrt{\sum_{i=1}^n (x_i-y_i)^2}, i=1,2,3,...n \quad (2)$$

Information :

x_i : i th x object

y_i : y -th power

n : number of objects

3. Recalculate the centroid of the newly formed cluster by calculating the mean of each data point in the cluster.
4. Perform optimization to meet the criteria by repeating the last two steps.

The research strategy systematically applied these methods, and testing procedures involved applying the segmentation methods to chest X-ray images, extracting numerical data, and using K-Means clustering to classify diseases and healthy lungs based on the white pixel area in the segmented image. The research incorporated a robust testing process to evaluate the effectiveness of the applied methodologies. Each dataset was labeled with respective class names, facilitating the testing process. The assessment involved comparing the number of white pixels in test images to predetermined clustering classes.

3. RESULT AND DISCUSSION

The first stage in this study was to collect x-ray image data used as objects in this study. Data in the form of digital data will be processed in the Joint Photographic Experts Group (*jpeg) format. The x-ray image data used is x-ray data including Covid-19 disease, Tuberculosis, Pneumonia and healthy lungs.

Table 1. Datasets

No.	Class	Total Data
1	Covid-19	107
2	Tuberculosis	651
3	Pneumonia	752
4	Normal Lungs	1342

In table 1, there are types and amounts of data used in this research process. All data is collected through the Kaggle website which provides various kinds of datasets for research purposes. This data is obtained by downloading the required dataset.

The next step is image preprocessing. The image epreprocessing stage goes through three stages which aim to improve the quality of the raw data (image) before further analysis. These three stages are resizing all image sizes to 256x256 pixels so that all images are the same size, changing all RGB images to Grayscale images, and carrying out the filtering process with the Histogram Equalization Method.

3.1. Preprocessing Process

3.1.1. Image Resizing Process

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns. Image size normalization process is done by imresize function via MATLAB. This process will display an image with a size of 256x256 as shown below:

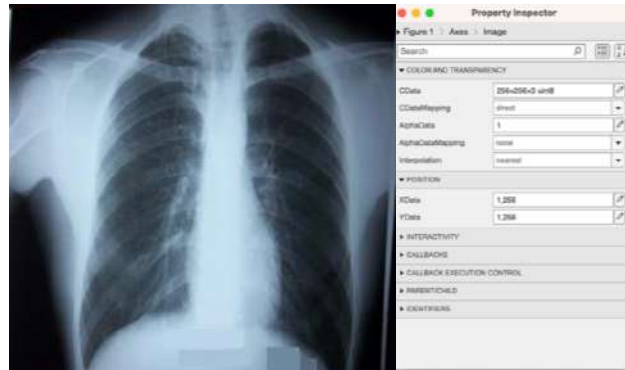


Figure 2. Resize Image

3.1.2. Grayscale Image Process

The grayscale image process in the image aims to change the RGB (Red, Green, Blue) image to a grayscale image with an intensity of 0 to 255 (8-bit image). The grayscale image process in MATLAB is done with the function `rgb2gray`. The results of this stage can be seen in the Figure 3 below:



Figure 3. Grayscale Image

3.1.3. Filtering Image Process With Histogram Equalization

Filtering process aims to improve image quality by reducing noise and adjusting image brightness. The filtering process in this research uses the Histogram Equalization method, which is a graphic equalization that represents the distribution of grayscale image intensities [19]. The filtering process in this study uses the Histogram Equalization technique, which is a graphic equalization process that represents the distribution of grayscale image intensities [17]. This process is done with the `histeq` function in MATLAB. The image on the right from Figure 5 shows that the image already has better contrast and a flatter histogram than Figure 4.

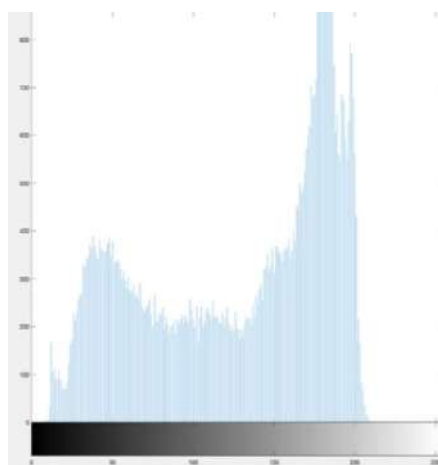


Figure 4. Before Filtering

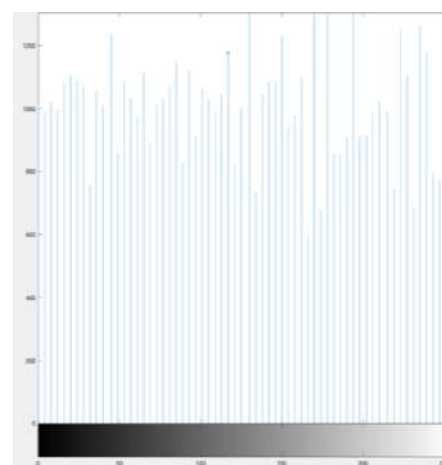


Figure 1. After Filtering

3.2. Calculation Process of The White Area of The Chan-ve-se Segmentation Image

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns [18]. Image size normalization process is done by `imresize` function via MATLAB. This process will display an image with a size of 256x256 as shown below:

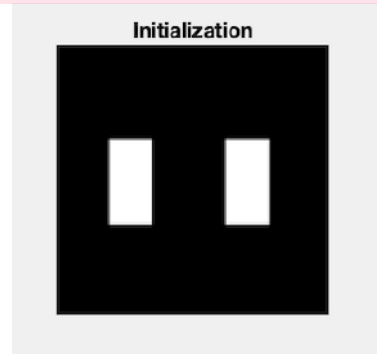


Figure 6. Initialization Mask

The segmentation process using the Chan-Vese method will produce black and white images as shown in Figure 7 which is a comparison of the images before and after segmentation.

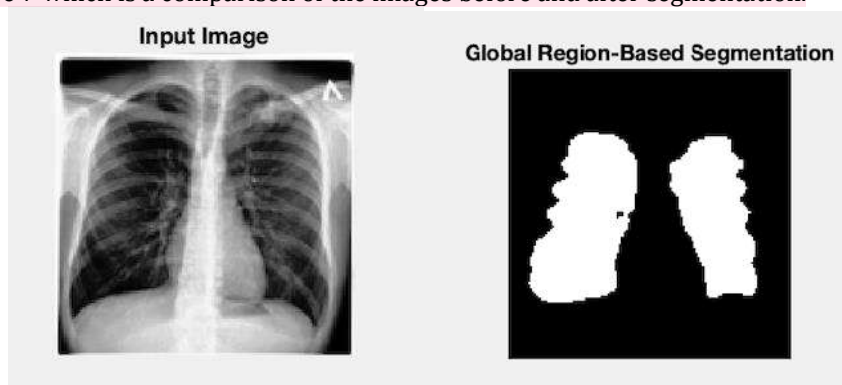


Figure 7. Comparison of Raw and Segmented Image

The next step is to convert the segmented image into a binary image with the `im2bw` function and fill in imperfect image areas that have holes with the `imfill` function. After everything has been done, the calculation of the area of white pixels in the image can be done with the `regionprops` function, which is a function in Matlab that is used to measure the properties of a binary image. Data on the area of white pixels in segmented images can be seen in Table 2 for Covid-19, Table 3 for Tuberculosis, Table 4 for Pneumonia, Table 5 for Normal Lungs.

Table 2. Area of White Pixels of Covid-19 Image

No.	Data	Area
1	'COVID19(460) Small.jpeg'	2060
2	'COVID19(461) Small.jpeg'	2070
3	'COVID19(462) Small.jpeg'	2313
4	'COVID19(463) Small.jpeg'	2416
5	'COVID19(464) Small.jpeg'	3384

Table 3. Area of White Pixels of Tuberculosis Image

No.	Data	Area
1	'Tuberculosis-1 Small.jpeg'	4326
2	'Tuberculosis-10 Small.jpeg'	3676
3	'Tuberculosis-100 Small.jpeg'	4255
4	'Tuberculosis-101 Small.jpeg'	4462
5	'Tuberculosis-102 Small.jpeg'	3340

1

Table 4. Area of White Pixels of Pneumonia Image

No.	Data	Area
1	'person1000_2931.jpeg'	3320
2	'person1000_1681.jpeg'	2040
3	'person1000_2932.jpeg'	1799
4	'person1000_2932.jpeg'	1761
5	'person1000_2934.jpeg'	3039

Table 5. Area of White Pixels of Normal Lungs Image

No.	Data	Area
1	'IM-0115-0001.jpeg'	2194
2	'IM-0117-0001.jpeg'	1842
3	'IM-0119-0001.jpeg'	1732
4	'IM-0122-0001.jpeg'	2010
5	'IM-0125-0001.jpeg'	1787

3.3. Calculation Process of The White Area of The Canny Edge-Based Segmentation Image

The next image segmentation process uses the second method, namely Canny Edge Detection. With this process, we will find a border around the chan-ve-segmented image by detecting changes in brightness levels and generating the circumference of the image as another variable needed in the clustering process.

This segmentation process uses the edge function in Matlab. By using the edge function, an image of the Canny edge detection results will be obtained as shown in Figure 9 below.

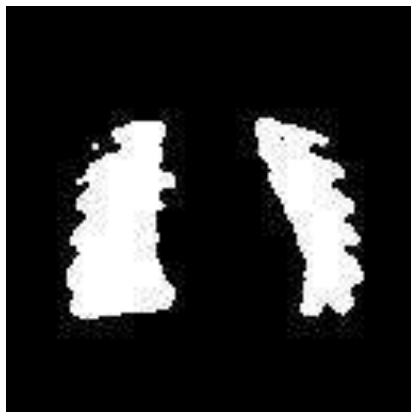


Figure 8. Chan-Vese Segmentation

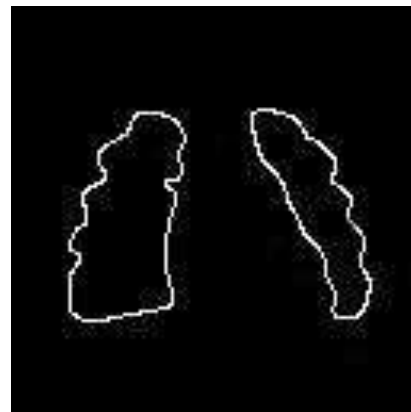


Figure 9. Canny Segmentation

Through the image segmentation results from Chan-Vese and then Canny, we get the circumference of the edge that surrounds the image. The results are described in the Table 6 for Covid-19, Table 7 for Tuberculosis, Table 8 for Pneumonia, Table 9 for Normal Lungs.

Table 6. White Pixels Circumference of Covid-19 Image

No.	Data	Circumference
1	'COVID19(460) Small.jpeg'	499
2	'COVID19(461) Small.jpeg'	401
3	'COVID19(462) Small.jpeg'	376
4	'COVID19(463) Small.jpeg'	431
5	'COVID19(464) Small.jpeg'	446

Table 7. White Pixels Circumference of Tuberculosis Image

No.	Data	Circumference
1	'Tuberculosis-1 Small.jpeg'	484
2	'Tuberculosis-10 Small.jpeg'	480
3	'Tuberculosis-100 Small.jpeg'	474
4	'Tuberculosis-101 Small.jpeg'	492
5	'Tuberculosis-102 Small.jpeg'	479

Table 8. White Pixels Circumference of Pneumonia Image

No.	Data	Circumference
1	'person1000_2931.jpeg'	586
2	'person1000_1681.jpeg'	382
3	'person1000_2932.jpeg'	394
4	'person1000_2932.jpeg'	399
5	'person1000_2934.jpeg'	346

Table 9. White Pixels Circumference of Normal Lungs Image

No.	Data	Circumference
1	'IM-0115-0001.jpeg'	491
2	'IM-0117-0001.jpeg'	498
3	'IM-0119-0001.jpeg'	468
4	'IM-0122-0001.jpeg'	397
5	'IM-0125-0001.jpeg'	491

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

Calculation :
$$\frac{\text{The Number of Pixels of The Canny Detection Segmented Image}}{\text{The Number of Pixels of The Chan-Vese Segmented Image}} = \frac{491}{2060} = 4,12825651 \quad (3)$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below, The research involved a detailed analysis of various medical images, and the results are presented in Tables 10 to 13, showcasing the white pixel ratios for different categories of lung images. Each table provides specific details for the examined images, including the file names, circumference, area, and the calculated white pixel ratio.

Table 10. White Pixels Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	'COVID19(460) Small.jpeg'	499	2060	0,24223301
2	'COVID19(461) Small.jpeg'	401	2070	0,19371981
3	'COVID19(462) Small.jpeg'	376	2313	0,16255945
4	'COVID19(463) Small.jpeg'	431	2416	0,17839404
5	'COVID19(464) Small.jpeg'	446	3384	0,13179669

Table 10 outlines the white pixel ratios for several Covid-19 chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. For instance, 'COVID19(460) Small.jpeg' has a circumference of 499, an area of 2060, and a calculated ratio of 0.24223301

Table 11. White Pixels Ratio of Tuberculosis Image

No.	Data	Circumference	Area	Ratio
1	'Tuberculosis-1 Small.jpeg'	484	4326	0,11188165
2	'Tuberculosis-10 Small.jpeg'	480	3676	0,19371981
3	'Tuberculosis-100 Small.jpeg'	474	4255	0,16255945
4	'Tuberculosis-101 Small.jpeg'	492	4462	0,17839404
5	'Tuberculosis-102 Small.jpeg'	479	3340	0,13179669

In Table 11, the white pixel ratios for Tuberculosis chest X-ray images are presented. Similar to Table 10, it includes file names, circumference, area, and the calculated ratio. For example, 'Tuberculosis-1 Small.jpeg' has a circumference of 484, an area of 4326, and a calculated ratio of 0.11188165.

Table 12. White Pixels Ratio of Pneumonia Image

No.	Data	Circumference	Area	Ratio
1	'person1000_2931.jpeg'	586	3320	0,17650602
2	'person1000_1681.jpeg'	382	2040	0,19371981
3	'person1000_2932.jpeg'	394	1799	0,16255945
4	'person1000_2932.jpeg'	399	1761	0,17839404
5	'person1000_2934.jpeg'	346	3039	0,13179669

Table 12 provides information on the white pixel ratios for Pneumonia chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. 'person1000_2931.jpeg' has a circumference of 586, an area of 3320, and a calculated ratio of 0.17650602, as an example

Table 13. White Pixels Ratio of Normal Lungs Image

No.	Data	Circumference	Area	Ratio
1	'IM-0115-0001.jpeg'	491	2194	0,22379216
2	'IM-0117-0001.jpeg'	498	1842	0,27035831
3	'IM-0119-0001.jpeg'	468	1732	0,27020785
4	'IM-0122-0001.jpeg'	397	2010	0,19751244
5	'IM-0125-0001.jpeg'	491	1787	0,27476217

The white pixel ratios for images of normal lungs are detailed in this table. It includes file names, circumference, area, and the calculated ratio. 'IM-0115-0001.jpeg' has a circumference of 491, an area of 2194, and a calculated ratio of 0.22379216, as one example. These tables collectively provide a comprehensive overview of the white pixel ratios across different types of chest X-ray images, contributing valuable insights into the characteristics of each category.

3.5. Clustering Data by K-Means

After all image processing has been completed, the next step is the clustering process using the K-Means method. This process begins by calculating the average of all data including data on the ratio of Covid-19, Tuberculosis, Pneumonia, and Healthy Lungs. The average value is obtained with the data from the previous ratio calculation process.

Table 14. Mean Value Data

No.	Data	Average (Mean)
1	Covid-19 Lungs	0.16540681
2	Tuberculosis Lungs	0.10936217
3	Pneumonia Lungs	0.2004141
4	Normal Lungs	0.24035373

As in the table 14, you can see the average of each disease data. This clustering process is carried out so that four cluster classes are obtained, namely Cluster 0, Cluster 1, Cluster 2, Cluster 3. Determining the name of the cluster is done by finding the value that is closest to the average in the data for each disease. Cluster 0 has the closest value to the average value in the Covid-19 data, as well as Cluster 1 for Tuberculosis data, Cluster 2 for Pneumonia data, Cluster 3 for Normal Lung data. The clustering process is carried out using the Jupyter Notebook software and the cluster results and centroid values are shown in the table below:

Table 15. Centroid for Each Cluster

No.	Cluster	Centroid
1	Cluster 0 (Covid-19 Lungs)	0.154021
2	Cluster 1 (Tuberculosis Lungs)	0.083526
3	Cluster 2 (Pneumonia Lungs)	0.189932
4	Cluster 3 (Normal Lungs)	0.239203

The clustering process was executed using the Jupyter Notebook software, a popular tool for interactive and collaborative data analysis. The results of this process, including the identified clusters and their corresponding centroid values, are summarized in Table 15. This table elucidates the outcomes of the clustering process, showcasing the centroids for each identified cluster. The clusters are differentiated based on the types of lung conditions:

1. Cluster 0 (Covid-19 Lungs): The centroid value for this cluster is 0.154021, representing the average position of data points within the cluster. This centroid is indicative of the characteristics associated with chest X-ray images depicting Covid-19 affected lungs.
2. Cluster 1 (Tuberculosis Lungs): With a centroid value of 0.083526, this cluster represents the average features of chest X-ray images illustrating Tuberculosis affected lungs.
3. Cluster 2 (Pneumonia Lungs): The centroid value for this cluster is 0.189932, indicating the central tendency of features in chest X-ray images depicting Pneumonia affected lungs.
4. Cluster 3 (Normal Lungs): This cluster is characterized by a centroid value of 0.239203, suggesting the average features of chest X-ray images portraying normal, healthy lungs.

3.6. Testing Process

All the data analyzed both have their own name labels so that the testing process can be easily carried out. The testing process is carried out by seeing whether the value of the number of white pixels in the test image belongs to the predetermined clustering class. The results can be seen in the table 16. The testing process can be carried out in several steps as follows:

1. Grouping data for each category in the cluster class and match the value of the calculation of the previous ratio with the predetermined centroid point.
2. Count the amount of data for each category that is correctly included in the clustering class according to its name label.

Table 16. Result of The Cluster

	Classes	Actual Class			
		Covid-19	Tuberculosis	Pneumonia	Normal
Predicted Class	Covid-19	73	12	9	13
	Tuberculosis	56	521	42	32
	Pneumonia	20	11	702	19
	Normal	126	112	116	988

3.7. Result of Model Validation Test

The table shows that the number of data labeled Covid-19 that is correctly included in the Covid-19 lung cluster class is as much as the total data, the amount of data labeled as Tuberculosis that is correctly included in the Tuberculosis lung cluster class is as much as the total data, the amount of data labeled Pneumonia that is correctly included in the Pneumonia lung cluster class as much as the total data, and the number of data labeled Normal that is correctly included in the Normal lung cluster class as much as the total data.

The validation test is carried out with equation (4) [12] and shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

$$\text{Accuracy} = \frac{\text{The Number of Clustered Data That Corresponds To The Data Label}}{\text{Total}} \times 100\% = \frac{2284}{2852} \times 100\% = 80\% \quad (4)$$

5. CONCLUSION

The findings of this study reveal that the application of the K-Means Clustering method to images resulting from Chan-Vese segmentation and Canny Edge Detection yields an overall accuracy of 80%. This accuracy is computed by assessing the alignment of the data in the cluster class with its corresponding data label. However, it is crucial to acknowledge that several factors can influence this result, with the quantity of data being a notable one. The accuracy is intricately linked to the dataset size, and obtaining a higher or lower accuracy level is contingent on factors beyond just employing the right methodology.

In delving deeper into the observed results, it becomes evident that while the chosen methods—Chan-Vese segmentation and Canny Edge Detection—have demonstrated a commendable accuracy, there exists potential for improvement. Further research avenues could explore the application of alternative segmentation and edge detection methods. Investigating the effectiveness of cutting-edge techniques or hybrid approaches might contribute to enhanced accuracy, especially in detecting more complex lung diseases.

For future studies, researchers might also consider varying the quantity of data used for analysis. A comprehensive investigation with an increased dataset size could provide a more nuanced understanding of the methodology's performance. Balancing the right method with an optimal amount of data holds the potential to yield more accurate and robust results.

Additionally, it would be valuable to extend this research to encompass a broader spectrum of lung diseases, including those of a more intricate nature. Exploring diverse datasets with varying complexities could further validate and generalize the applicability of the clustering method, thereby contributing to advancements in the field of lung disease detection.

REFERENCES

- [1] Niederman, M. S., & Cilloniz, C. (2022). Aspiration pneumonia. *Revista Espanola de Quimioterapia*, 35. <https://doi.org/10.37201/req/s01.17.2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Frailty-Associated Pneumonia? *Geriatrics (Switzerland)*, 7(5). <https://doi.org/10.3390/geriatrics7050115>
- [3] Natarajan, A., Beena, P. M., Devnikar, A. V., & Mali, S. (2020). A systemic review on tuberculosis. In *Indian Journal of Tuberculosis* (Vol. 67, Issue 3). <https://doi.org/10.1016/j.ijtb.2020.02.005>
- [4] Kiani, D. (2023). X-Ray Diffraction (XRD). In *Springer Handbooks*. https://doi.org/10.1007/978-3-031-07125-6_25
- [5] Patil, B. M., & Burkpalli, V. (2022). Segmentation of cotton leaf images using a modified chan vese method. *Multimedia Tools and Applications*, 81(11). <https://doi.org/10.1007/s11042-022-12436-8>
- [6] Song, J., Pan, H., Liu, W., Xu, Z., & Pan, Z. (2021). The Chan-Vese Model with Elastica and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3047848>
- [7] Wang, Z., Wang, K., Yang, F., Pan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and Sobel operator. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.005>
- [8] Zheng, D., Bao, C., Shi, Z., Ling, H., & Ma, K. (2022). Unsupervised Deep Learning Meets Chan-Vese Model. *CSIAM Transactions on Applied Mathematics*, 3(4). <https://doi.org/10.4208/csiam-am.SO-2021-0049>
- [9] Sekehravani, E. A., Babulak, E., & Masoodi, M. (2020). Implementing canny edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [10] Pradeep Kumar Reddy, R., & Nagaraju, C. (2019). Improved canny edge detection technique using S-membership function. *International Journal of Engineering and Advanced Technology*, 8(6). <https://doi.org/10.35940/ijeat.E7419.088619>
- [11] Huang, M., Liu, Y., & Yang, Y. (2022). Edge detection of ore and rock on the surface of explosion pile based on improved Canny operator. *Alexandria Engineering Journal*, 61(12). <https://doi.org/10.1016/j.aej.2022.04.019>
- [12] Pratiwi, E. H., & Juniati, D. (2022). CLUSTERING OF LUNG DISEASE BASED ON CHEST X-RAY USING DIMENSIONS FRACTAL BOX COUNTING AND K-MEDOIDS. *Jurnal Riset Dan Aplikasi Matematika (JRAM)*, 6(1), 1–12. <https://doi.org/10.26740/JRAM.V6N1.P1-12>
- [13] Bookstaver, M. (2021). Secondary Data Analysis. In *The Encyclopedia of Research Methods in Criminology and Criminal Justice: Volume II: Parts 5-8*. <https://doi.org/10.1002/9781119111931.ch107>
- [14] Ferreira, W. D., Ferreira, C. B. R., da Cruz Júnior, G., & Soares, F. (2020). A review of digital image forensics. *Computers and Electrical Engineering*, 85. <https://doi.org/10.1016/j.compeleceng.2020.106685>
- [15] Sundani, D., Widiyanto, S., Karyanti, Y., & Wardani, D. T. (2019). Identification of image edge using quantum canny edge detection algorithm. *Journal of ICT Research and Applications*, 13(2). <https://doi.org/10.5614/itbj.ict.res.appl.2019.13.2.4>
- [16] Sinaga, K. P., & Yang, M. S. (2020). Unsupervised K-means clustering algorithm. *IEEE Access*, 8. <https://doi.org/10.1109/ACCESS.2020.2988796>
- [17] Rao, B. S. (2020). Dynamic Histogram Equalization for contrast enhancement for digital images. *Applied Soft Computing Journal*, 89. <https://doi.org/10.1016/j.asoc.2020.106114>
- [18] Baskar, A., Rajappa, M., Vasudevan, S. K., & Muruges, T. S. (2023). Digital Image Processing. In *Digital Image Processing*. <https://doi.org/10.1201/9781003217428>
- [19] Agrawal, S., Panda, R., Mishro, P. K., & Abraham, A. (2022). A novel joint histogram equalization based image contrast enhancement. *Journal of King Saud University - Computer and Information Sciences*, 34(4). <https://doi.org/10.1016/j.jksuci.2019.05.010>



Dokumen setelah di exclude

turnitin

87 of 90 Joko Riyono FTI

Grade: / 100

Download Details Help

Similarity 12% Flags Feedback Rubrics

Exclude this Text

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyana Putri⁵

^{1,2,3,4}Fakultas Teknologi Industri, Universitas Trisakti, Jakarta
⁵Information System, Universitas Diponegoro, Semarang

Article Info

Article history:

Received September 02, 2023
Revised February 15, 2024
Accepted April 21, 2024
Available Online May 06, 2024

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be extracted from images that can be used for analysis as a support for the world of health. Image segmentation is a method in which images are divided into several segments or subgroups.

12% Overall Similarity

5 Exclusions

Match Groups Sources

Show overlapping sources

1 Publication

Ooi Wei Herng, Aimi Salihah Abdul ... 2%

7 text blocks 126 matched words

1 of 7 20 words

<https://doi.org/10.1109/IAI-DASE7696.2025.11213730>

CT Images for COVID-19," IEEE Andescon, ANDESCON 2024 - Proceedings, 2024, doi:

Page 1 of 11 5870 words 152%



UNIVERSITAS TRISAKTI

FAKULTAS TEKNOLOGI INDUSTRI

FACULTY OF INDUSTRIAL TECHNOLOGY - UNIVERSITAS TRISAKTI

Kampus A - Jl. Kyai Tapa No. 1 - Grogol - Jakarta Barat 11440 - Indonesia

Telp : +62-21-5663232 (Hunting)

Pesawat : Sekretariat Fakultas : 8405, TM : 8434, TE : 8413, TI : 8407, TIF : 8436

E-mail : ftiusakti@trisakti.ac.id

Website : <https://fti.trisakti.ac.id/>

DOKUMEN SETELAH EXCLUDE

Joko Riyono FTI

Joko Riyono_89-99_1178_260720_113216

 GENAP 2025-2026

Document Details

Submission ID

trn:oid:::3618:147872534

Submission Date

Aug 10, 2026, 9:34 PM GMT+7

Download Date

Aug 11, 2026, 10:50 AM GMT+7

File Name

Joko Riyono_89-99_1178_260720_113216.pdf

File Size

469.4 KB

11 Pages

5,870 Words

31,044 Characters

12% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

Filtered from the Report

- Bibliography
- Quoted Text

Exclusions

- 5 Excluded Sources

Match Groups

-  **49 Not Cited or Quoted 12%**
Matches with neither in-text citation nor quotation marks
-  **0 Missing Quotations 0%**
Matches that are still very similar to source material
-  **0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 5%  Internet sources
- 8%  Publications
- 9%  Submitted works (Student Papers)

Integrity Flags

0 Integrity Flags for Review

Our system's algorithms look deeply at a document for any inconsistencies that would set it apart from a normal submission. If we notice something strange, we flag it for you to review.

A Flag is not necessarily an indicator of a problem. However, we'd recommend you focus your attention there for further review.

Match Groups

- 49 Not Cited or Quoted 12%**
Matches with neither in-text citation nor quotation marks
- 0 Missing Quotations 0%**
Matches that are still very similar to source material
- 0 Missing Citation 0%**
Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%**
Matches with in-text citation present, but no quotation marks

Top Sources

- 5% Internet sources
- 8% Publications
- 9% Submitted works (Student Papers)

Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Publication	Ooi Wei Herng, Aimi Salihah Abdul Nasir, Abdul Syafiq Abdull Sukor. "MSFKNN-DP...	2%
2	Student papers	Institut Pertanian Bogor on 2024-09-05	1%
3	Student papers	iGroup on 2018-07-19	1%
4	Publication	Deni Saepudin, Egi Shidqi Rabbani, Dio Navialdy, Didit Adytia. "Water Level Time...	<1%
5	Internet	journal.unesa.ac.id	<1%
6	Internet	iieta.org	<1%
7	Student papers	Universitas Pendidikan Indonesia on 2018-12-26	<1%
8	Internet	jurnal.unprimdn.ac.id	<1%
9	Internet	jurnalsaintek.uinsby.ac.id	<1%
10	Student papers	Higher Education Commission Pakistan on 2019-02-28	<1%

11	Student papers	University of Warwick on 2026-07-11	<1%
12	Student papers	Trisakti University on 2022-10-04	<1%
13	Publication	Prasetyo Wibowo, Arna Fariza, Ferry Astika Saputra. "The combination of the ND...	<1%
14	Student papers	The Hong Kong Polytechnic University on 2013-05-02	<1%
15	Publication	Adi Budi Prasetyo, Rizki Wahyudi, Imam Tahyudin, Selvia Ferdiana Kusuma, Luzi ...	<1%
16	Internet	ia802303.us.archive.org	<1%
17	Student papers	University of North Texas on 2021-07-20	<1%
18	Internet	edepot.wur.nl	<1%
19	Internet	growingscience.com	<1%
20	Internet	maxapress.com	<1%
21	Internet	www.analyticsvidhya.com	<1%
22	Publication	Andi Ridwan Makkulawu, Karma, Arwini Arisandi, Ismail Gaffar. "Forecasting Buf...	<1%
23	Publication	Touka Hafsia, Asma Belhaj, Hatem Tlijani, Khaled Nouri. "Evaluation of Edge Dete...	<1%
24	Internet	ejournal.unesa.ac.id	<1%

25	Internet	ijeecs.iaescore.com	<1%
26	Internet	link.springer.com	<1%
27	Internet	mdpi-res.com	<1%
28	Internet	sciendo.com	<1%
29	Internet	www.grafiati.com	<1%
30	Internet	www.iieta.org	<1%
31	Publication	"Computer Vision and Robotics", Springer Science and Business Media LLC, 2026	<1%
32	Student papers	Bahcesehir University on 2021-06-14	<1%
33	Publication	David Mumford, Jayant Shah. "Optimal approximations by piecewise smooth func...	<1%
34	Student papers	The University of Buckingham on 2017-03-20	<1%



JOIN (Jurnal Online Informatika)

p-ISSN: 2528-1682, e-ISSN: 2527-9165

Volume 9 Number 1 | June 2024: 89-99

DOI: 10.15575/join.v9i1.1178

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images

Joko Riyono¹, Christina Eni Pujiastuti², Sofia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyana Putri⁵

^{1,2,3,4}Fakultas Teknologi Industri, Universitas Trisakti, Jakarta

⁵Information System, Universitas Diponegoro, Semarang

Article Info

Article history:

Received September 02, 2023

Revised February 15, 2024

Accepted April 21, 2024

Available Online May 06, 2024

Keywords:

Canny

Chan-Vese

K-Means Clustering

Lungs

Segmentation

X-Ray Image

ABSTRACT

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure. This examination aims to see directly and assess the severity of lung conditions. With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image. In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method. This research shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

Corresponding Author:

Joko Riyono,

Fakultas Teknologi Industri, Universitas Trisakti, Jakarta, Indonesia.

Email: jokoriyono@trisakti.ac.id

1. INTRODUCTION

The lungs are one of the vital organs in the human body. Not only play a role in the respiratory system, the lungs are also responsible for the human circulatory system. Lung health can be influenced by many factors such as lifestyle, environmental hygiene, and heredity [1]. If there is a malfunction in the lungs, human health will be disrupted as a whole. Therefore, examination of lung malfunction should be done as early as possible.

The procedure carried out in a lung examination usually requires investigations because lung diseases generally have similar symptoms such as coughing, fever, decreased body weight, loss of appetite, and so on [2]. Supporting examinations can also facilitate medical workers in determining the diagnosis. Usually a lung examination is complemented by a chest X-ray examination procedure [3]. This examination aims to see directly and assess the severity of lung conditions.

The chest X-ray procedure provides an image based on the diffraction of electromagnetic waves, namely X-rays. The use of this light makes it possible to see human organs visually without having to do a surgical procedure (non-invasive procedure). This procedure produces a two-dimensional image as a representation of the condition of the lungs in the human body and basically this examination is only done through visual observation [4]. Therefore, of course, proper analysis is needed in determining the diagnosis through chest X-ray images.

With current technological advances, image analysis can be done easily. Through digital image processing methods, information can be obtained from images that can be used for analysis as a support for diagnoses in the world of health. Of course, this can also be applied to chest x-ray images.

Digital image processing is one of the areas of research in computer science. Broadly speaking, digital image processing works by analyzing digital images in such a way as to obtain a more perfect image. Not only that, image processing in research is also used in extracting information on images as needed. To extract information on several parts of an image, it is usually done with the segmentation method first.

Basically, the segmentation method is used to separate objects in an image. Image segmentation works by dividing digital images into several segments based on the characteristics of the image. This method allows for the separation of objects from the background. This is of course very necessary in research related to image analysis to extract or obtain information from the desired parts of the image.

Image segmentation is a method in which digital images are divided into several segments or subgroups based on the characteristics of the pixels in the image [5]. This aims to reduce the detector's inference time when processing the entire image because with segmentation, the detector does not need to process the entire image but only the region selected by the segmentation algorithm. Image segmentation aims to classify areas that have similarities so that they can also distinguish objects in the image from their background [6].

There are two segmentation techniques that are often used and can be divided into two categories, namely Region Segmentation which is a segmentation technique to find regions that meet certain homogeneity criteria such as finding color values that have similarities with other pixels so that they can be used as one region and Edge-Based Segmentation which is a technique for finding edges between regions between different characteristics [7].

The Chan-Vese strategy could be a locale division procedure, which could be a strategy that works without borders. The dynamic form show is one of the working models of division procedure that employs vitality and constrain imperatives on the picture into cluster locales [6]. The dynamic form demonstrate is commonly utilized in different picture preparing applications, particularly in therapeutic picture processing such as chest X-ray pictures, brain CT looks or MRI pictures of organs. Positive edge models are utilized in advanced picture preparing by pixel separation. The Chan-Vese strategy is utilized to distinguish visual objects with developmental energies. The advancement of the Mumford-Shah demonstrate and this demonstrate is based on the vitality diminishment issue, which can be re-expressed as equations of unequivocal levels, driving to a less difficult way of understanding the issue [8].

Canny identify is an edge-based division method found by John F. Canny in 1986 [9]. Basically, the Canny strategy works by employing a grayscale picture as input and producing concentrated discontinuities as yield or edge images. In its application, there are steps for shrewd edge location strategy i.e. smooth or channel commotion, calculate incline quality or slope course, apply delay edge prepare setting, not max [10]. This strategy has criteria that moreover ended up its advantage in picture division strategy, specifically Canny Detector has the capacity to distinguish edges based on indicated convolution parameters and is adaptable in decide the level of edge thickness discovery, to supply a least of separate between the edge of the location result and the initial edge, as it were one reaction on each edge to play down clutter within the post-processing step there [11].

Previous research has been carried out by Elsha Heny Pratiwi and Dwi Juniandi in 2022 regarding their research entitled Clustering Lung Disease Based on Chest X-Rays Using Fractal Dimensions Box Counting and K-Medoids. In his research, clustering of lung diseases was carried out based on the results of information from x-ray images of the lungs obtained through the canny segmentation method and resulted in an accuracy of 87% [12].

In this study, clustering with the K-Means method will be carried out on the results of segmentation of x-ray images of lung diseases, namely Covid-19, Tuberculosis, and Pneumonia. The segmentation method that will be implemented is the Chan-Vese Method and the Canny Edge Detection Method.

2. METHOD

This research was conducted through a quantitative approach because the entire process was carried out using data in the form of numbers as an analytical tool. The data in this research is a type of data in the form of images obtained from previous studies. It can be said, the data used in this study is secondary data. Secondary data is data that is already available and collected by other parties outside the agency under study. Secondary data can generally be obtained through websites, books, articles,

Enhancing Lung Disease Classification through K-Means Clustering, Chan-Vese Segmentation, and Canny Edge Detection on X-Ray Segmented Images (Joko Riyono¹, Christina Eni Pujiastuti², Sopia Debi Puspa³, Supriyadi⁴, Fayza Nayla Riyani Putri⁵)

90

internal organizational records and so on [13]. In this study, data was obtained through a site that contains many types of datasets that are commonly used by researchers in conducting research, namely Kaggle.

The image data used as the research subject is an x-ray image of the chest from patients with Covid-19 lung disease, tuberculosis, pneumonia, and healthy lungs which will also be used to extract information from the image in the form of numerical data from the results of segmented image. This numeric data will be used again in the clustering process to produce disease cluster classes based on the number of white pixel areas in the segmented image. In this study, there are several stages described as a flowchart as shown in Figure 1 below:

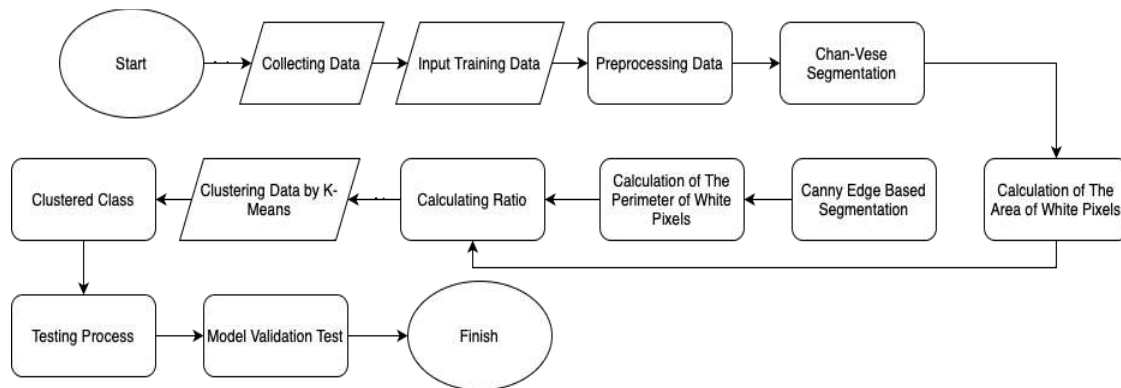


Figure 1. Research Methods Flowchart

The segmentation process applied to the image aims to obtain the features used in the analysis process, in this case, namely the white area in the segmented image [14]. This white area represents the damaged area of the lungs. Before the segmentation process is carried out, the image goes through several two stages in the data preprocessing process, namely the Resize process, Grayscale Process and the Filtering process with Histogram Equalization.

The image segmentation process is carried out twice, namely by the Chan-Vese method and Canny edge detection. The Chan-Vese method is an improvement from the edge-based model, because it bases edge detection on an image not based on image gradients but is based on curve evolution techniques, the Mumford-shah function for segmentation and level set [6]. This is because, detection using image gradients is less effective because discrete gradients are limited and the stop function is never null at an edge and allows the curve to pass through the existing boundaries. In the Chan-Vese model, initial contours can be applied anywhere in the image and the Chan-Vese model will automatically detect all contours, regardless of the position of the original contours. Active contour models are commonly used in various image processing applications, especially in medical image processing, such as chest X-ray images, brain CT scans or MRI images of the body. Positive edge models are used in digital image processing through pixel separation. The evolution of the Mumford-Shah model and this model is based on the energy reduction problem, which can be reformatted in the formula of definite levels, making the problem easier to solve [6].

Edge detection in an image is a process that produces the edges of an image object, its purpose is to mark the part that becomes a detailed image. Canny edge detection is one of the edge detection algorithms that has a minimum error rate and produces optimal edge images [15]. The edge (edge) is a sudden (large) change in the value of the intensity of gray degrees in a short distance. The purpose of edge detection is to group objects in the image, and is also used to further analyze the image.

The segmentation process, crucial for feature extraction, employed two methods: Chan-Vese and Canny edge detection. The Chan-Vese method, based on curve evolution techniques and Mumford-Shah function, aimed to detect damaged areas in the lungs by focusing on the white regions in segmented images. The Canny edge detection, known for its minimum error rate and optimal edge images, identified sudden changes in intensity, marking detailed parts of the images. Both methods contributed to obtaining precise data on the white pixel area representing lung damage.

After the segmentation process is complete, numerical data will be obtained in the form of white pixel area in the image which will then be used in the clustering process to group the data into several classes, namely the Covid-19 class, Tuberculosis, Pneumonia, and Normal or healthy lung class. Mathematically, K-Means clustering is carried out in 4 stages as [16]:

1. Initialize the centroid values randomly

$$v = \frac{\sum_{i=1}^n x_i}{n}, i=1,2,3,...n \quad (1)$$

Information :

v : centroid on cluster

x_i : i -th object

n : number of objects/number of cluster member objects.

2. Place each data point to the nearest centroid by calculating the distance of each data point to the centroid in Euclidean distance

$$(x,y)=||x-y||=\sqrt{\sum_{i=1}^n (x_i-y_i)^2}, i=1,2,3,...n \quad (2)$$

Information :

x_i : i th x object

y_i : y -th power

n : number of objects

3. Recalculate the centroid of the newly formed cluster by calculating the mean of each data point in the cluster.
4. Perform optimization to meet the criteria by repeating the last two steps.

The research strategy systematically applied these methods, and testing procedures involved applying the segmentation methods to chest X-ray images, extracting numerical data, and using K-Means clustering to classify diseases and healthy lungs based on the white pixel area in the segmented image. The research incorporated a robust testing process to evaluate the effectiveness of the applied methodologies. Each dataset was labeled with respective class names, facilitating the testing process. The assessment involved comparing the number of white pixels in test images to predetermined clustering classes.

3. RESULT AND DISCUSSION

The first stage in this study was to collect x-ray image data used as objects in this study. Data in the form of digital data will be processed in the Joint Photographic Experts Group (*jpeg) format. The x-ray image data used is x-ray data including Covid-19 disease, Tuberculosis, Pneumonia and healthy lungs.

Table 1. Datasets

No.	Class	Total Data
1	Covid-19	107
2	Tuberculosis	651
3	Pneumonia	752
4	Normal Lungs	1342

In table 1, there are types and amounts of data used in this research process. All data is collected through the Kaggle website which provides various kinds of datasets for research purposes. This data is obtained by downloading the required dataset.

The next step is image preprocessing. The image epreprocessing stage goes through three stages which aim to improve the quality of the raw data (image) before further analysis. These three stages are resizing all image sizes to 256x256 pixels so that all images are the same size, changing all RGB images to Grayscale images, and carrying out the filtering process with the Histogram Equalization Method.

3.1. Preprocessing Process

3.1.1. Image Resizing Process

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns. Image size normalization process is done by imresize function via MATLAB. This process will display an image with a size of 256x256 as shown below:

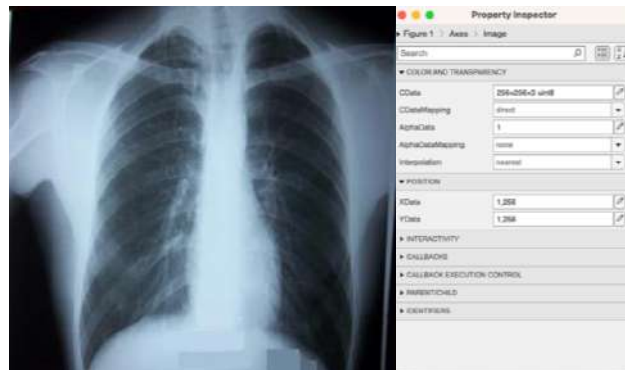


Figure 2. Resize Image

3.1.2. Grayscale Image Process

The grayscale image in the image aims to change the RGB (Red, Green, Blue) image to a grayscale image with an intensity of 0 to 255 (8-bit image). The grayscale process in MATLAB is done with the function `rgb2gray`. The results of this stage can be seen in the Figure 3 below:



Figure 3. Grayscale Image

3.1.3. Filtering Image Process With Histogram Equalization

Filtering process aims to improve image quality by reducing noise and adjusting image brightness. The filtering process in this research uses the Histogram Equalization method, which is a graphic equalization that represents the distribution of grayscale image intensities [19]. The filtering process in this study uses the Histogram Equalization technique, which is a graphic equalization process that represents the distribution of grayscale image intensities [17]. This process is done with the `histeq` function in MATLAB. The image on the right from Figure 5 shows that the image already has better contrast and a flatter histogram than Figure 4.

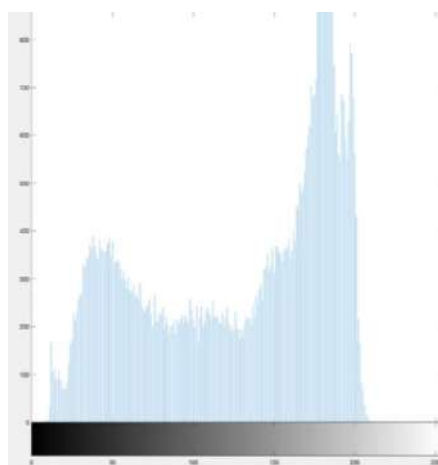


Figure 4. Before Filtering

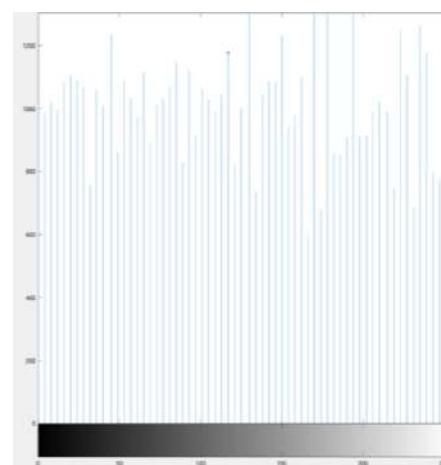


Figure 1. After Filtering

3.2. Calculation Process of The White Area of The Chan-ve-se Segmentation Image

The normalization process in the image aims to change the size of the image resolution so that all images have the same resolution size. Changes in the size of the image resolution will be equated to 256 x 256 pixels. With a size of 256 x 256 pixels, the image size can be represented as a matrix with 256 rows and 256 columns [18]. Image size normalization process is done by imresize function via MATLAB. This process will display an image with a size of 256x256 as shown below:

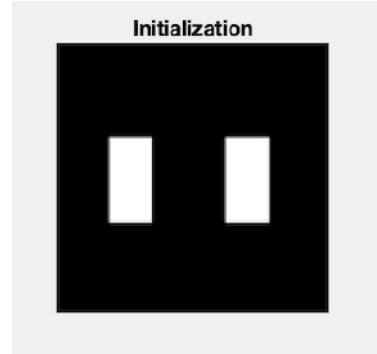


Figure 6. Initialization Mask

The segmentation process using the Chan-Vese method will produce black and white images as shown in Figure 7 which is a comparison of the images before and after segmentation.

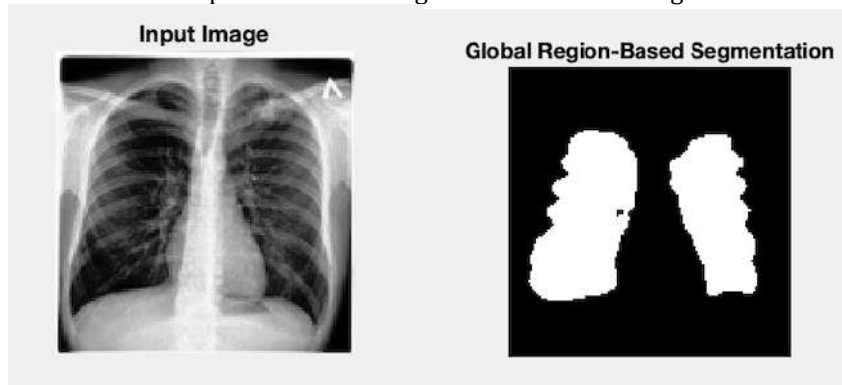


Figure 7. Comparison of Raw and Segmented Image

The next step is to convert the segmented image into a binary image with the im2bw function and fill in imperfect image areas that have holes with the imfill function. After everything has been done, the calculation of the area of white pixels in the image can be done with the regionprops function, which is a function in Matlab that is used to measure the properties of a binary image. Data on the area of white pixels in segmented images can be seen in Table 2 for Covid-19, Table 3 for Tuberculosis, Table 4 for Pneumonia, Table 5 for Normal Lungs.

Table 2. Area of White Pixels of Covid-19 Image

No.	Data	Area
1	'COVID19(460) Small.jpeg'	2060
2	'COVID19(461) Small.jpeg'	2070
3	'COVID19(462) Small.jpeg'	2313
4	'COVID19(463) Small.jpeg'	2416
5	'COVID19(464) Small.jpeg'	3384

Table 3. Area of White Pixels of Tuberculosis Image

No.	Data	Area
1	'Tuberculosis-1 Small.jpeg'	4326
2	'Tuberculosis-10 Small.jpeg'	3676
3	'Tuberculosis-100 Small.jpeg'	4255
4	'Tuberculosis-101 Small.jpeg'	4462
5	'Tuberculosis-102 Small.jpeg'	3340

Table 4. Area of White Pixels of Pneumonia Image

No.	Data	Area
1	'person1000_2931.jpeg'	3320
2	'person1000_1681.jpeg'	2040
3	'person1000_2932.jpeg'	1799
4	'person1000_2932.jpeg'	1761
5	'person1000_2934.jpeg'	3039

Table 5. Area of White Pixels of Normal Lungs Image

No.	Data	Area
1	'IM-0115-0001.jpeg'	2194
2	'IM-0117-0001.jpeg'	1842
3	'IM-0119-0001.jpeg'	1732
4	'IM-0122-0001.jpeg'	2010
5	'IM-0125-0001.jpeg'	1787

3.3. Calculation Process of The White Area of The Canny Edge-Based Segmentation Image

The next image segmentation process uses the second method, namely Canny Edge Detection. With this process, we will find a border around the chan-ve-segmented image by detecting changes in brightness levels and generating the circumference of the image as another variable needed in the clustering process.

This segmentation process uses the edge function in Matlab. By using the edge function, an image of the Canny edge detection results will be obtained as shown in Figure 9 below.

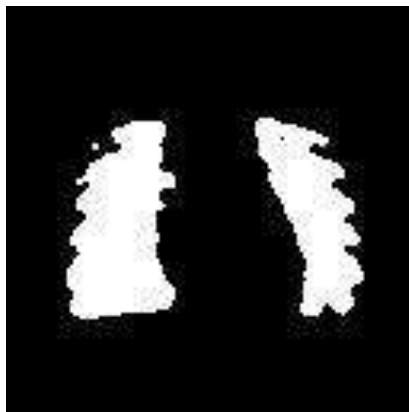


Figure 8. Chan-Vese Segmentation

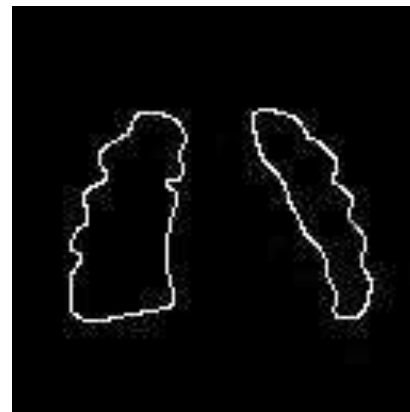


Figure 9. Canny Segmentation

Through the image segmentation results from Chan-Vese and then Canny, we get the circumference of the edge that surrounds the image. The results are described in the Table 6 for Covid-19, Table 7 for Tuberculosis, Table 8 for Pneumonia, Table 9 for Normal Lungs.

Table 6. White Pixels Circumference of Covid-19 Image

No.	Data	Circumference
1	'COVID19(460) Small.jpeg'	499
2	'COVID19(461) Small.jpeg'	401
3	'COVID19(462) Small.jpeg'	376
4	'COVID19(463) Small.jpeg'	431
5	'COVID19(464) Small.jpeg'	446

Table 7. White Pixels Circumference of Tuberculosis Image

No.	Data	Circumference
1	'Tuberculosis-1 Small.jpeg'	484
2	'Tuberculosis-10 Small.jpeg'	480
3	'Tuberculosis-100 Small.jpeg'	474
4	'Tuberculosis-101 Small.jpeg'	492
5	'Tuberculosis-102 Small.jpeg'	479

Table 8. White Pixels Circumference of Pneumonia Image

No.	Data	Circumference
1	'person1000_2931.jpeg'	586
2	'person1000_1681.jpeg'	382
3	'person1000_2932.jpeg'	394
4	'person1000_2932.jpeg'	399
5	'person1000_2934.jpeg'	346

Table 9. White Pixels Circumference of Normal Lungs Image

No.	Data	Circumference
1	'IM-0115-0001.jpeg'	491
2	'IM-0117-0001.jpeg'	498
3	'IM-0119-0001.jpeg'	468
4	'IM-0122-0001.jpeg'	397
5	'IM-0125-0001.jpeg'	491

3.4. Calculating Ratio

So far, area and circumference data have been obtained from the segmented image. Furthermore, ratio calculations are carried out because the size of human lungs has different sizes. With this step, the data can be used for the next clustering process.

This process is done by the equation (3). For example, one of the data calculations for the Covid-19 data below:

- Number of White Pixel (Canny Edge-Based Segmentation) of "COVID19(460) Small.jpeg": 491
- Number of White Pixel (Chan-Vese Segmentation) of "COVID19(460) Small.jpeg": 2060

$$\text{Calculation : } \frac{\text{The Number of Pixels of The Canny Detection Segmented Image}}{\text{The Number of Pixels of The Chan-Vese Segmented Image}} = \frac{491}{2060} = 4,12825651 \quad (3)$$

From the calculation results above, it can be concluded that the number of white pixels in the "COVID19(460) Small.jpeg" image is 4.12825651. The same process applies to all images and the results are as shown in the table below, The research involved a detailed analysis of various medical images, and the results are presented in Tables 10 to 13, showcasing the white pixel ratios for different categories of lung images. Each table provides specific details for the examined images, including the file names, circumference, area, and the calculated white pixel ratio.

Table 10. White Pixels Ratio of Covid-19 Image

No.	Data	Circumference	Area	Ratio
1	'COVID19(460) Small.jpeg'	499	2060	0,24223301
2	'COVID19(461) Small.jpeg'	401	2070	0,19371981
3	'COVID19(462) Small.jpeg'	376	2313	0,16255945
4	'COVID19(463) Small.jpeg'	431	2416	0,17839404
5	'COVID19(464) Small.jpeg'	446	3384	0,13179669

Table 10 outlines the white pixel ratios for several Covid-19 chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. For instance, 'COVID19(460) Small.jpeg' has a circumference of 499, an area of 2060, and a calculated ratio of 0.24223301

Table 11. White Pixels Ratio of Tuberculosis Image

No.	Data	Circumference	Area	Ratio
1	'Tuberculosis-1 Small.jpeg'	484	4326	0,11188165
2	'Tuberculosis-10 Small.jpeg'	480	3676	0,19371981
3	'Tuberculosis-100 Small.jpeg'	474	4255	0,16255945
4	'Tuberculosis-101 Small.jpeg'	492	4462	0,17839404
5	'Tuberculosis-102 Small.jpeg'	479	3340	0,13179669

In Table 11, the white pixel ratios for Tuberculosis chest X-ray images are presented. Similar to Table 10, it includes file names, circumference, area, and the calculated ratio. For example, 'Tuberculosis-1 Small.jpeg' has a circumference of 484, an area of 4326, and a calculated ratio of 0.11188165.

Table 12. White Pixels Ratio of Pneumonia Image

No.	Data	Circumference	Area	Ratio
1	'person1000_2931.jpeg'	586	3320	0,17650602
2	'person1000_1681.jpeg'	382	2040	0,19371981
3	'person1000_2932.jpeg'	394	1799	0,16255945
4	'person1000_2932.jpeg'	399	1761	0,17839404
5	'person1000_2934.jpeg'	346	3039	0,13179669

Table 12 provides information on the white pixel ratios for Pneumonia chest X-ray images. Each entry includes the file name, circumference, area, and the calculated ratio. 'person1000_2931.jpeg' has a circumference of 586, an area of 3320, and a calculated ratio of 0.17650602, as an example

Table 13. White Pixels Ratio of Normal Lungs Image

No.	Data	Circumference	Area	Ratio
1	'IM-0115-0001.jpeg'	491	2194	0,22379216
2	'IM-0117-0001.jpeg'	498	1842	0,27035831
3	'IM-0119-0001.jpeg'	468	1732	0,27020785
4	'IM-0122-0001.jpeg'	397	2010	0,19751244
5	'IM-0125-0001.jpeg'	491	1787	0,27476217

The white pixel ratios for images of normal lungs are detailed in this table. It includes file names, circumference, area, and the calculated ratio. 'IM-0115-0001.jpeg' has a circumference of 491, an area of 2194, and a calculated ratio of 0.22379216, as one example. These tables collectively provide a comprehensive overview of the white pixel ratios across different types of chest X-ray images, contributing valuable insights into the characteristics of each category.

3.5. Clustering Data by K-Means

After all image processing has been completed, the next step is the clustering process using the K-Means method. This process begins by calculating the average of all data including data on the ratio of Covid-19, Tuberculosis, Pneumonia, and Healthy Lungs. The average value is obtained with the data from the previous ratio calculation process.

Table 14. Mean Value Data

No.	Data	Average (Mean)
1	Covid-19 Lungs	0.16540681
2	Tuberculosis Lungs	0.10936217
3	Pneumonia Lungs	0.2004141
4	Normal Lungs	0.24035373

As in the table 14, you can see the average of each disease data. This clustering process is carried out so that four cluster classes are obtained, namely Cluster 0, Cluster 1, Cluster 2, Cluster 3. Determining the name of the cluster is done by finding the value that is closest to the average in the data for each disease. Cluster 0 has the closest value to the average value in the Covid-19 data, as well as Cluster 1 for Tuberculosis data, Cluster 2 for Pneumonia data, Cluster 3 for Normal Lung data. The clustering process is carried out using the Jupyter Notebook software and the cluster results and centroid values are shown in the table below:

Table 15. Centroid for Each Cluster

No.	Cluster	Centroid
1	Cluster 0 (Covid-19 Lungs)	0.154021
2	Cluster 1 (Tuberculosis Lungs)	0.083526
3	Cluster 2 (Pneumonia Lungs)	0.189932
4	Cluster 3 (Normal Lungs)	0.239203

The clustering process was executed using the Jupyter Notebook software, a popular tool for interactive and collaborative data analysis. The results of this process, including the identified clusters and their corresponding centroid values, are summarized in Table 15. This table elucidates the outcomes of the clustering process, showcasing the centroids for each identified cluster. The clusters are differentiated based on the types of lung conditions:

1. Cluster 0 (Covid-19 Lungs): The centroid value for this cluster is 0.154021, representing the average position of data points within the cluster. This centroid is indicative of the characteristics associated with chest X-ray images depicting Covid-19 affected lungs.
2. Cluster 1 (Tuberculosis Lungs): With a centroid value of 0.083526, this cluster represents the average features of chest X-ray images illustrating Tuberculosis affected lungs.
3. Cluster 2 (Pneumonia Lungs): The centroid value for this cluster is 0.189932, indicating the central tendency of features in chest X-ray images depicting Pneumonia affected lungs.
4. Cluster 3 (Normal Lungs): This cluster is characterized by a centroid value of 0.239203, suggesting the average features of chest X-ray images portraying normal, healthy lungs.

3.6. Testing Process

All the data analyzed both have their own name labels so that the testing process can be easily carried out. The testing process is carried out by seeing whether the value of the number of white pixels in the test image belongs to the predetermined clustering class. The results can be seen in the table 16. The testing process can be carried out in several steps as follows:

1. Grouping data for each category in the cluster class and match the value of the calculation of the previous ratio with the predetermined centroid point.
2. Count the amount of data for each category that is correctly included in the clustering class according to its name label.

Table 16. Result of The Cluster

	Classes	Actual Class			
		Covid-19	Tuberculosis	Pneumonia	Normal
Predicted Class	Covid-19	73	12	9	13
	Tuberculosis	56	521	42	32
	Pneumonia	20	11	702	19
	Normal	126	112	116	988

3.7. Result of Model Validation Test

The table shows that the number of data labeled Covid-19 that is correctly included in the Covid-19 lung cluster class is as much as the total data, the amount of data labeled as Tuberculosis that is correctly included in the Tuberculosis lung cluster class is as much as the total data, the amount of data labeled Pneumonia that is correctly included in the Pneumonia lung cluster class as much as the total data, and the number of data labeled Normal that is correctly included in the Normal lung cluster class as much as the total data.

The validation test is carried out with equation (4) [12] and shows that the results of the accuracy of applying the K-Means Clustering method to Chan-Vese and Canny Edge-Based Image Segmentation are 80%.

$$\text{Accuracy} = \frac{\text{The Number of Clustered Data That Corresponds To The Data Label}}{\text{Total}} \times 100\% = \frac{2284}{2852} \times 100\% = 80\% \quad (4)$$

5. CONCLUSION

The findings of this study reveal that the application of the K-Means Clustering method to images resulting from Chan-Vese segmentation and Canny Edge Detection yields an overall accuracy of 80%. This accuracy is computed by assessing the alignment of the data in the cluster class with its corresponding data label. However, it is crucial to acknowledge that several factors can influence this result, with the quantity of data being a notable one. The accuracy is intricately linked to the dataset size, and obtaining a higher or lower accuracy level is contingent on factors beyond just employing the right methodology.

In delving deeper into the observed results, it becomes evident that while the chosen methods—Chan-Vese segmentation and Canny Edge Detection—have demonstrated a commendable accuracy, there exists potential for improvement. Further research avenues could explore the application of alternative segmentation and edge detection methods. Investigating the effectiveness of cutting-edge techniques or hybrid approaches might contribute to enhanced accuracy, especially in detecting more complex lung diseases.

For future studies, researchers might also consider varying the quantity of data used for analysis. A comprehensive investigation with an increased dataset size could provide a more nuanced understanding of the methodology's performance. Balancing the right method with an optimal amount of data holds the potential to yield more accurate and robust results.

Additionally, it would be valuable to extend this research to encompass a broader spectrum of lung diseases, including those of a more intricate nature. Exploring diverse datasets with varying complexities could further validate and generalize the applicability of the clustering method, thereby contributing to advancements in the field of lung disease detection.

REFERENCES

- [1] Niederman, M. S., & Cilloniz, C. (2022). Aspiration pneumonia. *Revista Espanola de Quimioterapia*, 35. <https://doi.org/10.37201/req/s01.17.2022>
- [2] Smithard, D. G., & Yoshimatsu, Y. (2022). Pneumonia, Aspiration Pneumonia, or Frailty-Associated Pneumonia? *Geriatrics (Switzerland)*, 7(5). <https://doi.org/10.3390/geriatrics7050115>
- [3] Natarajan, A., Beena, P. M., Devnikar, A. V., & Mali, S. (2020). A systemic review on tuberculosis. In *Indian Journal of Tuberculosis* (Vol. 67, Issue 3). <https://doi.org/10.1016/j.ijtb.2020.02.005>
- [4] Kiani, D. (2023). X-Ray Diffraction (XRD). In *Springer Handbooks*. https://doi.org/10.1007/978-3-031-07125-6_25
- [5] Patil, B. M., & Burkpalli, V. (2022). Segmentation of cotton leaf images using a modified chan vese method. *Multimedia Tools and Applications*, 81(11). <https://doi.org/10.1007/s11042-022-12436-8>
- [6] Song, J., Pan, H., Liu, W., Xu, Z., & Pan, Z. (2021). The Chan-Vese Model with Elastica and Landmark Constraints for Image Segmentation. *IEEE Access*, 9. <https://doi.org/10.1109/ACCESS.2020.3047848>
- [7] Wang, Z., Wang, K., Yang, F., Pan, S., & Han, Y. (2018). Image segmentation of overlapping leaves based on Chan-Vese model and Sobel operator. *Information Processing in Agriculture*, 5(1). <https://doi.org/10.1016/j.inpa.2017.09.005>
- [8] Zheng, D., Bao, C., Shi, Z., Ling, H., & Ma, K. (2022). Unsupervised Deep Learning Meets Chan-Vese Model. *CSIAM Transactions on Applied Mathematics*, 3(4). <https://doi.org/10.4208/csiam-am.SO-2021-0049>
- [9] Sekehravani, E. A., Babulak, E., & Masoodi, M. (2020). Implementing canny edge detection algorithm for noisy image. *Bulletin of Electrical Engineering and Informatics*, 9(4). <https://doi.org/10.11591/eei.v9i4.1837>
- [10] Pradeep Kumar Reddy, R., & Nagaraju, C. (2019). Improved canny edge detection technique using S-membership function. *International Journal of Engineering and Advanced Technology*, 8(6). <https://doi.org/10.35940/ijeat.E7419.088619>
- [11] Huang, M., Liu, Y., & Yang, Y. (2022). Edge detection of ore and rock on the surface of explosion pile based on improved Canny operator. *Alexandria Engineering Journal*, 61(12). <https://doi.org/10.1016/j.aej.2022.04.019>
- [12] Pratiwi, E. H., & Juniati, D. (2022). CLUSTERING OF LUNG DISEASE BASED ON CHEST X-RAY USING DIMENSIONS FRACTAL BOX COUNTING AND K-MEDOIDS. *Jurnal Riset Dan Aplikasi Matematika (JRAM)*, 6(1), 1–12. <https://doi.org/10.26740/JRAM.V6N1.P1-12>
- [13] Bookstaver, M. (2021). Secondary Data Analysis. In *The Encyclopedia of Research Methods in Criminology and Criminal Justice: Volume II: Parts 5-8*. <https://doi.org/10.1002/9781119111931.ch107>
- [14] Ferreira, W. D., Ferreira, C. B. R., da Cruz Júnior, G., & Soares, F. (2020). A review of digital image forensics. *Computers and Electrical Engineering*, 85. <https://doi.org/10.1016/j.compeleceng.2020.106685>
- [15] Sundani, D., Widiyanto, S., Karyanti, Y., & Wardani, D. T. (2019). Identification of image edge using quantum canny edge detection algorithm. *Journal of ICT Research and Applications*, 13(2). <https://doi.org/10.5614/itbj.ict.res.appl.2019.13.2.4>
- [16] Sinaga, K. P., & Yang, M. S. (2020). Unsupervised K-means clustering algorithm. *IEEE Access*, 8. <https://doi.org/10.1109/ACCESS.2020.2988796>
- [17] Rao, B. S. (2020). Dynamic Histogram Equalization for contrast enhancement for digital images. *Applied Soft Computing Journal*, 89. <https://doi.org/10.1016/j.asoc.2020.106114>
- [18] Baskar, A., Rajappa, M., Vasudevan, S. K., & Muruges, T. S. (2023). Digital Image Processing. In *Digital Image Processing*. <https://doi.org/10.1201/9781003217428>
- [19] Agrawal, S., Panda, R., Mishro, P. K., & Abraham, A. (2022). A novel joint histogram equalization based image contrast enhancement. *Journal of King Saud University - Computer and Information Sciences*, 34(4). <https://doi.org/10.1016/j.jksuci.2019.05.010>